

Comfort-Aire®



Product Catalog

www.marsdelivers.com



MARS®
Delivering Confidence

Table of Contents

Room Air Cooling	3-9
Cooling with Electric Heat	9-10
Thru-the-Wall Cooling/Heating	11-13
Heat Pumps	14
Casement Cooling	15
RXTS Series	15
Room Air Accessories	16
Installation Tips	16
Portables	17-18
Dehumidifiers	19
Mini-Splits	20-22
26" PTAC	23
PTACs	24

Desktop Fans	
10" Metal Desktop Fans.....	25
12" Metal Desktop Fans.....	26
12" Plastic Desktop Fans.....	27
16" Metal Desktop Fans.....	28
16" Plastic Desktop Fans.....	29
Pedestal Fans	
14" Metal Pedestal Fans.....	30
16" Metal Pedestal Fans.....	31
18" Metal Pedestal Fans.....	32
18" Plastic Pedestal Misting Fan.....	33
Box Fans	
20" Plastic Box Fans.....	33
Tower Fans	
28" & 42" Plastic Tower Fans.....	34
Window Fan	
9" Plastic Twin Window Fan.....	34
18" Plastic Wall Fan	
18" Plastic Wall Fan.....	35
Floor Fans	
20" Metal Floor Fan.....	35
20" Plastic Circulator Floor Fan.....	35
Commercial Pedestal Fans	
30" Metal Oscillating Pedestal Fan.....	36
30" Metal Fixed Pedestal Fan.....	36
Commercial Drum Fans	
24" Tilted Drum Fan.....	37
30" Fixed Direct Drive Drum Fan.....	37
36" Fixed Direct Drive Drum Fan.....	37
36" Fixed Belt Drive Drum Fan.....	38
42" Fixed Belt Drive Drum Fan.....	38



Comfort-Aire room air products come charged with the environmentally friendly R-410A and R-32 refrigerant.



All Comfort-Aire room air products are listed with either CSA or UL for application in the United States and Canada. See the model rating plate for specific certifications.

visit us online at:

www.marsdelivers.com

Comfort-Aire®

Tips for SIZING

Room air units are an economical and practical means of adding comfort to a home, commercial space, warehouse office, or other area. For best results, the air conditioner or room heat pump should be correctly sized for the space. The specifications in this catalog show the approximate square footage which each unit effectively cools. However, other factors should be considered in selecting model size—it would be a good idea to choose the next size up if there are multiple doors and windows in the space, if ceilings are exceptionally high, if heat-generating equipment is used, or if several people occupy the space.

Use the chart below as a quick reference in determining which unit(s) will fit your needs.

Square Feet to be conditioned	Square Meters to be conditioned	Capacity Needed (BTUH)
100 - 150	9.3 - 13.9	5,000
150 - 250	13.9 - 23.2	6,000
250 - 300	23.2 - 27.9	7,000
300 - 350	27.9 - 32.5	8,000
350 - 400	32.5 - 37.2	9,000
400 - 450	37.2 - 41.8	10,000
450 - 550	41.8 - 51.1	12,000
550 - 700	51.1 - 65.1	14,000
700 - 1,000	65.1 - 92.9	18,000
1,000 - 1,200	92.9 - 111.5	21,000
1,200 - 1,400	111.5 - 130.1	23,000
1,400 - 1,500	130.1 - 139.4	25,000
1,500 - 2,000	139.4 - 185.8	30,000

Guidelines from www.energystar.gov

Energy Star recommends increasing capacity by 10% for a sunny room, decreasing by 10% for shaded room.

If used in a kitchen, add 4,000 BTUHs to the total.

If more than two people regularly use the room, add 600 BTUH for each additional person.

Cooling

5,000 BTUH

ORGILL #4415709



RG-51Q

5,000 BTUH

FEATURES

- Electro-mechanical seven-position control for easy temperature selection
- Adjustable thermostat from minimal cooling to maximum cooling
- Easy to access, slide-out filter is washable
- Adjustable air direction
- Compact, lightweight cabinet with attractive decorator front grille

SPECIFICATIONS

Cooling Capacity BTUH	5,000
Approx. Sq. Ft. Cooling	100-150
EER/CEER	11.0/11.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.27
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	2/2
Air Delivery Max. CFM	145
dB Level (hi/low)	56/52
Amps Cooling	4.6
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	No
Refrigerant Type	R32
Shipping Weight (lbs.)	39.5
Dimensions (in.)	Height 12.0
	Width 16.0
	Depth 13.19



RADS-51Q

5,000 BTUH

FEATURES

- Electronic controls with remote
- Two-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	5,000
Approx. Sq. Ft. Cooling	100-150
EER/CEER	12.1/12.2
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.27
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	150
dB Level (hi/med/low)	56/54/53
Amps Cooling	4
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	44
Dimensions (in.)	Height 12.0
	Width 16.0
	Depth 13.2

Q Series - Standard Control



ORGILL #7006349

RADS-61Q **6,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote
- Adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	6,000
Approx. Sq. Ft. Cooling	150-250
EER/CEER	12.2/12.1
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.48
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	169
dB Level (hi/med/low)	56/53/52
Amps Cooling	3.7
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	48.5
Dimensions (in.)	Height 13.4
	Width 18.5
	Depth 15.7



ORGILL #7006356

RADS-81Q **8,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	8,000
Approx. Sq. Ft. Cooling	300-350
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.11
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	196
dB Level (hi/med/low)	58/55/53
Amps Cooling	5.1
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	53.26
Dimensions (in.)	Height 15
	Width 22
	Depth 17.7



ORGILL #8145211

RADS-101Q **10,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	10,000
Approx. Sq. Ft. Cooling	400-450
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.32
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	300
dB Level (hi/med/low)	61/58/56
Amps Cooling	8.03
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	64
Dimensions (in.)	Height 14.6
	Width 19.0
	Depth 21.5

Q Series - Standard Control



ORGILL #8145229

RADS-121Q

12,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver mode, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	300
dB Level (hi/med/low)	61/59/58
Amps Cooling	9.7
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	75
Dimensions (in.)	Height 14.6
	Width 19.0
	Depth 21.5



ORGILL #8145203

RADS-151Q

15,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver mode, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	15,100
Approx. Sq. Ft. Cooling	550-700
EER/CEER	11.9/11.8
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	3.17
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	376
dB Level (hi/med/low)	58/54/53
Amps Cooling	11.9
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	118
Dimensions (in.)	Height 17.9
	Width 23.6
	Depth 25.4



ORGILL #0293647

RADS-183P

18,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	17,700/18,000
Approx. Sq. Ft. Cooling	700-1000
EER/CEER	11.8/11.8
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	3.80
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	360
dB Level (hi/med/low)	60/57/54
Amps Cooling	7.5/7.0
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Tandem NEMA 6-15P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	129
Dimensions (in.)	Height 17.9
	Width 23.6
	Depth 25.4

Q Series - Standard Control

R Series - Smartphone Compatible



ORGILL #2380442

RADS-253P **25,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	24,700/25,000
Approx. Sq. Ft. Cooling	1400-1500
EER/CEER	10.3/10.3
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	5.71
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	523
dB Level (hi/med/low)	63/62/62
Amps Cooling	11.8/10.8
Amps Heating	N/A
Maximum Fuse Size	20A
Power Cord	20A Tee NEMA 6-20P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	151
Dimensions (in.)	Height 18.6
	Width 26.5
	Depth 26.5



RAD-283M **28,000 BTUH**
Nominal

FEATURES

- Large capacity cooling for residential or commercial applications
- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes

SPECIFICATIONS

Cooling Capacity BTUH	28,000/28,000
Approx. Sq. Ft. Cooling	1500-2000
EER	9.0/9.0
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	6.34
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	523
dB Level (hi/med/low)	63/58/56
Amps Cooling	15.0/13.8
Amps Heating	N/A
Maximum Fuse Size	30A
Power Cord	30A Tandem NEMA 6-30P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	156
Dimensions (in.)	Height 18.6
	Width 26.5
	Depth 26.5



RADS-61R **6,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote
- Adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	6,000
Approx. Sq. Ft. Cooling	150-250
EER/CEER	12.2/12.1
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.48
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	169
dB Level (hi/med/low)	56/53/52
Amps Cooling	3.7
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	48.5
Dimensions (in.)	Height 13.4
	Width 18.5
	Depth 15.7

R Series - Smartphone Compatible



RADS-81R

8,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	8,000
Approx. Sq. Ft. Cooling	300-350
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.11
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	196
dB Level (hi/med/low)	58/55/53
Amps Cooling	5.1
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	53.26
Dimensions (in.)	Height 15
	Width 22
	Depth 17.7



RADS-101R

10,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- 24-hour on/off timer and auto restart, energy saver function; auto, dehumidification and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	10,000
Approx. Sq. Ft. Cooling	400-450
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.32
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	300
dB Level (hi/med/low)	61/58/56
Amps Cooling	8.03
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	64
Dimensions (in.)	Height 14.6
	Width 19.0
	Depth 21.5



RADS-121R

12,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver mode, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	12.0/12.0
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	300
dB Level (hi/med/low)	61/59/58
Amps Cooling	9.7
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	75
Dimensions (in.)	Height 14.6
	Width 19.0
	Depth 21.5

R Series - Smartphone Compatible



RADS-151R

15,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver mode, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	15,100
Approx. Sq. Ft. Cooling	550-700
EER/CEER	11.9/11.8
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	3.17
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	376
dB Level (hi/med/low)	58/54/53
Amps Cooling	11.9
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R32
Shipping Weight (lbs.)	118
Dimensions (in.)	Height 17.9
	Width 23.6
	Depth 25.4



RADS-183R

18,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	17,700/18,000
Approx. Sq. Ft. Cooling	700-1000
EER/CEER	11.8/11.8
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	3.80
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	360
dB Level (hi/med/low)	60/57/54
Amps Cooling	7.5/7.0
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Tandem NEMA 6-15P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	129
Dimensions (in.)	Height 17.9
	Width 23.6
	Depth 25.4



RADS-253R

25,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- One degree temperature adjustment
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes



SPECIFICATIONS

Cooling Capacity BTUH	24,700/25,000
Approx. Sq. Ft. Cooling	1400-1500
EER/CEER	10.3/10.3
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	5.71
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	523
dB Level (hi/med/low)	63/62/62
Amps Cooling	11.8/10.8
Amps Heating	N/A
Maximum Fuse Size	20A
Power Cord	20A Tee NEMA 6-20P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	151
Dimensions (in.)	Height 18.6
	Width 26.5
	Depth 26.5

R Series - Smartphone Compatible

**RAD-283R****28,000 BTUH**
Nominal**FEATURES**

- Large capacity cooling for residential or commercial applications
- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Easy-access, slide-out, washable filter
- Energy saver function, 24-hour on/off timer, dehumidification and auto modes

SPECIFICATIONS

Cooling Capacity BTUH	28,000/28,000
Approx. Sq. Ft. Cooling	1500-2000
EER	9.0/9.0
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	6.34
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	523
dB Level (hi/med/low)	63/58/56
Amps Cooling	15.0/13.8
Amps Heating	N/A
Maximum Fuse Size	30A
Power Cord	30A Tandem NEMA 6-30P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Refrigerant Type	R410A
Shipping Weight (lbs.)	156
Dimensions (in.)	Height 18.6
	Width 26.5
	Depth 26.5

**ORGILL #8298861****REG-81M****8,000 BTUH**
Nominal**FEATURES**

- Electronic controls with full feature remote, 24-hour on/off timer
- Energy saver mode, auto restart
- Four way adjustable air direction
- One degree temperature adjustment
- Designed for supplemental electric heat only, thermostat cycles heating element on and off

SPECIFICATIONS

Cooling Capacity BTUH	8,000
Approx. Sq. Ft. Cooling	300-350
EER/CEER	10.9/10.9
Heating Capacity BTUH (electric)	3,500
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.90
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	277
dB Level (hi/med/low)	58/55/52
Amps Cooling	6.3
Amps Heating	11.6
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	82
Dimensions (in.)	Height 16.1
	Width 22.6
	Depth 23.0

**ORGILL #3145844****REG-123M****12,000 BTUH**
Nominal**FEATURES**

- Electronic controls with full feature remote, 24-hour on/off timer
- Energy saver mode, auto restart
- Four way adjustable air direction
- One degree temperature adjustment
- Designed for supplemental electric heat only, thermostat cycles heating element on and off

SPECIFICATIONS

Cooling Capacity BTUH	11,600/12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	10.9/10.9
Heating Capacity BTUH (electric)	8,500/11,000
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	279
dB Level (hi/med/low)	61/58/55
Amps Cooling	5.2/5.0
Amps Heating	16.0/14.5
Maximum Fuse Size	20A
Power Cord	20A Tee NEMA 6-20P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	95
Dimensions (in.)	Height 16.1
	Width 22.6
	Depth 23.0



ORGILL #2226157

REG-183M **18,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote, 24-hour on/off timer
- Energy saver mode, auto restart
- Four-way adjustable air direction
- One degree temperature adjustment
- Designed for supplemental electric heat only, thermostat cycles heating element on and off

SPECIFICATIONS

Cooling Capacity BTUH	18,200/18,500
Approx. Sq. Ft. Cooling	700-1000
EER/CEER	10.7/10.7
Heating Capacity BTUH (electric)	13,000/16,000
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	3.80
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	446
dB Level (hi/med/low)	60/57/54
Amps Cooling	8.3/7.7
Amps Heating	22.0/20.0
Maximum Fuse Size	30A
Power Cord	30A Tandem NEMA 6-30P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	133
Dimensions (in.)	Height 17.9
	Width 23.6
	Depth 25.4



ORGILL #8259202

REG-253M **25,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote, 24-hour on/off timer
- Energy saver mode, auto restart
- Four-way adjustable air direction
- One degree temperature adjustment
- Designed for supplemental electric heat only, thermostat cycles heating element on and off

SPECIFICATIONS

Cooling Capacity BTUH	24,700/25,000
Approx. Sq. Ft. Cooling	1400-1500
EER/CEER	9.4/9.4
Heating Capacity BTUH (electric)	13,000/16,000
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	5.71
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	523
dB Level (hi/med/low)	63/61/58
Amps Cooling	12.4/11.3
Amps Heating	22.5/20.0
Maximum Fuse Size	30A
Power Cord	30A Tandem NEMA 6-30P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	156
Dimensions (in.)	Height 18.6
	Width 26.5
	Depth 26.5

Orgill-Clive[®]



BG-81P

8,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Energy saver function and 24-hour on/off timer
- Auto and sleep modes
- Interior trim kit included
- Fits standard wall sleeves



SPECIFICATIONS

Cooling Capacity BTUH	8,000
Approx. Sq. Ft. Cooling	300-350
EER/CEER	10.6/10.6
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.11
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	270
dB Level (hi/med/low)	57/54/52
Amps Cooling	7.0
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	76
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BG-101P

10,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Energy saver function and 24-hour on/off timer
- Interior trim kit included
- Fits standard wall sleeves
- Auto and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	10,000
Approx. Sq. Ft. Cooling	400-450
EER	10.6/10.6
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.32
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	269
dB Level (hi/med/low)	57/55/53
Amps Cooling	8.3
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	80
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BG-103P

10,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Energy saver function and 24-hour on/off timer
- Interior trim kit included
- Fits standard wall sleeves
- Auto and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	9,800/10,000
Approx. Sq. Ft. Cooling	400-450
EER	10.6/10.6
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.32
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	275
dB Level (hi/med/low)	58/56/54
Amps Cooling	4.8/4.5
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Tandem NEMA 6-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	80
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BG-121P

12,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Energy saver function and 24-hour on/off timer
- Interior trim kit included
- Fits standard wall sleeves
- Auto and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	10.5/10.5
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	286
dB Level (hi/med/low)	61/59/57
Amps Cooling	10.0
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	87
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BG-123P

12,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote and auto restart
- Four-way adjustable air direction
- Energy saver function and 24-hour on/off timer
- Interior trim kit included
- Fits standard wall sleeves
- Auto and sleep modes



SPECIFICATIONS

Cooling Capacity BTUH	11,700/12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	10.5/10.5
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	286
dB Level (hi/med/low)	61/59/57
Amps Cooling	5.6/5.2
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Tandem NEMA 6-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	89
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BG-143M

14,000 BTUH
Nominal

FEATURES

- Electronic controls with full feature remote, auto restart
- Four-way adjustable air direction
- 24-hour on/off timer, auto cool and sleep mode
- Interior trim kit included
- Fits standard wall sleeves
- Auto cool, auto mode, dehum only

SPECIFICATIONS

Cooling Capacity BTUH	13,600/14,000
Approx. Sq. Ft. Cooling	550-700
EER/CEER	9.3/9.5
Heating Capacity BTUH (electric)	N/A
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.96
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	296
dB Level (hi/med/low)	61/60/59
Amps Cooling	7.5/6.9
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Tandem NEMA 6-15P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	89
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BGE-103M **10,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote
- Four-way adjustable air direction
- Energy saver function, 24-hour on/off timer, auto cool and auto restart
- Interior trim kit included
- Fits standard wall sleeves
- Includes electric heat

SPECIFICATIONS

Cooling Capacity BTUH	9,800/10,000
Approx. Sq. Ft. Cooling	400-450
EER/CEER	9.6/9.6
Heating Capacity BTUH (electric)	8,600/10,600
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.32
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	269
dB Level (hi/med/low)	57/55/53
Amps Cooling	5.0/4.6
Amps Heating	15.0/13.5
Maximum Fuse Size	20A
Power Cord	20A Tandem NEMA 6-20P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	85
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BGE-123M **12,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote
- Four-way adjustable air direction
- Energy saver function, 24-hour on/off timer, auto cool and auto restart
- Interior trim kit included
- Fits standard wall sleeves
- Includes electric heat

SPECIFICATIONS

Cooling Capacity BTUH	11,700/12,000
Approx. Sq. Ft. Cooling	450-550
EER/CEER	9.5/9.5
Heating Capacity BTUH (electric)	8,600/10,600
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.54
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	286
dB Level (hi/med/low)	61/59/57
Amps Cooling	5.9/5.5
Amps Heating	15.0/13.5
Maximum Fuse Size	20A
Power Cord	20A Tandem NEMA 6-20P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	89
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



BGE-143M **14,000 BTUH**
Nominal

FEATURES

- Electronic controls with full feature remote
- Four-way adjustable air direction
- Energy saver function, 24-hour on/off timer, auto cool and auto restart
- Interior trim kit included
- Fits standard wall sleeves
- Includes electric heat

SPECIFICATIONS

Cooling Capacity BTUH	13,600/14,000
Approx. Sq. Ft. Cooling	550-700
EER	9.3/9.5
Heating Capacity BTUH (electric)	8,600/10,600
Power Supply	208/230V 60Hz
Humidity Removal Pts/Hr	2.96
Ventilation Control	No
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3/3
Air Delivery Max. CFM	296
dB Level (hi/med/low)	61/60/59
Amps Cooling	7.5/6.9
Amps Heating	15.0/13.5
Maximum Fuse Size	20A
Power Cord	20A Tandem NEMA 6-20P
Slide-Out Chassis	No
Interior Trim Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	89
Dimensions (in.)	Height 14.5
	Width 24.2
	Depth 20.3



RAH-123M **12,000 BTUH**
Nominal

FEATURES

- Electronic controls, wireless remote
- Sleep mode and 24-hour timer
- Thru-the-wall or window mount with support bracket included
- Cooling, heating, fan only and auto operation, energy saver mode
- Switches to supplemental electric heat at 40°F outside temperature (Not primary source of heat)

SPECIFICATIONS

Cooling Capacity BTUH	11,200/11,600
Approx. Sq. Ft. Cooling	450-550
EER	9.9
Power Supply	208/230V 60Hz
Amps Cooling	5.3/5.1
Electric Heat Cap. BTUH	9,452/12,215
Electric Heat Amps	15.6/13.3
HP Heat Cap. BTUH	9,900/10,200
Heat Pump Amps	5.3/5.1
Heat Pump COP	2.6
Humidity Removal Pts/Hr	3.17
Fan Speeds Cool/Heat/Fan	3/3/3
dB Level (hi/med/low)	72/70/68
Ventilation Control	No
Fan Only	Yes
Air Delivery Max. CFM	265
Maximum Fuse Size	20A
Power Cord	20A Tee NEMA 6-20P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Shipping Weight (lbs.)	110
Dimensions (in.)	Height 15.3
	Width 22.6
	Depth 23.6



RAH-183M **18,000 BTUH**
Nominal

FEATURES

- Electronic controls, wireless remote
- Automatic louver swing
- Thru-the-wall or window mount with support bracket included
- Cooling, heating, fan only, energy saver mode. and 24-hour timer
- Switches to supplemental electric heat at 40°F outside temperature (Not primary source of heat)

SPECIFICATIONS

Cooling Capacity BTUH	17,000/17,300
Approx. Sq. Ft. Cooling	700-1000
EER	9.9
Power Supply	208/230V 60Hz
Amps Cooling	7.8/7.3
Electric Heat Cap. BTUH	10,339/12,557
Electric Heat Amps	16.0/14.6
HP Heat Cap. BTUH	14,000/14,300
Heat Pump Amps	7.0/6.5
Heat Pump COP	2.8
Humidity Removal Pts/Hr	4.65
Fan Speeds Cool/Heat/Fan	3/3/3
dB Level (hi/med/low)	72/70/68
Ventilation Control	Yes
Fan Only	Yes
Air Delivery Max. CFM	541
Maximum Fuse Size	20A
Power Cord	20A Tee NEMA 6-20P
Slide-Out Chassis	Yes
Window Mounting Kit	Yes
Shipping Weight (lbs.)	159
Dimensions (in.)	Height 16.9
	Width 26.0
	Depth 27.8

Comfort-Care[®]



CD-81Q **8,000 BTUH**
Nominal

FEATURES

- For horizontal sliding or casement windows, fits opening 20⁹/₁₆" to 39⁷/₁₆" high, starting at 15¹/₂" wide
- Electronic controls and remote
- Four-way adjustable air direction
- Energy saver mode and 24-hour on/off timer, auto restart

SPECIFICATIONS

Cooling Capacity BTUH	8,000
Approx. Sq. Ft. Cooling	300-350
EER/CEER	10.9/10.8
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	.90
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	264
dB Level (hi/med/low)	54/51/48
Amps Cooling	6.6
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	80
Dimensions (in.)	Height 20.9
	Width 14.6
	Depth 23.5



CD-101Q **10,000 BTUH**
Nominal

FEATURES

- For horizontal sliding or casement windows, fits opening 20⁹/₁₆" to 39⁷/₁₆" high, starting at 15¹/₂" wide
- Electronic controls and remote
- Four-way adjustable air direction
- Energy saver mode and 24-hour on/off timer, auto restart

SPECIFICATIONS

Cooling Capacity BTUH	10,000
Approx. Sq. Ft. Cooling	400-450
EER/CEER	10.4/10.4
Heating Capacity BTUH (electric)	N/A
Power Supply	115V 60Hz
Humidity Removal Pts/Hr	1.1
Ventilation Control	Yes
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	323
dB Level (hi/med/low)	61/58/56
Amps Cooling	8.5
Amps Heating	N/A
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	No
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	84
Dimensions (in.)	Height 20.9
	Width 14.6
	Depth 23.5



Coming 2021!

Models
RXTS-81A
RXTS-101A
RXTS-121A

FEATURES

More than 35% Energy Savings: With the advanced DC Inverter technology, it achieves over 35% energy savings compared to other traditional units, and it's the first window AC to obtain the ENERGY STAR Most Efficient 2020 Certification. You may also get exclusive benefits from your local energy distributor

Extreme Quiet: 9 times quieter than some traditional units. The U-shape blocks the noise from the cooling system using your window. This design allows for extremely quiet operation as low as 42 dBA - almost as quiet as a library – so you can get a restful night's sleep or binge your favorite shows undisturbed
Flexible window open: This innovate groove design allows your window to open, bringing fresh air into your home anytime allowing you to maintain more of your view. Refrigerant: R32.

Smart Control: The RXTS Series is smartphone compatible - enabled, it can be controlled from anywhere through the cloud using the iOS or Android. You can also use voice commands with Alexa or Google Assistant if you prefer
Robust Installation: Support bracket is included for a more robust installation that supports the unit with the window open or closed. Available for single-hung or double hung window with size: 22 - 36 inches, minimal height at 13.75 inches.

Window Support Brackets

Easy-to-install brackets add a full measure of safety to window-mounted air conditioners. Manufactured from heavy gauge steel with a durable baked-on epoxy finish, the brackets have stainless steel hardware to resist weather damage. Unique bubble level helps ensure proper installation angle.



Orgill #7448723

AS080—For room air conditioners up to 80 pounds

Orgill #7448731

AS160—For room air conditioners up to 160 pounds



NTN-1—No screws or penetrations, simple, yet robust design



NTN-2—No screws or penetrations, simple, easy “drop in” installation

Both brackets install and remove with no structural disturbance.

EA448F Wall Sleeve

For BG and BGE Series


Sleeve is manufactured of G-90 steel and powder coated for durability and corrosion resistance; color matches unit color. The sleeve utilizes the aluminum back grille of the BG/BGE units, and front gaskets eliminate air.




EA448F—Wall Sleeve (inches)
15 1/4" H x 25 1/2" W x 17 1/2" D

Casement/Slider Windows

These windows which slide open to the side or open outward require a different type of window air conditioner. Our CD models are ideal for casement or slider windows. The window can close onto the sides of the unit, and a support platform is included. A plastic window filler panel is included with the unit—it can be cut to size and fits into an adjustable window panel frame. For a casement window, the window crank must be removed.



Slider Window
Filler panel fits into frame that is installed above the unit.

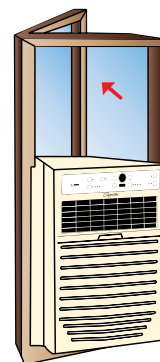


Casement Window
Window opens outward or the exterior pane may be removed. Crank mechanism is removed.

IMPORTANT!

Because so much of the weight of the air conditioner is on the outside, it is necessary to have a support bracket installed for safety.

Double Hung Window

When you look at your window-mount air conditioner, you will see louvers on the sides and/or top. These are designed to bring in fresh air that is then directed across the coils inside the unit. It is important that the air conditioner be correctly installed, especially leaving the side louvers and back grille unobstructed.



The chart on the last pages of this catalog shows the maximum thickness of the wall through which the air conditioner should be installed. These widths assure that the side or top louvers will be unobstructed so that adequate fresh air is available for heat transfer to occur.

Each carton shows the minimum and maximum size of the window in which that specific unit will fit.

Measure the width of the window opening and the maximum height when the window is open to determine if the unit you've chosen will fit the available window, in addition to checking the wall thickness.

Window-mount air conditioners come with adjustable side panels that slide open to completely fill the window opening; allow 3 to 4 inches of width for the accordion-type side panels to open. The window sash closes onto the bracket located on the top of the air conditioner.

IMPORTANT!

Always wait to cut a hole in the structure until unit arrives and dimensions can be verified.



ORGILL #3820735

PS-81D 8,000 BTUH
Nominal

FEATURES

- Cool a room without any ductwork or any special wiring, and move the unit from room to room as needed
- Ideal wherever temporary cooling is needed or where a window A/C isn't an option
- Built-in condensate disposal
- 60" single hose for fast installation
- Automatic louver swing
- Washable filter is easily accessed
- 24-hour on/off timer, auto restart
- ASHRAE Standard 128-2001

SPECIFICATIONS

Cooling Capacity BTUH	8,000
SACC BTUH	4,000-5,500
Approx. Sq. Ft. Cooling	300-350
EER	8.9
Power Supply	115V 60Hz
Humidity Removal Pts./Hr.	2.32
Fan Only	Yes
Fan Speeds Cool/Fan	1/1
Air Delivery Max. CFM	209
Amps Cooling	8.0
dB Level (hi/low)	56/52
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	N/A
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	60
Dimensions (in.)	
Height	27.7
Width	13.6
Depth	14.0

Hose Diameter 6"
Length 60"



ORGILL #3820743

PS-101D 10,000 BTUH
Nominal

FEATURES

- Cool a room without any ductwork or any special wiring, and move the unit from room to room as needed
- Ideal wherever temporary cooling is needed or where a window A/C isn't an option
- Built-in condensate disposal
- 60" single hose for fast installation
- Automatic louver swing
- Washable filter is easily accessed
- 24-hour on/off timer, auto restart
- ASHRAE Standard 128-2001

SPECIFICATIONS

Cooling Capacity BTUH	10,000
SACC BTUH	4,000-5,500
Approx. Sq. Ft. Cooling	400-450
EER	9.0
Power Supply	115V 60Hz
Humidity Removal Pts./Hr.	2.74
Fan Only	Yes
Fan Speeds Cool/Fan	1/1
Air Delivery Max. CFM	206
Amps Cooling	9.8
dB Level (hi/low)	55/51
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	N/A
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	62
Dimensions (in.)	
Height	27.7
Width	13.6
Depth	14.0

Hose Diameter 6"
Length 60"



PS-121D 12,000 BTUH
Nominal

FEATURES

- Cool a room without any ductwork or any special wiring, and move the unit from room to room as needed
- Ideal wherever temporary cooling is needed or where a window A/C isn't an option
- Built-in condensate disposal
- 60" single hose for fast installation
- Automatic louver swing
- Washable filter is easily accessed
- 24-hour on/off timer, auto restart
- ASHRAE Standard 128-2001

SPECIFICATIONS

Cooling Capacity BTUH	12,000
SACC BTUH	8,000
Approx. Sq. Ft. Cooling	450-550
EER	8.9
Power Supply	115V 60Hz
Humidity Removal Pts./Hr.	4.23
Fan Only	Yes
Fan Speeds Cool/Fan	3/3
Air Delivery Max. CFM	264
Amps Cooling	12
dB Level (hi/low)	55/53/52.5
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Slide-Out Chassis	N/A
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	79
Dimensions (in.)	
Height	27.6
Width	17.9
Depth	14.4

Hose Diameter 6"
Length 60"



ORGILL #6520241

PSH-141D

14,000 BTUH

Nominal

FEATURES

- Cool or heat a room without duct-work or special wiring, and move from room to room as needed
- Ideal wherever temporary cooling or heating is needed
- Built-in condensate disposal
- Automatic louver swing
- 60" single hose for fast installation
- Washable filter is easily accessed
- 24-hour on/off timer, auto restart
- ASHRAE Standard 128-2001

SPECIFICATIONS

Cooling Capacity BTUH	14,000
SACC BTUH	9,000
Approx. Sq. Ft. Cooling	550-700
EER	9.9
Heating Capacity BTUH	11,000
COP	2.76
Power Supply	115V 60Hz
Humidity Removal Pts./Hr.	4.27
Fan Only	Yes
Fan Speeds Cool/Heat/Fan	3/3
Air Delivery Max. CFM	306
Amps Cooling	11.9
Amps Heating	11.3
dB Level (hi/low)	56/54/52
Maximum Fuse Size	15A
Power Cord	15A Parallel NEMA 5-15P
Window Mounting Kit	Yes
Remote Control	Yes
Shipping Weight (lbs.)	86.6
Dimensions (in.)	
Height	30.1
Width	18.4
Depth	15.6

Hose Diameter 6"
Length 60"

Advantages of Portables

Portable air conditioners and heat/cool models are ideal for any area where temporary cooling (or heating) is needed, or in situations where a window air conditioner isn't an option.

Historical properties are ideal candidates for portables since the aesthetics of the building's exterior are maintained.

Also, additions to existing homes can be conditioned without upgrading the entire HVAC unit to accommodate the added square footage.

Some other applications that can benefit from the efficiency and portability of these units:

- Apartments
- College dormitory rooms
- Bedrooms and sunrooms
- Cottages/vacation homes
- Home workshops
- School and church classrooms
- Warehouse offices

Installation

Installing a portable unit takes only a few minutes. Hot air from the unit should be exhausted from the room, and a window adapter for the exhaust hose comes with the unit. It has sliding sides to fit a variety of windows, but with its low profile, light from the window isn't blocked. The adapter fits many sizes of double hung windows, and can also be used on certain casement windows and even patio doors—some on-site adjustments may be needed.

Since no ductwork or special wiring is required, the unit can be easily moved from one room to another. Heavy duty casters and handholds built into the sides of the cabinet facilitate location changes.

Ease of installing the window adapter is a primary reason the portable unit can be used throughout the house. However, if the portable is being used only for air circulation (fan), it's not necessary to use the hose hook-up.



A large diameter, 60" flexible hose effectively exhausts hot air to the outside.

Operation

Portable models feature cooling, dehumidification and air circulation (fan only) modes; the PSH-141D adds supplemental heating capability. The 24-hour on/off timer can be used to save energy by operating only at set times when residents are at home. The sleep mode also saves energy by increasing the temperature periodically through the night (so there is less cooling), which also increases the comfort level for many people.



A handy wireless remote controls all functions of the Comfort-Aire portable units.

Portable Dehumidifiers

Easy to use with top mounted controls. Unit automatically shuts off when bucket is full. BHDP models have built-in pump for fast direct draining. Features auto defrost and auto restart. Slide-out filter is easily removed for washing and reusing. Low temperature operation to 41°F.

Condensate bucket is accessed from the front, has handy handholds on each side and an interior handle; unit can be adapted to direct drain. BHDP units with built-in pump can be used for direct drain or bucket can be used to collect condensate.



All models are Energy Star® compliant
Low temperature operation down to 41°F (5°C)



BHD-22A
Capacity 22 pints/day
Bucket Capacity: 6.34 pints



BHD-35A
Capacity 35 pints/day
Bucket Capacity: 12.68 pints



BHDP-50A with Built-In Pump
Capacity 50 pints/day
Bucket Capacity: 12.68 pints

BHD-50A
Capacity 50 pints/day
Bucket Capacity: 12.68 pints

BHDP-60A with Built-In Pump
Capacity 60 pints/day
Bucket Capacity: 21.13 pints

Features

- **Automatic Water Level Shut-Off**—When the drain bucket is full, unit automatically shuts off, then displays a “Full” light
- **Drain Options**—Condensed water can be collected in the removable bucket that has a convenient handle, or continuously drained using the adapter kit that’s included
- **BHDP Models**—Built-in pump quickly and effectively removes condensate
- **Slide-Out Filter**—Filter is easily removed from unit so it can be cleaned and reused; check filter light is a reminder to clean the filter
- **Easy to Use Controls**—All controls are located on the top of the unit so they’re easy to see and adjust; actual room humidity/relative humidity set point is displayed
- **Auto Restart**—Automatically resumes operation after a power outage, ideal for second homes or offices, as well as primary residences
- **Slide-Out Filter**—Filter is easily removed from unit so it can be cleaned and reused; check filter light is a reminder to clean the filter

115V-1-60

Model	BHD- 22A	BHD- 35A	BHD- 50A	BHDP-50A	BHDP-60A
Orgill #	3471398	9649088	9649096	9821554	9821562
Pts/Day	22	35	50	50	60
Input Amps	2.2	3.25	4.8	4.8	4.1
Bucket Cap.	6.34 pints	12.68 pints	12.68 pints	12.68 pints	21.13 pints
Built-in Pump	No	No	No	Yes	Yes
Energy Star®	Yes	Yes	Yes	Yes	Yes
Sound (dBa)	50	50	51	51	59
Height (in.)	19.69	24.25	24.25	24.25	24.61
Width (in.)	15.2	15.43	15.43	15.43	18.78
Depth (in.)	10.24	11.1	11.1	11.1	14.17
Ship Wt lbs.	35.5	41.6	45.2	45.9	62.6

Our SVH-Series, rated up to 16 SEER, offers economical zone control because only the room or area being used is conditioned. Also inverter technology matches the compressor speed to the room's changing temperature requirements.

Optional 115 or 230 volt available on 9k and 12k.

S Series 16 SEER

Single Zone Heat Pumps

9,000 - 24,000 BTUH

Inverter technology

Up to 16 SEER!

Optional
Smartphone
Compatibility



Heat Pump	SVH09SB-0	SVH09SB-1	SVH12SB-0	SVH12SB-1	SVH18SB-1	SVH24SB-1
BTUH	9,000/	9,000/	12,000/	12,000/	18,000/	24,000/
clg/htg	9,800	9,800	12,000	12,000	18,000	24,000

Cooling down to 32°, heating down to 5°F.

D Series 19 SEER

Single Zone Heat Pumps

9,000 - 24,000 BTUH

Inverter technology

Optional
Smartphone
Compatibility



Heat pump models, all with inverter technology for efficiency. Modes include cooling, heating (heat pumps), fan only, dehumidification and sleep mode.



Includes wireless remote

	DVH09SG-0	DVH12SG-0	DVH09SG-1	DVH12SG-1	DVH18SG-1	DVH24SG-1
Cooling Capacity	9,000	12,000	9,000	12,000	18,000	24,000
Heating Capacity	10,000	12,000	9,000	12,000	18,000	24,000

Ductless Mini-Split Heat Pumps

Up to 19.8 SEER

Model	Specifications
VMH30SD-1	30,000 cool/30,000 heat BTU, 19.8 SEER, 208/230V
VMH36SD-1	36,000 cool/36,000 heat BTU, 16.0 SEER, 208/230V

Large capacity models are designed to condition spaces up to 1550 square feet. Super efficient heat pump mini-splits with variable speed compressors save up to 40% in energy consumption over standard models.

Includes wireless remote

Ambient Operating Temperature:

5° - 122°F Cooling

5° - 86°F Heating



Optional wired thermostat
Part No. 7800-206



Ceiling & Floor Console

Ductless Mini-Split Systems

UltraV Series Heat Pump Inverter Single Zone

Super efficient heat pumps are rated up to 25 SEER and operate down to -22°F.

100% capacity at 0°F.

Inverter technology saves up to 40% in energy consumption.



Includes wireless remote

VMH UltraV—Single/Multi Zone Ductless Mini-Splits

Our UltraV Series features a wide operating range with higher capacities in low temperatures. This allows the unit to operate in the cooling or heating mode with 100% output even when the outdoor temperature is as low as 0°F.

Advanced inverter technology means the room will reach the preset temperature quickly.

Energy usage is kept to a minimum as units run at low frequency most of the time. However, when required the unit ramps up automatically to reach and maintain the comfort level.

With this broad ambient range, these units are well suited to installations requiring year-round conditioning, both residential and light commercial.

All operate down to -22°F.

100% capacity: Multi at 5°F, Single at 0°F.

A- (outdoor)
B- (indoor)


208/230-1-60

UP TO 25 SEER

Outdoor Model	Specifications
A-VMH09SU-1	9,000 cool, 10,900 heat, 418 max. CFM
A-VMH12SU-1	12,000 cool, 11,800 heat, 418 max. CFM
A-VMH18SU-1B	17,000 cool, 18,000 heat, 512 max CFM
A-VMH24SU-1	24,000 cool, 24,000 heat, 794 max. CFM
Indoor Model	Specifications
B-VMH09SU-1†	9,000 cool, 10,900 heat, 418 max. CFM
B-VMH09SU-1C*	9,000 cool, 10,900 heat, 418 max. CFM
B-VMH12SU-1†	12,000 cool, 11,800 heat, 418 max. CFM
B-VMH12SU-1C*	12,000 cool, 11,800 heat, 418 max. CFM
B-VMH18SU-1B†	17,000 cool, 18,000 heat, 512 max CFM
B-VMH24SU-1†	24,000 cool, 24,000 heat, 794 max. CFM

VMH single and multi are interchangeable
*Optional programmable wired controller
†Optional smartphone control

Floor & Ceiling Console
Optional programmable wired controller

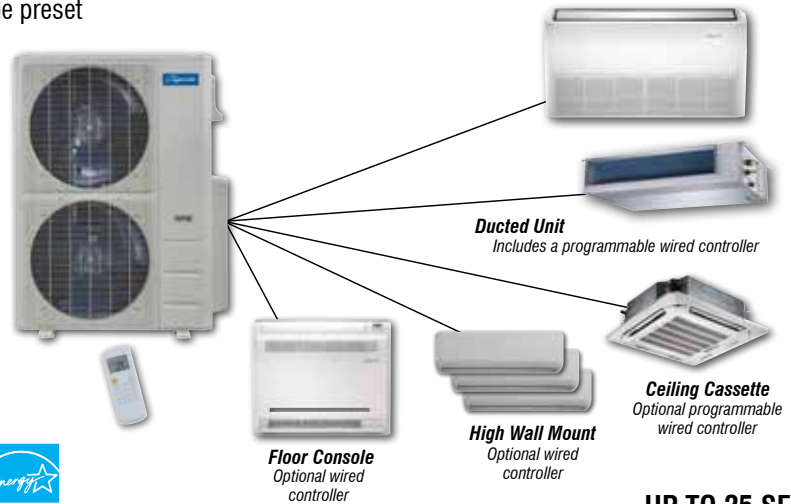

Ducted Unit
Includes a programmable wired controller

Floor Console
Optional wired controller

High Wall Mount
Optional wired controller

Ceiling Cassette
Optional programmable wired controller

208/230-1-60



UP TO 25 SEER

Indoor Ceiling Cassette	Capacity BTUH per unit	Floor Mount Indoor Unit	Capacity BTUH per unit
B-VMH09CU-1*	9,000 cool, 9,000 heat, 600 max. CFM	B-VMH12FU-1*	12,000 cool, 12,000 heat, 365 max. CFM
B-VMH12CU-1*	12,000 cool, 12,000 heat, 574 max. CFM	Ducted Unit	Capacity BTUH per unit
B-VMH18CU-1*	18,000 cool, 18,000 heat, 956 max. CFM	B-VMH09DU-1	9,000 cool, 9,000 heat, 353 max. CFM
B-VMH24CU-1*	24,000 cool, 24,000 heat, 1,400 max. CFM	B-VMH12DU-1	12,000 cool, 12,000 heat, 353 max. CFM
Cover Panel for Indoor Ceiling Cassette	Dimensions/Weight	B-VMH18DU-1	18,000 cool, 18,000 heat, 530 max. CFM
		B-VMH24DU-1	24,000 cool, 24,000 heat, 776 max. CFM
		Outdoor Unit	Capacity BTUH per unit
C-VMH91218CU-1*	25.47" x 25.47" x 1.97", 5.51 net, 9.92 ship	A-VMH18DU-1	19,000 cool, 20,000 heat, 2,130 CFM
C-VMH24CU-1*	37.4" x 37.4" x 2.17", 11.02 net, 17.64 ship	A-VMH28TU-1	28,000 cool, 28,000 heat, 2,130 CFM
Floor/Ceiling Mount Indoor	Capacity BTUH per unit	A-VMH36QU-1	36,000 cool, 35,800 heat, 4,500 CFM
		A-VMH48PU-1	48,000 cool, 37,800 heat, 4,500 CFM
		B-VMH18UU-1*	18,000 cool, 18,000 heat, 666 max. CFM
B-VMH24UU-1*	24,000 cool, 24,000 heat, 880 max. CFM		

*Outdoor units—Energy Star® compliant when combined with indoor units having an * by model number in above table


Ductless Mini-Split Systems

Multi-Zone Mini-Split Heat Pumps—Inverter Technology

Cool and heat one to five separate rooms or areas, depending on the capacity of the outdoor unit. Each zone has an independently controlled air handler with remote; ceiling cassettes and ducted units also have a wired wall thermostat. Built with enhanced filtration, quiet operation, multiple modes, low ambient cooling and “Follow Me” function.

Mix ‘n’ match indoor units

May be sized up to 150% of outdoor unit capacity, but may not provide full capacity for all indoor units. Total capacity of all indoor units can be as low as 50% of the outdoor unit’s capacity.

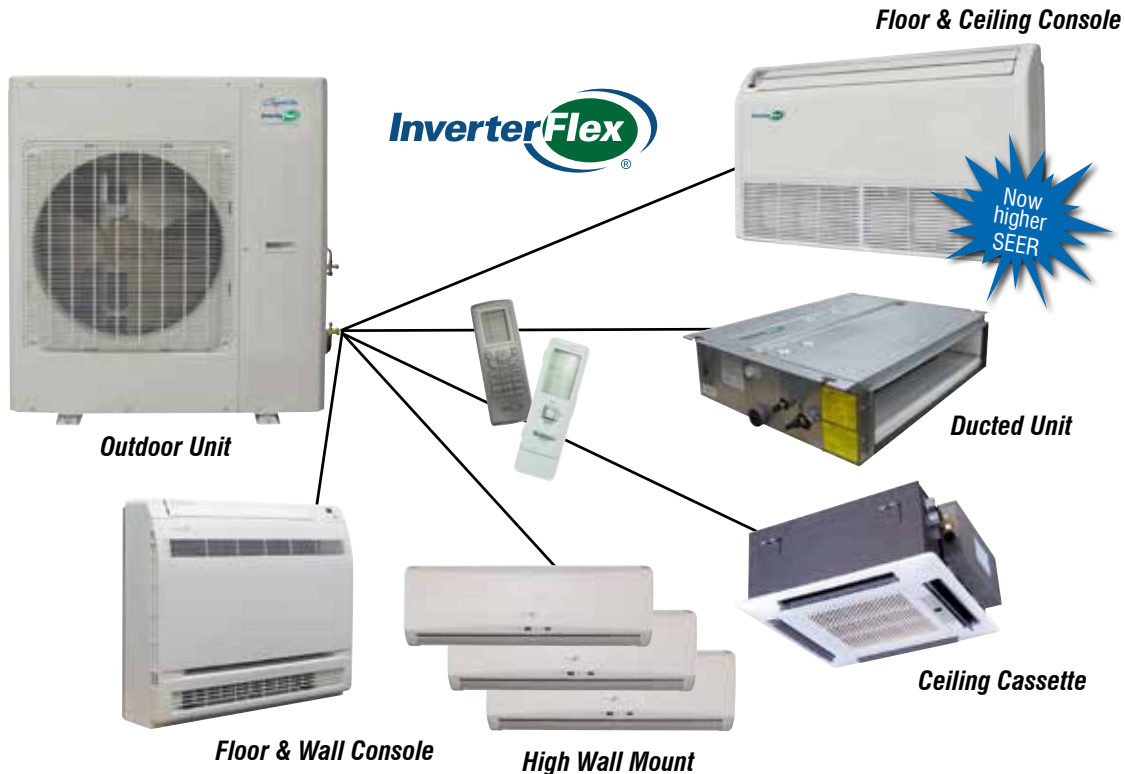

208/230-1-60

UP TO 22 SEER

Outdoor Unit	System Capacity BTUH	Cooling/Heating	Ducted Unit	Capacity BTUH per unit
A-VFH18DB-1	18,000 cool, 19,000 heat, HSPF 10.5		B-VFH09DA-1	8,500 cool, 9,500 heat, 265 max. CFM
A-VFH24TB-1	24,000 cool, 29,500 heat, HSPF 10.5		B-VFH12DA-1	11,900 cool, 13,100 heat, 324 max. CFM
A-VFH30QB-1	29,000 cool, 32,000 heat, HSPF 10.5		B-VFH18DA-1	15,300 cool, 18,700 heat, 412 max. CFM
A-VFH36QB-1	34,000 cool, 41,000 heat, HSPF 10.5		B-VFH21DA-1	20,400 cool, 22,600 heat, 588 max. CFM
A-VFH42PB-1	39,000 cool, 45,000 heat, HSPF 10.2		B-VFH24DA-1	22,800 cool, 27,400 heat, 588 max. CFM
High Wall Mount Indoor	Capacity BTUH per unit		Floor/Wall Console Indoor	Capacity BTUH per unit
B-VFH09MB-1	9,000 cool, 9,800 heat, 430 max. CFM		B-VFH09FA-1	9,000 cool, 9,500 heat, 383 max. CFM
B-VFH12MB-1	12,000 cool, 13,000 heat, 453 max. CFM		B-VFH12FA-1	12,000 cool, 13,000 heat, 441 max. CFM
B-VFH18MB-1	18,000 cool, 19,000 heat, 588 max. CFM		B-VFH18FA-1	18,000 cool, 19,000 heat, 494 max. CFM
B-VFH24MB-1	20,800 cool, 21,500 heat, 736 max. CFM		Floor/Ceiling Indoor Unit	Capacity BTUH per unit
Indoor Ceiling Cassette	Capacity BTUH per unit		B-VFH09UA-1	8,500 cool, 9,500 heat, 383 max. CFM
B-VFH12CA-1	12,000 cool, 13,000 heat, 353 max. CFM		B-VFH12UA-1	11,900 cool, 13,100 heat, 383 max. CFM
B-VFH18CB-1	14,400 cool, 16,000 heat, 353 max. CFM		B-VFH18UA-1	17,000 cool, 18,700 heat, 559 max. CFM
B-VFH24CA-1	22,800 cool, 27,400 heat, 694 max. CFM		B-VFH24UA-1	22,800 cool, 27,400 heat, 736 max. CFM
Front Panels	C-VFH1218CB-12K & 18K; C-VFH24CA-24K			

26" PTAC

Cooling only, electric heat and heat pump models provide year-round comfort, room by room; for hotels, motels, apartments, office buildings, schools, nursing homes and more. Design for quick installation in most 16" x 26" wall sleeves. Attractive appearance with state-of-the-art technology, these units minimize energy usage while ensuring guest comfort.

- **Energy-Efficient**—High energy efficiency ratios (EERs) save on utility costs
- **Quite Operation**—Indoor sound reduction is achieved through the unit's two permanently lubricated fan motors
- **Fresh Air Control Plate**—Allows outdoor air into room through filtered vent, 23 CFM
- **Easy to Service**—On-board computer diagnostics help prolong the life of the unit and simplify service; LED indicator flashes error codes



9,000 to 12,000 BTUH

Dimensions:
26" W x 15.6" H x 21.2" D (without sleeve)

Electric Heat and Heat Pump Feature 3.5 kW Heater

- 7602-800F**—Wall Sleeve, SnapEase, Steel, 26"
- 7602-801F**—Stamped Grille, Aluminum, 26"
- 7602-805F**—Architectural Grille, Aluminum, 26", Color-Clear
- 7602-806**—Thermostat Adapter

208/230V

FEATURE	COOLING ONLY		COOLING ONLY WITH ELECTRIC HEAT		HEAT PUMP WITH ELECTRIC HEAT	
	PTTC09A-1	PTTC12A-1	PTTE09A-1	PTTE12B-1	PTTH09A-1	PTTH12B-1
Cooling BTUH	9100/9300	11800/12000	9100/9300	11800/12000	9100/9300	11500/11700
EER	9.8/9.8	9.8/9.8	9.8/9.8	9.8/9.8	9.7/9.7	9.6/9.6
Cooling Amps	4.7/4.3	6.1/5.7	4.7/4.3	6.1/5.7	4.8/4.4	6.1/5.6
Max. Current Amps	6.1	15.2	15.2	15.2	15.2	15.2
Cooling Watts	930/950	930/950	940/960	1200/1220	1200/1220	1200/1220
Heat Pump BTUH	/	/	/	/	8600/8800	11200/11400
C.O.P. @ 47°F	/	/	/	/	10.2/10.2	9.9/9.9
Heat Pump Amps	/	/	/	/	4.3/4.0	5.9/5.4
Electric Heat Amps	/	/	14/15.2	14/15.2	14/15.2	14/15.2
Electric Heating Watts	/	/	2900/3500	2900/3500	2900/3500	2900/3500
Power Cord	LCDI 15 amp	LCDI 15 amp	LCDI 20 amp	LCDI 20 amp	LCDI 20 amp	LCDI 20 amp
Dehum. Pts/Hr	2.32	3.49	2.32	3.49	2.32	3.49
Airflow CFM	282/259/235	282/259/235	271/247/224	271/247/224	271/247/224	271/247/224
Indoor Sound Max. dB(A)	69/67/65	69/67/65	69/67/65	69/67/65	69/67/65	69/67/65
Out. Sound Max dB(A)	79/79/79	79/79/79	79/79/79	79/79/79	79/79/79	79/79/79
Net Wt./Shipping Wt. (lbs)	70.5/84	78/92	73/86	81/94	83/96	86/99

Note : Beginning mid to late summer the current PTTxxA-1 series will transition to the next series (PTTxxB-1). The new models will be available as stock depletes of current models.

- **Condensate Dispersal System**—“Slinger” system throws condensation onto the condenser coil for evaporation
- **Electronic Thermostat Control**—LED display makes it easy to select set point
- **Modes**—Cool, fan only and auto; heat pump models alternate between reverse cycle heat mode and electric heat mode
- **Compressor Restart Time Delay**—Prevents short cycling of the compressor
- **Freeze Protection**—Automatically activated when needed to keep the evaporator from freezing
- **Memory**—Restarts operation in the mode that was operating when power was lost
- **Fits Most Wall Sleeves**—Matching wall sleeve and grille available as optional accessories
- **Electric Heat**—Designed for supplemental heating only, automatically switches to electric heat when the temperature reaches 44° F or below



**7,000 to
15,000 BTUH**

**Dimensions:
42" W x 16¹/₁₆" H x 21¹/₁₆" D**

Electric Heat Standard—3 kW on 7K & 9K, 3 or 5 kW on 12K & 15K

Also available in 265V models, see brochure CA-PT.
Some series available in Sea Coast coating.

7602-500F—Wall Sleeve, insulated, knock-down:
saves room, easily assembled

7602-501F—Stamped grille

7602-505F—Architectural grille aluminum color- clear

208/230V COOLING ONLY WITH ELECTRIC HEAT

FEATURE	PTAC07A130B	PTAC09A130B	PTAC12A130B	PTAC12A150B	PTAC15A130B	PTAC15A150B
Cooling BTUH	6,800/7,200	9,300/9,500	11,800/12,000	11,800/12,000	14,300/14,500	14,300/14,500
EER	11.9/11.9	11.7/11.4	10.7/10.5	10.7/10.5	10.2/10.2	10.2/10.2
Cooling Amps	2.8/2.7	3.9/3.7	5.4/5.1	5.4/5.1	7.0/6.4	7.0/6.4
Max. Current Amps	3.6	5.1	7.3	7.3	8.9	8.9
Cooling Watts	570/605	795/835	1100/1140	1100/1140	1450/1470	1450/1470
Electric Heater kW	3.0	3.0	3.0	5.0	3.0	5.0
Elec. Heat BTUH @ 230V	10236	10236	10236	17060	10236	17060
Dehum. Pts/Hr	.63	1.27	2.32	2.32	3.59	3.59
Airflow CFM	352/250	352/250	405/333	405/333	405/370	405/370
Indoor Sound Max dB	45/35	45/35	48/42	48/42	48/45	48/45
Out. Sound Max dB	66	66	66	66	66	66
Net Wt./Shipping Wt.	97/110	102/115	108/121	108/121	112/126	112/126

208/230V HEAT PUMP WITH ELECTRIC HEAT

FEATURE	PTHP07A130B	PTHP09A130B	PTHP12A130B	PTHP12A150B	PTHP15A130B	PTHP15A150B
Cooling BTUH	6,800/7,200	9,300/9,500	11,800/12,000	11,800/12,000	14,300/14,500	14,300/14,500
EER	11.9/11.9	11.7/11.4	10.7/10.5	10.7/10.5	10.2/10.2	10.2/10.2
Cooling Amps	2.8/2.7	3.9/3.7	5.4/5.1	5.4/5.1	6.8/6.3	6.8/6.3
Max. Current Amps	3.6	5.1	7.3	7.3	8.9	8.9
Cooling Watts	570/605	795/835	1100/1140	1100/1140	1400/1420	1400/1420
Heat Pump BTUH	6,100/6,400	8,300/8,500	10,800/11,000	10,800/11,000	13,200/13,600	13,200/13,600
C.O.P. @ 47°F	3.30/3.30	3.50/3.50	3.50/3.30	3.50/3.30	3.30/3.30	3.30/3.30
Heating Amps	2.6/2.5	3.3/3.1	4.5/4.2	4.5/4.2	5.6/5.2	5.6/5.2
Heating Watts	535/560	685/710	900/950	900/950	1155/1180	1155/1180
Electric Heater kW	3.0	3.0	3.0	5.0	3.0	5.0
Elec. Heat BTUH @ 230V	10236	10236	10236	17060	10236	17060
Dehum. Pts/Hr	.63	1.27	2.32	2.32	3.59	3.59
Airflow CFM	352/250	352/250	405/333	405/333	405/370	405/370
Indoor Sound Max dB	45/35	45/35	48/42	48/42	48/45	48/45
Out. Sound Max dB	66	66	66	66	66	66
Net Wt./Shipping Wt.	99/112	104/117	110/123	110/123	112/126	112/126

10" Metal Desktop Fans



FD-1030DT0-MBL

10" Metal Oscillating Desktop Fan MATTE BLACK

10" vintage styled steel construction desktop fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	10	
Volts	115	
Finish/Color	Matte Black	
Watts	30	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Black	
Gross Weight	7.1	
Net Weight	5.7	
Certification	ETL	
Dimensions (in.)	Height	14
	Width	12
	Depth	9



FD-1030DT0-MBR

10" Metal Oscillating Desktop Fan BRASS

10" vintage styled steel construction desktop fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	10	
Volts	115	
Finish/Color	Brass	
Watts	30	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Brass	
Gross Weight	7.1	
Net Weight	5.7	
Certification	ETL	
Dimensions (in.)	Height	14
	Width	12
	Depth	9



FD-1030DT0-MCH

10" Metal Oscillating Desktop Fan CHROME

10" vintage styled steel construction desktop fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	10	
Volts	115	
Finish/Color	Chrome	
Watts	30	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Chrome	
Gross Weight	7.1	
Net Weight	5.7	
Certification	ETL	
Dimensions (in.)	Height	14
	Width	12
	Depth	9

12" Metal Desktop Fans



FD-1230DTO-MBL

12" Metal Oscillating Desktop Fan MATTE BLACK

12" vintage styled steel construction desktop fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	12	
Volts	115	
Finish/Color	Matte Black	
Watts	35	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Black	
Gross Weight	8.2	
Net Weight	7.1	
Certification	ETL	
Dimensions (in.)	Height	16
	Width	13
	Depth	9.5



FD-1230DTO-MBR

12" Metal Oscillating Desktop Fan BRASS

12" vintage styled steel construction desktop fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	12	
Volts	115	
Finish/Color	Brass	
Watts	35	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Brass	
Gross Weight	8.2	
Net Weight	7.1	
Certification	ETL	
Dimensions (in.)	Height	16
	Width	13
	Depth	9.5



FD-1230DTO-MCH

12" Metal Oscillating Desktop Fan CHROME

12" vintage styled steel construction desktop fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	12	
Volts	115	
Finish/Color	Chrome	
Watts	35	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Chrome	
Gross Weight	8.2	
Net Weight	7.1	
Certification	ETL	
Dimensions (in.)	Height	16
	Width	13
	Depth	9.5

12" Plastic Desktop Fans



FD-1230DTO-PBL

12" Plastic Oscillating Desktop Fan BLACK

12" black plastic desktop fan, 3 speeds with oscillation, base mounted button controls, direct drive motor, 3 plastic blades, adjustable metal tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, ultra quiet operation, convenient carry handle, 115 Volts - 60 HZ, 35 Watts, 5' 5" power cord, polarized plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	12	
Volts	115	
Finish/Color	Black	
Watts	35	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	Black	
Gross Weight	6.4	
Net Weight	5.1	
Certification	ETL	
Dimensions (in.)	Height	18.50
	Width	13.78
	Depth	10.24



FD-1230DTO-PWH

12" Plastic Oscillating Desktop Fan WHITE

12" white plastic desktop fan, 3 speeds with oscillation, base mounted button controls, direct drive motor, 3 plastic blades, adjustable metal tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, ultra quiet operation, convenient carry handle, 115 Volts - 60 HZ, 35 Watts, 5' 5" power cord, polarized plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	12	
Volts	115	
Finish/Color	White	
Watts	35	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	White	
Gross Weight	6.4	
Net Weight	5.1	
Certification	ETL	
Dimensions (in.)	Height	18.50
	Width	13.78
	Depth	10.24

Conquest-Air[®]

MARS[®]
marsdelivers.com

16" Metal Desktop Fans



FD-1630DTO-MBL

16" Metal Oscillating Desktop Fan MATTE BLACK

16" vintage styled steel construction desktop fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16	
Volts	115	
Finish/Color	Matte Black	
Watts	50	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Black	
Gross Weight	11	
Net Weight	9.3	
Certification	ETL	
Dimensions (in.)	Height	21
	Width	18
	Depth	10



FD-1630DTO-MBR

16" Metal Oscillating Desktop Fan BRASS

16" vintage styled steel construction desktop fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16	
Volts	115	
Finish/Color	Brass	
Watts	50	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Brass	
Gross Weight	11	
Net Weight	9.3	
Certification	ETL	
Dimensions (in.)	Height	21
	Width	18
	Depth	10



FD-1630DTO-MCH

16" Metal Oscillating Desktop Fan CHROME

16" vintage styled steel construction desktop fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, convenient carry handle, 120 Volts - 60 HZ, 30 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16	
Volts	115	
Finish/Color	Chrome	
Watts	50	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Chrome	
Gross Weight	11	
Net Weight	9.3	
Certification	ETL	
Dimensions (in.)	Height	21
	Width	18
	Depth	10

16" Plastic Desktop Fans



FD-1630DT0-PBL

16" Plastic Oscillating Desktop Fan BLACK

16" black plastic desktop fan, 3 speeds with oscillation, base mounted button controls, direct drive motor, 3 plastic blades, adjustable metal tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, ultra quiet operation, convenient carry handle, 115 Volts - 60 HZ, 35 Watts, 5' 5" power cord, polarized plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16	
Volts	115	
Finish/Color	Black	
Watts	45	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	Black	
Gross Weight	7.4	
Net Weight	5.9	
Certification	ETL	
Dimensions (in.)	Height	23.15
	Width	17.8
	Depth	11.22



FD-1630DT0-PWH

16" Plastic Oscillating Desktop Fan WHITE

16" white plastic desktop fan, 3 speeds with oscillation, base mounted button controls, direct drive motor, 3 plastic blades, adjustable metal tilt fan head, removable and washable grill around the fan blades to protect them from hands, objects and debris, ultra quiet operation, convenient carry handle, 115 Volts - 60 HZ, 35 Watts, 5' 5" power cord, polarized plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16	
Volts	115	
Finish/Color	White	
Watts	45	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	White	
Gross Weight	7.4	
Net Weight	5.9	
Certification	ETL	
Dimensions (in.)	Height	23.15
	Width	17.8
	Depth	11.22

MarsDelivers[®]

MARS[®]
marsdelivers.com

14" Metal Pedestal Fans



FP-1430DTO-MBL

14" Metal Oscillating Pedestal Fan MATTE BLACK

33" minimum height
47" maximum height

14" vintage styled steel construction pedestal fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 33" minimum height / 47" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 45 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	14	
Volts	115	
Finish/Color	Matte Black	
Watts	45	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Black	
Gross Weight	13.5	
Net Weight	11.9	
Certification	ETL	
Dimensions (in.)	Height	39
	Width	14
	Depth	13.5



FP-1430DTO-MBR

14" Metal Oscillating Pedestal Fan BRASS

33" minimum height
47" maximum height

14" vintage styled steel construction pedestal fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 33" minimum height / 47" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 45 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	14	
Volts	115	
Finish/Color	Brass	
Watts	45	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Brass	
Gross Weight	13.5	
Net Weight	11.9	
Certification	ETL	
Dimensions (in.)	Height	39
	Width	14
	Depth	13.5



FP-1430DTO-MCH

14" Metal Oscillating Pedestal Fan CHROME

33" minimum height
47" maximum height

14" vintage styled steel construction pedestal fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 33" minimum height / 47" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 45 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	14	
Volts	115	
Finish/Color	Chrome	
Watts	45	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	4	
Blades Color	Chrome	
Gross Weight	13.5	
Net Weight	11.9	
Certification	ETL	
Dimensions (in.)	Height	39
	Width	14
	Depth	13.5

16" Metal Pedestal Fans



FP-1630DT0-MBL

16" Metal Oscillating Pedestal Fan MATTE BLACK

35" minimum height
48" maximum height

16" vintage styled steel construction pedestal fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 35" minimum height / 48" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 50 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16
Volts	115
Finish/Color	Matte Black
Watts	50
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Black
Gross Weight	15.9
Net Weight	14.1
Certification	ETL
Dimensions (in.)	Height
	43
	Width
	16
	Depth
	13.5



FP-1630DT0-MBR

16" Metal Oscillating Pedestal Fan BRASS

35" minimum height
48" maximum height

16" vintage styled steel construction pedestal fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 35" minimum height / 48" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 50 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16
Volts	115
Finish/Color	Brass
Watts	50
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Brass
Gross Weight	15.9
Net Weight	14.1
Certification	ETL
Dimensions (in.)	Height
	43
	Width
	16
	Depth
	13.5



FP-1630DT0-MCH

16" Metal Oscillating Pedestal Fan CHROME

35" minimum height
48" maximum height

16" vintage styled steel construction pedestal fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 35" minimum height / 48" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 50 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	16
Volts	115
Finish/Color	Chrome
Watts	50
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Chrome
Gross Weight	15.9
Net Weight	14.1
Certification	ETL
Dimensions (in.)	Height
	43
	Width
	16
	Depth
	13.5

18" Metal Pedestal Fans



FP-1830DTO-MBL

18" Metal Oscillating Pedestal Fan MATTE BLACK

38" minimum height
51" maximum height

18" vintage styled steel construction pedestal fan with a matte black finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 38" minimum height / 51" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 60 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	18
Volts	115
Finish/Color	Matte Black
Watts	60
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Black
Gross Weight	17
Net Weight	15.2
Certification	ETL
Dimensions (in.)	Height
	48
	Width
	18
	Depth
	16



FP-1830DTO-MBR

18" Metal Oscillating Pedestal Fan BRASS

38" minimum height
51" maximum height

18" vintage styled steel construction pedestal fan with a brass finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 38" minimum height / 51" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 60 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	18
Volts	115
Finish/Color	Brass
Watts	60
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Brass
Gross Weight	17
Net Weight	15.2
Certification	ETL
Dimensions (in.)	Height
	48
	Width
	18
	Depth
	16



FP-1830DTO-MCH

18" Metal Oscillating Pedestal Fan CHROME

38" minimum height
51" maximum height

18" vintage styled steel construction pedestal fan with a chrome finish, 3 speeds with oscillation, direct drive motor, 4 aluminum fan blades, rotary switch, adjustable tilt fan head, height adjustable - 38" minimum height / 51" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 60 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	18
Volts	115
Finish/Color	Chrome
Watts	60
Speeds	3
Drive System	Direct drive
Blades (qty)	4
Blades Color	Chrome
Gross Weight	17
Net Weight	15.2
Certification	ETL
Dimensions (in.)	Height
	48
	Width
	18
	Depth
	16

18" Plastic Pedestal Misting Fan



FP-1830DTOM-PBL

18" Plastic Pedestal Misting Fan
BLACK

45" minimum height
54" maximum height

18" plastic pedestal misting fan with a black finish, 3 speeds with oscillation, direct drive motor, 3 black plastic fan blades, rotary switch, adjustable tilt fan head, height adjustable - 43" minimum height / 54" maximum, removable and washable grill around the fan blades to protect them from hands, objects and debris, 120 Volts - 60 HZ, 35 Watts, 5' 5" power cord, fused safety plug, minimal assembly required, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	18
Volts	115
Finish/Color	Black
Watts	35
Speeds	3
Drive System	Direct drive
Blades (qty)	3
Blades Color	Black
Gross Weight	21.6
Net Weight	16.8
Certification	ETL
Dimensions (in.)	Height
	54.33
	Width
	19.69
	Depth
	16.93

20" Box Fans



FF-2030Dxx-PBL

20" Plastic Box Fan
BLACK

20" box fan with a black finish, 3 speeds, direct drive motor, 5 black plastic fan blades, rotary switch, 120 Volts - 60 HZ, 55 Watts, 5' 5" power cord, fused safety plug, fully assembled for immediate use, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	20
Volts	115
Finish/Color	Black
Watts	55
Speeds	3
Drive System	Direct drive
Blades (qty)	5
Blades Color	Black
Gross Weight	8.4
Net Weight	6.9
Certification	ETL
Dimensions (in.)	Height
	21.06
	Width
	20.67
	Depth
	4.13



FF-2030Dxx-PWH

20" Plastic Box Fan
WHITE

20" box fan with a white finish, 3 speeds, direct drive motor, 5 white plastic fan blades, rotary switch, 120 Volts - 60 HZ, 55 Watts, 5' 5" power cord, fused safety plug, fully assembled for immediate use, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	20
Volts	115
Finish/Color	White
Watts	55
Speeds	3
Drive System	Direct drive
Blades (qty)	5
Blades Color	White
Gross Weight	8.4
Net Weight	6.9
Certification	ETL
Dimensions (in.)	Height
	21.06
	Width
	20.67
	Depth
	4.13

28" & 42" Tower Fans

9" Twin Window Fan



Control Panel

FT-2830Dx0-PBL

28" Plastic Tower Fan BLACK

28" tower fan with a black finish, 3 speed settings, top mounted rotary control, oscillation, space saving design, 120 volts, 35 watts, fully assembled, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	28
Volts	115
Finish/Color	Black
Watts	35
Speeds	3
Drive System	Direct drive
Blades (qty)	—
Blades Color	—
Gross Weight	7.5
Net Weight	6.4
Certification	UL
Dimensions (in.)	Height
	27.5
	Width
	12
	Depth
	12



Control Panel



Remote Control

FT-4230Dx0-PBL

42" Plastic Tower Fan BLACK

42" tower fan with a black finish, 3 speed settings, top mounted controls with remote control, oscillation, space saving design, 120 volts, 45 watts, fully assembled, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	42
Volts	115
Finish/Color	Black
Watts	45
Speeds	3
Drive System	Direct drive
Blades (qty)	—
Blades Color	—
Gross Weight	13.7
Net Weight	10.4
Certification	UL
Dimensions (in.)	Height
	41.5
	Width
	9.45
	Depth
	9.45



FWI-0930Dxx-PWH

9" Plastic Twin Window Fan WHITE

9" twin window fan with a white finish, 3 speeds, manual room temperature/thermostat, 2 independent fan motors, double built-in extending panel for window installation, fan can be reversed to exhaust stale hot air from the inside with the touch of a button, clip on feet to convert to floor fan, direct drive motor, 100% copper motor, 6 white fan blades, rotary switch, convenient carry handle, 120 Volts - 60 HZ, 55 Watts, 5' power cord, fused safety plug, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	9
Volts	115
Finish/Color	White
Watts	55
Speeds	3
Drive System	Direct drive
Blades (qty)	6
Blades Color	White
Gross Weight	7.7
Net Weight	6.6
Certification	ETL
Dimensions (in.)	Height
	12.83
	Width
	23.86
	Depth
	5.51

18" Plastic Wall Fan



FW-1830DT0-PWH

18" Plastic Wall Fan WHITE

18" wall fan with a white finish, 3 speeds with control dial and pull cord, 120 volts - 60 HZ, 55 watts, powder coated steel grill, chemical resistant polypropylene blades, 30 degree oscillation or can be locked in non oscillating position, 1 year limited warranty.

SPECIFICATIONS

Diameter in Inches	18	
Volts	115	
Finish/Color	White	
Watts	55	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	White	
Gross Weight	10.3	
Net Weight	7.1	
Certification	ETL	
Dimensions (in.)	Height	20.79
	Width	7.76
	Depth	20.67

20" Metal Floor Fan



FF-2030DTx-MBL

20" Metal Floor Fan BLACK

20" metal floor fan with black finish, 3 speed fan settings, 3 aluminum fan blades, adjustable tilt fan head, all metal construction, 100% copper motor, 120 Volts, 140 watts, carry handle, rubber pads protect surfaces, converts to wall use, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	20	
Volts	115	
Finish/Color	Black	
Watts	140	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	3	
Blades Color	Aluminum	
Gross Weight	15.8	
Net Weight	12.5	
Certification	UL	
Dimensions (in.)	Height	23.23
	Width	10.04
	Depth	23.62

20" Plastic Floor Fan



FF-2030DTx-PBL

20" Plastic Circulator Floor Fan BLACK

20" circulator floor fan with black finish, 3 speed fan settings, 5 plastic fan blades, adjustable tilt fan head, plastic construction, 120 Volts, 70 watts, convenient carry handle, converts to wall use, fully assembled, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	20	
Volts	115	
Finish/Color	Black	
Watts	70	
Speeds	3	
Drive System	Direct drive	
Blades (qty)	5	
Blades Color	Black	
Gross Weight	9	
Net Weight	7.3	
Certification	ETL	
Dimensions (in.)	Height	24.17
	Width	7.09
	Depth	24.09

30" Commercial Pedestal Fans



FP-3030DTO-MBL

30" Metal Oscillating Pedestal Fan BLACK

63" minimum height
76" maximum height

30" metal oscillating pedestal fan with black finish, 3 fan speeds, 3 aluminum fan blades, adjustable height - 63" to 77", adjustable tilt, indoor use only, 7800 CFM, direct drive, 6' power cord, 115V, 280 Watts, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches		30
Volts		115
Finish/Color		Black
Watts		280
Speeds		3
Drive System		Direct drive
Blades (qty)		3
Blades Color		Aluminum
Gross Weight		50.4
Net Weight		40.2
Certification		UL
Dimensions (in.)	Height	63
	Width	32
	Depth	27



FP-3030DTx-MBL

30" Metal Fixed Pedestal Fan BLACK

63" minimum height
76" maximum height

30" metal fixed pedestal fan with black finish, 3 fan speeds, 3 aluminum fan blades, adjustable height - 63" to 72", adjustable tilt, indoor use only, 7800 CFM, direct drive, 6' power cord, 115V, 230 Watts, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches		30
Volts		115
Finish/Color		Black
Watts		230
Speeds		3
Drive System		Direct drive
Blades (qty)		3
Blades Color		Aluminum
Gross Weight		47.3
Net Weight		39.7
Certification		UL
Dimensions (in.)	Height	63
	Width	32
	Depth	27

COMMERCIAL



FB-2430DTx-MBL

24" Tilted Drum Fan
BLACK

24" tilted drum fan with a black finish, steel construction, 2 fan speeds, adjustable tilt, direct drive, convenient handles, 2 wheels, 8,450 CFM, 115 V, 282 watts, 6' power cord, indoor use only, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	24
Volts	115
Finish/Color	Black
Watts	282
Speeds	2
Drive System	Direct drive
Blades (qty)	3
Blades Color	Aluminum
Gross Weight	30.8
Net Weight	27.6
Certification	UL
Dimensions (in.)	Height 30
	Width 29.2
	Depth 9.5



FB-3030Dxx-MBL

30" Fixed Direct Drive Drum Fan
BLACK

30" fixed drum fan with a black finish, steel construction, 2 fan speeds, 3 aluminum fan blades, direct drive, convenient handles, 2 wheels, 7,800 CFM, 115 V, 340 watts, 6' power cord, indoor use only, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	30
Volts	115
Finish/Color	Black
Watts	340
Speeds	2
Drive System	Direct drive
Blades (qty)	3
Blades Color	Aluminum
Gross Weight	49.3
Net Weight	42.3
Certification	UL
Dimensions (in.)	Height 34
	Width 32.7
	Depth 9.5



FB-3630Dxx-MBL

36" Fixed Direct Drive Drum Fan
BLACK

36" fixed drum fan with a black finish, steel construction, 2 fan speeds, 3 aluminum fan blades, direct drive, convenient handles, 2 wheels, 11,950 CFM, 115 V, 520 watts, 6' power cord, indoor use only, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	36
Volts	115
Finish/Color	Black
Watts	520
Speeds	2
Drive System	Direct drive
Blades (qty)	3
Blades Color	Aluminum
Gross Weight	59.1
Net Weight	52.3
Certification	UL
Dimensions (in.)	Height 39.5
	Width 39
	Depth 11.2

36" 42" Commercial Drum Fans



FB-3630Bxx-MBL

36" Fixed Belt Drive Drum Fans BLACK

36" fixed belt drive drum fan with a black finish, steel construction, 2 fan speeds, 3 aluminum fan blades, convenient handles, 2 wheels, 13,400 CFM, 115 V, 520 watts, 6' power cord, indoor use only, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	36
Volts	115
Finish/Color	Black
Watts	520
Speeds	2
Drive System	Belt drive
Blades (qty)	4
Blades Color	Aluminum
Gross Weight	78.9
Net Weight	71.1
Certification	UL
Dimensions (in.)	Height
	39
	Width
	39
	Depth
	21



FB-4230Bxx-MBL

42" Fixed Belt Drive Drum Fans BLACK

42" fixed belt drive drum fan with a black finish, steel construction, 2 fan speeds, 3 aluminum fan blades, convenient handles, 2 wheels, 15,790 CFM, 115 V, 670 watts, 6' power cord, indoor use only, 1 year limited warranty

SPECIFICATIONS

Diameter in Inches	42
Volts	115
Finish/Color	Black
Watts	670
Speeds	2
Drive System	Belt drive
Blades (qty)	4
Blades Color	Aluminum
Gross Weight	96.0
Net Weight	86.5
Certification	UL
Dimensions (in.)	Height
	45
	Width
	44
	Depth
	22.8

Comfy-Air[®]

MARS[®]
marsdelivers.com



The Quality Leader in Conditioning Air

There's the confidence that comes from dealing with a company that's been around for generations. Founded in 1933, we can actually trace our beginnings to the Wingert Furnace Company which began building coal, gas and oil furnaces in 1907. Headquartered in Jackson, Michigan, since 1955, our facility, our staff and our product offerings have grown over the years to meet changes in the HVAC industry, including emerging technologies and regulatory requirements.

MARS is known throughout the industry for efficient, reliable products and in-season availability. Whether for heating or cooling, these products meet or exceed industry standards for energy efficiency. Added to that, the line is constantly being updated to add the features and new technology customers demand.

REST ASSURED: VALUE-ADDED PROGRAMS

When you buy Comfort-Aire products, you're purchasing the peace of mind that comes from dealing with a company that's been in business for over 75 years. We have a well-deserved reputation not only for quality products, but also for standing behind those products with excellent warranty and support programs.

Comfort-Aire backs all its products with some of the strongest warranties in the industry. For details see the warranty card packed with the unit, or refer to our web site for copies of warranty details. Our products are built to exacting standards, but should you experience a problem, you can rely on our nationwide network of service providers.

Our room air products are accompanied by detailed, comprehensive installation and operating manuals and these, along with other technical data, are also available on our website.



The Quality Leader in Conditioning Air

There's the confidence that comes from dealing with a company that's been around for generations. Founded in 1933, we can actually trace our beginnings to the Wingert Furnace Company which began building coal, gas and oil furnaces in 1907. Headquartered in Jackson, Michigan, since 1955, our facility, our staff and our product offerings have grown over the years to meet changes in the HVAC industry, including emerging technologies and regulatory requirements.

MARS is known throughout the industry for efficient, reliable products and in-season availability. Whether for heating or cooling, these products meet or exceed industry standards for energy efficiency. Added to that, the line is constantly being updated to add the features and new technology customers demand.

REST ASSURED: VALUE-ADDED PROGRAMS

When you buy Comfort-Aire products, you're purchasing the peace of mind that comes from dealing with a company that's been in business for over 75 years. We have a well-deserved reputation not only for quality products, but also for standing behind those products with excellent warranty and support programs.

Comfort-Aire backs all its products with some of the strongest warranties in the industry. For details see the warranty card packed with the unit, or refer to our web site for copies of warranty details. Our products are built to exacting standards, but should you experience a problem, you can rely on our nationwide network of service providers.

Our room air products are accompanied by detailed, comprehensive installation and operating manuals and these, along with other technical data, are also available on our website.

Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer.

Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.

Incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product.

Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.

"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."