


WE PROUDLY SPONSOR:





ICETEAM.COM _ SOUTHERNGIRLPURSUIT.COM

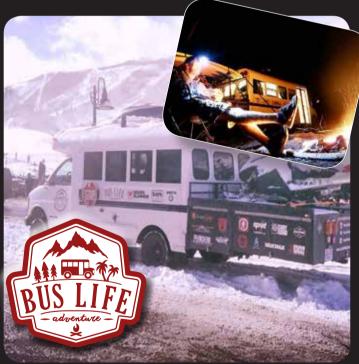





ROCKYMOUNTAINMEATHUNTER.COM

THE UNIQUE ATTRIBUTES OF EACH OF OUR SPONSOR RECIPIENTS ADDS VALUE AND ADDED INSIGHT INTO AN ALREADY RIGOROUSLY TESTED PRODUCT LINE. BECAUSE OF THEM, WE ARE CONSISTENTLY IMPROVING AND ADAPTING TO THE CHANGING ENVIRONMENTS AND EXTREMES OUR PRODUCTS ARE EXPOSED TO.









IMAGE LIBRARY

High res and low res product images are available for download from our online image gallery. Call 800.251.0001 for login information.

Table of Contents

HEAT

<u>4-5</u>
6-10
11
12
13
14
15
16-17
16-21
22-25
26
27
28-29
30-33

CAMP

Portable Shower Systems	34-35
Battery Operated Tent Fan	36
Portable Washing Machine	36
Angle Iron Propane Camp Stoves	37

CONNECT

Plan-O-Grams	38-39
Hose Assemblies	40-42
Propane Regulators	42-43
Brass Fittings and Accessories	44-46
Accessory Kits	47
Gas Mate™ Gas Quick Connector Kits	48
Propane Accessories	49
Tank Top Replacement Parts	50
Mr. Heater FAK/FALP Replacement Parts	51-52
Mr. Heater Buddy® and Vent Free Replacement Parts	53
BaseCamp Gaslight Replacement Parts	54
OEM Replacement Parts	55
Other Manufacturer Replacement Parts	56

Complete Product Index 57-60



U.S. icon located on the lower right of each product image indicates domestic availability from our Cleveland OH distribution center.

Globe icon represents availability on a direct ship basis from China.



Tank Top Heaters

HEATER "ORIGINAL" TANK TOP HEATERS FOR OUTDOOR USE

THE ORIGINAL... FOR OVER 40 YEARS! THE DIFFERENCE -

Mr. Heater tank tops are constructed from premium materials featuring chrome reflectors and a high grade stainless steel burning surface.

Simply put, MR. HEATER TANK TOPS LAST LONGER THEN ANY OTHER TANK TOP!

MR. HEATER TANK TOP HEATERS FEATURE:

- No electricity required Variable controlled heat
- · Convenient Portable, easy to light
- · Fast Heat when you want it
- Economical Costs pennies per hour to operate
- All Necessary Fittings Included
- Automatic Safety Shut-Off
- Made of durable materials & quality construction
- Outdoor Use Only





CSA Certified

Model #	Description
F242540	MH540T Heater - 45,000 Btu/hr.

- Unique rotating burner features both directional & multi-directional heat
- 540 Degrees of heat
- 3 Heat Settings: 30,000, 36,000, 45,000 BTU's
- No Electricity Needed
- Instant, Efficient Outdoor Heat
- · Quiet, Easy To Use
- Accidental Tip-Over Safety Shut-Off
- Outdoor Use Only



















Model #	Description
F242300	MH15C Heater/Cooker - 10,000-15,000 Btu/hr.

Multiple heat settings: 10,000, 12,500, 15,000 BTU's

Safety shut-off

Polished chrome reflector

 Use with disposable cylinders or 20 lb. refillable tanks (Connects to 20lb. tanks with F273701, F273702 Hose Assemblies - sold separately)

Outdoor use only

Not available in Canada



2 products in 1: Infrared Heater/Infrared Cooker

Model #	Description
F242200	MH15 Heater - 10,000-15,000 Btu/hr.

Multiple heat settings: 10,000, 12,500, 15,000 BTU's

Use with 1 lb. cylinder

Lightweight • Polished chrome reflector

Base included

Outdoor use only

Typical Uses: • Hunting • Fishing • Camping Not available in Canada





Model #	Description
F242100	MH15T Heater - 10,000-15,000 Btu/hr.

Multiple heat settings: 10,000, 12,500, 15,000 BTU's

Tip-over safety shut-off
 Soft Nose P.O.L.

Premium grade stainless steel burning surface

Polished chrome reflector

Direct connection to 20lb. bulk propane tank • Certified

Outdoor use only

Model #	Description
F242105	MH15TS with Piezo spark ignition

Typical Uses: • Camping/Fishing • Construction Sites • Loading Docks • Sporting Events



Model #	Description
F242650	MH30T Heater - 10,000-30,000 Btu/hr.
	·

Multiple heat settings: 10, 12.5, 15, 20, 25, 30,000 BTU's
Tip-over safety shut-offs
Soft Nose P.O.L.

Premium grade stainless steel burning surface

Direct connection to 20lb. bulk propane tank

Operate one or two burners at a time

Directional, adjustable heads

Polished chrome reflector
 Certified

Outdoor use only

Model #	Description
F242655	MH30TS with Piezo spark ignition

Typical Uses: • Camping/Fishing • Construction Sites • Loading Docks • Sporting Events



Multiple heat settings:

10, 12.5, 15, 20, 25, 30, 37.5, 45,000 BTU's

• Tip-over safety shut-offs • Soft Nose P.O.L.

Premium grade stainless steel burning surface

Direct connection to 20lb. bulk propane tank

Operate one, two or three burners at a time

• Directional, adjustable heads • Polished chrome reflector

Certified

Outdoor use only




Typical Uses: • Camping/Fishing • Construction Sites • Loading Docks • Sporting Events



Buddy® Heaters

Drawing on decades of experience as a market leader and innovator, Mr. Heater's indoor safe propane Buddy Heaters have become America's Most Popular Portable Heaters. For years, patented Buddy Heaters have done battle against the gripping cold of winter in the hunting blind, deer stand, and on the cold open ice, where mother nature is at her worst. Buddy Heaters have delivered life saving heat during power outages and natural disasters as well as spot heat in garages, barns, cabins, and workshops across the country.

For times when you don't want winter to get in the way—Get a Buddy!!

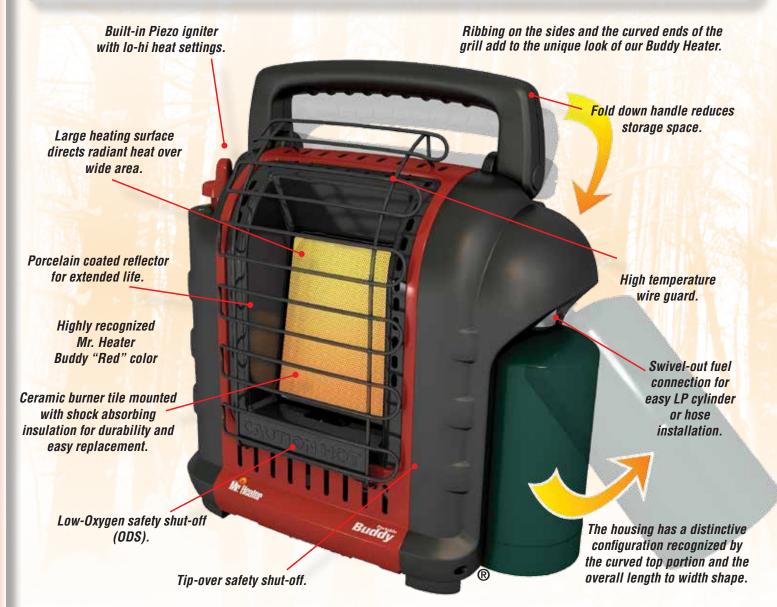

IDEAL FOR: • Emergency Heat • Tents/Campers • Workshops/Job Sites • Porches/ Patios/Decks

- Garages & Storage Buildings Picnics/Tailgate Parties Construction Trailers Sporting Events
- Barns/Sheds Hunting Blinds & Shelters Ice Fishing Shanties





CSA Certified

Multiple patents, Patents pending.

Buddy heaters are not designed for permanent installation or for use above an altitude of 7,000 ft.

Always check local codes for permitted uses.

NOTICE: Not for use in a "dwelling home" in California

* Certified indoor use in the USA except Massachusetts. Outdoor use only in Massachusetts & Canada.

ONLY USE BUDDY HOSES WHEN CONNECTING ANY BUDDY HEATER TO 20 Ib. BULK PROPANETANKS

NEVER use third party accessories or attachments with this heater (including attachments for warming or cooking);
doing so will void the product warranty, is extremely dangerous, and may result in personal injury or death to you or others.

SELF GENERATING POWER



Generates LED light

Model #	Description
F275300	MH11EB E-Buddy® (Indoor Safe)- 6,000 and 11,000 Btu/hr.
F275310	MH11EB E-Buddy® - (Massachusetts/Canada)*

- 2 heat settings (6,000 &11,000 Btu/hr)
- Swivel regulator and single control
- Thermal-Electric generator -
- Charge portable electronic devices (Phone, tablet, GPS, Camera)
- Integrated On/Off LED thermal-electric lighting in fold down handle
- 450mA, 2W power output USB plugin
- Low oxygen safety shut-off system (ODS) and tip-over safety shut-off
- Heats up to 275 sq. ft.
- Runs off a 1 lb. cylinder, connects to a 20lb. tank with optional hose and filter
- Runs approx. 3.5 hours on 1 lb. cylinder on low setting
- Certified











LED light bar built into handle



Charges USB devices









Buddy® Heaters

Model #	Description
F215100	MH4B "Little Buddy®" Heater (Indoor Safe) - 3,800 Btu/hr.
F215120	MH4B "Little Buddy®" (Massachusetts/Canada Only)*

- One button ignition/on function
- Tip-over safety shut-off
- 8" round stand uses little floor space
- Low oxygen safety shut-off system
- Heats up to 95 sq. ft.
- Connects directly to one 1lb. disposable propane cylinder
- Runs approx. 5.6 hours on 1 lb. cylinder
- Certified







Model #	Description
F232000	MH9BX Portable "Buddy®" Heater (Indoor Safe) - 4,000 and 9,000 Btu/hr.
F232050	MH9BX Portable "Buddy®" Heater (Massachusetts/Canada Only)*

- 2 heat settings (4,000 & 9,000 Btu/hr)
- Swivel regulator and single control
- Fold down handle
- Low oxygen safety shut-off system (ODS)
- Tip-over safety shut-off
- Heats up to 225 sq. ft.
- Runs off a 1 lb. cylinder, connects to a 20lb. tank with optional hose and filter
- Runs approx. 5.4 hours on 1 lb. cylinder on low setting
- Certified







F273704 10' Buddy hose (No filter required)



F273701 5' hose assembly (Filter required) **F273702** 12' hose assembly (Filter required)



F273699 Fuel filter







F2320789BX Portable Buddy Carry Bag





Outdoor use only in Massachusetts & Canada.

Buddy® Heaters

Model #	Description
F232035	MH12HB Hunting Buddy® (Indoor Safe)- 6,000 and 12,000 Btu/hr.
F232045	MH12HB Hunting Buddy® - (Massachusetts/Canada)*

2 heat settings (6,000 & 12,000 Btu/hr)

- Quiet electronic ignition
- Swivel regulator and single control
- Fold down handle
 Heavy Duty burner guard
- Low oxygen safety shut-off system (ODS)
- Tip-over safety shut-off
- Runs off a 1 lb. cylinder, connects to a 20lb. tank with optional hose and filter
- Storage space for spare 1 lb. cylinder, gloves, access.
- Runs approx. 3.5 hrs on 1 lb. cylinder
- Heats up to 300 sq. ft.

Certified







Optional Accessories.

F273701 5' hose assembly (No filter required) F273702 12' hose assembly (Filter required on both)



ianition









F273699 Fuel filter





Model #	Description
F274800	MH18B "Big Buddy®" Heater (Indoor Safe) - 4,000, 9,000 and 18,000 Btu/hr.
F274865	MH18B "Big Buddy®" Heater (Massachusetts/Canada Only)*

- 3 heat settings (4,000, 9,000 & 18,000 Btu/hr)
- Swivel regulator and single control
- Low oxygen safety shut-off system (ODS)
- Tip-over safety shut-off
- Heats up to 450 sq. ft.
- Fan* (Operates on 4 D batteries or A/C adapter both sold separately)
- Connects to two 1lb. cylinders or to a 20lb. tank with optional hose
- Runs approx. 11 hours on two 1 lb. cylinders on low setting
- Certified
- * Fan not required for use

Optional Accessories.



F273701 5' F273702 12' Hose assembly (Filter required)



F273699 Fuel Filter



F274889 18B Buddy Carry Bag



F273704 10' Buddy hose (No filter required)





F271803 Tank to quick disconnect hose (No filter required)



F276127 AC adapter





Ideal for duck blinds, pop-up blinds, deer stands, hunting camps, cabins, tents and emergencies.

BUDDY HEATERS - QUICK COMPARE











			-	-	
Model #	MH4B	мн9вх	MH11EB	MH12HB	MH18B
Heat Type	Radiant	Radiant	Radiant	Radiant	Radiant
Heat Settings	3,800 Btu/hr	4,000/9,000 Btu/hr	6,000/11,000 Btu/hr	6,000/12,000 Btu/hr	4,000/9,000/18,000 Btu/hr
Heat Up To:	95 Sq. Ft.	225 Sq. Ft.	275 Sq. Ft.	300 Sq. Ft.	450 Sq. Ft.
Ignition	Piezo	Piezo	Piezo	Electronic	Piezo
Fuel	1# Propane Cylinder	1# Propane Cylinder	1# Propane Cylinder Storage for 2nd cylinder	1# Propane Cylinder Storage for 2nd cylinder	(2X) 1# Propane Cylinder
Run Time 1# Propane Cylinder	5.6 hours	5.4 Hrs. Low 2.4 Hrs. High	3.5 Hrs. Low 2. Hrs. High	3.5 Hrs. Low 1.8 Hrs. High	11 Hrs. Low (Two 1#) 4.8 Hrs. Med. (Two 1#) 2.8 Hrs. High (Two 1#)
Attach to 20# Propane Tank	NO	YES	YES	YES	YES
Run Tlme on (1) 20# Tank	N/A	108 Hrs. Low 48 Hrs. High	72 Hrs. Low 39 Hrs. High	72 Hrs. Low 36 Hrs. High	108 Hrs. Low 48 Hrs. Med. 24 Hrs. High
Accidental Tip-Over Safety Shut-Off	YES	YES	YES	YES	YES
Low Oxygen Safety Shut-Off	YES	YES	YES	YES	YES
Indoor Safe	YES (Certified outdoor use only in MASS/ Canada)				
Model# for Mass/Canada (Outdoor Use Only)	#F215120	#F232050	#F275310	#F232045	#F274865
Certified	YES	YES	YES	YES	YES
Patented Swivel Regulator	NO	YES	YES	YES	YES
Fan Included	NO	NO	YES	NO	YES



The only golf cart heater with: Oxygen Depletion System Tip-over safety switch Wind-resistant screen and pilot system

> Built to withstand rugged terrain

FEATURES:

- Easy-Grip Handle
- Porcelain **Coated Reflector**
- Wind Resistant Screen
- Large Radiant **Heating Surface**
 - Pilot Wind Guard
 - Heavy-Duty Wire Guard
- Oxygen Depletion System (ODS)
- Tip-Over Safety Switch
- Cup Holder Adapter (Fits Most Golf **Cart Cup Holders**)

- Model # **Description** F242010 MH4GC Golf Cart Heater (Propane) - 4,000 Btu/hr.
- 4,000 BTU
- Operates up to 5.5 hours on 1 lb. propane cylinder (not included)
- Wind resistant protective screen
- · High-intensity radiant heat
- Safety systems
 - Oxygen depletion system and tip-over safety switch
- Outdoor Use Only
- Certified

Patented





Model #	Description
F232078	9BX Portable Buddy Carry Bag
F274889	18B Portable Buddy Carry Bag

- Double zipper provides large opening for Buddy heaters
- Large front zippered pocket holds hoses, regulators and accessories
- Padded shoulder strap and zippered rear pocket
- Quick access to two 1 lb. propane cylinders

Ships 6 in counter display carton or product can be pegged independently.

Zippered rear pocket

Oversized double zippers provide large opening for heaters

Large front zippered pocket holds hoses, regulators and accessories

Padded shoulder strap

Quick access to two
1 lb. propane cylinders



1 lb. MR. HEATER CABINET HEATER

Model #	Description
F227500	MH18CH - (Propane) - 6,000, 12,000 and 18,000 Btu/hr.

- Heats up to 450 sq. ft. Hi-Med-Low heat settings
- 20 lb bulk tank mounts inside unit for easy portability
- Hose and regulator included
- Tip-over safety shut-off switch
- Low oxygen safety shut-off system (ODS)
- Rugged steel construction
- Limited 1 year warranty
- Certified
 - * 7000 ft High Altitude Restriction



Portable radiant heat for ALL OUTDOOR APPLICATIONS! Simply roll this heater around on its heavy-duty lockable casters to deliver heat right where you need it. The MH18CH features a tip-over safety switch and a low oxygen safety shut-off system, and requires no electricity to operate. With 3 heat settings and a quick Piezo ignition the Mr. Heater cabinet heater is efficient and economical to operate.



Forced Air Electric Heaters

Model #	Description
F236120	MH165FAET 1.5 Kw Portable Forced Air Electric Heater

- 5,118 Btu/hr heats up to 136 sq. ft
- Thermostatically controlled guiet operation
- Adjustable heat angle with fan only option
- 6' Cord & plug included
- 120V, 15 amp
- Certified









Model #	Description
F236125	MH360FAET 3.6 Kw Portable Forced Air Electric Heater

- 12,283 Btu/hr heats up to 307 sq. ft
- Thermostatically controlled guiet operation
- Adjustable heat angle with fan only option
- 6' Cord & plug included
- 240V 15 amp double pole breaker required
- Certified





Model #	Description
F236130	MH530FAET 5.3 Kw Forced Air Electric Garage Heater

- 18,084 Btu/hr heats up to 452 sq. ft
- Thermostatically controlled quiet operation
- High and low heat settings
- Adjustable heat angle with fan only option
- Ceiling mount with tilt and swivel feature
- 6' Cord included (plug sold separately)
- 240V 30 amp double pole breaker required
- Certified





Model #	Description	
F236135	MH530FAERT 5.3 Kw Forced Air Electric	
	Garage Heater w/remote thermostat	

- 18,084 Btu/hr heats up to 452 sq. ft
- · Remote thermostat with 6' cord
- Thermostatically controlled quiet operation
- High and low heat settings
- Adjustable heat angle with fan only option
- Ceiling mount with tilt and swivel feature
- 6' Cord included (plug sold separately)
- 240V 30 amp double pole breaker required
- Certified











Handheld Torches

Model #	Description
F272603	MH500DPT Handheld Torch - 500,000 Btu/hr.

- 500,000 Btu/hr
- Piezo ignition
- Ergonomic handle with squeeze trigger for flow adjustment
- Needle valve adjustment
- 36" HD angled ergonomic shaft and form fitting handle
- Includes molded steel arm support
- Excess flow P.O.L. fitting
- 10 foot hose
- Certified
- Full color display carton







Molded steel arm support





Ergonomic grip handle with squeeze trigger

Model #	Description
F272602	MH500LPT Handheld Torch - 500,000 Btu/hr.

- 500,000 Btu/hr
- 36" total length with HD shaft.
- Form fitting ergonomic grip handle
- Needle valve adjustment
- Excess flow P.O.L. fitting
- 10 foot hose and striker included
- Lightweight, easy to use
- Certified
- Full color display carton







Model #	Description
F272601	MH400PT Handheld Torch - 400,000 Btu/hr.

- 400,000 Btu/hr
- 31" total length
- Needle valve adjustment
- Excess flow P.O.L. fitting
- 10 foot hose included
- · Lightweight, easy to use
- Certified
- 8 pack bulk display carton



Convection/Portable Radiant Heaters

MR. HEATER CONVECTION HEATERS

Model #	Description
F270470	MH25CVX - Convection Heater - 25,000 Btu/hr.
F270490	MH80CVX -Convection Heater - 30,000 - 80,000 Btu/hr.
F270500	MH200CVX -Convection Heater - 75,000 - 200,000 Btu/hr.

MH25CVX Heats approx. 625 sq. ft. and runs up to 17 hrs. on 20lb.. tank

• MH80CVX Heats approx. 2,000 sq. ft. and runs up to 14 hrs. on 20lb.. tank (low)

• MH200CVX Heats approx. 5,000 sq. ft. and runs up to 29 hrs. on 100lb.. tank (low)

Piezo ignition system

 Telescoping chamber for reduced ship cube/retail space (MH80CVX/MH200CVX only)

 Instant locking chamber for easy assembly (MH80CVX/MH200CVX only)

10' hose and regulator included

Certified





MR. HEATER PORTABLE RADIANT HEATERS

Model #	Description
F270700	MH35LP -Portable Radiant - 35,000 Btu/hr.

- Heats up to 875 sq. ft.
 No electricity required
 Clean, quiet, odorless
- Tip-over switch, safety shut-off
- 10' hose and regulator included
- Operates on standard 20lb. tank
- Includes fold-down handle and 3.5" tires for transport
- Fully assembled, ready to use
- Runs up to 12 hrs. on a 20lb. tank
- Certified







Model #	Description
F270800	MH125LP - Portable Radiant - 125,000 Btu/hr.

- Heats up to 3,125 sq. ft. Rugged, durable construction No electricity required
- Welded frame, heat shield, safety shut-off, regulator
- 10' hose and regulator included
- Recommended for operation on tanks 100 lbs. and larger
- Fully assembled ready to use Includes handles & wheels
- Runs up to 17 hrs. on a 100lb. tank CSA certified

Model #	Description	
F273737	Accessories - 2 tank hook up kit	





The World's First CORDLESS FORCED AIR HEATERS



For either indoor or outdoor use. Adequate ventilation must be provided.

Model #	Description
F227900	MH35CLP Hero (Forced Air Propane) - 35,000 Btu/hr.

- Patented Cordless Technology
- QBT 50% Quieter than a standard propane heater
- One-touch gas valve with Piezo igniter
- 35,000 Btu/hr, propane heater heats up to 875 sq. ft.
- Runs up to 8 hrs. on internal rechargeable battery
- Operates while charging recharges in 3 hrs.
- Runs up to 12 hrs. on a 20 lb. propane tank
- Certified

Model #	Description
F227964	Replacement Battery





10 ft. hose with regulator included

Model #	Description
F228810	MH60CLP Hero (Forced Air Propane) - 30,000-60,000 Btu/hr

- Patented Cordless Technology
- 30-60,000 Btu/hr, propane heater heats up to 1500 sq. ft.
- Ships with 1 internal battery (4 hrs.), second battery can be added to extend runtime additional 4 hrs (8 hrs. total)
- Runs up to 4 hrs. on single rechargeable battery
- Operates while charging recharges 1 battery in 3 hrs., two in 6 hrs.
- Runs up to 14 hrs. on a 20 lb. propane tank on low setting
- QBT 50% Quieter than a standard propane heater
- Electronic Ignition Certified

Model #	Description
F227964	Replacement Battery



10 ft. hose with regulator included

Quiet Burner Technology[®] Delivers 50% Less Noise

NOISE IS AN ISSUE......Everyone has experienced the annoying drone of a forced air propane heater. Quite often consumers will turn their heater off after a few hours rather than continue to deal with the noise. No one wants to choose between being cold and being annoyed by noise. For decades, all standard atmospheric burners have produced significant noise and significant complaints.

Mr. Heater's new patent pending QBT burners feature a new innovation in the heating industry and deliver 50% less noise than all the other standard forced air heaters on the market today.

Imagine a heater you can run and have a conversation over. Imagine a garage or job-site free from loud droning heater noise.

Mr Heater's patent pending Quiet Burner

Technology® reduces the annoying drone of a

forced air heater by at least 50%



Standard
Forced Air
Propane Heaters



Mr. Heater®
Forced Air
Propane Heaters
with QBT



Visit www.mrheater.com or www.youtube.com/mrheatertv
Experience the difference.



Forced Air Propane

MR. HEATER FORCED AIR PROPANE HEATERS

Heavy-duty design built for the jobsite. The Mr. Heater Liquid Propane Forced Air Heater comes with a standard 10' hose and regulator and all the safety you would expect of a Mr. Heater product. Equipped with factory installed high limit switches and thermoelectric safety valves, you can feel comfortable using these heaters on any jobsite. Just plug the heater into a 115v outlet, hook up the included hose and regulator to a 20lb propane tank or larger, and you are ready to take the chill out of any job.

For either indoor or outdoor use. Adequate ventilation must be provided.



Typical uses include: Construction Sites • Sporting events • Patios • Factories • Utility/Farm Buildings • Barns

Forced Air Propane

Mr Heater Forced Air Propane Heaters range from 38K to 400K BTU's and are built to last with high quality components. All our heaters come equipped with Quiet Burner Technology™. QBT heaters are quieter than standard propane heaters by as much as 50%. Typical uses include: construction sites, patios, factories, sporting events, utility and out buildings and farming functions, (barns etc.).

Model #	Description
F271350	MH38QFA - Forced Air Propane - 38,000 Btu/hr.

- Heats approximately 950 sq. ft.
- Runs up to 12 hrs. on 20lb. tank
- High limit temperature safety switch
- Piezo ignition
- QBT technology 50% Quieter than a standard propane heater
- 10' hose and regulator included
- Certified









Model #	Description
F271370	MH60QFAV- Forced Air Propane - 30,000-60,000 Btu/hr.

- Heats approximately 1,500 sq. ft.
- Runs up to 14 hrs. on 20lb. tank (low setting)
- High limit temperature safety switch
- Continuous ignition
- QBT technology 50% Quieter than a standard propane heater
- 10' hose and regulator included
- Certified









Model #	Description
F271380	MH85QFAV - Forced Air Propane- 50,000-85,000 Btu/hr.

- Heats approximately 2,125 sq. ft.
- Runs up to 8.5 hrs. on 20lb. tank (low setting)
- High limit temperature safety switch
- Continuous ignition
- QBT technology
- 50% Quieter than a standard propane heater
- 10' hose and regulator included
- Certified











Forced Air Propane

Model #	Description
F271390	MH125QFAV - Forced Air Propane - 75,000 - 125,000 Btu/hr.

- Heats approximately 3,125 sq. ft.
- Runs up to 11.5 hrs. on 40lb. tank (low setting)
- High limit temperature safety switch
- Continuous ignition
- QBT technology 50% Quieter than a standard propane heater
- 10' hose and regulator included
- Certified

Model #	Description
F273737	2 tank hook up kit













- Heats approximately 4,250 sq. ft.
- Runs up to 17 hrs. on 100lb. tank (low setting)
- High limit temperature safety switch
- Automatic solid state ignition
- Onboard thermostat
- QBT technology
 - 50% Quieter than a standard propane heater
- 10' hose and regulator included
- Certified

Model #	Description
F273737	2 tank hook up kit











Model #	Description
F272425	MH400FAVT -Forced Air Propane - 250,000-400,000 Btu/hr.

- Heats approximately 10,000 sq. ft.
- QBT technology
 - 50% Quieter than a standard propane heater
- Runs up to 17 hrs. on 2-100lb. tanks (low setting)
- High limit temperature safety switch
- Automatic solid state ignition
- Onboard thermostat
- 10' hose and regulator included
- Certified

Model #	Description
F273737	2 tank hook up kit





FALP - QUICK COMPARE













Stock# Model#	F271350 MH38QFA	F271370 MH60QFAV	F271380 MH85QFAV	F271390 MH125QFAV	F271400 MH170QFAVT	F272425 MH400FAVT
BTU Rating	38,000	30-60,000	50-85,000	75-125,000	125-175,000	250-400,000
Variable Output	NO	YES	YES	YES	YES	YES
Heats Up To: (Approx. Sq. Ft.)	950	1,500	2,125	3,125	4,250	10,000
Fuel	Propane	Propane	Propane	Propane	Propane	Propane
Minimum Recommended Tank Size	20 lb.	20 lb.	20 lb.	40 lb.	100 lb.	(2X) 100 lb.
Approx. Run Time On Minimum Tank Size	12 Hrs.	7 Hrs. High 14 Hrs. Low	5 Hrs. High 8.5 Hrs. Low	7 Hrs. High 11.5 Hrs. Low	12.5 Hrs. High 17 Hrs. Low	10 Hrs. High 17 Hrs. Low
Certified	YES	YES	YES	YES	YES	YES
10' Hose & Regulator Included	YES	YES	YES	YES	YES	YES
Ignition	Piezo	Continuous	Continuous	Continuous	Automatic Solid State	Automatic Solid State
QUIET BURNER TECHNOLOGY*	YES	YES	YES	YES	YES	YES



Forced Air Kerosene

MR. HEATER FORCED AIR KEROSENE HEATERS

Suitable for outdoor use.



Whether using it in your garage, or on the jobsite, Mr. Heater Forced Air Kerosene heaters are up for the task. Equipped with high-output, fully enclosed motors, and large glove friendly controls, you can't go wrong. These heaters are equipped with high limit safety switches and photo CAD cells to shut the units off in unsafe conditions. You can use these heaters with no worries, and focus on the task at hand. These kerosene heaters have been factory tested for multiple fuel types. If you use Kerosene, Diesel, or even jet fuel, these heaters have all the versatility and safety features the job site requires.



Forced Air Kerosene

Mr. Heater Forced Air Kerosene Heaters are designed using high quality components for years of dependable service. Every heater can be assembled in 5 minutes out of the box and features the best cold weather starting capability in the industry.

• Requires 115 VOLT AC outlet

• Operates using kerosene, JP8 (Jet A Fuel), filtered #1 and #2 diesel, and #1 and #2 fuel oil • Will operate at extremely low temperatures

LIQUID FUELS PRODUCE EXCELLENT RESULTS IN EXTREME COLD.

Model #	Description
F270255	MH50KR -Forced Air Kerosene - 50,000 Btu/hr.

- Heats approximately 1,250 sq. ft.
- Runs up to 11 hrs. on full tank
- 4 gallon fuel tank
- Overheat safety shut-off
- Continuous ignition
- Certified

Model #	Description
F261210	In-line Thermostat











Model #	Description
F270270	MH75KTR- Forced Air Kerosene - 75.000 Btu/hr.

- Heats approximately 1,875 sq. ft.
- Runs up to 11 hrs. on full tank
- 6 gallon fuel tank
- Overheat safety shut-off
- Continuous ignition
- Onboard thermostat
- Certified





The MH75KTR Forced Air Kerosene Heater also features: illuminated on/off switch. fuel gauge, cord wrap, easy-off gas cap and an electric outlet.





Forced Air Kerosene

Model #	Description
F270320	MH125KTR - Forced Air Kerosene - 125,000 Btu/hr.

- Heats approximately 3,125 sq. ft.
 Runs up to 9 hrs. on full tank
- 8.5 gallon fuel tank Side lift handles
- Troubleshooting diagnostics with LED indicator
- Overheat safety shut-off
- Continuous ignition
- Onboard thermostat
- Certified

The MH125KTR also features: illuminated on/off switch, fuel gauge, air pressure gauge, cord wrap, easy-off gas cap, steel drain plug, electric outlet, and 10" pneumatic tires.

Model #	Description
F270370	MH175KTR - Forced Air Kerosene - 175 000 Rtu/hr

- Heats approximately 4,375 sq. ft. Runs up to 10 hrs. on full tank
- 13.4 gallon fuel tank Side lift handles
- Troubleshooting diagnostics with LED indicator
- Overheat safety shut-off
- Continuous ignition
- Onboard thermostat
- Certified

The MH175KTR also features: illuminated on/off switch, fuel gauge, air pressure gauge, cord wrap, easy-off gas cap, steel drain plug, electric outlet, and 10" pneumatic tires.

Model #	Description
F270385	MH210KTR - Forced Air Kerosene - 210,000 Btu/hr.

- Heats approximately 5,250 sq. ft.
 Runs up to 8.5 hrs. on full tank
- 13.4 gallon fuel tank Side lift handles
- Troubleshooting diagnostics with LED indicator
- Overheat safety shut-off
- Continuous ignition
- Onboard thermostat
- Certified

The MH210KTR also features: illuminated on/off switch, fuel gauge, air pressure gauge, cord wrap, easy-off gas cap, steel drain plug, electric outlet, and 10" pneumatic tires.







FAK - QUICK COMPARE











Stock# Model#	F270255 MH50KR	F270270 MH75KTR	F270320 MH125KTR	F270370 MH175KTR	F270385 MH210KTR
BTU Rating	50,000	75,000	125,000	175,000	210,000
Heats Up To: (Approx. Sq. Ft.) 1,250		1,875 3,125		4,375	5,250
Kerosene JP8 #1 Diesel #2 Diesel #1 Fuel Oil #2 Fuel Oil		Kerosene JP8 #1 Diesel #2 Diesel #1 Fuel Oil #2 Fuel Oil			
Certified	YES	YES	YES	YES	YES
Tank Size (Gallon)	4	6	8.5	13.4	13.4
Run Time: (Approx.)	11 Hrs.	11 Hrs.	9 Hrs.	10 Hrs.	8.5 Hrs.
Thermostat Sold Separately		Included	Included	Included	Included
On-Board Diagnostics (LED) NO		YES	YES	YES	YES
Power Requirement 115V/60Hz/3.5A		115V/60Hz/4A 115V/60Hz/5.5A		115V/60Hz/5.5A	115V/60Hz/5.5A
Fuel Gauge NO		YES	YES	YES	YES
Illuminated YES		YES	YES	YES	YES
Cord Wrap	YES	YES	YES	YES	YES
Ignition	Continuous	Continuous	Continuous	Continuous	Continuous
Tires	NO	NO	10" Pneumatic	10" Pneumatic	10" Pneumatic
Assembly Requirement	Yes (Handle)	Yes (Handle)	Yes (5 Minutes)	Yes (5 Minutes)	Yes (5 Minutes)
Fan/Motor	Sealed For Longer Life	Sealed For Longer Life	Sealed For Longer Life	Sealed For Longer Life	Sealed For Longer Life
Air Pressure Gauge	NO	NO	YES	YES	YES
Drain Plug	NO - Drains from fill	NO - Drains from fill	YES - Steel	YES - Steel	YES - Steel



Radiant Kerosene

Model #	Description
F270265	MH700FR - 70,000 Btu/hr. Radiant Kerosene

- Heats approximately 1,750 sq. ft.
- Runs up to 5 hrs. on full tank
- 2.75 gallon fuel tank
- Featuring Quiet Burner Technology
- Thermostatically controlled
- LED readout for set temp and room temp.
- Fuel level indicator
- Replaceable external fuel filter.
- Onboard thermostat
- Certified









Model #	Description
F270269	MH1250FR - 125,000 Btu/hr. Radiant Kerosene

- Heats approximately 3,125 sq. ft.
- Runs up to 10 hrs. on full tank
- 9.25 gallon fuel tank
- Featuring Quiet Burner Technology
- Thermostatically controlled

• LED readout for set temp and room temp.

- Solid rubber tires
- Replaceable external fuel filter.
- Onboard thermostat
- Certified













Radiant Heaters

MR. HEATER HIGH INTENSITY RADIANT WORKSHOP HEATERS

Whether you use it in your garage to keep your cars warm or in your shop to keep the work force busy and comfortable, the Mr. Heater Garage heaters transfer almost all of the fuel it burns directly into clean safe radiant heat. Utilizing a unique power pile thermocouple to control the valve, there is no electricity required. Just hook-up and mount the heater to the wall and make the gas connection, then you are ready to go. Clean, Safe, Radiant Heat whenever you need it.



Model #	Description				
F272100	MH25LP - 22,000 Btu/hr. High intensity Radiant (Propane)				
F272200	MH25NG - 25,000 Btu/hr. High intensity Radiant (Natural Gas)				

- Heats up to 625 sq. ft. (2-1/2 car garage)
- For use in low profile buildings with 7-12 ft. ceilings or higher
- No electricity required heats during power outages
- Includes thermostat and mounting brackets
- Certified

Model #	Description				
F271239	Universal Hook Up Kit				
F200293	Fuel Conversion Kit - NG to LP				
F200294	Fuel Conversion Kit- LP to NG				
F204435	Grid kit - MH25LP/NG				

Retrofit grid kits available. Contact us for details.

Model #	Description				
F272700	MH40LP - 40,000 Btu/hr. High intensity Radiant (Propane)				
F272800	MH40NG - 40,000 Btu/hr. (Natural Gas)				

- Heats up to 1,000 sq. ft.
- For use in buildings with 10-15 ft. ceilings or higher
- No electricity required heats during power outages
- Includes thermostat and mounting brackets
- Certified

Model #	Description
F271239	Universal Hook Up Kit
00285A	Fuel Conversion Kit - NG to LP
00286A	Fuel Conversion Kit - LP to NG
F204440	Grid Kit - MH40 LP/NG (pictured installed)

Retrofit grid kits available. Contact us for details.





F204440 grid kit sold separately







Vent-Free Heaters

MR. HEATER VENT-FREE RADIANT HEATERS

Model #	Description
F299811	MHVFRD10NG - (Natural Gas) - 10,000 Btu/hr.
F299810	MHVFRD10LP - (Propane) - 10,000 Btu/hr.
F299821	MHVFRD20NGT - (Natural Gas) - 20,000 Btu/hr.
F299820	MHVFRD20LPT - (Propane) - 18,000 Btu/hr.
F299831	MHVFRD30NGT - (Natural Gas) - 30,000 Btu/hr.
F299830	MHVFRD30LPT - (Propane) - 30,000 Btu/hr.

Radiant Heating System

Automatic low oxygen shut-off system (ODS)

• Legs included • Wall mounting hardware included

• 4500 ft High Altitude Restriction

• Blower Fan Kit (F299201 Sold Separately)

- Available for 20K and 30K units

• Certified - Not Approved for use in California or Canada.

Always check local codes for permitted uses.


















					and the same of th		
Model#	MHVFRD10LP F299810	MHVFRD10NG F299811	MHVFRD20LPT F299820	MHVFRD20NGT F299821	MHVFRD30LPT F299830	MHVFRD30NGT F299831	
BTU Rating	10,000 10,000		18,000 20,000		30,000	30,000	
Burn Rate	tate .463 lbs/hr .001 MCF		.926 lbs/hr .020 MCF		1.389 lbs/hr	.030 MCF	
Variable Output	Variable Output YES		NO	NO NO		NO	
Heats Up To: (Approx. Sq. Ft.) 250		250	500 500		750	750	
Fuel	Fuel Propane Natural Gas		Propane	Propane Natural Gas		Natural Gas	
Minimum Recommended Tank Size	lecommended 20 lb. NA		20 lb. NA		20 lb.	NA	
Certified	YES YES		YES	YES	YES	YES	
Low Oxygen Safety Shut-Off	YES	YES	YES	YES	YES	YES	
Legs & Hardware Included	YES	YES	YES	YES	YES	YES	
Ignition	Piezo	Piezo	Electronic	Electronic	Electronic	Electronic	
Integrated Blower Fan	NO	NO	Sold Separately F299201	Sold Separately F299201	Sold Separately F299201	Sold Separately F299201	
Thermostat	NO	NO	YES	YES	YES	YES	

Vent-Free Heaters

MR. HEATER VENT-FREE BLUE FLAME HEATERS

Model #	Description
F299711	MHVFBF10NG - (Natural Gas) - 10,000 Btu/hr.
F299710	MHVFBF10LP - (Propane) - 10,000 Btu/hr.
F299721	MHVFBF20NGT - (Natural Gas) - 20,000 Btu/hr.
F299720	MHVFBF20LPT - (Propane) - 20,000 Btu/hr.
F299731	MHVFBF30NGT - (Natural Gas) - 30,000 Btu/hr.
F299730	MHVFBF30LPT - (Propane) - 30,000 Btu/hr.

Model #	Description
F299812	MHVFIH10LPT - (W/thermostat) - 10,000Btu/hr.
F299735	MHVFGH30NGT - (Natural Gas Garage Heater) - 30,000 Btu/hr.
F299732	MHVFGH30LPT - (Propane Garage Heater) - 30,000 Btu/hr.



Automatic low oxygen shut-off system (ODS)

• 4500 ft High Altitude Restriction

Blower Fan Kit (F299201 Sold Separately)

- Available for 20K and 30K units

• Certified - Not Approved for use in California or Canada.

Always check local codes for permitted uses.























	AND DESCRIPTION OF THE PARTY OF	The second second							
Model #	MHVFBF10LP F299710	MHVFBF10NG F299711	MHVFBF20LPT F299720	MHVFBF20NGT F299721	MHVFBF30LPT F299730	MHVFBF30NGT F299731	MHVFIH10LPT w/metal plate F299812	MHVFGH30NGT w/metal plate F299735	MHVFGH30LPT w/metal plate F299732
BTU Rating	10,000	10,000	20,000	20,000	30,000	30,000	10,000	30,000	30,000
Burn Rate	.463 lbs/hr	.001 MCF	.926 lbs/hr	.020 MCF	1.389 lbs/hr	.030 MCF	.463 lbs/hr.	.030 MCF	1.389 lbs/hr
Variable Output	YES	YES	NO	NO	NO	NO	NO	NO	NO
Heats Up To: (Approx. Sq. Ft.)	250	250	500	500	750	750	250	750	750
Fuel	Propane	Natural Gas	Propane	Natural Gas	Propane	Natural Gas	Propane	Natural Gas	Propane
Minimum Recom- mended Tank Size	20 lb.	NA	20 lb.	NA	20 lb.	NA	20 lb.	NA	20 lb.
Certified	YES	YES	YES	YES	YES	YES	YES	YES	YES
Low Oxygen Safety Shut-Off	YES	YES	YES	YES	YES	YES	YES	YES	YES
Legs Included	YES	YES	YES	YES	YES	YES	NO	YES	YES
Wall Mount Hardware Included	YES	YES	YES	YES	YES	YES	YES	YES	YES
Ignition	Piezo	Piezo	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Integrated Blower Fan	NO	NO	Sold Separately F299201	Sold Separately F299201	Sold Separately F299201	Sold Separately F299201	NO	YES	YES
Thermostat	NO	NO	YES	YES	YES	YES	YES	YES	YES



Unit/Utility Heaters

INDIRECT FIRED UNIT HEATERS

Consumers across the country are turning their garages and barns into heated work spaces that can be used comfortably 12 months per year. Mr. Heater Unit Heaters use a built-in electric high-velocity fan to pull cool air into the rear of the heater and over a heat exchanger, forcing hot air into the surrounding area. Our Unit heaters require 115 VOLT AC power and can operate using propane (LP) or natural gas (NG). Proper venting is required and is sold separately.



• Turn garages, pole barns, workshops into heated work spaces • Set up for natural gas; includes LP conversion kit • High velocity fan • Heater can be controlled with any standard 24V thermostat (not included) • 115 V AC required • Requires vertical or horizontal venting (sold separately) • 10 year warranty on heat exchanger: 3 year warranty on parts and burner • Unit heaters are 82% efficient

Vent Kits (Sold separately) (VERTICAL F102840 or F102848) (HORIZONTAL F102860)



Unit/Utility Heaters

Model #	Description
F260550	MHU50 - 50,000 Btu/hr. (Natural Gas/LP conversion kit)

- Ships as NG, includes NG to LP conversion kit
- Heats up to 1,250 sq. ft.
- Spark ignition features self-diagnostic control module
- Includes angle brackets (2) for ceiling mount
- 3" Flue size for vertical vent 4" for horizontal
- Category 1 vertical; Category 3 horizontal venting
- Certified





Fuel Conversion Kits - (NG to LP conversion kits included with new units, additional kits sold separately)

Model #	Description
F260164	Converts 50,000 & 80,000 BTU Big Maxx Unit heater from propane to natural gas
F260163	Converts 50,000 & 80,000 BTU Big Maxx Unit heater from natural gas to propane



Model #	Description
F260560	MHU80 - 80,000 Btu/hr. (Natural Gas/LP conversion kit)

- Ships as NG, includes NG to LP conversion kit
- Heats up to 2,000 sq. ft.
- Spark ignition features self-diagnostic control module
- Includes angle brackets (2) for ceiling mount
- 1/2" gas connection
- Category 1 vertical; Category 3 horizontal venting
- 4" Flue size
- Certified





Fuel Conversion Kits - (NG to LP conversion kits included with new units, additional kits sold separately)

Model #	Description
F260164	Converts 50,000 & 80,000 BTU Big Maxx Unit heater from propane to natural gas
F260163	Converts 50,000 & 80,000 BTU Big Maxx Unit heater from natural gas to propane





Unit/Utility Heaters



Great for pole barns, light commercial and large workshops

Model #	Description
F260590	MHU125 - 125,000 Btu/hr. (Natural Gas/LP conversion kit)

- Ships as NG, includes NG to LP conversion kit
- Heats up to 3,125 sq. ft.
- Spark ignition features self-diagnostic control module
- Includes angle brackets (2) for ceiling mount
- 1/2" gas connection
- Category 1 vertical; Category 3 horizontal venting
- 4" Flue size
- Certified









Unit/Utility Heaters Accessories

Model #	Description
F271239	Universal Hook Up Kit

- 22" stainless steel flex gas connector Brass shut-off valve (1/2" female pipe thread x 1/2" male flare)
- 1/2" male flare x 1/2" male pipe 1/2" male flare x 3/8" male pipe 1/2" male flare x 3/8" female pipe
- Special gas seal tape for connections

Model #	Description
F210359	Thermostat

Low voltage Reed switch
 UL listed





INDIRECT FIRED UNIT HEATER VENT KITS

Model #	Description
F102840	Vent Kit - Vertical - 3"


Includes: (1) 3" elbow, (2) 3" x 24" 26 gauge pipe, (1) 3" x 36" B. vent pipe, (1) adjustable ceiling/wall fire stop, (1) adjustable roof flashing, (1) storm collar, (1) 3" gas vent top (Not for sale in Canada)


Model #	Description
F102848	Vent Kit - Vertical- 4"

Includes: (1) 3" to 4" adapter, (1) 4" x 36" B-vent pipe, (2) 4" x 24" vent pipe, (1) 4" 90-degree elbow, wall fire stop, roof flashing, storm collar, vent cap

Model #	Description	
F102860	Vent Kit - Horizontal - 4"	

Includes: (1) 3"x4" adapter - used on 50K only, (1) 4" adapter, (1) 45 degree elbow, (1) 4"x12" length, (1) 4" adjustable length (6"-19"), (1) wall thimble, (1) 4" screened termination tee, (1) Hi-temp 2.8 oz. silicone, (1) SS screw kit. (Stainless Steel meets venting standards)





Model #	MHU50 F260550	MHU80 F260560	MHU125 F260590
BTU Rating	50,000	80,000	125,000
Heats Up To: (Approx. Sq. Ft.)	1,250	2,000	3,125
Fuel Conversion Kit NG to LP	F260163	F260163	NA
Fuel Conversion Kit LP to NG	F260164	F260164	NA
Recommended thermostat	24V	24V	24V
Certified	YES	YES	YES
Available Vent Kits	F102840, F102848, F102860	F102848, F102860	F102848, F102860



THE B.O.S.S. XB13

This 10,000-12,000 BTU has an external battery pack that is powered by 4 D-Cell batteries and will power through 6 five minute showers. A 1 lb disposable cylinder connects directly to the included pre-calibrated regulator to deliver over 115 minutes of hot water on high. The included quick connect pump and shower head deliver an average of .6 gallons per minute, ensuring that your shower is as good when roughing it as it is at home.

THE B.O.S.S. XW18

This adjustable 10,000-17,000 BTU product is compact and cordless. This allows you to enjoy a hot shower even in the most remote places. The internal battery will power through 8 five minute showers and the unit can be hooked up to DC power as well with included car port cable. A 1 lb disposable cylinder connects directly to the included pre-calibrated regulator to deliver over 60 minutes of hot water on high. The included quick connect pump and shower head deliver an average of .6 gallons per minute, ensuring that your shower is as good when roughing it as it is at home.

THE B.O.S.S. XCW20

This product is both digital and cordless, allowing you to enjoy a hot shower even in the most remote places. The internal battery will power through 8 five minute showers and the unit can be hooked up to AC or DC power as well with included cables. A 1 lb disposable cylinder connects directly to the included pre-calibrated regulator to deliver over 60 minutes of hot water on high. The included quick connect pump and shower head delivers an average of .8 gallons per minute, ensuring that your shower is as good when roughing it as it is at home.



ALL SHOWERS FEATURE:

• CSA SAFETY CERTIFIED DESIGN • ELECTRONIC IGNITION • VARIABLE TEMPERATURE CONTROL • QUICK CONNECT FITTINGS • ANTI-SCALD PROTECTION • SAFETY TIP OVER PROTECTION • INSTANT HOT WATER • SHOWER HEAD, PUMP & REGULATOR INCLUDED

Portable Propane Shower Systems

Model #	Description
F235350	Battery Operated Shower System (B.O.S.S.) XCW20

- 18,000 BTU per hour Flow rate .66 1.18 gallons per minute
- Water can be increased by up to 45 degrees F above source water temperature
- Built-in rechargeable battery powers LCD display and pump for 40 minutes of run time
- Stainless steel housing
- Complete kit includes Quick connect deluxe shower head with remote burner control, pump assembly,
 AC and DC adaptors, and carry bag
- Dual outlets adjustable on and off shower and tap outlets
- Certified to ANSI Z21.96-2014 * CSA B11.6-2014



Model #	Description
F235325	Battery Operated Shower System (B.O.S.S.) XW18

- 17,000 BTU per hour Flow rate .6 -.8 gallons per minute
- Water can be increased by up to 42 degrees F above source water temperature
- Built in rechargeable battery powers pump for 40 minutes of run time
- Complete kit includes Quick connect shower head and pump assembly and DC adaptor
- Single Dual Function Faucet/Shower Outlet with Quick Connect Fittings
- Certified to ANSI Z21.96-2014 * CSA B11.6-2014

Model #	Description
F235300	Battery Operated Shower System (B.O.S.S.) XB13

- 12,000 BTU per hour Flow rate .6 gallons per minute
- Water can be increased by up to 35 degrees F above source water temperature
- Electronic Ignition
- 4 D-Cell Battery operated pump for 40 minutes of run time
- Complete kit includes Single Outlet with Quick connect shower head and pump assembly
- Certified to ANSI Z21.96-2014 * CSA B11.6-2014

	CORDLESS
	B.SS BANK
ower head	

Model #	Description
F235897	BOSS Rechargeable Shower

- Pump operates on internal Lithium Ion battery
- Rechargeable with USB (USB cable included)
- · Deluxe shower head with 6' hose
- Multiple mounting assemblies





Camping Essentials

Model #	Description
F235100	Tent Fan with L.E.D. Light

- Two speed fan with foam blades
- Energy efficient white LED rated to 90 lumens
- Carabineer hook included
- Up to 48 hours fan run time on low, up to 24 hours on high
- 100+ hours light run time on low
- Operates with 4 x D batteries (not included)



Safe to touch foam blades



LED light has 2 brightness settings and a night light



Rubber fan and light buttons



Model #	Description
F235884	Portable Single Tub Washing Machine

- Top loading single tub
- 4.40lb wash capacity
- Spin eature

Quiet operation wash cycle with timer

- 120V AC operation or can be used with a DC to AC power inverter
- Bottom mounted agitator
- Agitating wash action with timer control
- Strong ABS plastic housing
- External drain tube



Spin Feature Reduces Drying Time



Simple Action Drop & Drain



Light Load Capacity



BEST FOR LIGHT LOADS

Camp Stoves

More durable than cast iron, these welded angle-iron stoves feature corrosion-resistant brass valves and high-output aluminum cast burners. Hose and regulator sold separately. For outdoor use only. Not Approved for use in Canada.

Model #	Description
F235825	Single Burner Angle Iron Stove
F235830	Double Burner Angle Iron Stove
F235835	Triple Burner Angle Iron Stove
F273071	5' Propane Hose Assembly
F273072	12' Propane Hose Assembly

- Welded angle iron burners are tougher, stronger, and more durable than cast iron
- Aluminum cast burners for better combustion
- Range style cook-top with variable temperature control
- Adjustable legs For use with propane (hose and regulator required but not included)





Mir Heater Hoses, Fittings and Accessories



Mr. Heater has assembled the industries most complete line of high quality propane hoses, fittings, regulators and accessories. These products allow connections to all types of high and low pressure appliances in the camping, grilling, R.V., and outdoor markets. Mr. Heaters accessories are designed to work universally with all brands of propane appliances. Each individual package explains product uses and make it easy for the consumer to find the right accessories. All Mr. Heaters accessories are assembled in the USA and stocked in our Cleveland OH warehouse.

PLAN-O-GRAMS

Mr. Heater accessory plan-o-grams deliver high store traffic and become a destination for propane appliance education and connectivity. Purchase a Mr. Heater ready designed planogram or design your own.



Model #	Description
F273949	AVALON (2 each of 27 accessories)

#F273949	AVALON (2 each of 27 accessories)
F276152 -	1/4" Male Pipe Thread x 9/16" Left Hand Male Thread
F276129 -	9/16" Left Hand Thread x P.O.L.
F273754 -	1/4" Male Pipe Thread x 1"-20 Female Throwaway Cylinder Thread
F276190 -	Propane or Natural Gas Connector
F276187 -	Propane or Natural Gas 3/8" Quick Connector
F276136 -	Propane Low Pressure Regulator
F276148 -	5' Propane Hose Assembly
F273702 -	12' Propane Hose Assembly
F276153 -	3/18" Male Pipe Thread X 9/16" Left Hand Male Thread
F273655 -	Excess Flow P.O.L. x 1/4" Male Pipe Thread
F273755 -	1/4" Male Pipe Thread x 1"-20 Male Throwaway Cylinder Thread
F276133 -	Bulk Tank Adapter
F276495 -	Propane Acme Nut
F273719 -	High Pressure Regulator With P.O.L.
F273716 -	22" Propane Replacement Barbecue Hose
F276124 -	5' Propane Hose Assembly
F276154 -	9/16" Left Hand Male Thread x 9/16"Left Hand Male Thread
F276139 -	1/4" Male Pipe Thread x P.O.L.
F276130 -	9/16" Left Hand Male Thread x 1"-20 Throwaway Cylinder Thread w/Shut-off
F276172 -	Propane Tank Refill Adapter
F273761 -	90° Low Pressure Regulator With Appliance End Fitting
F273759 -	90° Propane Low Pressure Regulator
F273767 -	Propane Low Pressure LP Regulator
F273701 -	5' Propane Hose Assembly
F273717 -	Propane "Steak Saver" Adapter
F273710 -	5' Propane Hose Assembly
F276171 -	Propane "Steak Saver" Adapter





Plan-0-Grams

#F273961	Top 20 (2 each of 20 accessories)
F276139 -	1/4" Male Pipe Thread x P.O.L.
F276172 -	Propane Tank Refill Adapter
F276187 -	Propane or Natural Gas 3/8" Quick Connector
F273761 -	90° Low Pressure Regulator With Appliance End Fitting
F273716 -	22" Propane Replacement Barbecue Hose
F276124 -	5' Propane Hose Assembly
F273071 -	5' Propane Hose/Regulator Assembly
F273754 -	1/4"Male Pipe Thread x 1"-20 Female Throwaway Cylinder Thread
F273755 -	1/4" Male Pipe Thread x 1"-20 Male Throwaway Cylinder Thread
F276330 -	Propane Gas Coupling Adapter Kit
F273759 -	90° Propane Low Pressure Regulator
F273767 -	Propane Low Pressure LP Regulator
F273710 -	5' Propane Hose Assembly
F273702 -	12' Propane Hose Assembly
F273756 -	1/4" Male Pipe Thread x P.O.L. w/Handwheel
F276495 -	Propane Acme Nut
F276136 -	Propane Low Pressure Regulator
F273719 -	High Pressure Regulator With P.O.L.
F273701 -	5' Propane Hose/Regulator Assembly
F273717 -	5' Propane Appliance Extension Hose Assembly

Model #	Description
F273961	Top 20 (2 each of 20 accessories)



F273967	BBQ(2 each of 21 items + 6 Tankfoot)
F276139	P.O.L,,RF,Nut,1/4"NPT,O-Ring,w/Handwheel
F273655	Pigtail,XFL,1/4NPT,POL,Nut,Handwheel
F276262	Adapter,3/8"MPX3/8"MF
F276330	Kit,Gas Mate II,Adapter,Coupling
F276328	Gas Mate Plug X ,W/H,S,X, 1/4,MP
F276334	Gas Matell,Coupling,5,LP510BK
F273783	Handwheel ,Plastic,Packaged
F276171	L/P,Grill,Steak Saver Adapter
F276495	Coupling, 1/4"MP, Appliance End
F276133	Adapter Appliance End ,(BL),1"-20MT
F276187	Quick-Connect X 3/8FPX3/8FP,W/MP,CONN
F273716	Hose1'10"L,BBQ,Replacement
F276336	Gauge LP,Gas,Female Acme X Male Acme
F276136	REGULATOR,11"
F273768	Regulator,11"WC,W/Acme Nut
F273761	Regulator,Appliance End,90D
F271161	Hose,1/4ID,BBQ,Regulator,REPLA
F273720	Hose,3/8ID,12'L,3/8FP,3/8MF,GA
F271167	Hose1/4ID,BBQ,Regulator,2,Output
F273071	Hose,5'L,3/8FF,POL,Regulator
F273169-6	Tank Foot 6 pack

Model #	Description
F273967	BBQ (2 each of 21 items + 6 Tankfoot)



٠,		
	Model #	Description
	F273071	5' Propane Hose/Regulator Assembly
	F273072	12' Propane Hose/Regulator Assembly

(Regulator w/Restricted Flow Soft Nose P.O.L. and Hand Wheel x 3/8" Female Flare) Connects low pressure portable propane appliances to a 20lb. propane tank.



Hose Assemblies

Model #	Description
F273076	5' Propane Hose/Regulator Assembly
F273077	12' Propane Hose/Regulator Assembly

(Regulator with Soft Nose P.O.L. and Handwheel x 3/8" Female Pipe Thread) Connects low pressure portable propane appliances to a 20lb. propane tank.



Model #	Description
F271161	22" Repl. Propane BBQ Hose & Regulator Assembly with Appliance End Fitting/Acme Nut

(Regulator w/Appliance End Fitting/Acme Nut x 3/8" Female Flare) - For Type 1 (QCC-1©) propane gas grill systems



Model #	Description
F271167	Propane Hose/Regulator Assembly with Two Outputs

11" W.C. Regulator x 2 - 22" (3/8") Female Flare Fittings Connects propane grill with main and separate side burner



Model #	Description
F273716	22" Propane Replacement Barbecue Hose

(3/8" Male Pipe Thread x 3/8" Female Flare) - Fits most barbecue propane gas grills. Most commonly used with F273761 regulator



Model #	Description
F276124	5' Propane Hose Assembly

(3/8" Male Pipe Thread x 3/8" Female Pipe Thread) Used to connect low pressure propane appliances to low pressure propane regulators.

Model #

F273707



Description

5' Propane Hose Assembly

Model #	Descriptions Lengths (XX = inches)
F271163-(XX)	30,60 - Propane Hose Assembly

(3/8" Male Pipe Thread x 3/8" Female Flare) - Most commonly used to hook a low pressure regulator to a propane appliance.

Assembly (UL 569/UL 21)



F273707-108	9' Propane Hose Assembly
•	pe Thread x 3/8" Female Flare)

Replaces most propane hose assemblies between regulator and fish cooker/smoker, torches or other propane appliances.



Model #	Description
F271470	15' Propane Appliance Extension Hose Assemb

(3/8" Male Pipe Thread x 3/8" Female Pipe Thread) (3/8" ID High Pressure Hose) Used in addition to the existing propane hose for more length between propane tank and propane appliances.



Model #	Description
F271474	15' Propane Appliance Extension Hose Assembly

(1/4" Male Pipe Thread x 1/4" Female Pipe Thread) (1/4" ID High Pressure Hose) Use as an extension hose for portable propane appliances.



Hose Assemblies



Model #	Description
F273717	5' Propane Appliance Extension Hose Assembly

(1/4" Male Pipe Thread x 1/4" Female Pipe Thread) (1/4" ID High Pressure Hose) - Use as an extension hose for portable propane appliances.



Model #	Description
F276148	5' Propane Hose Assembly

(9/16" Left Hand Female Threads on Both Ends) Used to connect one propane hose or for additional length connect two F276148 hoses with F276154 propane brass fitting.



Model #	Description
F273701	5' Propane Hose Assembly
F273702	12' Propane Hose Assembly

(Swivel 1"- 20 Male Throwaway Cylinder Thread x Excess Flow Soft Nose P.O.L w/Handwheel) Connects appliances that are designed for disposable propane cylinders to a 5-20lb. tank.

Hand tighten swivel on both ends. Recommended use with F273699 Fuel Filter

Model #	Description
F273703-60	5' Propane Hose Assembly
F273703-144	12' Propane Hose Assembly

(Appliance End fitting/Acme Nut x 1" - 20 Male Throwaway Cylinder Thread) Used to connect portable appliances to a 20 lb. propane tank.

Recommended use with F273699 Fuel Filter





(Swivel 1"- 20 Male Throwaway Cylinder Thread x Soft Nose Excess Flow P.O.L w/Handwheel)

Connects propane appliances that are designed to be connected to 1lb. propane

bottles to 5-20lb. tanks.

Hand tighten swivels on both ends. No Fuel Filter required

Model #	Description
F273710	5' Propane Hose Assembly
F273711	12' Propane Hose Assembly

(Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread) -Used with most propane distribution postsand "Y" (F271715) connectors as well as 1lb. propane cylinders.



Hand tighten swivel on both ends.

Model #	Description
F271138-20	20" Propane Hose Assembly

(Acme Nut x 1/4" Male Pipe Thread)
Commonly used to connect
bulk propane tank on a
camper to a regulator.

Assembly



Model #	Descriptions Lengths (XX = inches)
F271144-(XX)	15. 24. 36. 48. 60.144

(Excess Flow Soft Nose P.O.L. x 1/4" Inverted Male Flare) Commonly used to connect an auxiliary bulk propane tank to a motor home.



Model #	Descriptions Lengths (XX = inches)
F271149-(XX)	36, 48, 72, 144

(3/8" Female Flare x 3/8" Female Flare) - Connects existing propane gas line to appliances equipped with 3/8" male flare





Model #	Descriptions Lengths (XX = inches)
F271158-(XX)	12, 15, 18, 24, 36

(Acme Nut x 1/4" Inverted Male Flare) Connects to propane tank and propane auto change-over dual stage regulator. (F273766)





Hose Assemblies

Model #	Description
F271803	12' Big/Tough Buddy Hose w/Regulator

(Quick Connect x Regulator w/Acme Nut) - Used to hook a Big/Tough Buddy to a 20lb. propane tank.



Model #	Description
F271802	12' Big/Tough Buddy RV Hose

(Quick Connect x 3/8" Female Flare) Used to hook an existing regulated propane line in a camper or motor home to the Big/Tough Buddy.



Model #	Description
F271117	12' Quick-Connect Propane Hose Assembly

(Male quick-connect X swivel 1"-20 male throwaway cylinder thread)
Connect a high-pressure grill or appliance that uses throw-away propane cylinders to a high-pressure RV onboard propane supply.



Model #	Description
F271806	12' Quick Connect Propane Hose Assembly with shut off valve and full flow male plug

Connects a low pressure propane gas grill to an onboard RV propane supply.



Model #	Description
F273720	12' Natural Gas Patio Hose Assembly

(3/8" Female Pipe Thread x 3/8" Male Flare Quick Connect/Disconnect with Dust Plug and Cap) Used when connecting natural gas barbecue grills attached to decks or patios to the supply from a structure.



Model #	Description
F276342	Propane Gas Gauge

(Appliance End Fitting/Acme Nut x Acme Thread and Female P.O.L.) -Meets all Type 1 safety standards .



Model #	Description
F276171	Propane "Steak Saver" Adapter

(1" - 20 Female Throwaway Cylinder Thread x Female P.O.L. & Acme Thread) Used with 1lb. bottles to grills or distribution posts to grills.



Model #	Description
F276172	Propane Tank Refill Adapter

(Female 1 lb. Cylinder Thread x Soft Nose P.O.L.) - Refills 1lb. bottles in 1 minute or less. NOT AVAILABLE IN CANADA





Model #	Description
F273769	Propane Portable Table Top Regulator

(1"-20 Female Throwaway Cylinder Thread Inlet x Orifice Outlet) Used with most propane tabletop grills.



Model #	Description
F273719	Propane High Pressure Regulator with P.O.L.

Range of 0-20 PSI (Full Flow Soft Nose P.O.L. X 1/4" Female Pipe Thread) - Most commonly used on deep fryers, fish cookers, smokers or other high pressure propane appliances.



Propane Regulators









Two stage auto changeover regulator provides easy change over from empty to full cylinder while providing adequate fuel to your RV. Complete with cover bracket and hardware (not shown). 11" W.C. 400,000 BTU max flow. 2 - 1/4" Inverted Female Flare Inlets x 3/8" Female Pipe Outlet -400.000 BTU Propane level indicator located on top of regulator.



Model #	Description
F273766	Propane Auto-Changeover Two Stage Regulator







Model #	Description
F273763	Propane Vertical Two Stage Regulator
F273868	Propane Horizontal Two Stage Regulator
F273863	Propane Horizontal Two Stage Regulator w/P.O.L.

Dual stage regulator uses both a high/low pressure regulator to provide smooth and continuous flow to the appliance or RV while providing 11" W.C. Complete with covers (not shown). 225,000 BTU max flow. 1/4" Female Pipe Thread Inlet x 3/8" Female Pipe Thread Outlet.



Model #	Description
F273767	Propane Low Pressure LP Regulator

(1/4" Female Pipe Thread (Inlet) x 3/8" Female Pipe Thread (Outlet) Use with low pressure propane appliances up to 160,000 BTU's.



Model #	Description
F273830	Propane 30 PSI High Pressure Regulator

Designed for high pressure RV applications. Ideal for fifth wheel split-cylinder applications. 360,000 BTU Capacity 1/4" female pipe thread inlet and outlet.



Model #	Description
F276136	Propane Low Pressure Regulator

(3/8" Female Pipe Thread x Restricted Flow Soft Nose P.O.L.) - 11" W.C. low pressure regulator will operate barbecue grills and low pressure appliances. 75,000 BTU max flow.



Acme nut x 3/8" female pipe	threa
W.C. low pressure regulator.	
For use with most propane	- 4

grills 75,000 BTU max flow.

Model #

F273768



Model #	Description
F273761	90° Propane Low Pressure Regulator with Appliance End Fitting /Acme Nut

(3/8" Female Pipe Thread x Appliance End Fitting) - For Type 1 (QCC-1®) gas grill systems.



Model #	Description
F273759	90° Propane Low Pressure Regulator w/ P.O.L.

Description

(3/8" Female Pipe Thread x Restricted Flow Soft Nose P.O.L.)11" W.C. low pressure regulator will operate propane barbecue grills and low pressure

propane appliances. 90°, 75,000 BTU max flow. • 🕒 us



Brass Fittings & Accessories



Model #	Description
F273655	Excess Flow Soft Nose P.O.L. x 1/4" Male Pipe Thread



Model #	Description
F273762	Full Flow Soft Nose P.O.L. w/Handwheel x 1/4" Male Pipe Thread





Model #	Description	
F276129	Restricted Flow Soft Nose P.O.L. x 9/16" Left Hand Male Thread	



Model #	Description
F276139	Restricted Flow Soft Nose P.O.L. x 1/4" Male Pipe Thread





Model #	Description
F273755	1/4" Male Pipe Thread x 1"-20 Male Throwaway Cylinder Thread





Model #	Description
F276140	1" - 20 Male Throwaway Cylinder Thread x 1/4" Female Pipe Thread









Model #	Description	
F273729	1/4" Inverted Female Flare x 1/4" Male Pipe Thread	

Replacement inlet fitting for F273766 auto-changeover regulator



Model #	Description
F273791	Propane Female P.O.L. w/Acme Thread x 1/4" Male Pipe Thread







Brass Fittings & Accessories

Model #	Description
F276495	Propane Grill Acme Nut (Black)

(Appliance End Fitting/Acme Nut x 1/4" Male Pipe Thread) For appliances with 80,000 BTU's or less.



Model #	Description
F276497	Propane Grill Acme Nut (Green)

(Appliance End Fitting/Acme Nut x 1/4" Male Pipe Thread) -200,000 BTU Capacity.



Model #	Description
F273758	Propane Bulk Cylinder Adapter with Handwheel

(1"-20 Throwaway Cylinder Thread x Restricted Flow Soft Nose P.O.L.) To be attached directly to a bulk tank (i.e., Mr. Camper, Coleman Co. Inc.®, or Century Primus® stove).



Model #	Description
F276133	Propane Bulk Cylinder Adapter with Appliance End Fitting/Acme Nut

(Acme Nut x 1"-20 Male Throwaway Cylinder Thread) Used to hook portable appliances to new propane tanks.



Model #	Description
F276400	Propane Brass Caps

(1" - 20 Female Pipe Thread) - Provides threaded protection for most posts, tees, etc. Two caps provided.



Model #	Description
F271741	30"/15" Propane Distribution Post/Tree

(Three 1"-20 Male Throwaway Cylinder Threads x Full Flow Soft Nose P.O.L.)
Hooks 3 propane appliances to a s ingle 20lb. propane tank. Can hook up to new QCC-1® and old style cylinders.



Model #	Description
F271733	Black Pipe Tee

(2 - 1"-20 Throwaway Cylinder Threads x Appliance End/Acme Nut Fitting) Hookup 2 appliances to a refillable 20lb. cylinder (use with F273712 hose assy.).



Model #	Description
F271736	Black Pipe Tee w/Adapter

Appliance End/Acme Nut fitting x 1"-20 Throaway Cylinder Thread x Female P.O.L. w/Acme Thread) (Use with hose assemblies. F273074, F273706 and F273712).



Model #	Description
F276338	Propane Converter

Converts liquid gas style stoves to 1 lb. propane tanks Converter is Pressure Regulated and has a Variable Rate Control



Brass Fittings & Accessories



Model #	Description
F271715	Propane "Y" Male Adapter with Handwheel

(2 - 1"-20 Throwaway Cylinder Threads xExcess Flow Soft Nose P.O.L.)Hookup 2 propane appliances to a refillable 20lb. propane cylinder (use with F273710-11 hose assy.).



Model #	Description
F271735	Propane "Y" Female Adapter with Handwheel

(Two Female P.O.L.'s w/Acme Threads & Excess Flow Soft. Nose P.O.L.) Hook up 2 propane appliances to a bulk propane tank (use with F273701-02).



Model #	Description
F273751	Propane Adapter Tee

(Excess Flow Soft Nose P.O.L. x 1"-20 Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread)

(Use with hose assy. F273710-11 and F273701-02).



Model #	Description
F273752	Propane Stay A While Tee

(Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread x 1/4" Inverted Female Flare) - Connects auxiliary propane cylinder to additional propane appliance.



Model #	Description
F273753	Propane 90° Stay Flow Adapter

(Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. and Acme Thread) - Connects additional propane appliance to 20lb. propane tank.



Model #	Description
F273760	Propane 90° Elbow

(Restricted Flow Soft Nose P.O.L. x 1"

- 20 Male Throwaway Cylinder Thread)

- Allows for propane appliances designed to be attached directly to refill cylinder such as a propane lantern.



Model #	Description
F276152	1/4" Male Pipe Thread x 9/16" Left Hand Male Thread





Model #	Description
F276153	3/8" Male Pipe Thread x 9/16" Left Hand Male Thread





Model #	Description
F276154	9/16" Left Hand Male Pipe Thread x 9/16" Left Hand Male Thread





Model #	Description
F276262	3/8" Male Pipe Thread x 3/8" Male Flare





Accessory Kits



Model #	Description
F273714	Propane Stay Flow Kit

(12' Propane Hose/Tee Assembly) - Commonly used in RV applications to provide additional source of propane to high pressure appliances. (Swivel 1" - 20 Male throwaway cylinder thread x swivel 1" - 20 female throwaway cylinder thread x tee assembly; excess flow Soft Nose P.O.L. x 1" - 20 male throwaway cylinder thread x female P.O.L. and Acme thread)



5' Propane Flexible pigtail hose assembly: Soft Nose excess flow P.O.L. x 1/4" inverted male flare; stay a while tee: excess flow Soft Nose P.O.L. x 1" - 20 male throwaway cylinder thread x female P.O.L. w/Acme thread x 1/4"inverted female flare)) - Connects auxiliary propane hose cylinder to motor home.



	THE RESERVE OF THE PERSON OF T
del #	Description

Propane Stay A While Deluxe Kit

Model # F273734

(12' Propane Hose Assembly: Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1" - 10 Female throwaway cylinder thread; 5' hose assembly: excess flow Soft Nose P.O.L. x 1/4" inverted male flare; stay a while tee: excess flow Soft Nose P.O.L. x 1" - 20 male throwaway cylinder thread x female P.O.L. w/Acme thread x 1/4" inverted female flare)



Model #	Description
F273735	Propane Stay Flow Plus Kit

(12' Propane Hose Assembly: Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread; 90° Stay Flow Adapter: Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread) - Connects camper and additional appliance to a 20lb. propane tank.



Model #	Description
F273737	Propane 2 Tank Hook Up Kit

(30" Hose Assembly with Excess Flow Soft Nose P.O.L.'s on both ends x Full Flow Tee) - Most commonly used to hook multiple bulk tanks to most applications.



Model #	Description
F271239	"One Stop" Universal Gas Appliance Hook-up Kit

Kit includes:

- · 22" stainless steel flex gas connector
- Brass shut-off valve (1/2" female pipe thread x 1/2" male flare)
- 1/2" male flare x 1/2" male pipe
- 1/2" male flare x 3/8" male pipe
- 1/2" male flare x 3/8" female pipe
- Special gas seal tape for connections





Gas MateTM Quick Connector Kits

Model #	Description
F276181	Propane/Natural Gas Connector Kit w/Shut-off valve & Full Flow Male Plug

(1/4" Male Pipe Thread Plug x 1/4" Female Pipe Thread Socket)
Certified;

1/2 P.S.I. Low pressure



(1/4" Male Pipe Thread Excess FlowPlug x 1/4" Female Pipe Thread Socket) Certified 250 P.S.I. rated



Model #	Description
F276187	Propane/Natural Gas 3/8" Quick Connector & Full Flow Male Plug

(3/8" Male Pipe Thread x 3/8" Female Pipe Thread) Certified; 1/2 P.S.I. Low pressure



Model #	Description
F276190	Propane/Natural Gas Connector & Full Flow Male Plug

(1/4" Male Pipe Thread Full Flow Plug x 1/4" Female Pipe Thread Socket) Certified 250 P.S.I. rated



Model #	Description
F276281	Propane/Natural Gas Full Flow Male Plug

(1/4" Male Pipe Thread x Full Flow Male Plug) - For high pressure appliances. Can be used with F276334 or can replace excess flow plug-in F276186 & F276330





Model #	Description
F276328	Propane/Natural Gas Excess Flow Male Plug

(1/4" Male Pipe Thread x Male Plug Quick Connect Fitting) - For appliances 80,000 BTU's or less. For use with F276334.



Model #	Description
F276329	Propane Cylinder Fill Plug

(7/8" Female P.O.L. x Male Plug) - Use with Gas Mate II Quick Connect Coupling Kit. (F276330).



Model #	Description
F276330	Propane Gas Grill "Quick-Connect" Adapter Kit

(1/4" Male Pipe Thread x Male Plug) (Quick Connect x Soft Nose Excess Flow P.O.L.) Provides plug in/plug out use of appliances.
Certified; 250 P.S.I. Rated





Model #	Description
F276334	Propane Gas Grill "Quick Connect" Adapter

(Quick Connect x Soft Nose Excess Flow P.O.L.)Use with Ducane, Weber & PGS gas grills or other grill users of a Gas Mate II system.
Certified; 250 P.S.I. Rated



Not sure what you need? Call us or visit our website.



Propane Accessories

Model #	Description
F261210	Thermostat - For portable kerosene (50KR only)



Model #	Description
F273169-6	TankFoot® Propane Tank Stabilizer (6)
F273169-30	TankFoot® Propane Tank Stabilizer (30)

Fits 20lb., 30lb. and 40lb. tanks; reduces risk of tipping propane tank while on jobsite and transporting in your R.V., pick-up, car, etc.



Model #	Description
F273699	Universal Fuel Filter

Required for use with all Portable Buddy and Big Buddy Heaters when attaching to a 20 lb. propane tank. Most commonly used with F273701(5') and F273702(12') propane hose assemblies



Model #	Description
F273783	Handwheel

(2 handwheels per pack) Used with Mr. Heater propane products and P.O.L. nuts that use a 7/8" open end wrench



Model #	Description
F273786	O-Rings

(20 per pack) Used to replace o-rings on Mr. Heater Soft Nose P.O.L.'s



Model #	Description
F275228	Tank Foot (1 lb. propane cylinder)

Fits portable throw-away propane cylinders; reduces risk of tipping cylinder while in use.



Model #	Description
F276127	6v/800mA Power Adapter

Use with Big Buddy and Tough Buddy heaters. Uses standard 110 outlet. Also powers products requiring 6VDC and up to 800mA current.







Tank Top Replacement Parts

Model #	Description
F273116	Safety Shut-off Valve with Orifice

Replacement for MH12, MH12T Mr. Heater Tank Top Models

(up to and including 2010)



Model #	Description
F273117	12.5" Thermocouple Lead

Replacement for most Mr. Heater Tank Top Models

(Replacement for Mr. Heater

models up to and including 2010)



Description

Thermocouple Assembly



Model #	Description
F237349	Thermocouple Assembly with Tip-over Switch Wires

MR. HEATER: MH15T, MH15TS (2011-current)

MH30T, MH30TS (2012-current) SUNRITE: SRC15T, SRC30T (all) SR15T, SR30T (2011-current)



MR. HEATER: MH15. MH15C MH30T, MH30TS (2011 series)

MH45T (2011-2012)

Replaces part #17425

Model #

F237425


SUNRITE: SRC15T, SRC30T (2009-2010 ONLY)



Replaces part #17349

Model #	Description
F273164	Screen Assembly

Replacement for most Mr. Heater Tank Top Models (Includes replacement hardware) (Replacement for all Mr. Heater models)



Model #	Description
F237314	Regulator for Mr. Heater and Sun Rite Tank Top Heaters

MR. HEATER: MH15T. MH15TS. MH30T.

MH30TS, MH45T

SUNRITE: SRC15T, SRC30T

Replaces part #17314



Model #	Description
F237416	Safety Shut-off for Mr. Heater and SunRite Tank Top Heaters


MR. HEATER: MH15T, MH15TS, MH30T, MH30TS, MH45T

SUNRITE: SRC15T, SRC30T

Replaces part #17416



Go to our website www.mrheater.com





FAK/FALP Replacement Parts



Model #	Description
F221803	Electrode Kit (2005 models and prior)

MR. HEATER: MH50KT, MH75KT, MH125KT, MH175KT HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT



Model #	Description
F221857	Electrode Kit (Kerosene 2006 models through current)

MR. HEATER: MH50KT. MH75KT. MH125KT. MH175KT. MH210KT MR. HEATER: MH50KR. MH75KTR. MH125KTR. MH175KT. MH210KT HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT, HS210KT



Replaces part #21819 and 22144

Model #	Description
F221887	Replacement Filter Kit (2009 models through current)

MR. HEATER: MH50KTR, MH75KTR, MH125KTR, MH175KTR, MH210KTR CONTRACTOR SERIES: TS75KR, TS125KTR, TS175KTR, TS210KTR CONTRACTOR PLUS: PA50KR. PA75KTR. PA175KTR. PA210KTR HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT




Model #	Description
F226831	Rotor Kit (2003 models through current)


MR. HEATER: MH50KT, MH75KT, MH125KT, MH175KT HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT

ALL PRO: SPC-, SPC-K50, SPC-K100,

SPC-K125,

SPC-K150, SPC-K175 UNIVERSAL: K50-FA, K75, K100-FAT,





Model #	Description
F226865	Flame Sensor Kit (2003 models through current)

MR. HEATER: MH50KT, MH75KT, MH125KT, MH175KT HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT ALL PRO: SPC-K50, SPC-K100, SPC-K150

UNIVERSAL: K50-FA, K100-FA, K150-FA

Replaces part #s: 26903 26924 26925

F226875

Replaces part #21803



Model #	Description
F266842	Pump Adjustment Kit (2003 models through current)

MR. HEATER: MH50KT, MH75KT, MH125KT, MH175KT(2003-2008) MR. HEATER: MH50KR, MH75KTR, MH125KTR, MH175KTR, MH210KTR

(2009-present)

HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT

ALL PRO: SPC-K50, SPC-K100, SPC-K150 UNIVERSAL: K50-FA, K100-FA, K150-FA



Model #	Description
F263015	Replacement Filter Kit (2003-2004 models)

MR. HEATER: MH50KT, MH75KT, MH125KT, MH175KT HEATSTAR: HS50KT, HS75KT, HS125KT, HS175KT

ALL PRO: SPC-K50, SPC-K100. SPC-K150

UNIVERSAL: K50-FA.

K100-FA, K150-FAT



Model #	Description
F263016	Replacement Filter Kit (2005 models through 2008)

MR. HEATER: MH50KT. MH75KT. MH125KT, MH175KT, MH210KT

HEATSTAR: HS50KT. HS75KT. HS125KT.

HS175KT, HS210KT





FAK/FALP Replacement Parts

Model #	Description
F227416	Nozzle Kit (All models through current)

Description Model # F221878 Nozzle Kit (All models through current)





MR. HEATER: MH75KT/MH75KTR HEATSTAR: HS75KT



Replaces part #27416/28710

Model #	Description
F221879	Nozzle Kit (All models through current)

Model #	Description
F221879	Nozzle Kit (All models through current)



MR. HEATER: MH125KT/MH125KTR HEATSTAR: HS125KT

Replaces part #28742/28712

Model #	Description
F221889	Nozzle Kit (All models through current)

MR. HEATER: MH175KT/MH175KTR **HEATSTAR:** HS175KT



Replaces part #28743/28713

Model #	Description
F221891	Nozzle Kit (All models through current)

MR. HEATER: MH210KT/MH210KTR HEATSTAR: HS210KT



Model #	Description
F228794	Spark Plug

MR. HEATER: MH170FAVT **HEATSTAR:** HS170FAVT



Model # **Description** F228795 Spark Plug

MR. HEATER: MH85FAV (2003-08), MH125FAV (2003-2013) HEATSTAR: HS85FAV (2003-08), HS125FAV (2003-2013)



Replaces part #21083



MR. HEATER: MH35FA, MH170FAVT, MH400FAVT HEATSTAR: HS35FA, HS170FAVT, MH400FAVT



Replaces part #26168



Model #	Description
F228797	High Limit Switcl

MR. HEATER: MH55FAV, MH85FAV **HEATSTAR:** HS55FAV, HS85FAV

Replaces part #21751



Model #	Description
F228798	High Limit Switch

MR. HEATER: MH125FAV **HEATSTAR:** HS125FAV



Buddy & Vent Free Replacement Parts



Pilot Assemblies

Model # F278527 Pilot Assembly for Big Buddy

Description

MR. HEATER: MH18B

Replaces part #78422



MR. HEATER: MH9B(2001-2008) MH9BX (2009-CURRENT)

Replaces part #73404





Vent-Free Series Pilot Assemblies

Model # **Description** F270398 Vent-Free Pilot Assemblies (NG) (2015 - prior)

All Mr. Heater / Heatstar 20k & 30k NG Vent Free Heater

Replaces part #70339



Model #	Description
F270399	Vent-Free Pilot Assemblies (LP) (2015 - prior)

All Mr. Heater / Heatstar 20k & 30k LP Vent Free Heater

Replaces part #70358







BaseCamp Gaslight Replacement Parts

Model #	Description
F220330	Glass Globe (Fits Paulin® Gas Lights)

Replacement globe made of heat resistant glass.



Model #	Description
F220353	Soft. Tie-On Mantle (Fits Paulin® Gas Lights)

• Replaces broken soft. mantle, or can be used with ceramic burner head 20381 and gasket 20339 to convert light from preformed mantle to soft mantle.





Model #	Description
F220351	Preformed Mantle (Fits Paulin® Gas Lights)

Replaces broken preformed mantle, or can be used with ceramic burner head 20338 and gasket 20339 to convert light from soft mantle to preformed mantle.



Model #	Description
20338	Ceramic Burner Head (For Preformed Mantle)

Replaces broken burner head, or can be used with preformed mantle F220351 above and gasket 20339 to convert light from soft mantle to preformed mantle.





Model #	Description
20339	Burner Head Gasket

Replacement gasket for both burner heads; should be replaced whenever burner head is removed.





Model #	Description
20381	Ceramic Burner Head (For Soft. Mantle)

Replaces broken burner head, or can be used with soft. mantle F220353 and gasket 20339 to convert light from preformed mantle to soft mantle.





Not sure what you need? Call us or visit our website.



OEM Replacement Parts

Model #	Description
F263012	Spark Plug

REDDY HEATER: R70, R70A, R70B, R70BT, R70CT, R100, R100A, R100B, R110, R150A, R150A, R150AT, R150B, R150BT, R150D, R150M, R155A, R150BT, R150B

R165, R350, R350A, R600, R600A, M66D, M100D, M150S, M350, M600

MASTER (DESA): B66D, B70B, B70BT, B100A, B100B, B100D, B100G, B110, B150A, B150B, B150C, B150D, B150F, B150Ft, B150F, B150FT, B150FT,

B150M, B165, B350A, B350B, B350D, B600, B600A, B600B, B600D

DESA: C100D, C100E, C100F, C150D, C150E, C150F KOEHRING: K100A, K150, K350, K350A, K600

KNIPCO: F66D, F110E, F110F, F110G, F110H, F150F, F150G, F150H, F150S, F350 **REMINGTON:** REM100, REM100A, REM110, REM150, REM150A, REM150B, REM165



Model #	Description
F263013	Spark Plug

REDDY HEATER: R30, R35, R35A, R35B, R50, R50A, R50B, M30, M50A, RLP45,

RLP80, RLP150

MASTER (DESA): B50A, B50B, B50D, B50E, B50F, BLP45, BLP80, BLP150

DESA: C35, C35A, C35B, C50D, C50E, C50F

KOEHRING: K30, K50A

KNIPCO: F30, F50A, F50E, F50F, F50G

REMINGTON: REM35, REM35A, REM50, REM50W, REM50A, REM50AW

VANGUARD: VLP45, VLP80, VLP150



Model #	Description
F263014	Replacement Filter Kit

REDDY HEATER: R30, R35, R35A, R35B, R50, R50A,

R50B, R55, R55A, R70, R70A, R70B, R70BT,

R70CT, M30, M50A, M66D

MASTER (DESA): B50A, B50B, B50D, B50E, B50F, B50G, B50H, B66D, B70B, B70BT DESA: C35, C35A, C35B, C50D, C50E, C50F

KOEHRING: K30, K50A KNIPCO: F30, F50A, F50E, F50G

REMINGTON: REM35, REM35A, REM50, REM50W, REM50A, REM50AW,

REM50B, REM55, REM55A



Model #	Description
F263016	Replacement Filter Kit (2005 models through 2008)

REDDY HEATER: R100, R100A, R100B, R110. R150B, R150BT, R150D, R155, R165

MASTER (DESA): B100A, B100B, B100G, B110, B150F, B150Ft., B150G, B150GT, B165

DESA: C100D, C100E, C100F, 150F

KOEHRING: K100A

KNIPCO: F110E, F110F, F110G, F110H, F150H REMINGTON: REM100, REM100A, REM110,

REM150A, REM150B, REM165



Model #	Description
F263017	Replacement Filter Kit

REDDY HEATER: R100, R100A, R100B, R110, R150B, R150BT, R150D, R155, R165 MASTER (DESA): B100A, B100B, B100G, B110, B150F, B150Ft., B150G, B150GT,

DESA: C100D, C100E, C100F, 150F

KOEHRING: K100A

KNIPCO: F110E, F110F, F110G, F110H, F150H

REMINGTON: REM100. REM100A. REM110, REM150A, REM150B, REM165



Model #	Description
F263018	Replacement Filter Kit

REDDY HEATER: R150, R150A, R150AT, M100D, M150S MASTER (DESA): B100D, B150A, B150B, B150C, B150D

DESA: C150D, C150E **KOEHRING:** K150

KNIPCO: F110D, F150F, F150G, F66D

REMINGTON: *REM150*







Other Mfg. Replacement Parts



Description F263006 Nozzle Kit

REDDY HEATER: R35B. R35A

DESA: CC35B

REMINGTON: REM35A





Model #	Description
F263007	Nozzle Kit

REDDY HEATER: R50, R50A, R50B DESA: C50D, C50E, C50F MASTER (DESA): B50D, B50E, B50F

KNIPCO: *F50E, F50F, F50G*

REMINGTON: REM50, REM50W, REM50A, REM50AW



Model #	Description
F263008	Nozzle Kit

REDDY HEATER: R70, R70A, R70B, R70T, R70CT

MASTER (DESA): B70, B70B, B70T

Lb. WHITE: K70(T) HANDY MASTER: HM70



Model #	Description
F263009	Nozzle Kit

REDDY HEATER: R100, R100A, R100B, R110 **DESA:** C100D, C100E, C100F, (HA3009/PP209)

KOEHRING: K100A

MASTER (DESA): B100A, B100B, B100G, B110 **KNIPCO:** *F110E, F110F, F110G, F110H* REMINGTON: REM100, REM100A, REM110



Model #	Description
F263011	Nozzle Kit

REDDY HEATER: R150, R150A, R150B, R150BT, R150M, R150D, R155, M100D, M150S

HANDYMASTER: HM150 DESA: C150D, C150E, C150F **KOEHRING**: K150

MASTER (DESA): B150A, B150B, B150C, B150D, B150F, B150Ft., B150M, B150G, B150GT

KNIPCO: F150F, F150G, F150S, F150H



















General Buying Information

Prices and terms are subject to change without notice.

Orders will be billed at prices and terms in effect on the date of shipment.

Terms: Net 30

All orders are accepted and the above terms extended with the approval of the Mr. Heater Credit Department.

Freight Terms:

Shipments are F.O.B. Factory (Cleveland, Ohio; Bedford, Ohio; Portland, Oregon; Depending on Shipment of Origin.)

All orders for Mr. Heater products will be shipped to one destination within the 48 continental United States according to one of the following freight policies, at Mr. Heater's discretion.

Package Quantities:

Orders must be in package quantities. Mr. Heater Inc. also reserves the right to alter quantities ordered, if necessary, to conform to package quantities.

Merchandise Return Authorization:

Merchandise may not be returned without the prior approval of Mr. Heater Inc. Please fax your return request to the Customer Service Department at 1-800-321-0552. Upon receipt, the request will be reviewed and if appropriate a return material authorization number (RMA#) will be issued. Merchandise returned without prior approval will be subject to refusal and returned freight collect; or if accepted, a handling charge of 25% of purchase price will be deducted from the credit memo.

Authorized merchandise returned for credit, repair or replacement must be shipped with TRANSPORTATION CHARGES PREPAID. Full credit will be issued for original invoice subject to a handling and repacking charge of 25%. Merchandise returned transportation collect will be charged back by invoice or deducted from credit.

Credit allowances for obsolete, shelf-worn or damaged merchandise will be solely at the discretion of Mr. Heater Inc. This merchandise is subject to an additional 10% handling charge and costs of new packaging.

Indemnification:

Notwithstanding any provisions for indemnification contained in any purchase orders or other documents generated or used by the Customer, Mr. Heater Inc. assumes no responsibility to indemnify or otherwise defend or protect Customer or any other purchaser of its products for liability resulting from Customer's actual or alleged independent conduct, or the actual or alleged independent conduct of Customer's agents or employees including but not limited to, resale of products purchased from Mr. Heater: (1) with any product alterations not authorized by Mr. Heater (2) without all instructions and warnings provided by Mr. Heater (3) with oral or written instructions inconsistent with those provided by Mr. Heater (4) which have been used or damaged by Customer or returned by Customer after retail sale, or (5) in violation of any state or local statute or ordinance.

Image Library

High res and low res product images are available for download from our online image gallery. Call 800.251.0001 for login information.



U.S. icon located on the lower right of each product image indicates domestic availability from our Cleveland OH distribution center.



Globe icon represents availability on a direct ship basis from China.

Enerco, based in Cleveland Ohio, has been at the forefront of infrared combustion technology since 1957. This market leading technology has allowed Enerco to build expertise in consumer heating products as well as heavy duty commercial and construction heating products. Starting in 1984, Enerco's Mr. Heater Brand has delivered innovative technology and unmatched quality and service as America's Most Popular Brand Of Heaters. From its Original Tank Tops to its patented Buddy Heaters, millions of consumers have enjoyed high quality comfortable heat. Mr. Heaters Contractor Series Forced Air Propane and Kerosene Heaters have become the industry standard for dependability while its unit heaters have expanded the garage to usable workspace in the winter months. 2011 marked the launch of HERO-The World's First Cordless Forced Air Propane Heaters featuring Quiet Burner Technology®. Through innovative products, innovative marketing, and world class customer service, Mr. Heater is leading the way in portable heat!

Product specifications and appearance are subject to change without notice.

Product images may not be precise.

INNOVATIVE MARKETING

Mr. Heater's innovative marketing campaign features print and web advertising that will generate millions of impressions during the heating season alone. These campaigns drive traffic to your stores to ring the register. Mr. Heater's website (mrheater.com) and youtube channel (http://www.youtube.com/user/MrHeaterTV) feature videos armed to drive home the Mr. Heater products. Customers have the ability to like us on Facebook and also follow us on Twitter and Instagram.





You Tube







Our interactive and full-featured website, www.mrheater.com, brings exciting new ways for us to educate, interact, and bring the complete online experience to customers and business partners.

As part of an initiative our company will continue to grow our online presence. The website provides interactive schematics, increased educational features, chat function, various customer <u>Contact Us</u> venues including email, Facebook, and Twitter.

Our website, which is responsive to tablets, mobile phones, and desktop computers enables you to create accounts, set up wish lists to share with friends and family, and also compare products.

