

RESIDENTIAL ANCHOR POINTS

[1]



[2]



[3]



[4]



[5]




[6]



[7]



[8]

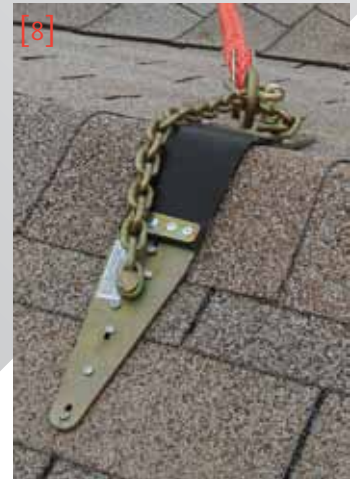

[9]



| Part# | Description | Pitch | Weight |
|-------|---|--------------|--------|
| 00420 | Truss Boss Anchor Kit: weather-proof cap & fasteners | | 2.00 |
| 00422 | Truss Boss Anchor Cap | | 0.50 |
| 00432 | Truss Boss Anchor | | 1.50 |
| 00440 | T-T Boss Anchor Kit (fasteners included) – grey | | 5.00 |
| 00441 | T-T Boss Anchor Kit (fasteners included) – terracotta | | 5.00 |
| 00442 | T-T Boss Anchor Kit (fasteners included) – black | | 5.00 |
| 00455 | Temper Reusable Anchor | Any | 3.50 |
| 00458 | Temper Reusable Anchor with Swivel Top | Any | 4.10 |
| 00460 | SP-Anchor | Any | 2.00 |
| 00470 | Stainless Steel Reusable Anchor | Any | 0.45 |
| 00480 | WA-Anchor (fasteners included) | 7/12 | 0.80 |
| 00481 | WA-Anchor (fasteners included) | 7/12 – 12/12 | 1.00 |
| 00482 | Halo Anchor (fasteners included) | Any | 0.80 |
| 00485 | Global Anchor (fasteners included) | | 6.00 |

[1] & [2] Temper Reusable Anchors ↘

- Meets all applicable OSHA & ANSI standards
- Can be installed with screws or duplex nails
- For temporary use on wood rooftops
- Fasteners provided
- Fits up to 12/12 roof pitch
- Offset holes down the center to avoid truss splitting
- Can be used between 2 trusses when all holes are filled
- Thicker plated metal for longer lasting life of the product
- Approved for use in metal deck 20g or better. Please contact Customer Service for fastener specifications

[3] SP-Anchor (00460) ↘

- Fits any pitch
- Disposable
- Easy to install by nailing or screwing into the truss
- Screws are included
- Meets all applicable OSHA & ANSI standards
- Durable galvanized steel

[4] Stainless Steel Reusable Anchor (00470) ↘

- For temporary use on wood rooftops
- Fits any roof pitch
- Meets all applicable OSHA & ANSI standards
- Durable & reusable
- Easy installation
- Fasteners provided

[5] WA-Anchor ↘

- Can be left in place or removed from service after construction is complete
- Attaches by drilling through the top chord & securing to the wall plate using four (4) 16d sinkers
- Provides safe vertical anchorage access when performing siding/external wall constructions
- Cost effective and versatile
- Attaches to 2 x 4 & 2 x 6 top plates
- Supplied with all necessary fasteners
- Used as fall arrest or fall restraint

[6] Truss Boss Anchor (00432) ↘

- Installs in less than a minute
- Extremely cost effective
- Attach Truss Boss Anchor to truss while on the ground
- Waterproof flashing for both composite & tile roof
- Non-corrosive materials

[7] T-T Boss Anchor Kit ↘

- Does not penetrate the top sheathing
- Comes with environmentally safe Aluminum flashing w/ vulcanized EPDM
- Cap is made of Luran-S which is highly durable unlike the competition & designed not to blow off
- Anchor can be put on the truss while the truss is on the ground
- Hassle-free flashing design makes it extremely easy to install
- Unique design absorbs energy in a fall registering impact forces below 900 lb.
- Used as fall arrest or fall restraint

[8] Halo Anchor (00482) ↘

- Reusable ¼" thick steel roof anchor
- Complete with zinc plated forged alloy steel O-ring
- Nail or bolt into the roof member
- Removable, it may be used again after an inspection
- 5,000 lb. minimum breaking strength
- Supplied with all necessary fasteners
- Used as fall arrest or fall restraint
- May also be used in conjunction with temporary Rope HLL

[9] Global Anchor (00485) ↘

- Universal anchor that gives you the choice of installing the anchor at the peak of the roof (up to a 12/12 pitch) or in the field using our hex head screws or duplex nails
- Fasteners included
- Used as fall arrest or fall restraint
- You can install through:

sheathing only
sheathing into the top chord
existing roofing/sheathing