

DEWALT®

POWER TOOLS, EQUIPMENT & ACCESSORIES



GUARANTEED TOUGH.®

OPEN >

TOOLS

COMPRESSORS	16	DRILLS	9	NAILERS	15
Compressor Combo Kits	17	1/2" Drills	9	Brad Nailers	15
Electric – EHP Portable	16	1/4" Drills	9	Coil Nailer	15
Electric – Wheeled Portable	17	3/8" Drills	9	Finish Nailers	15
Gas – Hand Carry	16	FASTENING	10	Framing Nailers	15
Gas – Wheeled Portable	16	Cut-Out Tool	10	Palm Nailer	15
Oil Free – Hand Carry	16	Impact Wrenches	10	Staplers	15
Oil Lube – Hand Carry	16	Screwdrivers	10	OPTICAL INSTRUMENTS	18
CORDLESS	1	GENERATORS	17	PORTABLE ALARMS	21
Adhesive Dispensers	4	HAMMERS & HAMMERDRILLS ..	11	Mobilelock™	21
Batteries/Chargers	5	Demolition Hammers	11	Sitelock®	21
Circular Saws	2	Hammerdrills	11	Sitelock® Sensors	21
Compact Power™	1	SDS Hammers	11	PRESSURE WASHERS	19
Cordless Combo Kits	6	SDS Max/Spline Hammers	11	SAWS	7
Cordless Shears	4	LASERS	18	Circular Saws	7
Cut-Off Tools	4	Lasers	18	Framing Saw	7
Cut-Out Tools	3	Rotary Lasers	18	Jig Saws	7
Finish Nailers	4	METALWORKING	12	Masonry Saw	7
Flashlights	5	Bench Ginders	13	Miter Saws	8
Fluorescent Area Lights	5	Chop Saws	14	Reciprocating Saws	7
Hammerdrills/Drill/Drivers	1	Cut-Off Machines	14	Scroll Saw	7
Impact Drivers	2	Die Ginders	13	Table Saws	8
Impact Wrenches	2	HP Body Grip Ginders	12	Tile Saw	7
Jig Saws	3	HP Trigger Grip Ginders	12	WOODWORKING	19
Metal Cutting Circular Saw	2	Large Angle Ginders	13	1/4 Sheet Sander	20
Pencil Vibrator	3	Medium Angle Ginders	13	Belt Sanders	20
Reciprocating Saws	3	Multi-Cutter Saw	14	Compact Router	21
Right Angle Drill/Drivers	2	Polishers	13	Planer	20
Screwdrivers	3	Portable Band Saws	14	Plate Joiner	21
SDS Hammers	3	Shears/Nibblers	14	Random Orbit Sanders	19
Wet/Dry Vacs	4	Small Angle Ginders	12	Routers	20
Worklight/Charger	5	Straight Ginders	13	Thickness Planers	20
Worksite Radio/Charger	5				
Xenon Floodlights	5				
XRP™ Drill/Drivers	1				
XRP™ Hammerdrills	1				

TIPS (ease of use)

CLICK:

Index Item – takes you to that exact product
 Right Edge – to go to next page
 Left Edge – to go to previous page
 Center – to go back to Index


HAMMERDRILL/DRILL/DRIVERS

1/2" (13mm) 36V Cordless Hammerdrill/Drill/Driver Kit

SPECIFICATIONS	DC900KL
Voltage	36V
Max. Power	750 UW0
# of Speed Settings	3
Max. RPM	0-400/0-1,200/0-1,600
Max. BPM	0-6,800/0-20,400/0-27,200
Chuck Size	1/2"
Chuck Type	Self-tightening
Tool Weight	6.9 lbs
Charger/Batteries	1 hour / (2) 36V
Includes	360° side handle

XRP™ HAMMERDRILLS


1/2" (13mm) 18V Cordless Hammerdrill/Drill/Driver Kit **1/2" (13mm) 18V Cordless Hammerdrill/Drill/Driver Kit** **1/2" (13mm) 14.4V Cordless Hammerdrill/Drill/Driver Kit** **1/2" (13mm) 14.4V Cordless Hammerdrill/Drill/Driver Kit**

SPECIFICATIONS	DC925KA/VA*	DC926KA/VA*	DC935KA/VA*	DC936KA/VA*
Voltage	18V	18V	14.4V	14.4V
Max. Power	510 UW0	510 UW0	335 UW0	335 UW0
# of Speed Settings	3	3	3	3
Max. RPM	0-450/0-1,500/0-2,000	0-450/0-1,500/0-2,000	0-450/0-1,450/0-1,800	0-450/0-1,450/0-1,800
Max. BPM	0-7,650/0-25,500/0-34,000	0-7,650/0-25,500/0-34,000	0-7,650/0-24,650/0-30,600	0-7,650/0-24,650/0-30,600
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Self-tightening	Self-tightening	Self-tightening	Self-tightening
Tool Weight	6.2 lbs	6.2 lbs	5.4 lbs	5.4 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V XRP™	1 hour / (2) 14.4V XRP™
Includes	360° side handle	360° side handle		

XRP™ DRILL/DRIVERS

1/2" (13mm) 18V Cordless Drill/Driver Kit **1/2" (13mm) 14.4V Cordless Drill/Driver Kit** **1/2" (13mm) 12V Cordless Drill/Driver Kit**

SPECIFICATIONS	DC920KA	DC930KA	DC940KA
Voltage	18V	14.4V	12V
Max. Power	510 UW0	335 UW0	290 UW0
# of Speed Settings	3	3	3
Max. RPM	0-450/0-1,500/0-2,000	0-450/0-1,450/0-1,800	0-450/0-1,450/0-1,800
Chuck Size	1/2"	1/2"	1/2"
Chuck Type	metal, single sleeve ratcheting	metal, single sleeve ratcheting	metal, single sleeve ratcheting
Tool Weight	6.0 lbs	5.3 lbs	5.0 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V XRP™	1 hour / (2) 12V XRP™
Includes	360° side handle		

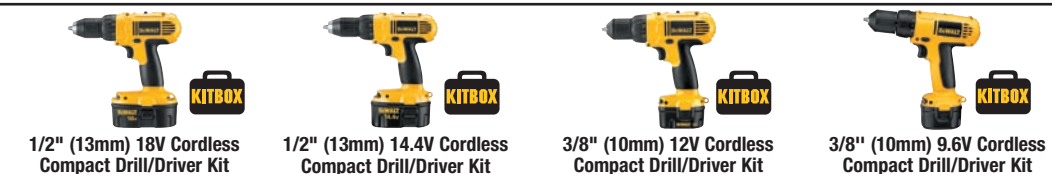COMPACT POWER™

1/2" (13mm) 18V Cordless Compact Drill/Driver Kit **1/2" (13mm) 14.4V Cordless Compact Drill/Driver Kit** **3/8" (10mm) 12V Cordless Compact Drill/Driver Kit** **3/8" (10mm) 9.6V Cordless Compact Drill/Driver Kit**

SPECIFICATIONS	DC759KA	DC728KA	DC727KA/VA*	DC750KA
Voltage	18V	14.4V	12V	9.6V
Max. Power	380 UW0	270 UW0	230 UW0	130 UW0
# of Speed Settings	2	2	2	2
Max. RPM	0-450/0-1,500	0-400/0-1,400	0-400/0-1,400	0-300/0-1,100
Chuck Size	1/2"	1/2"	3/8"	3/8"
Chuck Type	plastic, single sleeve ratcheting	plastic, single sleeve ratcheting	plastic, single sleeve ratcheting	plastic, single sleeve ratcheting
Tool Weight	5.2 lbs	4.7 lbs	3.9 lbs	3.4 lbs
Charger/Batteries	1 hour / (2) 18V	1 hour / (2) 14.4V	1 hour / (2) 12V	1 hour / (2) 9.6V
Includes	double-ended screwdriver bit	double-ended screwdriver bit	double-ended screwdriver bit	double-ended screwdriver bit

*Comes with 1 hour vehicle charger

www.DEWALT.com

1-800-4 DEWALT

IMPACT WRENCHES

1/2" (13mm) 36V High Torque Impact Wrench Kit

1/2" (13mm) 18V High Torque Impact Wrench Kit

1/2" (13mm) 18V Impact Wrench Kit

1/2" (13mm) 14.4V Impact Wrench Kit

1/2" (13mm) 12V Impact Wrench Kit

3/8" (9.5 mm) 12V Impact Wrench Kit

SPECIFICATIONS	DC800KL	DW059K-2	DW057K-2	DW055K-2	DW053K-2	DW051K-2
Voltage	36V	18V	18V	14.4V	12V	12V
Drive	patented shear-resistant 1/2" square	patented shear-resistant 1/2" square	1/2" square w/detent pin retention	1/2" square w/detent pin retention	1/2" square w/detent pin retention	3/8" square w/hog ring retention
No Load Speed	1,400 rpm	1,650 rpm	0-2,400 rpm	0-2,400 rpm	0-2,400 rpm	0-2,400 rpm
Impacts/Min	2,500 bpm	2,600 bpm	0-3,000 bpm	0-3,000 bpm	0-3,000 bpm	0-3,000 bpm
Max.. Torque	3,900 in-lbs	3,600 in-lbs	1,650 in-lbs	1,550 in-lbs	1,400 in-lbs	1,200 in-lbs
Max.. Torque	325 ft-lbs	300 ft-lbs	138 ft-lbs	129 ft-lbs	117 ft-lbs	100 ft-lbs
Tool Length	10-3/4"	10-3/4"	6-1/2"	6-1/2"	6-1/2"	6-1/2"
Tool Weight	7.5 lbs	7.55 lbs	4.9 lbs	4.1 lbs	3.75 lbs	3.7 lbs
Charger/Batteries	1 hour / (2) 36V	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V	1 hour / (2) 12V	1 hour / (2) 12V


18V Cordless Impact Driver Kit

14.4V Cordless Impact Driver Kit

12V Cordless Impact Driver Kit

9.6V Cordless Impact Driver Kit
IMPACT DRIVERS

SPECIFICATIONS	DW056K-2	DW054K-2	DW052K-2	DW050K-2
Voltage	18V	14.4V	12V	9.6V
Drive Size	1/4" hex shank quick release	1/4" hex shank quick release	1/4" hex shank quick release	1/4" hex shank quick release
No Load Speed	0-2,400 rpm	0-2,400 rpm	0-2,400 rpm	0-2,400 rpm
Impacts/Min	0-3,000 bpm	0-3,000 bpm	0-3,000 bpm	0-3,000 bpm
Max.. Torque	1,170 in-lbs	1,150 in-lbs	1,000 in-lbs	900 in-lbs
Max.. Torque	98 ft-lbs	96 ft-lbs	83 ft-lbs	75 ft-lbs
Tool Length	6-1/2"	6-1/2"	6-1/2"	6-1/2"
Tool Weight	4.9 lbs	4.1 lbs	3.75 lbs	3.5 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V	1 hour / (2) 12V	1 hour / (2) 9.6V


7-1/4" 36V Cordless Circular Saw Kit

18V Cordless Circular Saw Kit

5-3/8" (136mm) 18V Cordless Trim Saw Kit

6-3/4" (173mm) 18V Cordless Metal Cutting Circular Saw Kit
CIRCULAR SAWS

SPECIFICATIONS	DC300K	DC390K	DW936K
Voltage	36V	18V	18V
No Load Speed	4,000 rpm	3,700 rpm	0-3,200 rpm
Blade Diameter	7-1/4"	6-1/2"	5-3/8"
Bevel Capacity	0-50°	0-50°	50°
Depth Of Cut At 90°	2-7/16"	2-1/4"	1-5/8"
Tool Weight	9.9 lbs	8.7 lbs	7.5 lbs
Charger/Batteries	1 hour / (1) 36V	1 hour / (1) 18V XRP™	1 hour / (1) 18V
Includes	carbide tipped blade, rip fence	16 tooth-carbide saw blade, blade wrench, rip fence	5/8" 16-tooth carbide saw blade and blade wrench

METAL CUTTING CIRCULAR SAW

SPECIFICATIONS	DW934K-2
Voltage	18V
No Load Speed	3,200 rpm
Blade Diameter	6-3/4"
Bevel Capacity	N/A
Depth Of Cut At 90°	2-3/8"
Tool Weight	9.5 lbs
Charger/Batteries	1 hour / (2) 18V XRP™
Includes	6-3/4" 40-tooth titanium carbide tipped blade


3/8" (10mm) 18V Cordless Right Angle Drill/Driver Kit

3/8" (10mm) 14.4V Cordless Right Angle Drill/Driver Kit

3/8" (10mm) 12V Cordless Right Angle Drill/Driver

3/8" (10mm) 9.6V Cordless Right Angle Drill/Driver Kit
RIGHT ANGLE DRILL/DRIVERS

SPECIFICATIONS	DW960K-2	DW966K-2	DW965K-2	DW955K-2
Voltage	18V	14.4V	12V	9.6V
Max. Power	320 UWO	210 UWO	165 UWO	130 UWO
Chuck Size	3/8"	3/8"	3/8"	3/8"
# of Speed Settings	2	2	2	2
No Load Speed	0-500/0-1,500 rpm	0-400/0-1,250 rpm	0-400/0-1,200 rpm	0-400/0-1,100 rpm
Chuck Type	plastic, 2-sleeve	plastic, 2-sleeve	plastic, 2-sleeve	plastic, 2-sleeve
Tool Weight	4.7 lbs	4.4 lbs	4.1 lbs	3.9 lbs
Charger/Batteries	1 hour / (2) 18V	1 hour / (2) 14.4V	1 hour / (2) 12V	1 hour / (2) 9.6V
Includes	screwdriver bit			

RECIPROCATING SAWS


36V Cordless Reciprocating Saw Kit 18V Cordless Reciprocating Saw Kit 14.4V Cordless Reciprocating Saw Kit

SPECIFICATIONS	DC305K	DC385K	DW937K
Voltage	36V	18V	14.4V
Keyless Blade Clamp	Yes	Yes	Yes
Strokes/Min	0-3,000 spm	0-3,000 spm	0-2,700 spm
4 Position Blade Clamp	Yes	Yes	No
Stroke Length	1-1/8"	1-1/8"	7/8"
Electric Brake	Yes	Yes	Yes
Tool Weight	8.4 lbs	8.3 lbs	6 lbs
Charger/Batteries	1 hour / (1) 36V	1 hour / (1) 18V XRP™	1 hour / (1) 14.4V
Includes	reciprocating saw blade	reciprocating saw blade	reciprocating saw blade

PENCIL VIBRATOR


18V Cordless Pencil Vibrator Kit

SPECIFICATIONS	DC530KA
Voltage	18V
Vibrator Diameter	1-1/8"
Shaft Length	4'
Vibrations Per Minute	14,000 vpm
Charger/Batteries	1 hour / (2) 18V XRP™
Includes	soft-side bag for batteries and charger

SDS HAMMERS


36V Cordless 1" SDS Rotary Hammer Kit

24V Cordless 7/8" SDS Hammer Kit

18V Cordless 7/8" SDS Hammer Kit

SPECIFICATIONS	DC233KL	DC223KA	DC212KA
Voltage	36V	24V	18V
No Load Speed	0-1,150 rpm	0-1,100 rpm	0-1,100 rpm
Blows/Min	0-4,400 bpm	0-4,100 bpm	0-4,100 bpm
Concrete Maximum	1"	7/8"	7/8"
Concrete Optimum	1/4-5/8"	5/32"-1/2"	5/32"-1/2"
Tool Length	10.5"	10.5"	10.5"
Tool Weight	7.8 lbs	8.4 lbs	7.6 lbs
Charger/Batteries	1 hour / (2) 36V	1 hour / (2) 24V	1 hour / (2) 18V XRP™
Includes	360° side handle, depth rod	360° side handle, depth rod	360° side handle, depth rod

JIG SAWS


36V Cordless Jig Saw Kit w/Keyless Blade Change 18V Cordless Jig Saw Kit w/Keyless Blade Change

SPECIFICATIONS	DC308K	DC330K
Voltage	36V	18V
Strokes/Min	0-2,700 spm	0-3,000 spm
Stroke Length	1"	1"
Keyless Blade Clamp	Yes	Yes
Dust Blower	Yes	Yes
Tool Weight	7.5 lbs	7.5 lbs
Charger/Batteries	1 hour / (1) 36V	1 hour / (1) 18V XRP™
Includes	jig saw blade	jig saw blade

CUT-OUT TOOLS


18V Cordless Cut-Out Tool

14.4V Cordless Cut-Out Tool

SPECIFICATIONS	DC550KA	DC551KA
Voltage	18V	14.4V
No Load Speed	26,000 rpm	26,000 rpm
Collet Diameter	1/4", 1/8"	1/4", 1/8"
Adjustable Guide	Yes	Yes
Tool Weight	4.5 lbs	4.2 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V XRP™
Includes	1 general purpose bit, 1 drywall cutting bit, 1/4" & 1/8" collets	1 general purpose bit, 1 drywall cutting bit, 1/4" & 1/8" collets

SCREWDRIVERS


18V Cordless Light Gauge Steel Framing Screwdriver

18V Cordless Drywall/Deck Screwdriver Kit

12V Cordless Drywall/Deck Screwdriver Kit

1/4" (6mm) 7.2V Cordless Two-Position Screwdriver Kit

SPECIFICATIONS	DC668KA	DC520KA	DW979K-2	DW920K-2
Voltage	18V	18V	12V	7.2V
Drive	1/4" hex	1/4" Hex	1/4" Hex	1/4" Hex
No Load Speed	0-900/0-2,700 rpm	0-900/0-2,900 rpm	0-800/0-2,300 rpm	0-500 rpm
Max. Torque	180 in-lbs	180 in-lbs	180 in-lbs	80 in-lbs
Capacity (CRS)	12-28 ga.	12 ga.	12 ga.	-
Tool Weight	5.4 lbs	5.1 lbs	4.2 lbs	2.5 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 12V	1 hour / (2) 7.2V
Includes	#2 Phillips screwdriver bit, 5/16" nut runner	bit tip/magnetic holder, drywall nosepiece, TEKS® nosepiece	bit tip/magnetic holder, drywall nosepiece, TEKS® nosepiece	(2) screwdriver bits

**FINISH
NAILERS**

**18V Cordless 1-1/4" - 2-1/2" 15 Gauge
34° Angled Finish Nailer Kit**

**18V Cordless 1-1/4" - 2-1/2" 16 Gauge
20° Angled Finish Nailer Kit**

**18V Cordless 1-1/4" - 2-1/2" 16 Gauge
Straight Finish Nailer Kit**

SPECIFICATIONS	DC628K	DC618K	DC616K
Voltage	18V	18V	18V
Nailer Operating Mode	bump and sequential	bump and sequential	bump and sequential
Nailing Rate	4-5 nails/sec	4-5 nails/sec	4-5 nails/sec
Nail Diameter/Type - 15 gauge DA type	15 Ga DA type gauge	16 gauge	16 gauge
Magazine Angle/Capacity	34° / 110 nails	20° / 110 nails	straight / 110 nails
Nail Length Capacity	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"
Magazine Loading	rear - load	rear - load	rear - load
Integrated Belt Hook	Yes	Yes	Yes
Tool Free Jam Clearing	Yes	Yes	Yes
Tool Free Depth Adjustment	Yes	Yes	Yes
Tool Weight	8.9 lbs	8.5 lbs	8.5 lbs


**18V Cordless 18 Gauge
Off-Set Shear Kit**

**18V Cordless 18 Gauge
Swivel Head and Shear Kit**

**14.4V Cordless 18 Gauge
Swivel Head and Shear Kit**
**CORDLESS
SHEARS**

SPECIFICATIONS	DC495KA	DC490KA	DW941K-2
Voltage	18V	18V	14.4V
Strokes/Min	0-2,300 spm	0-2,300 spm	0-2,300 spm
Minimum Cutting Radius	1"	5.5"	5.5"
Capacity In Steel	18 ga.	18-28 ga.	18-28 ga.
Tool Weight	6.1 lbs	6.1 lbs	5.8 lbs
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 14.4V
Includes	blade wrench	blade wrench	blade wrench


**18V Cordless Adhesive
Dispenser - 10oz**

**18V Cordless Adhesive
Dispenser - 29oz**

**18V Cordless Adhesive
Dispenser - 300ml**
**ADHESIVE
DISPENSERS**

SPECIFICATIONS	DC545K	DC546K	DC547K
Voltage	18V	18V	18V
Lbs. of Force	650	650	650
Auto Reverse	Yes	Yes	Yes
"Set & Forget" Speed Control	Yes	Yes	Yes
Capacity	10oz, 1/10gal, & 300ml-310ml cartridges	29oz, & quart size cartridges	300ml & 600ml sausage packs
Max. Speed	25 in/min	25 in/min	25 in/min
Weight	6.85 lbs	7.75 lbs	7.00 lbs
Charger/Batteries	1 hour / (1) 18V	1 hour / (1) 18V	1 hour / (1) 18V


**36V 4-1/2" Cordless
Cut-Off Tool Kit**

**18V 4-1/2" Cordless
Cut-Off Tool Kit**
**CUT-OFF
TOOLS**

SPECIFICATIONS	DC415KL	DC410KA
Voltage	36V	18V
No Load Speed	6,500 rpm	6,500 rpm
Spindle Lock	Yes	Yes
Spindle Thread	5/8"-11	5/8"-11
Tool Weight	7.2 lbs	7.0 lbs
Charger/Batteries	1 hour / (2) 36V	1 hour / (2) 18V XRP™
Includes	Type 27 & Type 1 guards, wrench, matched flanges, Type 1 (cutting) wheel, side handle	Type 27 & Type 1 guards, wrench, backing flange, Type 27 wheel, 3-position side handle

**WET/DRY
VACS**

**2 Gallon Cordless or
Corded Wet/Dry Vac**

**18V Cordless 1/2 Gallon
Wet/Dry Portable Vac**

SPECIFICATIONS	DC500	DC515K
Tank Size	2 gal	1/2 gal
Hose Diameter	1-1/4"	1-1/4"
Hose Length	5'	2.5'
Voltage (DC Operation)	12-18V	18V
Blower	Yes	No
Tool Weight	7.2 lbs	6.0 lbs
Charger/Batteries	Sold Separately	1 hour / (1) 18V XRP™
Includes	5' heavy-duty rubber hose, crevice tool and wide nozzle	

WORKSITE RADIO/CHARGER



Worksite Radio/Charger

SPECIFICATIONS	DC011
Power Source	7.2V to 18V Battery or AC Power
Radio Output	92 dB
AM/FM Digital Tuner	Yes
Auxiliary Port	Yes
Charge Time	1 hour or less
Tool Weight	13.2 lbs

WORKLIGHT/CHARGER


Cordless/Corded Worklight/Dual Port Charger w/GFCI Protection

SPECIFICATIONS	DC022
Power Source	12-18V Batteries or AC Power
Bulb	38W Fluorescent
Brightness	2700 Lumens
Charge Time	1 Hour or less
Run-Time	1-hour on 18V DC9096 Battery
Weight	12.0 lbs
Batteries	Sold Separately

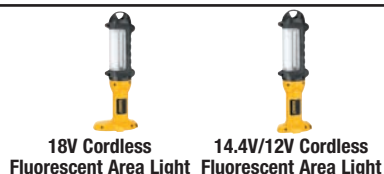FLUORESCENT AREA LIGHTS


18V Cordless Fluorescent Area Light

14.4V/12V Cordless Fluorescent Area Light

SPECIFICATIONS	DC527	DC528
Voltage	18V	14.4V OR 12V
Bulb	13 Watt	13 Watt
Run-Time	3.5 hrs	2.75 hrs
Weight	1.25 lbs	1.15 lbs
Battery	Sold Separately	Sold Separately

XENON FLOODLIGHTS


36V Cordless Floodlight

18V Cordless Flexible Floodlight

14.4V Cordless Flexible Floodlight

SPECIFICATIONS	DC509	DW919	DW918
Voltage	36V	18V	14.4V
Bulb	Xenon	Xenon	Xenon
Run-Time	8 hrs	3 hrs	3 hrs
Weight	1.14 lbs	.75 lbs	0.5 lbs
Battery	Sold Separately	Sold Separately	Sold Separately

FLASHLIGHTS


18V Cordless Pivoting Head Flashlight

14.4V Cordless Pivoting Head Flashlight

12V Cordless Pivoting Head Flashlight

SPECIFICATIONS	DW908	DW906	DW904
Voltage	18V	14.4V	12V
Bulb	Xenon	Xenon	Xenon
Run-Time	3 hrs	3 hrs	3 hrs
Tool Weight	0.5 lbs	0.5 lbs	0.5 lbs
Batteries	Sold Separately	Sold Separately	Sold Separately

BATTERIES/CHARGERS


1 Hour Charger w/ Auto. Tune-Up™ Mode

Dual Port 1 Hour Charger

15 Minute Charger

Worksite Radio/Charger

1 Hour Fan Cooled Charger

1 Hour Charger

1 Hour Vehicle Charger

1 Hour Fan Cooled Vehicle Charger

CAT #	VOLTAGE	DW9116	DW9216	DW9117	DC011	DW0246	DC9000	DW9109	DW0249
DC9360	36V	X	X	X	X	X	60	X	X
DW0242	24V	X	X	X	X	60	X	X	60
DC9096	18V	60	60	20	60	X	X	60	X
DC9091	14.4V	60	60	20	60	X	X	60	X
DC9071	12V	60	60	20	60	X	X	60	X
DW9061	9.6V	45	45	15	45	X	X	45	X
DW9057	7.2V	30	30	12	30	X	X	30	X

**CORDLESS
COMBO KITS**

**36V Cordless 4-Tool
Combo Kit**

**36V Cordless 2-Tool
Combo Kit**

**36V Cordless 2-Tool
Combo Kit**

**18V Cordless 4-Tool
Combo Kit**

**18V Cordless 4-Tool
Combo Kit**

SPECIFICATIONS	DCX6401	DCX6200	DCX6210	DC4PAKA	DC4MEGA
Voltage	36V	36V	36V	18V	18V
Hammerdrill/drill/driver	DC900	DC900	DC900	DC925	DC925
Rotary Hammer	—	—	—	—	DC212
Circular Saw	DC300 (7-1/4")	DC300 (7-1/4")	—	DC390 (6-1/2")	—
Reciprocating Saw	DC305	—	DC305	DC385	DC385
Flexible Floodlight	DC509	—	—	DW919	DW919
Charger/Batteries	1 hour / (2) 36V	1 hour / (2) 36V	1 hour / (2) 36V	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™
Includes	360° side handle, 7-1/4" carbide tipped circular saw blade, circular saw rip fence, reciprocating saw blade and kit box	360° side handle, 7-1/4" carbide tipped circular saw blade, circular saw rip fence and contractor bag	360° side handle, reciprocating saw blade and contractor bag	360° side handle, carbide tipped circular saw blade, circular saw rip fence and kit box	360° side handle, depth rod and kit box


**18V Cordless 9-Tool
Combo Kit**

**18V Cordless 9-Tool
Combo Kit**

**18V Cordless 6-Tool
Combo Kit**

**18V Cordless 6-Tool
Combo Kit**

**18V Cordless 5-Tool
Combo Kit**
**CORDLESS
COMBO KITS**

SPECIFICATIONS	DC9PAKRA	DC9PAKIA	DC6PAKRA	DC6PAKIA	DC5PAKA/DC5PAKVD
Voltage	18V	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DC925	DC925	DC925	DC925	DC925
Circular Saw	DC390 (6-1/2")	DC390 (6-1/2")	DC390 (6-1/2")	DC390 (6-1/2")	DC390 (6-1/2")
Reciprocating Saw	DC385	DC385	DC385	DC385	DC385
Right Angle Drill	DW960	—	DW960	—	—
Cut-Off Tool	DC410	DC410	DC410	DC410	—
Cut-Out Tool	DC550	DC550	—	—	—
Jig Saw	DC330	DC330	—	—	DC330
Impact Driver	—	DW056	—	DW056	—
Impact Wrench	DW059	DW059	—	—	—
Flexible Floodlight	DW919	DW919	DW919	DW919	DW919
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™ *Adds vehicle charger & 3rd XRP™ battery
Includes	360° side handle, carbide tipped circular saw blade, circular saw rip fence, reciprocating saw blade, jig saw blades, type 1 and type 27 guards, wrench, backing flange, (1) type 1 wheel, 3-position side handle and (2) contractor bags		360° side handle, carbide tipped circular saw blade, circular saw rip fence, type 1 and type 27 guards, wrench, backing flange, (1) type 1 wheel, 3-position side handle, reciprocating saw blade and contractor bag		360° side handle, carbide tipped circular saw blade, circular saw rip fence, jig saw blades, reciprocating saw blade and kit box


**18V Cordless 2-Tool
Combo Kit**

**18V Cordless 2-Tool
Combo Kit**

**18V Cordless 4-Tool
Combo Kit**

**18V Cordless Compact
2-Tool Combo Kit**

**18V Cordless Compact
2-Tool Combo Kit**
**CORDLESS
COMBO KITS**

SPECIFICATIONS	DC2PAKSA	DC2PAKCA	DC4CPKA	DC759CA	DC759SA
Voltage	18V	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DC925	DC925	—	—	—
Drill/Driver	—	—	DC759	DC759	DC759
Circular Saw	DC390 (6-1/2")	—	DW936 (5-3/8")	—	DW936 (5-3/8")
Reciprocating Saw	—	DC385	DW938	DW938	—
Pivoting Head Flashlight	—	—	DW908	—	—
Charger/Batteries	1 hour / (2) 18V XRP™	1 hour / (2) 18V XRP™	1 hour / (2) 18V	1 hour / (2) 18V	1 hour / (2) 18V
Includes	360° side handle, carbide tipped circular saw blade, circular saw rip fence and kit box	360° side handle, reciprocating saw blade and kit box	carbide tipped circular saw blade, reciprocating saw blade and kit box	reciprocating saw blade and kit box	carbide tipped circular saw blade and kit box


TILE SAW

10" Wet Tile Saw

SPECIFICATIONS	D24000/D24000S
Amps	15.0 Amps
Blade Diameter	10"
Max Rip Capacity	24" Tile
Diagonal Cut Capacity	18" Tile
Plunge Feature	Yes
Max. Depth of Cut	3-3/4"
Integrated 45° Miter	Yes
Integrated 22.5° Miter	Yes
Length	34"
Tool Weight	69 lbs

MASONRY SAW

4.5" Wet/Dry Masonry Saw

SPECIFICATIONS	DW861W
Amps	12.5 Amps
Bevel Capacity	60°
RPM	11,500
Arbor Size	5/8"
Tool Weight	6.0 lbs

RECIPROCATING SAWS

Reciprocating Saw Kit
Reciprocating Saw Kit
Reciprocating Saw Kit

SPECIFICATIONS	DW311K	DW310K	DW304PK
Amps	13.0 Amps	12.0 Amps	10.0 Amps
Strokes/Min	0-2,700 spm	0-2,700 spm	0-2,800 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes	Yes	Yes
4-Position Blade Clamp	No	No	Yes
Orbital Action	Yes	No	No
Adjustable Shoe	Yes	Yes	Fixed
Variable Speed Dial	Yes	No	No
Tool Length	18.0"	18.0"	17.5"
Tool Weight	9.0 lbs	8.6 lbs	7.0 lbs

FRAMING SAW

7-1/4" (184mm) High-Torque Framing Saw

SPECIFICATIONS	DW378G/GT/GK
Amps	15.0 Amps
Max Watts Out	2,000 W
No Load Speed	4,600 rpm
Bevel Capacity	50°
Blade Diameter	7-1/4"
Depth of Cut at 90°	2-7/16"
Depth of Cut at 45°	1-7/8"
Tool Weight	13.0 lbs

CIRCULAR SAWS

7-1/4" (184mm) Lightweight Circular Saw

7-1/4" (184 mm) Lightweight Circular Saw Kit w/High Strength Base and Electric Brake

7-1/4" (184mm) Circular Saw

8-1/4" (210mm) Circular Saw

SPECIFICATIONS	DW368/DW368K	DW369CSK	DW364/DW364K	DW384
Amps	15.0 Amps	15.0 Amps	15.0 Amps	15.0 Amps
Max Watts Out	2,200 W	2,200 W	2,075 W	2,075 W
No Load Speed	5,800 rpm	5,800 rpm	5,800 rpm	5,800 rpm
Bevel Capacity	56°	56°	50°	50°
Bevel Stops	45° / 22.5°	45° / 22.5°	N/A	N/A
Rear Pivot	N/A	N/A	Yes	Yes
Electric Brake	N/A	Yes	Yes	Yes
Depth of Cut at 90°	2-3/8"	2-3/8"	2-7/16"	2-15/16"
Depth of Cut at 45°	1-3/4"	1-3/4"	1-7/8"	2-1/4"
Tool Weight	9.5 lbs	9.8 lbs	12.3 lbs	12.75 lbs

JIG SAW

Variable Speed Top-Handle Jig Saw Kit


Compact Jig Saw Kit

SPECIFICATIONS	DW331K	DW317K
Amps	6.5 Amps	5.5 Amps
Strokes/Min	500-3,100 spm	0-3,100 spm
Stroke Length	1"	1"
Keyless Blade Clamp	Yes	Yes
Dust Blower	Yes	N/A
Orbital Action	4-position	4-position
Tool Weight	6.4 lbs	6.2 lbs

SCROLL SAW

Variable-Speed Scroll Saw

SPECIFICATIONS	DW788
Amps	1.3 Amps
Strokes/Min	400-1,750 spm
Stroke Length	3/4"
Depth of Cut (inches)	2"
Tool Weight	56 lbs
SCROLL SAW ACCESSORIES	
DW7880	– Scroll Saw Stand
DW7881	– Worklight

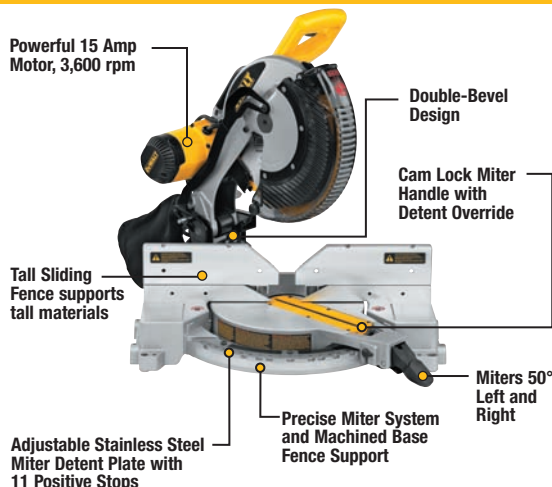
MITER SAWS
SPECIFICATIONS

	DW703	DW712
Amps	15.0 Amps	15.0 Amps
No Load Speed	5,000 rpm	5,400 rpm
Blade Diameter	10"	8-1/2"
Arbor Size	5/8"	5/8"
Vertical Capacity: Baseboard Against Fence	3-1/2"	3-1/4"
Vertical Capacity: Crown Molding Vertically Nested	4-1/2"	3-1/2"
Horizontal Capacity: Baseboard Lying Flat	6"	11.8"
Horizontal Capacity: Crown Molding Lying Flat	5-1/4"	11.8"
45° Bevel Cut Capacity (dimensional lumber)	2x6	2x12
90° Cross-Cut Capacity (dimensional lumber)	4x4	2x12


12" (305mm) Single-Bevel Compound Miter Saw

12" (305mm) Double-Bevel Compound Miter Saw

12" (305mm) Double-Bevel Sliding Compound Miter Saw

Universal Miter Saw Workstation
MITER SAWS (continued)

SPECIFICATIONS	DW715	DW716	DW718	DW723
Amps	15.0 Amps	15.0 Amps	15.0 Amps	Quick Change Clamps
No Load Speed	4,000 rpm	3,600 rpm	3,600 rpm	12" Extension
Blade Diameter	12"	12"	12"	Lightweight – 33 lbs
Arbor Size	5/8 or 1"	5/8" or 1"	5/8" or 1"	Support up to 400 lbs
Vertical Capacity: Baseboard Against Fence	6-1/2"	6-1/2"	6-1/2"	
Vertical Capacity: Crown Molding Vertically Nested	5-1/4"	6-5/8"	6-5/8"	
Horizontal Capacity: Baseboard Lying Flat	8"	8" (10" with back fence)	16"	
Horizontal Capacity: Crown Molding Lying Flat	6-1/2"	6-1/2"	11-1/4"	
45° Bevel Cut Capacity (dimensional lumber)	2x8	2x8 (2x10 with back fence)	2x14 (2x16 with back fence)	
90° Cross-Cut Capacity (dimensional lumber)	4x6	2x8 (2x10 with back fence)	2x14 (2x16 with back fence)	

MITER SAW ACCESSORIES

DW7051 – Length Stop
(for all DeWALT Miter Saws)

DW7053 – Dust Bag
(for all DeWALT Miter Saws)

DW7055 – Replacement Kerf Plate
(for DW703, DW715 and DW716)

DW7080 – Extension Kit
(for DW703, DW712, DW715, DW716 and DW718)

DW7082 – Vertical Clamp
(for DW703, DW712, DW715, DW716 and DW718)

DW7084 – Crown Stops
(for DW703, DW712, DW715, DW716 and DW718)

MITER SAW STAND ACCESSORIES

DW7231 – Workstation Tool Mounting Brackets
(for DW723 only)

DW7232 – Work Piece Support and Length Stop
(for DW723 only)

TABLE SAWS

10" Compact Job Site Table Saw

10" Job Site Table Saw

10" Woodworker's Table Saw

SPECIFICATIONS	DW745	DW744X	SPECIFICATIONS	DW746/DW746X
Amps	15.0 Amps	15.0 Amps	Horsepower	1-3/4 HP
No Load Speed	3,850 rpm	3,650 rpm	No Load Speed	3000 rpm
Blade Diameter	10"	10"	Blade Diameter	10"
Arbor Size	5/8"	5/8"	Arbor Size	5/8"
Dust Port Diameter	2-1/4"	2-1/4"	Dust Port Diameter	2-1/2"
Depth of Cut at 90°	3-1/8"	3-1/8"	Depth Of Cut At 90°	3-1/8"
Depth of Cut at 45°	2-1/4"	2-1/4"	Depth Of Cut At 45°	2-1/8"
Max Rip to Right of Blade	16"	24-1/2"	Max Rip to Right of Blade	with DW7468: 30", with DW7464: 52"
Max Rip to Left of Blade	12"	15-1/2"	Max Rip to Left of Blade	16"
Max Width of Dado	N/A	13/16"	Max Width of Dado	13/16"
Tool Weight	64 lbs	64 lbs	Tool Weight	254 lbs


TABLE SAW ACCESSORIES

DW7450 – Table Saw Stand
(for DW745)

DW7440 – Portable Table Saw Stand

DW7441 – Out Feed and Side Support

DW7444 – Dado Throat Plate

DW7460 – Mobile Base

DW7461 – Sliding Table

DW7462 – Cast Iron Extension Wing

DW7463 – Out Feed Table

DW7464 – 52" Precision Fence Rail System

DW7466 – Dado Throat Plate

DW7468 – 30" Precision Fence Rail System

DW7469 – Low Profile Fence Face Attachment



1/4" DRILLS



1/4" (6mm) VSR Drill

SPECIFICATIONS

	DW217
Chuck Size	1/4"
Amps	6.7 Amps
No Load Speed	0-4,000 rpm
Max Watts Out	510 W
Gear Reduction	Single
Capacity In Wood (Spade Bit)	3/4"
Capacity In Wood (Hole Saw)	N/A
Capacity In Steel (Twist Bit)	1/4"
Tool Weight	3.2 lbs

3/8" DRILLS



3/8" (10mm) VSR Drill



3/8" (10mm) VSR Drill Kit w/Keyless Chuck



3/8" (10mm) VSR Drill w/Metal Keyless Chuck



3/8" (10mm) VSR Drill



3/8" (10mm) VSR Drill



3/8" (10mm) VSR Right Angle Drill

SPECIFICATIONS

	D21002	D21008K	D21009	DW222	DW223G	DW160V
Keyless Chuck	N/A	Yes	Yes	Yes	N/A	N/A
Chuck Size	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Amps	6.0 Amps	6.0 Amps	6.0 Amps	6.7 Amps	7.0 Amps	3.7 Amps
No Load Speed	0-2,500 rpm	0-2,500 rpm	0-2,500 rpm	0-1,200 rpm	0-1,200 rpm	0-1,200 rpm
Max Watts Out	480 W	480 W	480 W	520 W	560 W	200 W
Gear Reduction	Single	Single	Single	Double	Double	Double
Capacity In Wood (Spade Bit)	1"	1"	1"	1-1/4"	1-1/4"	1-1/8"
Capacity In Wood (Hole Saw)	1-1/8"	1-1/8"	1-1/8"	2-1/8"	2-1/8"	1-1/8"
Capacity In Steel (Twist Bit)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Tool Weight	3.2 lbs	3.5 lbs	3.5 lbs	3.3 lbs	3.6 lbs	3.75 lbs



1/2" (13mm) VSR Drill



1/2" (13mm) VSR Drill w/Keyless Chuck



1/2" (13mm) VSR Drill w/Anti-Lock Control



1/2" (13mm) VSR Drill



1/2" (13mm) VSR Drill w/Keyless Chuck

1/2" DRILLS

SPECIFICATIONS

	DW235G	DW236/K	DW239	DW245	DW246
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Amps	7.8 Amps	7.8 Amps	7.8 Amps	7.8 Amps	7.8 Amps
No Load Speed	0-850 rpm	0-850 rpm	0-850 rpm	0-600 rpm	0-600 rpm
Max Watts Out	600 W	600 W	600 W	600 W	600 W
Gear Reduction	Double	Double	Double	Triple	Triple
Capacity In Wood (Spade Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
Capacity In Wood (Auger Bit)	1-1/8"	1-1/8"	1-1/8"	1-1/2"	1-1/2"
Capacity In Steel (Twist Bit)	1/2"	1/2"	1/2"	1/2"	1/2"
Capacity In Steel (Hole Saw)	1-1/2"	1-1/2"	1-1/2"	2-3/4"	2-3/4"
Tool Weight	4.2 lbs	4.2 lbs	4.2 lbs	4.4 lbs	4.4 lbs



1/2" (13mm) VSR Drill w/Anti-Lock Control



1/2" (13mm) Right Angle Drill Kit



1/2" (13mm) Stud & Joist Drill



1/2" (13mm) VSR Spade Handle Drill



1/2" (13mm) End Handle Drill

1/2" DRILLS (continued)

SPECIFICATIONS

	DW249	DW120K	DW124/K	DW130V	DW140
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Amps	7.8 Amps	7.0 Amps	11.5 Amps	9.0 Amps	7.0 Amps
No Load Speed	0-600 rpm	400/600/900 rpm	300/1,200 rpm	0-550 rpm	600 rpm
Max Watts Out	600 W	580 W	850 W	600 W	580 W
Gear Reduction	Triple	Triple	Triple	Triple	Triple
Capacity In Wood (Spade Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
Capacity In Wood (Auger Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
Capacity In Steel (Twist Bit)	1/2"	1/2"	1/2"	1/2"	1/2"
Capacity In Steel (Hole Saw)	2-3/4"	5"	5"	3"	1-1/2"
Tool Weight	4.5 lbs	9.75 lbs	13.5 lbs	7.5 lbs	7.0 lbs

SCREWDRIVERS

**VSR Drywall
Screwdriver**

**VSR Drywall
Screwdriver**

**VSR Drywall
Screwdriver**

**VSR Deck/Drywall
Screwdriver**

**VSR Drywall/Framing
Screwdriver**

**VSR Depth-Sensitive
Screwdriver**

SPECIFICATIONS	DW255	DW252	DW272/W/WT	DW257	DW276	DW266
Amps	6.0 Amps	6.0 Amps	6.3 Amps	6.2 Amps	6.5 Amps	6.5 Amps
No Load Speed	0-5,300 rpm	0-4,000 rpm	0-4,000 rpm	0-2,500 rpm	0-2,500 rpm	0-2,500 rpm
Clutch	Standard	Standard	Standard	Standard	Standard	Standard
Torque	60 in-lbs	60 in-lbs	81 in-lbs	132 in-lbs	132 in-lbs	132 in-lbs
Max Fastener Size	#8	#8	#8	#12	#14	#14
Tool Weight	2.9 lbs	2.8 lbs	3.1 lbs	3.5 lbs	3.6 lbs	3.5 lbs


**VSR All-Purpose
Screwdriver Kit**

**VSR Versa-Clutch®
Screwdriver**

**VSR Versa-Clutch®
Screwdriver**

**VSR Versa-Clutch®
Screwdriver**

**VSR Positive-Clutch
Screwdriver**

**VSR Positive-Clutch
Screwdriver**
SCREWDRIVERS

SPECIFICATIONS	DW260K	DW267	DW268	DW269	DW281	DW284
Amps	6.2 Amps	6.5 Amps	6.5 Amps	6.5 Amps	6.5 Amps	6.5 Amps
No Load Speed	0-2,500 rpm	0-2,000 rpm	0-2,500 rpm	0-1,000 rpm	0-2,500 rpm	0-2,500 rpm
Clutch	Standard	VERSA-CLUTCH® System	VERSA-CLUTCH® System	VERSA-CLUTCH® System	Positive	Positive
Torque	132 in-lbs	164 in-lbs	132 in-lbs	344 in-lbs	132 in-lbs	132 in-lbs
Max Fastener Size	#12	#14	#14	#14	#14	#14
Tool Weight	3.2 lbs	3.7 lbs	3.7 lbs	3.7 lbs	3.4 lbs	3.3 lbs


**1/2" (13mm)
Impact Wrench**

**3/4" (19mm) Impact Wrench
w/Detent Pin Anvil**

**3/4" (19mm)
Impact Wrench**
**IMPACT
WRENCHES**

SPECIFICATIONS	DW292/K/DW293	DW294	DW297
Amps	7.5 Amps	7.5 Amps	10.0 Amps
No Load Speed	2,100 rpm	2,100 rpm	1,600 rpm
Max. Torque	345 ft-lbs	345 ft-lbs	434 ft-lbs
Impacts/Min	2,700 bpm	2,700 bpm	1,800 bpm
Tool Length	11-1/4"	11-1/4"	13"
Tool Weight	7.0 lbs	7.0 lbs	11.0 lbs


Cut-Out Tool
**CUT-OUT
TOOL**

SPECIFICATIONS	DW660/K/SK
Amps	5.0 Amps
No Load Speed	30,000 rpm
Collet Diameter	1/8, 1/4"
Adjustable Guide	Yes
Spindle Lock	Yes
Tool-Free Bit Change	Yes
Tool Length	10"
Tool Weight	3.2 lbs


HAMMER-DRILLS

1/2" (13mm) VSR Single Speed Hammerdrill

1/2" (13mm) VSR Dual Range Hammerdrill

1/2" (13mm) VSR Dual Range Hammerdrill Kit

SPECIFICATIONS	DW511	DW505/K	DW520K
Amps	6.7 Amps	7.8 Amps	8.2 Amps
Max Watts Out	550 W	650 W	750 W
No Load Speed	0-2,700 rpm	0-1,100 / 0-2,700 rpm	0-1,100 / 0-2,700 rpm
Blows/Min	0-46,000 bpm	0-19,000 / 0-46,000 bpm	0-19,000 / 0-46,000 bpm
Capacity In Steel	1/2"	1/2"	1/2"
Capacity In Wood	1-1/4"	1-1/2"	1-1/2"
Concrete Optimum	3/16-3/8"	3/16 - 3/8"	3/16 - 7/16"
Concrete Maximum	1/2"	1/2"	1/2"
Tool Length	11-1/2"	13"	14"
Tool Weight	3.85 lbs	4.8 lbs	5.3 lbs

SDS HAMMERS

1" Pistol Grip SDS Hammer Kit

1" D-Handle SDS Hammer Kit

1" L-Shape SDS Rotary Hammer Kit

1-1/8" SDS Rotary Hammer Kit

SPECIFICATIONS	D25111K/D25113K	D25211K/D25213K	D25313K/D25314K	DW570K/D25404K
Concrete Drilling	1"	1"	1"	1-1/8"
Impact Energy	2.2 / 2.5 ft-lbs	2.2 / 2.5 ft-lbs	2.5 ft-lbs	3.34 ft-lbs
Amps	8.0 Amps	8.0 Amps	8.0 Amps	8.3 Amps
No Load Speed	0-1,150 rpm	0-1,150 rpm	0-1,150 rpm	0-730 rpm
Blows/Min	0-4,300 bpm	0-4,300 bpm	0-4,300 bpm	0-4,100 bpm
Chipping	No / Yes	No / Yes	Yes	Yes
Switch	VSR	VSR	VSR	VS
Quick Change Removable Chuck	No	No	No / Yes	Yes
Tool Length	14.2"	16.6"	11.5"/12.1"	15.25"
Tool Weight	5.6 / 5.7 lbs	5.9 / 6.1 lbs	6.5 / 6.8 lbs	10.75 lbs



D25300D—Rotary Hammer Dust Extraction for use with D25303, D25304, D25313, D25314 L-Shape SDS hammers



D25300DH—HEPA Dust Extraction for same models as D25300D

SDS MAX/SPLINE HAMMERS

1-9/16" SDS Max Combination Hammer

1-3/4" SDS Max Combination Hammer

1-7/8" SDS Max Combination Hammer with CTC

2" SDS Max Combination Hammer with CTC

1-9/16" Spline Combination Hammer

1-3/4" Spline Combination Hammer

SPECIFICATIONS	D25500K	D25600K	D25701K	D25730K	D25550K/D25551K	D25650K
Concrete Drilling	1-9/16"	1-3/4"	1-7/8"	2"	1-9/16"	1-3/4"
Impact Energy	7.3 ft-lbs	8 ft-lbs	11.7 ft-lbs	15 ft-lbs	7.3 ft-lbs	8 ft-lbs
Amps	11.0 Amps	11.5 Amps	13 Amps	15 Amps	11.0 Amps	11.5 Amps
No Load Speed	140-280 rpm	140-280 rpm	137-275 rpm	125-250 rpm	140-280 rpm	140-280 rpm
Loaded Speed (bpm)	1,330-2,660 bpm	1,330-2,660 bpm	1,260-2,520 bpm	1,152-2,304 bpm	1,330-2,660 bpm	1,330-2,660 bpm
Bit Lock	Yes	Yes	Yes	Yes	No / Yes	Yes
Chipping	Yes	Yes	Yes	Yes	Yes	Yes
Clutch	Yes	Yes	2-Stage CTC	2-Stage CTC	Yes	Yes
Tool Length	18.5"	18.5"	20.5"	23"	18.5"	18.5"
Tool Weight	13.0 lbs	13.4 lbs	17.5 lbs	19.2 lbs	13.0 lbs	13.4 lbs


7 lb. Compact SDS Chipping Hammer

12 lb. SDS Max Demolition Hammer


19 lb. SDS Max Demolition Hammer

22 lb. SDS Max Demolition Hammer

27 lb. 3/4" Hex Demolition Hammer

Pavement Breaker w/Hammer Truck & Steel
DEMOLITION HAMMERS

SPECIFICATIONS	D25330K	D25830K/D25850K	D25890K	D25900K	D25940K	D25980K
Bit Retention	SDS-Plus	SDS-Max / Spline	SDS-Max	SDS-Max	3/4"	1-1/8"
Impact Energy	2.5 ft-lbs	8 ft-lbs	15 ft-lbs	3.7-18.5 ft-lbs	22 ft-lbs	61 ft-lbs
Amps	6.3 Amps	11.5 Amps	15 Amps	14 Amps	15 Amps	15 Amps
Loaded Speed (bpm)	0-1,150 bpm	1,330-2,660 bpm	1,152-2,304 bpm	1,020-2,040 bpm	1620 bpm	900 bpm
Variable Impact Control Dial	—	7 Settings	8 Settings	19 Settings	—	—
Chisel Rotation	—	Yes	Yes	One-step, 12 Positions	One-step, 12 Positions	—
Tool Length	11.5"	18.5"	23"	25"	28.5"	—
Tool Weight	6.5 lbs	12.3 / 13.2 lbs	19 lbs	21.6 lbs	26.4 lbs	68.3 lbs

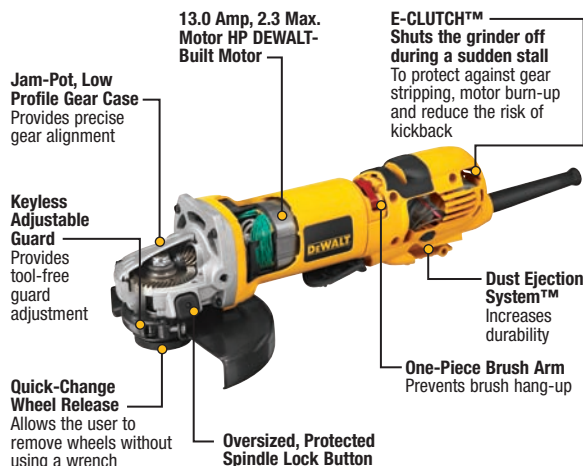

SMALL ANGLE GRINDERS



4-1/2" (115mm)
Small Angle Grinder

SPECIFICATIONS

D28110

Amps	7.0 Amps AC/DC
Max. Watts Out / Horsepower	800 W / 1.1 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	No
Quick-Change	Yes
Tool Length	10-3/4"
Tool Weight	4.1 lbs

SMALL ANGLE GRINDERS



4-1/2" (115mm)
Small Angle Grinder



4-1/2" (115mm)
Small Angle Grinder



4-1/2" (115mm)
Small Angle Grinder



4-1/2" Paddle Switch
Grinder (grounded)

SPECIFICATIONS

D28402

Amps	10.0 Amps AC/DC
Max. Watts Out / Horsepower	1,200 W / 1.6 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	11-1/4"
Tool Weight	4.6 lbs

D28402N

Amps	10.0 Amps AC/DC
Max. Watts Out / Horsepower	1,200 W / 1.6 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	No
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	11-1/4"
Tool Weight	4.6 lbs

D28112

Amps	10.0 Amps AC/DC
Max. Watts Out / Horsepower	1,200 W / 1.6 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	11-1/4"
Tool Weight	4.6 lbs

DW802G

Amps	9.0 Amps
Max. Watts Out / Horsepower	1,000 W / 1.3 HP
No Load Speed	10,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	No
Quick-Change	No
Tool Length	11.5"
Tool Weight	5.1 lbs

HP BODY GRIP GRINDERS



6" High Performance
Cut-Off/Grinder



6" High Performance
Cut-Off/Grinder



6" High Performance
Cut-Off/Grinder



4-1/2" - 5" High
Performance Grinder



4-1/2" - 5" High
Performance Grinder



4-1/2" - 5" High
Performance Grinder

SPECIFICATIONS

D28144

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

D28144N

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	No
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

D28140

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

D28114

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

D28114N

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	No
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

D28131

Amps	13.0 Amps
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	11,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	13"
Tool Weight	4.6 lbs

HP TRIGGER GRIP GRINDERS



4-1/2" / 5" High Performance
Grinder w/Trigger Grip



4-1/2" / 5" High Performance
Grinder w/No-Lock On Trigger Grip



5" / 6" High Performance
Grinder w/Trigger Grip



5" / 6" High Performance
Grinder w/No-Lock On Trigger Grip

SPECIFICATIONS

D28115

Amps	13.0 Amps AC/DC
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	15"
Tool Weight	4.75 lbs

D28115N

Amps	13.0 Amps AC/DC
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	No
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	15"
Tool Weight	4.75 lbs

D28065

Amps	13.0 Amps AC/DC
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	Yes
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	15"
Tool Weight	4.75 lbs

D28065N

Amps	13.0 Amps AC/DC
Max. Watts Out / Horsepower	1,700 W / 2.3 HP
No Load Speed	9,000 rpm
Spindle Lock	Yes
Spindle Thread	5/8"-11
Trigger Lock-On	No
Dust Extraction™	Yes
Quick-Change	Yes
Tool Length	15"
Tool Weight	4.75 lbs


LARGE ANGLE GRINDERS

7" (180mm)
Large Angle Grinder

7" (180mm)
Large Angle Grinder

9" (230mm)
Large Angle Grinder

9" (230mm)
Large Angle Grinder

7" / 9" Large
Angle Sander

7" & 9" 5.3 HP
Large Angle Grinder

SPECIFICATIONS	D28474W	D28494S	D28493N	D28494N	D28497	D28499X
Amps	15.0 Amps AC/DC	15.0 Amps AC/DC	15.0 Amps AC/DC	15.0 Amps AC/DC	15.0 Amps AC/DC	15.0 Amps AC/DC
Max. Watts Out / Horsepower	3,084 W / 4.1 HP	3,084 W / 4.1 HP	3,084 W / 4.1 HP	3,084 W / 4.1 HP	3,084 W / 4.1 HP	3,950 W / 5.3 HP
No Load Speed	8,000 rpm	6,000 rpm	5,000 rpm	6,000 rpm	6,000 rpm	6,000 rpm
Use Wheels RPM Above	8,500 rpm	6,600 rpm	5,500 rpm	6,600 rpm	6,600 rpm	6,600 rpm
Spindle Lock	Yes	Yes	Yes	Yes	Yes	Yes
Spindle Thread	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11
Motor Abrasion Protection	Yes	Yes	Yes	Yes	Yes	Yes
Steel-Cut Gears	Yes	Yes	Yes	Yes	Yes	Yes
Tool Length	19.2"	19.2"	19.2"	19.2"	19.2"	20.7"
Tool Weight	13.15 lbs	13.15 lbs	13.6 lbs	13.6 lbs	12.9 lbs	14.5 lbs



5" (125mm) Medium Angle Grinder

7" (180mm) Medium Angle Grinder

MEDIUM ANGLE GRINDERS

SPECIFICATIONS	DW831	DW840
Amps	12.0 Amps AC/DC	13.0 Amps AC/DC
Max. Watts Out / Horsepower	1,837 W / 2.5 HP	2,250 W / 3 HP
No Load Speed	10,000 rpm	8,000 rpm
Use Wheels RPM Above	11,000 rpm	8,500 rpm
Spindle Lock	Yes	Yes
Spindle Thread	5/8"-11	5/8"-11
Tool Length	14.33"	16.1"
Tool Weight	7.4 lbs	8.0 lbs


7"/9" Electronic
Variable Speed Polisher

7"/9" Variable
Speed Polisher

7"/9" Variable
Speed Polisher

POLISHERS

SPECIFICATIONS	DW849	DW847	DW845
Amps	8.0 AC Amps	7.0 AC Amps	7.0 AC Amps
Max. Watts Out	1,400 W	700 W	700 W
No Load Speed	0-1,000/0-3,000 rpm	0-1,750 rpm	0-2,300 rpm
Spindle Thread	5/8"-11	5/8"-11	5/8"-11
Spindle Lock	Yes	Yes	Yes
Tool Length	17.3"	15.9"	15.9"
Tool Weight	8.25 lbs	7.8 lbs	7.8 lbs


1-1/2" (40mm)
Die Grinder

2" (50mm)
Die Grinder

DIE GRINDERS

SPECIFICATIONS	DW887	DW888
Amps	3.0 Amps AC/DC	5.0 Amps AC/DC
Max. Watts Out	350 W	485 W
No Load Speed	25,000 rpm	19,000 rpm
Spindle Thread	1/4" collet & 1/8" sleeve	1/4" collet & 1/8" sleeve
Tool Length	13.0"	9.2"
Tool Weight	3.25 lbs	6.0 lbs


2-1/2" (65mm)
Straight Grinder

6" (150mm)
Straight Grinder

STRAIGHT GRINDERS

SPECIFICATIONS	DW880	DW882
Amps	5.0 Amps AC/DC	13.0 Amps AC/DC
Max. Watts Out	485 W	2,250 W
No Load Speed	19,000 rpm	5,700 rpm
Spindle Thread	3/8"-24	5/8"-11
Tool Length	18.5"	24.4"
Tool Weight	6.8 lbs	14.8 lbs


2-1/2" (65mm)
Straight Grinder

6" (150mm)
Straight Grinder

BENCH GRINDERS

SPECIFICATIONS	DW756	DW758
Amps	4.0 AC Amps	4.2 AC Amps
Horsepower	5/8 HP	3/4 HP
No Load Speed	3,450 rpm	3,600 rpm
Wheel Diameter	6"	8"
Spindle Diameter	1/2"	5/8"
Adjustable Tool Resets	Yes	Yes
Tool Length	15"	16"
Tool Weight	28.5 lbs	39.5 lbs

**PORTABLE
BAND SAWS**

**Deep Cut Variable
Speed Band Saw**

**Deep Cut Variable
Speed Band Saw**

SPECIFICATIONS	D28770/K	DW328
Amps	6.0 Amps	6.0 Amps
Ft./Min.	80-280'	100-265'
Max. Capacity (Rectangular)	4-3/4"	4-3/4"
Max. Capacity (Round)	4-3/4"	4-1/2" x 4-3/4"
Tool Length	21"	21.5"
Tool Weight	15.0 lbs	14 lbs


**14" (355mm)
Multi-Cutter Saw**
**MULTI-CUTTER
SAW**

SPECIFICATIONS	DW872
Amps	15.0 Amps
No Load Speed	1,300 rpm
Spindle Lock	Yes
Quick Lock Vise	Yes
Wheel Arbor	1"
Wheel Diameter	14"
Max. Capacity (Round)	5-3/16"
Max. Capacity (Rectangular)	6-1/2" x 4-1/2"
Tool Length	21"
Tool Weight	47.0 lbs

**SHEARS/
NIBBLERS**

14 Gauge Shear

12 Gauge Shear

16 Gauge Nibbler

16 Gauge Profile Nibbler

14 Gauge Nibbler

SPECIFICATIONS	DW892	DW893	DW896	DW897	DW898
Amps	3.0 Amps AC/DC	6.5 Amps AC/DC	3.0 Amps AC/DC	6.5 Amps AC/DC	6.5 Amps AC/DC
Max. Watts Out	384 W	225 W	385 W	225 W	225 W
Strokes/Min	2,700 spm	1,950 spm	2,100 spm	1,950 spm	1,950 spm
Capacity (Mild Steel)	14 ga.	12 ga.	16 ga.	16 ga.	14 ga.
Capacity (Stainless Steel)	16 ga.	14 ga.	18 ga.	18 ga.	16 ga.
Starting Hole	—	—	1"	1"	5/8"
Tool Length	9.5"	10.5"	9.75"	10.5"	10.5"
Tool Weight	4.5 lbs	4.5 lbs	4.5 lbs	4.5 lbs	4.5 lbs


**1/2" Variable Speed
Cement Shear**

**18 Gauge Swivel
Head Shear**

14 Gauge Shear
**SHEARS/
NIBBLERS**

SPECIFICATIONS	D28605	DW890	DW891
Amps	6.5 Amps	6.8 Amps	3.0 Amps AC/DC
Max. Watts Out	800 W	800 W	384 W
Strokes/Min	0-2,500 spm	0-2,500 spm	2,700 spm
Capacity (Mild Steel)	N/A	18 ga.	14 ga.
Capacity (Stainless Steel)	N/A	20 ga.	16 ga.
Tool Length	9.1"	9.1"	9.1"
Tool Weight	4.5 lbs	4.5 lbs	4.5 lbs

**CHOP
SAWS**

**14" Chop Saw
w/Quick-Change Keyless
Blade Change System**

**14" (355mm)
Chop Saw**

SPECIFICATIONS	D28715	D28700
Amps	15.0 Amps	15.0 Amps
No Load Speed	4,000 rpm	3,800 rpm
Horsepower	5.5	4.0
Quick Lock Vise	Yes	Yes
Wheel Arbor	1"	1"
Wheel Diameter	14"	14"
Max. Capacity (Round)	5"	4-1/2"
Max. Capacity (Rectangular)	4-1/2" x 6-1/2"	4-3/4" x 5-1/3"
Blade Change	Quick Change	Wrench
Tool Weight	39.0 lbs	35 lbs


**14" (355mm) Cut-Off
Machine**

12" Cut-Off Machine
**CUT-OFF
MACHINES**

SPECIFICATIONS	D28755	D28754
Amps	15.0 Amps	15.0 Amps
No Load Speed	4,300 rpm	5,000 rpm
Depth of Cut	5"	4-1/2"
Horsepower	5.3 HP	5.3 HP
Dust Collection	Yes	No
Wheel Diameter	14"	14"
Wheel Rotation	clockwise/counter clockwise	clockwise/counter clockwise
Motor Abrasion Protection	Yes	Yes
Tool Length	23.9"	23.9"
Tool Weight	24.7 lbs	24.7 lbs

FINISH NAILERS

15 Gauge 1-1/4" - 2-1/2" Angled Finish Nailer Kit

16 Gauge 1-1/4" - 2-1/2" Finish Nailer Kit

SPECIFICATIONS	D51275K	D51256K
Nail Diameter	15 gauge	16 gauge
Nail Length Range	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"
Magazine Angle	34°	Straight
Magazine Capacity	110 nails	160 nails
Magazine Loading	Rear load, dual load	Rear load, dual load
Operating Pressure	70 - 120 psi	70 - 120 psi
Depth Setting	Tool Free	Tool Free
No Mar Pad	Low profile rubber	Low profile rubber
Integrated Belt Hook	Tool Free reversible	Tool Free reversible
Jam Clearing	Tool Free	Tool Free

BRAD NAILERS

18 Gauge 1-1/4" Brad Nailer Kit

18 Gauge 2" Brad Nailer Kit

SPECIFICATIONS	D51236K	D51238K
Nail Diameter	18 gauge	18 gauge
Nail Length Range	5/8" - 1-1/4"	5/8" - 2"
Magazine Angle	Straight	Straight
Magazine Capacity	110 nails	110 nails
Magazine Loading	Side Load	Side load
Operating Pressure	70 - 120 psi	70 - 120 psi
Depth Setting	Tool Free	Tool Free
No Mar Pad	Low profile rubber	Low profile rubber
Integrated Belt Hook	None	None
Jam Clearing	Tool Free	Tool Free

FRAMING NAILERS

31° Clipped Head Framing Nailer

31° Clipped Head Framing Nailer

20° Full Round Head Framing Nailer

20° Full Round Head Framing Nailer

SPECIFICATIONS	D51822	D51823	D51844	D51845
Nail Style	Clipped Head	Clipped Head	Full Round Head	Full Round Head
Magazine Angle	31°	31°	20°	20°
Nail Length Range	2" - 3-1/2"	2" - 3-1/2"	2" - 3-1/2"	2" - 3-1/2"
Nail Diameter Range	.113"-.131"	.113"-.131"	.113"-.148"	.113"-.148"
Magazine Capacity	80 nails	80 nails	65 nails	65 nails
Engine Type	Drop sleeve	Drop sleeve	Drop sleeve	Drop sleeve
Jam Clearing	5 mm or 3/16" Allen Key Required	Tool Free	5mm or 3/16" Allen Key Required	Tool Free
Dry Fire Lockout	Yes	Yes	Yes	Yes
Integrated Rafter Hook	No	Tool Free	No	Tool Free
Depth Setting	Tool Free	Tool Free	Tool Free	Tool Free


1" x 1/4" 18 Gauge Narrow Crown Stapler

1-1/2" x 1/4" 18 Gauge Narrow Crown Stapler

1" - 2" x 7/16" 16 Gauge Medium Crown Stapler

1" - 2" x 1/2" 16 Gauge Medium Crown Stapler
STAPLERS

SPECIFICATIONS	D51420K	D51422K	D51430	D51431
Staple Diameter	18 gauge staple	18 gauge staple	16 gauge Staple	16 gauge Staple
Staple Crown Size	1/4"	1/4"	7/16"	1/2"
Staple Length Range	1/2" - 1"	1/2" - 1-1/2"	1" - 2"	1" - 2"
Magazine Capacity	100 Staples	100 Staples	160 Staples	160 Staples
Magazine Angle	Straight	Straight	Straight	Straight
Magazine Loading	Bottom load	Bottom load	Top Load	Top Load
Operating Pressure	70 - 120 psi	70 - 120 psi	70 - 120 psi	70 - 120 psi
Speed	-	-	20 Fasteners/Second @ 100psi	20 Fasteners/Second @ 100psi
Depth Setting	Tool Free	Tool Free	Tool Free	Tool Free
Jam Clearing	None	None	Tool Free	Tool Free


3/4" - 1-3/4" Coil Roofing Nailer
COIL NAILER


SPECIFICATIONS	D51321
Nail Style	Coil Roofing
Nail Diameter Range	.120"
Nail Length Range	3/4" - 1-3/4"
Canister Capacity	120
Operating Pressure	70-120 psi
Canister Loading	2-door side load
Nose Piece Carbide Inserts	Yes
Depth Setting	Tool Free thumb wheel
Jam Clearing	Integrated in nose door
Steel Wear Guards	Yes


Palm Nailer
PALM NAILER

SPECIFICATIONS	D51180
Operating Pressure	70-120 psi
Nail Diameter	6d-16d gauge
Net Weight	2.65 lbs

NAILS


16 Gauge Straight Galvanized Finish Nails
DCS16125 - 1-1/4"
DCS16150 - 1-1/2"
DCS16200 - 2"
DCS16250 - 2-1/2"

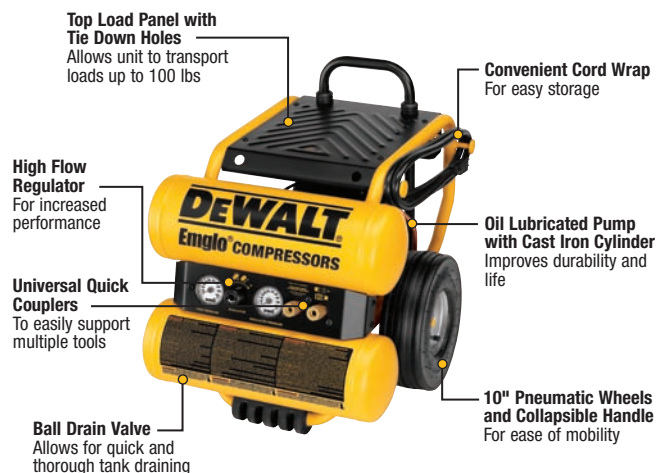
OIL FREE - HAND CARRY

1 Gallon, 135 PSI Max, Trim Compressor

2 Gallon, 150 PSI Max, Trim Compressor

SPECIFICATIONS	D55140	D55141
Horsepower	0.3 continuous HP	0.6 continuous HP
Drive	Direct drive	Belt
Tank Size	1.0 gal	2.0 gal
Power Supply	120V, 60Hz, 2.6 amps	120V, 60Hz, 10 amps
CFM @100 PSI	.6 CFM	1.8 CFM
Pump Speed	2,200 rpm	2,200 rpm
Tool Length	19.0"	21.25"
Tool Width	14.5"	19.0"
Tool Height	9.0"	10.5"
Tool Weight	24 lbs	30 lbs

OIL LUBE - HAND CARRY

1.1 HP Continuous 4 Gallon Electric Compressor

1.1 HP Continuous 4 Gallon Compressor w/Control Panel

1.1 HP Continuous 4 Gallon Electric Compressor

1.2 HP Continuous 4 Gallon Single Tank Compressor

1.1 HP Continuous 4 Gal, Wheeled Compressor

SPECIFICATIONS	D55151	D55152	D55153	D55155	D55154
Horsepower	1.1 Continuous HP	1.1 Continuous HP	1.1 Continuous HP	1.2 Continuous HP	1.1 Continuous HP
Drive	Direct drive	Direct drive	Direct drive	Direct drive	Direct drive
Tank Size	4 gal	4 gal	4 gal	4 single ASME tank gal	4 single ASME tank gal
Power Supply	120V AC 14 amps, 60 Hz,	120V AC, 15 amps, 60 Hz	120V AC, 15 amps, 60 Hz	120V AC, 15 amps, 60 Hz	120V AC, 15 amps, 60 Hz
CFM @100 PSI	3.2 CFM	3.8 CFM	3.8 CFM	4.5 CFM	3.8 CFM
Pump Speed	3,400 rpm	3,400 rpm	3,400 rpm	3,400 rpm	3,400 rpm
Tool Length	18.5"	18"	18"	21.75"	22.0"
Tool Width	15"	18"	18.5"	23"	18.5"
Tool Height	16.75"	16"	16.75"	12.5"	23"
Tool Weight	53.32 lbs	65 lbs	56.5 lbs	61 lbs	61 lbs


4 HP 4 Gallon, Compressor with Control Panel
GAS - HAND CARRY

SPECIFICATIONS	D55250
Horsepower	4 HP
Drive	Direct Drive
Tank Size	4.0 gal
Power Supply	Honda gas OHV GX engine
CFM @100 PSI	4.5 CFM
Pump Speed	3,450 rpm
Tool Length	21.5"
Tool Width	17"
Tool Height	18.5"
Tool Weight	68 lbs


4.5 Gallon, 200 PSI, Compressor w/Wheels

15 Gallon, 200 PSI, 120V Electric Workshop Compressor
ELECTRIC - EHP™ PORTABLE

SPECIFICATIONS	D55146	D55168
Horsepower	1.8 (running) HP	1.8 continuous HP
Drive	Direct Drive	Belt Drive
Tank Size	4.5 gal	15 gal
Power Supply	120V AC 15 amps, 60 Hz	120V AC 15 amps, 60 Hz,
CFM @100 PSI	5.2 CFM	5.4 CFM
Pump Speed	1,750 rpm	1,750 rpm
Tool Length	33.5"	22.0"
Tool Width	15"	44.75"
Tool Height	23"	24.5"
Tool Weight	85 lbs	92 lbs


5.5 HP 8 Gallon, Wheeled Portable Compressor

5.5 HP 17 Gallon Compressor

5.5 HP, 10.5 Gallon, 150 PSI Wheeled Portable w/Roll Cage

8 HP 8 Gallon, Wheeled Portable Compressor

9 HP 17 Gallon Compressor
GAS - WHEELED PORTABLE

SPECIFICATIONS	D55270	D55276	D55273	D55271	D55275
Horsepower	5.5 HP	5.5 HP	5.5 HP	8 HP	9 HP
Drive	Belt Drive	Belt Drive	Belt Drive	Belt Drive	Belt Drive
Tank Size	8 gal	17 gal	10.5 gal	8 gal	17 gal
Power Supply	Honda gas OHV GX engine	Honda gas OHV GX engine	Gas	Honda gas OHV GX engine	Honda gas OHV GX engine
CFM @100 PSI	8.9 CFM	8.9 CFM	10.3 CFM	16.2 CFM	16.2 CFM
Pump Speed	1,200 rpm	1,200 rpm	1025 rpm	890 rpm	890 rpm
Tool Length	43"	43"	50"	43"	43"
Tool Width	18.25"	31.0"	24.2"	18.25"	20.25"
Tool Height	25"	20.25"	22.30"	27.75"	33.75"
Tool Weight	160 lbs	185 lbs	185 lbs	213 lbs	238 lbs

ELEC. - WHEELED PORTABLE

1.5 HP 8 Gallon, Compressor

1.5 HP 8 Gallon, Compressor w/Dual Voltage & Dual Control

2 HP 8 Gallon, Compressor w/Dual Voltage & Dual Control

2 HP 17 Gallon, Compressor w/Dual Voltage & Dual Control

3 HP 17 Gallon, Compressor with Dual Control

SPECIFICATIONS	D55170	D55570	D55580	D55585	D55395
Drive	Belt Drive	Belt Drive	Belt Drive	Belt Drive	Belt Drive
Horsepower	1.5 HP	1.5 HP	2 HP	2 HP	3 HP
Tank Size	8 gal	8 gal	8 gal	17 gal	17 gal
Power Supply	2 pole induction motor	2 pole induction motor	2 pole induction motor	2 pole induction motor	2 pole induction motor 230V only
CFM @100 PSI	6.5 CFM	6.5 CFM	8.4 CFM	8.4 CFM	13.8 CFM
Pump Speed	900 rpm	900 rpm	1,070 rpm	1,070 rpm	800 rpm
Tool Length	43"	43"	43"	43"	43"
Tool Width	23.5"	23.5"	23.5"	29.75"	32"
Tool Height	18.25"	18.25"	18.25"	20.25"	20.25"
Tool Weight	165 lbs	168 lbs	175 lbs	201 lbs	254 lbs


2" Brad Nailer/1 Gal Compressor

Finish Nailer/Brad Nailer/Compressor

2" Brad Nailer/Compressor

3-1/2" (90mm) 31° Clipped Head Framing Nailer/Compressor

3-1/2" (90mm) Round Head Framing Nailer/Compressor
COMPRESSOR COMBO KITS

SPECIFICATIONS	D55140BN	D55141FBNB	D55151BN	D55153FC	D55153FR
Compressor	D55140	D55141	D55151	D55153	D55153
Max PSI	135	150	125	125	125
Tank Size	1.0 gal	2.0 gal	4 gal	4 gal	4 gal
CFM @100 PSI	.6 CFM	1.8 CFM	3.2 CFM	3.5 CFM	3.5 CFM
Horsepower	0.3 continuous HP	0.6 continuous HP	1.1 continuous HP	1.2 continuous HP	1.2 continuous HP
Power Supply	120V, 60Hz, 2.6 amps, permanent magnet motor	120V, 60Hz, 8 amps, universal motor	120V AC 14 amps, 60 Hz, 2 pole induction motor	120V AC, 15 amps, 60 Hz, 2 pole induction motor	120V AC, 15 amps, 60 Hz, 2 pole induction motor
Pump Type	maintenance free	maintenance free	oil lubricated	oil lubricated	oil lubricated
Nailer(s)	D51238K (2" 18 gauge brad)	D51256K (2-1/2" 16 gauge finish) D51236K (1-1/4" 18 gauge brad)	D51238K (2" 18 gauge brad)	D51823K (3-1/2" clipped head framing nailer)	D51845K (3-1/2" round head framing nailer)
Hose	25' X 1/4" w/fittings	25' X 1/4" w/fittings	25' X 1/4" w/fittings	50' X 3/8" w/fittings	50' X 3/8" w/fittings
Accessories	nailer plug and kit box	nailer plugs & contractor bag	nailer plug and kit box	-	-
Tool Length	19.0"	21.25"	18.5"	18"	18"
Tool Width	14.5"	19.0"	15"	18.5"	18.5"
Tool Height	9.0"	10.5"	16.75"	16.75"	16.75"
Tool Weight	24 lbs	30 lbs	53 lbs	56 lbs	56 lbs


3000 Watt Gas Generator

4400 Watt Gas Generator

6300 Watt Gas Generator

7000 Watt Gas Generator
GAS GENERATORS

SPECIFICATIONS	DG3000	DG4400B	DG6300B	DG7000B
Max AC Output (W)	3000	4400	6300	7000
Rated AC Output (W)	2920	4180	5950	6550
Surge Watts	9150	15600	18300	21400
Alternator Type	Brushless, 2-Pole	Brushless, 2-Pole	Brushless, 2-Pole	Brushless, 2-Pole
Excitation	Condensed	Condensed	Condensed	Condensed
Phase	Single	Single	Single	Single
Frequency (HZ)	60	60	60	60
Rated Current (120V/240V) (A)	20	31.7/15.9	49.6/24.8	54.6/27.3
Displacement	196 cc	270 cc	389 cc	389 cc
120V GFCI Receptacles (20 Amp)	1	2	2	2
120V DUPLEX Twist Locking Receptacle (20 Amp) NEMA (L5 - 20R)	1	No	No	No
120V Twist Locking Receptacle (30 Amp) NEMA (L5 - 30R)	No	1	2	2
120V/240V Twist Locking Receptacle (20 Amp) NEMA (L14 - 20R)	No	1	No	No
120V/240V Twist Locking Receptacle (30 Amp) NEMA (L14 - 30R)	No	No	1	1
Tool Length	23.6"	28.0"	28.0"	28.0"
Tool Width	19.3"	21.7"	21.7"	21.7"
Tool Height	20.5"	21.5"	21.5"	21.5"
Dry Weight (lbs)	118	234	246	261
Starting System	Recoil	Recoil/Cordless Battery Start	Recoil/Cordless Battery Start	Recoil/Cordless Battery Start

ROTARY LASERS

Self Leveling Interior Rotary Laser - Combo Kit

Self Leveling Rotary Laser - Combo Kit w/Detector (Int/Ext)

Self Leveling Rotary Laser - Combo Kit w/Tripod (Int/Ext)

Self-Leveling Exterior Rotary Laser - Combo Kit

SPECIFICATIONS	DW077KI	DW077KD	DW077KDT	DW076KE
Power Supply	9.6V-18V DeWALT Batteries	9.6V-18V DeWALT Batteries	9.6V-18V DeWALT Batteries	9.6V-18V DeWALT Batteries
Accuracy per 100 ft.	1/8 in	1/8 in	1/8 in	1/8 in
Rotation Speed	0, 10, 60, 250, & 800 rpm	0, 10, 60, 250, & 800 rpm	0, 10, 60, 250, & 800 rpm	600 rpm
Self-Leveling Range	±5 °	±5 °	±5 °	±5 °
Indoor Visibility Range	200 (dia) ft	200 (dia) ft	200 (dia) ft	50 (dia) ft
Range with Detector	2000 (dia) ft	2000 (dia) ft	2000 (dia) ft	2000 (dia) ft
Laser Class	IIIa (<5mW) @ 635nm	IIIa (<5mW) @ 635nm	IIIa (<5mW) @ 635nm	IIIa (<5mW) @ 635nm
Tool Weight	5.5 lbs	5.5 lbs	5.5 lbs	5.5 lbs
Includes	1 hour charger, 18V battery, wall mount, wireless (IR) remote control, laser target card, laser enhancement glasses	same as DW077KI plus digital laser detector	same as DW077KD plus construction Tripod	1 hour charger, 14.4V battery, digital laser detector


18V Cordless Rotary Laser Kit

18V Cordless Rotary Laser Kit - Combo Kit (Int/Ext)

18V Cordless Rotary Laser Kit

Rotary Laser - Interior Kit

Rotary Laser - Combo Kit (Int/Ext)
ROTARY LASERS

SPECIFICATIONS	DW073K	DW073KD	DW071K	DW071KI	DW071KD
Power Supply	9.6V-18V DeWALT Batteries	9.6V-18V DeWALT Batteries	3 D-Size Alkaline	3 D-Size Alkaline	3 D-Size Alkaline
Accuracy per 100 ft.	± 1/4 in	± 1/4 in	± 1/4 in	± 1/4 in	± 1/4 in
Indoor Visibility Range	200 (dia) ft	200 (dia) ft	200 (dia) ft	200 (dia) ft	200 (dia) ft
Range with Detector	600 (dia) ft	600 (dia) ft	600 (dia) ft	600 (dia) ft	600 (dia) ft
Rotation Speed	0-600 rpm	0-600 rpm	0-600 rpm	0-600 rpm	0-600 rpm
Laser Class	IIIa (<5mW) @ 635nm	IIIa (<5mW) @ 635nm	IIIa (<5mW) @ 635nm-650nm	IIIa (<5mW) @ 635nm-650nm	IIIa (<5mW) @ 635nm-650nm
Protected Head	Yes	Yes	Yes	Yes	Yes
Roll Bar / Bump Sensor	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
Tool Weight	8.9 lbs	8.9 lbs	6.6 lbs	6.6 lbs	6.6 lbs
Includes	1 hour charger, 18V battery, laser target card, laser enhancement glasses	same as DW073K plus digital laser detector and clamp	laser target card	same as DW071K plus wall mount and laser enhancement glasses	same as DW071KI plus digital laser detector and clamp


LaserChalkLine™ Self-Leveling Line Laser (Horizontal & Vertical)

LaserChalkLine™ Self-Leveling Line Laser (Horizontal only)

Self Leveling Level, Plumb, & Square, 4 Beam Laser

Laser Plumb Bob

3-Beam Laser Level
LASERS

SPECIFICATIONS	DW087K	DW086K	DW084K	DW082K	DW099
Power Supply	3 "AA" batteries	3 "AA" batteries	4 "AA" Alkaline	4 "AA" Alkaline	3 "AA" Alkaline batteries
Accuracy	± 1/8" @ 30 ft	± 1/8" @ 30 ft	± 1/4" @ 100 ft	± 1/8" @ 50 ft	± 1/4" @ 75 ft
Self-Leveling Range	5 °	5 °	N/A	N/A	N/A
Indoor Visibility Range	± 50 ft	± 50 ft	± 100 ft	± 100 ft	± 100 ft
Laser Class	II	II	II (<1mW) @ 635nm	II (<1mW) @ 635nm	II
Includes	3 (AA) batteries 20+ hours run-time	same as DW087K	4 (AA) batteries	4 (AA) batteries	

LASER ACCESSORIES

DW0714 – Laser Enhancement Glasses
DW0730 – Laser Target Card

DW0732 – Digital Laser Detector and Clamp
DW0734 – Construction Grade Rod

DW0736 – Construction Tripod
DW0772 – Digital Laser Detector & Clamp


20x Builders Level Package

20x Transit Level Package

26x Auto Level Package
OPTICAL INSTRUMENTS

SPECIFICATIONS	DW090PK	DW092PK	DW096PK
Leveling Type	Manual	Manual	Auto
Accuracy per 100 ft.	±1/4 in	±1/4 in	±1/32 in
Magnification	20x	20x	26x
Range	200 ft	200 ft	300 ft
Stadia Ratio	1:100	1:100	1:100
Horizontal Circle Type	Continuous Drive	Continuous Drive	Continuous Drive
Each include an aluminum tripod w/quick adjust legs and 8' aluminum grade rod (feet-inches-eighths)			


Floor Layout Laser
TILE LASER

SPECIFICATIONS	DW060K
Accuracy per 25 ft.	+/- 1/8 in
Operating range	Up to 100' ft
Operating Temperature	0-45 °C
Battery Life	70 hrs



PRESSURE WASHERS

DP3900 Heavy-Duty Pressure Washer

SPECIFICATIONS	DP3900
PSI Max*	3750 PSI
GPM Max	4.0 GPM
Engine	389cc Honda OHV GX 390
Pump	General® Pump w/Easy Start
Wheels	12" Steel w/Pneumatic Tires
Thermal Protection	Yes
Low Oil Shutoff	Yes
Hose	75' X 3/8" Non-Marking Steel Braided
Pump/Hose Connection	Quick Connect
Hose/Gun Connection	Quick Connect
Wand	34" + 27" Extension Wand
Nozzles	0°, 15°, 25°, 40° & soap
Engine Orientation	Horizontal

PRESSURE WASHERS



DP3100 Heavy-Duty Pressure Washer






DP3400 Heavy-Duty Pressure Washer



DP3750 Heavy-Duty Pressure Washer

SPECIFICATIONS	DP3100	DP3400	DP3750
PSI Max*	3100 PSI	3400 PSI	3750 PSI
GPM Max	2.8 GPM	3.2 GPM	4.0 GPM
Engine	196cc Honda OHV GX 200	270cc Honda OHV GX 270	389cc Honda OHV GX 390
Pump	DeWALT® Patented Maintenance-Free Pump	General® Pump	AR® Pump
Wheels	10" Steel w/Pneumatic Tires	12" Steel w/Pneumatic Tires	12" Steel w/Pneumatic Tires
Thermal Protection	Yes	Yes	Yes
Low Oil Shutoff	Yes	Yes	Yes
Hose	25' X 3/8" Steel Braided Hose	50' X 3/8" Steel Braided Hose	50' X 3/8" Steel Braided Hose
Pump/Hose Connection	Quick Connect	Quick Connect	Quick Connect
Hose/Gun Connection	Quick Connect	Quick Connect	Quick Connect
Wand	16" stainless steel lance	34" stainless steel lance	34" stainless steel lance
Nozzles	0°, 15°, 25°, 40° & soap	0°, 15°, 25°, 40° & soap	0°, 15°, 25°, 40° & soap
Engine Orientation	Horizontal	Horizontal	Horizontal

PRESSURE WASHER ACCESSORIES



*Water flow and max. pressure ratings determined in accordance with PWMA standard PW101.

RANDOM ORBIT SANDERS



5" VS Random Orbit Sander



5" Random Orbit Sander



5" PSA Random Orbit Sander



6" Right Angle Random Orbit Sander

SPECIFICATIONS	D26453/D26453K	D26451/D26451K	D26450	DW443
Amps	3.0 Amps	3.0 Amps	3.0 Amps	4.3 Amps
Orbits/Min	7,000-12,000 opm	12,000 opm	12,000 opm	4,300-6,800 opm
Orbit Diameter	3/32"	3/32"	3/32"	3/16"
Dust Collection	Yes	Yes	Yes	Yes
Paper Size/Type	5", 8-Hole Hook & Loop	5", 8-Hole Hook & Loop	5", 8-Hole Pressure Sensitive Adhesive	6", 6-Hole Hook & Loop
Dust Sealed Switch	Yes	Yes	Yes	N/A
Pad Break	Yes - CFS	Yes - CFS	Yes - CFS	Yes
Tool Weight	3.5 lbs	3.4 lbs	3.4 lbs	5.7 lbs

1/4 SHEET SANDER

1/4 Sheet Palm Grip Sander

SPECIFICATIONS	D26441/D26441K
Amps	2.4 Amps
Orbits/Min	14,000 opm
Orbit Diameter	1/16"
Dust Collection	Yes
Paper Size/Type	1/4 Sheet
Dust Sealed Switch	Yes
Pad Break	N/A
Tool Weight	3.0 lbs

BELT SANDERS

3" X 21" Variable Speed Belt Sander

3" X 21" VS Belt Sander Kit w/Inversion Stand/Frame

3" X 21" Belt Sander

SPECIFICATIONS	DW433/DW433K	DW433KT	DW432
Amps	8.0 Amps	8.0 Amps	8.0 Amps
Dust Collection	Yes	Yes	Yes
Paper Size/Type	3" X 21"	3" X 21"	3" X 21"
SFPM	850-1,400	850-1,400	1,400
Dust Sealed Switch	No	No	No
Tool Weight	12.0 lbs	12.0 lbs	12.0 lbs


DW4055 – Sanding Frame & Inversion Stand
ROUTERS

1-3/4 HP (maximum motor HP) Fixed Base Router

1-3/4 HP (maximum motor HP) Fixed Base/Plunge Router Combo Kit

2-1/4 HP (maximum motor HP) EVS Fixed Base Router w/Soft Start

2-1/4 HP (maximum motor HP) EVS D-Handle Router w/Soft Start

SPECIFICATIONS	DW616/K/M	DW616PK	DW618/K/M	DW618D
Amps	11.0 Amps	11.0 Amps	12.0 Amps	12.0 Amps
Horsepower	1-3/4 HP	1-3/4 HP	2-1/4 HP	2-1/4 HP
No Load Speed	24,500 rpm	24,500 rpm	8,000-24,000 rpm	8,000-24,000 rpm
Collet Diameter	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"
Plunge Stroke	N/A	2-1/2"	N/A	N/A
Depth Stop	Micro-fine Ring	Micro-Fine Ring / 5 Stage Turret	Micro-fine Ring	Micro-fine Ring
Base Dimension	6"	6"	6"	6"
Spindle Lock	No	No	Yes	Yes
Tool Weight	7.1 / 7.1 / 5.5 lbs	10.0 lbs	7.2 / 7.2 / 5.6 lbs	8.2 lbs


2-1/4 HP (max. motor HP) EVS Fixed Base/Plunge Router Kit w/Soft Start

2-1/4 HP (maximum motor HP) Three Base Router Kit

2 HP (maximum motor HP) EVS Plunge Router

3 HP (maximum motor HP) EVS Plunge Router
ROUTERS

SPECIFICATIONS	DW618PK	DW618B3	DW621/DW621K	DW625
Amps	12.0 Amps	12.0 Amps	10.0 Amps	15.0 Amps
Horsepower	2-1/4 HP	2-1/4 HP	2 HP	3 HP
No Load Speed	8,000-24,000 rpm	8,000-24,000 rpm	8,000-24,000 rpm	8,000-22,000 rpm
Collet Diameter	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"
Plunge Stroke	2-1/2"	2-1/2"	2-1/8"	2-7/16"
Depth Stop	Micro-Fine Ring / 5 Stage Turret	Micro-Fine Ring / 5 Stage Turret	3 Stage Turret Stop	3 Stage Turret Stop
Base Dimension	6"	6"	4-5/16 x 6-1/4"	5-5/8 x 6-11/16"
Spindle Lock	Yes	Yes	Yes	Yes
Tool Weight	10.1 lbs	10.1 lbs	9.0 lbs	11.2 lbs


12-1/2" Thickness Planer w/Three Knife Cutter-Head

13" Three Knife, Two Speed Thickness Planer
THICKNESS PLANERS

SPECIFICATIONS	DW734	DW735
Amps	15.0 Amps	15.0 Amps
No Load Speed	10,000 rpm	10,000 rpm
Max. Depth of Cut	1/8"	1/8"
Depth Capacity	6"	6"
Width Capacity	12-1/2"	13"
Tool Weight	80 lbs	92 lbs

DW734 THICKNESS PLANER ACCESSORIES

DW7342 – 12-1/2" Disposable, Reversible Knives
DW7331 – Dust Hood

DW735 THICKNESS PLANER ACCESSORIES

DW7350 – Mobile Stand
DW7351 – 13" Folding Tables
DW7352 – 13" Disposable, Reversible Knives
DW7353 – Chip Collector

PLANER

3-1/4" Planer Kit with 3/32" (2.5mm) Depth of Cut

SPECIFICATIONS	DW680K
Amps	7.0 Amps
No Load Speed	15,000 rpm
Depth Of Cut (mm) / (inches)	2.5 mm / 3/32"
Planing Width	3-1/4"
Rabbeting Depth	1/2"
Tool Weight	6.2 lbs

PLANER ACCESSORIES

DW6654 – Pair Of Carbide Planer Blades
DW6655 – High Speed Steel Blades
DW6658 – Reversible Carbide Planer Blades


COMPACT ROUTER

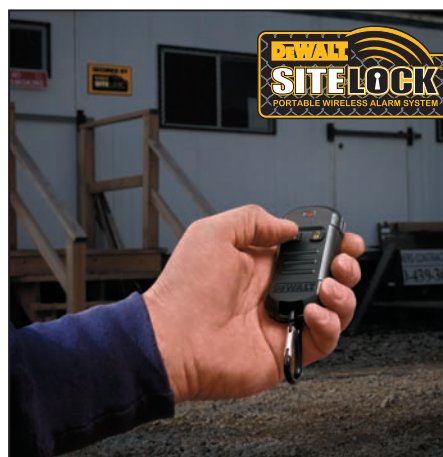
SPECIFICATIONS	D26670	D26670K	
Amps	5.6 Amps	5.6 Amps	D26671 – Standard Base
No Load Speed	30,000 rpm	30,000 rpm	D26672 – Tilt Base
Collet Diameter	1/4"	1/4"	D26673 – Offset Base
Spindle Lock	Yes	Yes	
Tool Weight	3.75 lbs	3.75 lbs	
Includes	fixed base, offset base & tilt base		


PLATE JOINER

SPECIFICATIONS	DW682K	
Amps	6.5 Amps	
No Load Speed	10,000 rpm	
Depth Of Cut (mm)	20 mm	
Arbor Size	7/8"	
Fence Type	Dual Rack and Pinion	
Biscuits Accepted	0, 10, 20	
Tool Weight	6.6 lbs	


MOBILELOCK™


SPECIFICATIONS	DS500	DS505K	DS510K
Battery Type	Lithium Ion (rechargeable)	Lithium Ion (rechargeable) and 4 "D" Alkaline	Lithium Ion (rechargeable) and 3-volt lithium (non-rechargeable)
Battery	4.4 Amp Hr	4.4 (Li-Ion) Amp Hr	4.4 Amp Hr
Run Time	approximately 4 wks	approximately 12 wks	approximately 4 wks
Cellular Communication	Sprint PCS	Sprint PCS	Sprint PCS
Location Technology	QUALCOMM gpsOne	QUALCOMM gpsOne	QUALCOMM gpsOne


SITELOCK®


SPECIFICATIONS	DS100	DS001
Wireless Frequency	900 MHz	
Range	up to 2000 ft.	
Sensor Capacity	Up to 48 and 6 Key Chain Remote Controls #	
Cellular Radio	1.2 Watts	
Back-Up Communications	Standard Telephone Line	
Loudness	Siren 110 dBA	
Battery Cell	12.0V Valve Regulated Lead Acid	
Run-Time	over 8 on battery back-up hrs	
Charge Time at 100%	12 hrs	
Power Supply	16.5V AC Power	

SITELOCK® SENSORS


SPECIFICATIONS	DS350	DS300	DS210	DS220	DS200	DS380	DS300B
Wireless Frequency	900 MHz	900 MHz	900 MHz	900 MHz	900 MHz	900 MHz	900 MHz
Range	Up to 2000 ft.	Up to 2000 Ft.	Up to 2000 Ft.	Up to 2000 Ft.	Up to 2000 Ft.	Up to 2000 ft.	Up to 2000 Ft.
Battery Cell	3.0V Lithium	3.0V Lithium	3.0V Lithium	3.0V Lithium	3.0V Lithium	Lithium-Ion	3.0V Lithium
Battery Life	1-2 Yrs.	1-2 Yrs.	1-2 Yrs.	1-2 Yrs.	1-2 Yrs.	18 Hour Run Time	Up to 2 Yrs.

REPLACEMENT CABLES FOR DS300 OR DS300B


DS302 – 2'
DS306 – 6'
DS312 – 12'
DS324 – 24'