



# **Fast-Setting Concrete**

## **No Mixing Required**



## TABLE OF CONTENTS

ITEM #	PRODUCT	PAGE
<b>CONCRETE PRODUCTS</b>		
110125	Concrete Mix - 25 kg.....	1
100465	POST HASTE® Concrete Mix - 25 kg .....	1
100425	QUIKRETE® Fast Setting Concrete 25 kg .....	2
100725	QUIKRETE® 6000 - 25 kg.....	2
110682	Countertop Mix QUIKRETE® .....	3
110326	Sand/Topping Mix - 25 kg .....	3
158556	Portland Expanding Grout – 22.7 kg.....	4
<b>MASONRY PRODUCTS</b>		
113655	Mason Mix (Type S) - 25 kg.....	4
115525	Water Resistant Parging Mix - 25 kg .....	5
123151	QUIKWALL Surface Bonding Cement – Gray 22 kg .....	5
<b>CEMENTS AND LIME</b>		
112425	Cement, Type GU (Type 10) – 40 kg.....	6
405942	Cement, Type GU (Type 10) – 20 kg.....	6
112525	Cement, Type MCS (Mortar 'S') - 34 kg.....	6
112479	HE (Type 30) Portland Cement – 40 kg.....	7
9994022	HS (Type 50) Portland Cement – 20 kg.....	7
9994010	White Portland Cement   Federal White – 40 kg .....	7
405951	Portland Cement Lime Blend – 40 kg .....	7
9994028	Hydrated Lime – Type 'S' - 23 kg .....	8
<b>REPAIR PRODUCTS - BAGS</b>		
113318	Bonded Topping Mix – bag 18 kg .....	8
113143	Concrete Resurfacer – 18 kg .....	9
170125	BlackTop Patch - 25 kg.....	9
<b>SANDS AND AGGREGATE PRODUCTS</b>		
111325	Premium Play Sand - 25 kg .....	10
115125	All Purpose Gravel - 25 kg .....	10
115155	Base Rock - 25 kg.....	11
115036	Patio Paver Jointing Sand - 36 kg .....	11
115831	Traction Sand - 18 kg.....	12
<b>MISCELLANEOUS PRODUCTS</b>		
692316	QUIKTUBE Building Form - 6" x 8' .....	12
692251	QUIKTUBE Building Form - 8" x 8' .....	12
692252	QUIKTUBE Building Form - 10" x 8' .....	12
652253	QUIKTUBE Building Form - 12" x 8' .....	12
692132	Walk Maker® Building Form – Country Stone .....	13
692134	Walk Maker® Building Form – European Block.....	13
131720,1,2,3	Liquid Cement Colors - Charcoal, Brown, Buff, Red - 296 ml bottle .....	13
691741	Backer Rod - 3/4" diameter x 20' .....	14
691706	Expansion Joint Strip – 40 per carton – 5' long .....	14
861016	Acrylic Fortifier – 0.95 L bottle .....	15
860112	Concrete & Asphalt Cleaner – 0.95 L bottle .....	15
873102	Acrylic Concrete Cure & Seal (Satin) – 3.8 L pail .....	16
873004	Acrylic Concrete Cure & Seal (Satin) – 8.5 L pail .....	16



## TABLE OF CONTENTS (CONTINUED)

ITEM #	PRODUCT	PAGE
<b>REPAIR PRODUCTS – PATCHING PRODUCTS</b>		
113304	Bonded Topping Mix – pail 4.5 kg .....	16
112612	Hydraulic Water Stop Cement – 4.5 kg pail .....	17
112606	Hydraulic Water Stop Cement – 9 kg pail .....	17
112621	Hydraulic Water Stop Cement – 22 kg pail .....	17
124512	Anchoring Cement – pail 4.5 kg .....	17
124012	Quick-Setting Cement – pail 4.5 kg .....	18
990203	Concrete Bonding Adhesive - 3.8 L pail .....	18
990216	Concrete Bonding Adhesive - 946 ml bottle .....	18
865036	Concrete Patching Compound – 0.95 L tube .....	19
124116	Zip and Mix Repair Mortar - 1.36 kg .....	19
865033	Pre-Mixed Stucco Patch – pail 0.95 L .....	20
120145	Exterior Stucco Patch - White – 4.5 kg pail .....	20
<b>REPAIR PRODUCTS – JOINT AND CRACK REPAIR</b>		
864038	Gray Concrete Crack Seal - 3.8 L jug .....	21
864002	Gray Concrete Crack Seal - 946 ml bottle .....	21
862012	Concrete Repair – 296 ml tube .....	22
865011	Stucco Crack Repair – 296 ml tube .....	22
862002	Mortar Repair - 296 ml tube .....	23
862025	Fireplace Mortar – 300 ml tube .....	23
862019	Poly Mortar Joint Sealant - 300 ml tube .....	23
866012	Polyurethane Sealant Gray – Self Levelling 300 ml tube .....	24
866032	Polyurethane Sealant Gray – Self Levelling 858 ml tube .....	24
866013	Polyurethane Sealant – Non-Sag 300 ml tube .....	24
862032	FASTSET™ Anchoring Epoxy - 296 ml .....	25
990212	Commercial Grade Polyurethane Adhesive – 300 ml .....	25
990213	Commercial Grade Polyurethane Adhesive – 858 ml .....	25
<b>WATERPROOFING PRODUCTS</b>		
9991060	XYPEX High 'N Dry - 2.27 kg pail .....	25
9991059	XYPEX High 'N Dry - 5 kg pail .....	25
9991058	XYPEX High 'N Dry - 11 kg pail .....	25
9991062	XYPEX Patch 'N Plug – 2.27 kg pail .....	26
9991063	XYPEX Patch 'N Plug – 9 kg pail .....	26

Data/Spec sheets and Material Safety Data Sheets (MSDS) are available online

<http://www.targetproducts.com/prod-category.aspx>

# CONCRETE PRODUCTS

## CONCRETE MIX



### COVERAGE

Bags required at 4 inch thickness

AREA	1ft	2ft	3ft	4ft
1ft	1	2	3	3
2ft	2	3	5	6
3ft	3	5	7	9
4ft	3	6	9	12
5ft	4	8	12	15

1 x 25kg bag = 0.43 ft<sup>3</sup>

### SONOTUBE

Bags required per 4ft length

For general concrete construction and repair of concrete where thickness in excess of 2" is required for applications such as sidewalks, patios, driveways and foundations.

### Used for:

- Driveways
- Patios
- Retaining walls
- Footings
- Setting posts

### Features:

Consists of cement, sands and coarse aggregates pre-mixed for quality and convenience.

Approx. 4000 psi (27.6 MPa) in 28 days

Sets in approximately 4 hours at 20° C (68° F)

Mfr. No. 110125

Ship Weight 25 kg bag | 56 bags/pallet

6" diameter

8" diameter

10" diameter

12" diameter

1.8

3

5

7.3

## POST HASTE® CONCRETE MIX



A fast setting concrete.

### Used for:

- Setting posts
- Signs
- Footings
- Other concrete applications

### Features:

- Sets in 20 minutes.
- Eliminates; bracing, construction delays, rain washouts and unwanted depressions
- Approx. 4000 psi (24 MPa) in 28 days

Mfr. No. 100465

Ship Wt. 25 kg bag      56 bags/pallet

### COVERAGE

SETTING POSTS (# of bags per hole)

Depth of Hole in Inches (Metres)	19 (.46)	24 (.61)	30 (.76)	36 (.91)	42 (1.07)	48 (1.22)
Post 3" (75mm) Hole Dia. 9" (230mm)	2	2	3	3	4	4
Post 4" (100mm) Hole Dia. 9" (300mm)	2	2	3	3	4	41

1 x 25 kg bag = 0.44 ft<sup>3</sup>

## QUIKRETE® FAST SETTING CONCRETE



**No mixing required**

**COVERAGE:** 1 bag = 0.44 ft<sup>3</sup>

### Setting Posts (# of 25kg (55lb) bags per hole)

Depth of Hole (Inches)	19 (.46)	24 (.61)	30 (.76)	36 (.91)	42 (1.07)	48 (1.22)
Post 3"	2	2	3	3	4	4
Post 4"	2	2	3	3	4	4

### SLABS

Square Feet	2 (0.2)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.7)	100 (9.3)
4" (100mm) Thick	2	4	8	20	40	79
6" (150mm) Thick	3	6	12	30	60	118

All yields are approximate and do not allow for waster of uneven sub-grade, etc.

A fast setting concrete with fast strength gain.

### Used for:

- Setting posts
- Signs
- Slabs
- Footings

### Features:

- Set posts without mixing
- Sets hard in 20-40 minutes
- Walk on it in 2 hours
- 1000 psi in 24 hours
- Approx. 4000 psi (27.6 MPa) in 28 days

**Mfr. No. 100425**

**Ship Wt. 25 kg bag | 56 bags/pallet**

## QUIKRETE® 6000



### COVERAGE

**Bags required at 4 inch thickness**

AREA	1ft	2ft	3ft	4ft
1ft	0.75	1.5	2.3	3.0
2ft	1.5	3.0	4.6	6.1
3ft	2.3	4.6	6.9	9.2
4ft	3.0	6.1	9.2	12.3
5ft	3.8	7.7	11.5	15.3

Construction and repair of concrete where extra strength is required.

### Used for:

- Slabs
- Steps
- Patios
- Deck support
- Curbs, Patching existing concrete
- Driveways


### Features:

- High strength concrete (6000 psi) (41 MPa ) in 28 days.
- Fast strength gain (1 day = 2000 psi).
- Walk on in 8 hours.
- Allows construction in 24 hours
- Withstands higher impact and wears longer than regular concrete
- Less shrinkage

**Mfr. No. 100725**

**Ship Wt. 25 kg bag 56 bags/pallet**

## COUNTERTOP MIX

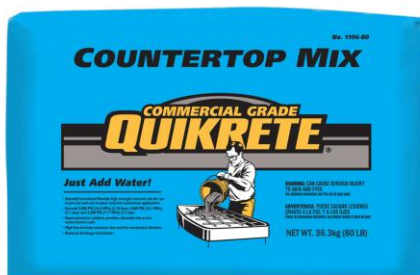

Countertop Mix is a flowable, high strength commercial grade concrete mix designed for use in concrete countertops, requiring only the addition of water.

### Used for:

- Countertop Mix is designed specifically for casting concrete countertops.

### Features:

- Super-plasticizer additive provides a flowable mix at the low water / cement ratio.
- High-flow formula minimizes the need for mechanical vibration.
- Reduced-shrinkage formulation.
- Approx 5000 psi (34.5 MPa) in 28 days.

**Mfr. No. 110682**

**Ship Wt. 36.3 kg bag 42 bags/pallet**

### COVERAGE

# of 36.3 kg bags required				
Square Feet (M <sup>2</sup> )	6 (0.56)	10 (0.93)	25 (2.32)	50 (4.65)
1.5" Thick (37mm) # of 36.3 kg (80lb)	2	3	6	11
2" Thick (50mm) # of 36.3 kg (80lb)	2	3	7	14
3" Thick (75mm) # of 36.3 kg (80lb)	3	5	11	21

## SAND / TOPPING MIX



Patching or resurfacing damaged concrete where up to 2" thickness is required.

### Used for:

- Driveways, Patios, Sidewalks etc.
- A base for laying flagstone & pavers
- A base for showers

### Features:

- Consists of cement, fine and coarse sand and admixtures.
- Approx. 4000 psi (27.6 MPa) in 28 days
- Just add water
- Concrete bonding adhesive is required to ensure proper bonding of overlay (Page 18)

**Mfr. No. 110326**

**Ship Wt. 25 kg bag 56 bags/pallet**

### COVERAGE

# of bags required for 1" or 2" topping					
Square Feet (M <sup>2</sup> )	5 (0.5)	10 (0.9)	20 (1.9)	35 (3.3)	50 (4.7)
1" Thick (25mm) # of 25 kg (55lb)	1	2	4	7	10
2" Thick (50mm) # of 25 kg (55lb)	2	4	8	14	20

## PORTLAND EXPANDING GROUT



A high-strength non-shrink grout used for the following applications.

### Used for:

- Grouting under columns and base plates
- Anchoring of posts and bolts into concrete
- Filling voids and cracks
- Repair to concrete structures

### Features:

- High strength – up to 8800 psi (60.5 MPa)
- 3200 psi (22 MPa) in 24 hours
- Non-shrink
- Up to 6" in thickness

**Mfr. No. 158556**

**Ship Wt. 22.7 kg bag 56 bags/pallet**

### COVERAGE

	No. of 22.7kg (50lb) bags				
Square Feet	2	5	10	15	20
(M2)	(0.2)	(0.5)	(0.9)	(1.4)	(1.8)
1" (25mm)	1	1	2	3	4
2" (50mm)	1	2	4	6	8
3" (75mm)	2	3	6	9	12

*All yields are approximate and do not allow for waste or uneven sub-grade, etc.*

## MASONRY PRODUCTS

### MASON MIX (TYPE S MORTAR)



Contractor grade, type 'S', pre-blended mortar.

### Used for:

- Brick construction
- Stone construction
- Repairing mortar joints
- Block Construction
- Base coat for stucco

### Features:

- Pre-blended, just add water
- High strength
- Exceeds ASTM C270 requirements

**Mfr. No. 113655**

**Ship Wt. 25 kg bag 56 bags/pallet**

### COVERAGE

1 bag lays 40 bricks
1 bags lays 18 standard blocks (16" x 8" x 8")
1 bags = 22 sq ft of base coat at 1/4" thick



## WATER RESISTANT PARGING MIX



Masonry coating and patching of concrete walls for cosmetic purposes.

### Used for:

- Concrete block
- Concrete & masonry walls
- Base coat for stucco

### Features:

- Easy to apply
- Strong bond
- Resists water penetration
- Can be applied above and below grade

**Mfr. No. 115525**

**Ship Wt. 25 kg bag 56 bags/pallet**

### COVERAGE

	No of 25 kg (55 lb) bags				
Square Feet	25 (2.3)	50 (4.7)	300 (27.9)	500 (46.5)	1000 (92.9)
1/8" thick (3 mm)	1	2	8	13	25
1/4" (6mm)	3	4	15	25	50

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

## QUIKWALL SURFACE BONDING CEMENT – GRAY



QUIKWALL Surface Bonding Cement is a premium resurfacing product. It eliminates the need for mortar in block wall construction.

### Used for:

- Resurfacing concrete and masonry wall

### Features:

- Strengthens and waterproofs block walls without mortar
- Superior bond
- Interior and exterior use

**Mfr. No. 123151**

**Ship Wt. 22.7 kg bag 35 bags/pallet**

### COVERAGE

	No of 22.7 kg (50 lb) bags				
Square Ft (M²)	25 (2.3)	50 (4.7)	300 (27.9)	500 (46.5)	1000 (92.9)
1/8" thick (3 mm)	1	1	6	10	20
1/4" thick (6 mm)	1	2	12	20	40

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

# CEMENTS AND LIME

## GU (TYPE 10) CEMENT



Normal Portland Cement is a basic ingredient for general purpose concrete.

### Used for:

- General Purpose Concrete

### Features:

- Just Add: Fine Aggregate, Coarse Aggregate and Clean Water
- Easy to transport to remote areas

Mfr. No. 112425 405942  
 Ship Wt. 40 kg bag 20 kg bag  
 40 bags/pallet 72 bags/pallet

### Mix Proportions for Concrete Mix:

CONCRETE STRENGTH	CEMENT	WATER (1)	FINE AGGREGATE (2) (DAMP)	COARSE AGGREGATE (3)	VOLUME
20 MPa	1 bag 40 kg	24 L	140 kg	125 kg	0.14m <sup>3</sup> (5 cu. Ft)
25 MPa	1 bag 40 kg	22 L	115 kg	120 kg	0.13m <sup>3</sup> (4.5 cu. Ft)
30 MPa	1 bag 40 kg	20 L	105 kg	110 kg	0.12m <sup>3</sup> (4.2 cu. Ft)
32 MPa (with air entrainment) **	1 bag 40 kg	18 L	95 kg	100 kg	0.11m <sup>3</sup> (3.8 cu. Ft)

## MCS (MORTAR S) CEMENT



Mortar S Cement, is a type 'S' cement.

### Used for:

- Making: Stucco-finish, Base Coat, Mortars, Parging and other masonry applications.

### Features:

- Mortar S Cement only requires the addition of sand and water for masonry applications

Mfr. No. 112525

Ship Wt. 34 kg bag 40 bags/pallet

### COVERAGE

Mix 1 - 34 kg bag mortar cement with 2 ¼ to 3 parts loose, damp sand for mortar applications

## HE (TYPE 30) PORTLAND CEMENT



Type HE is a High Early Strength Portland Cement.

### Used for:

- Applications where high early strengths are required

**Mfr. No. 112479**

**Ship Wt. 40 kg bag 40 bags/pallet**

## HS (TYPE 50) PORTLAND CEMENT



LAFARGE Type HS Portland Cement

### Used for:

- Applications that require high levels of sulphate resistance.

**Mfr. No. 9994022**

**Ship Wt. 20 kg bag 72 bags/pallet**

## WHITE PORTLAND CEMENT | FEDERAL WHITE



White Portland Cement Type I is a true Portland cement

### Used for:

- White or colouring applications.
- Federal White Cement can be used for all types of architectural or structural concrete construction where a whiter or brighter color may be needed for aesthetic or safety reasons.
- Federal White Cement may also be used to satisfy low alkali requirements.

**Mfr. No. 9994010**

**Ship Wt. 40 kg bag 40 bags/pallet**

## PORTLAND CEMENT LIME BLEND



TARGET Portland Cement Lime Blend is used for making mortars - ensuring uniformity during construction. It is prepared under tight quality control standards to ensure consistency.

### Used for:

- TARGET Portland Cement Lime Blend yields high strength mortar

### Features:

- TARGET Portland Cement lime mortars exhibit superior bond characteristics, less shrinkage and cracking than other mortars resulting in greater resistance to water penetration.

**Mfr. No. 405951**

**Ship Wt. 30 kg bag 50 bags/pallet**

## HYDRATED LIME – TYPE ‘S’



### Used for:

- Mixing with cement and sand to make mortar, stucco and other masonry products
- Agricultural use

### Features:

- Fine Grade

Mfr. No. 9994028

Ship Wt. 23 kg bag    50 bags/pallet

## REPAIR PRODUCTS - BAGS

### BONDED TOPPING MIX



### COVERAGE

1 – 18kg bag = 18 ft sq at 1/4" thickness

Concrete repair material designed for thin overlays and repair of concrete up to 1/2".

### Used for:

- Overlays
- Levelling
- Damaged and cracked concrete

### Features:


- High strength
- Strong bond
- 90 minute set
- Foot traffic in 2.5 hours
- Trowels to a featheredge

Bag Mfr. No. 113318

Ship Wt. 18 kg bag    56 bags/pallet



## CONCRETE RESURFACER

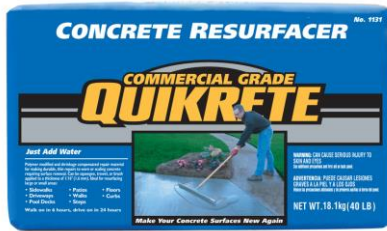

A polymer modified Portland cement based product designed for making thin layer repairs to and for restoring the appearance of existing sound concrete surfaces.

### Used for:

- Sidewalks
- Concrete Floors
- Patios
- Floors
- Pool Decks
- Driveways
- Parking Decks
- Curbs

**Mfr. No.** 113143

**Ship Weight** 18 kg bags 35 bags / pallet

### COVERAGE \*

	Squeegee Application				
Square Feet (M <sup>2</sup> )	35 (3.3)	90 (8.4)	200 (18.6)	300 (27.9)	500 (46.5)
1/16" (1.5mm) thick # of bags	1	2	3	4	7
	Thicker Application				
1/8" (3mm) thick # of bags	1	3	6	9	14
1/4" (6mm) thick # of bags	2	5	11	17	27
3/8" (9mm) thick # of bags	3	7	15	23	39

\* All yields are approximate and do not allow for waste or uneven sub-grade, etc.

## BLACK TOP PATCH



QUIKRETE Blacktop Patch is an asphalt cold patch for repairing pot holes and large cracks over 25 mm (1 inch).

### Used for:

- Asphalt pavements such as driveways
- Parking lots
- Roads
- Playground and pathways

### Features:

- Ready to use
- No mixing or heating required
- Traffic can begin immediately after levelling and compacting

**Mfr. No.** 170125

**Ship Wt.** 25 kg bag 30 bags/pallet

### COVERAGE

1 bag covers 2 sq ft at 2" thickness

# SANDS AND AGGREGATE PRODUCTS

## PREMIUM PLAY SAND



A versatile sand.

### Used for:

- Children's sandbox
- Traction for snowy and icy surfaces
- Base and between joints for concrete pavers
- Lawn and garden conditioner

### Features:

- Heat sterilized
- Washed and screened
- Free of most dust

**Mfr. No. 111325**

**Ship Wt. 25 kg bag     48 bags/pallet**

### COVERAGE

1 bag =  $\frac{1}{2}$  cubic ft  
(12" x 12" x 6" thick)

## ALL PURPOSE GRAVEL



Multi use gravel for decorative and landscaping applications.

### Used for:

- Landscaping
- Drainage
- Window wells
- Fish ponds
- Concrete

### Features:

- Easy to pour
- Easy to store
- Easy to transport
- Durable plastic bag

**Mfr. No. 115125**

**Ship Wt. 25 kg bag     30 bags/pallet**

### COVERAGE

1 bag =  $\frac{1}{2}$  cubic ft

## BASE ROCK



A levelling base for masonry products and other applications.

### Used as a base for:

- Pavers
- Flagstone
- Brick
- Retaining walls
- Walkways and Driveways

### Features:

- Saves time
- Professional quality
- Easy to use
- Durable plastic bag

Mfr. No. 115155

Ship Wt. 25 kg bag     30 bags/pallet

### COVERAGE

1 bag = ½ cubic foot

## PATIO PAVER JOINTING SAND



Properly graded fine sand for filling joints between pavers, flagstone and other masonry products.

### Used for:

- Patios
- Sidewalks
- Driveways

### Features:

- Washed and dried
- Properly screened
- Angular for stability
- Durable plastic bag

Mfr. No. 115036

Ship Wt. 36 kg bag     42 bags/pallet

### COVERAGE

36 kg (80 lb) bag = 7 to 9 m<sup>2</sup>  
(75 to 100 ft<sup>2</sup>)

## TRACTION SAND



Ideal for traction on all surfaces in icy conditions.

### Used for:

- Icy and snowy surfaces
- Added vehicle weight

### Features:

- Re-usable poly bag
- Angular
- Easy to pour

**Mfr. No. 115831**

**Ship Wt. 18 kg bag**

**48 bags/pallet**

## MISCELLANEOUS PRODUCTS

### QUIK-TUBE® BUILDING FORMS



The QUIK-TUBE® Building Forms are ridged fibre building form tubes that eliminate the need to build wood forms.

### Used for:


- Mailbox bases
- Deck supports
- Columns

Dia. x Length	6" x 8'	8" x 8'	10" x 8'	12" x 8'
Mfr. No.	692316	692251	692252	692253


**Minimum order of 3**



## WALK MAKER® BUILDING FORM



692134 • European Block Pattern

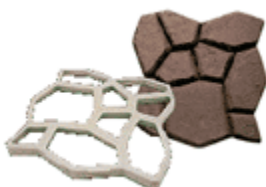

692132 • Country Stone Pattern

### COVERAGE

Approx. 1 ½ bags of 25 kg  
QUIKRETE 6000 concrete mix  
to one mould.

Reusable plastic moulds. Fill the mould with concrete mix (approx 1 ½ bags of 25 kg concrete mix fills 1 mould), trowel, and remove the mould. For best results use QUIKRETE® 6000.

### Used for:

- Walkways
- Garden Paths
- Patios
- Courtyards

### Features:

- Customize the color with QUIKRETE® Liquid Cement Colors

**Mfr. No. 692134 – European Block Pattern**

**Mfr. No. 692132 – Country Stone Pattern**

**Available: 1 pc 2' x 2' x 2" - 6 per case**

## LIQUID CEMENT COLOUR



### COVERAGE

Will colour up to 2 – 25 kg  
(55 lb) bag of Concrete,  
Mortar, or Sand Mix

More intense colour can be achieved  
by using additional Cement Colour.

Do not use more than one bottle  
per 25 kg (55lb)

A liquid coloring agent used to customize the color of your concrete project. Add correct amount of dry concrete mix or mortars to water for a proper consistency. One bottle will mix with two 25kg (55lb) bags of Concrete Mix. Available in Red, Brown, Buff, Charcoal.

### Used for:

- Adding color to Walk Maker™ projects
- Adding color to any concrete, mortar, sand topping or stucco project
- Permanent integral color

### Features:

- Add colour to a variety of projects including: curbs, driveways, fishponds, and stucco
- Available in 4 colours

Mfr. No.	131720	131721	131722	131723
Colour	Charcoal	Brown	Buff	Red

**Ship Wt. 296 ml - 12 bottles/case**

## BACKER ROD



A foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications.

### Used for:

- Expansion joints
- Curtain wall joints
- Partitions
- Log construction
- Pavement joints
- Pre-cast units

### Features:

- Backer Rod can be used as a temporary seal, or inserted into a joint to control sealant depth
- To create a backstop
- Allows for tooling of sealant
- Allows for proper wetting of the joint surfaces for sealing

**Mfr. No. 691741**

**1 piece 3/4" dia. X 20'      12 per case**

## EXPANSION JOINT STRIPS



Expansion Joint Strips are made from resilient wood fibers to prevent damage during expansion and contraction of concrete. Weather resistant.

### Used for:

- Driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures

**Mfr. No. 691706**

**Available in: 40 strips per carton**

## ACRYLIC FORTIFIER



### MIXING

Shake well before using.

Use the recommended amount of Concrete Acrylic Fortifier along with sufficient water to provide proper consistency

For QUIKRETE® Quick-Setting Cement & QUIKWALL® Surface Bonding Cement, add 1.9 L of Concrete Acrylic Fortifier per 22.7 kg bag

An acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts. Exceeds the requirements of ASTM C 1438

### Used for:

- Improving bonding to existing surfaces
- Eliminate moist curing in most circumstances
- Reduce permeability

### Features:

- Increases bond
- Strengthens concrete
- Helps protect concrete from environment

Mfr. No.	861002
Ship Wt.	0.95L bottle

## CONCRETE & ASPHALT CLEANER - CONCENTRATE



A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

### Used for:

- Removing soil grease, oil, etc. from all types of masonry, concrete, mortar and grout

### Cleans:

- Brick
- Slate
- Flagstone
- Quarry tile
- Driveways
- Grout in ceramic tile
- Parking lots
- Garage floors
- Gas stations
- Industrial plant floors
- Tools and Lawnmowers

### APPLICATION

**Light soil:** One part to 6 parts fresh water.

**Medium soil:** One part to 4 parts fresh water

**Heavy soil:** Dilute 1:1 or use full strength.

Mfr. No. 860112

946 ml - 12 per case

## ACRYLIC CONCRETE CURE & SEAL (SATIN)



Concrete sealer is used for curing, protecting and sealing concrete surfaces.

### Used for:

- Curing new concrete
- Protects concrete against water, salt, oils etc.
- Protects concrete against graffiti on concrete walls
- Protects concrete from environment

### Features:

- Attractive satin look
- Makes surface easier to clean
- Can be sprayed, broomed or roller applied

### COVERAGE

1 x 3.8L = 14-18 m<sup>2</sup>  
(150-200 ft<sup>2</sup>).

Mfr. No.	873102	873004
Ship Wt.	3.8 L	8.5 L
	6 pails/case	

## REPAIR PRODUCTS – PATCHING PRODUCTS

### BONDED TOPPING MIX



Concrete repair material designed for thin overlays and repair of concrete up to 1/2".

### Used for:

- Overlays
- Levelling
- Damaged and cracked concrete

### Features:

- High strength
- Strong bond
- 90 minute set.
- Foot traffic in 2.5 hours
- Trowels to a featheredge

### COVERAGE

1-4.5kg pail = 3¼ ft sq at ¼" thickness

Mfr. No.	113304
Ship Wt.	4.5 kg pail
	4 pails/case



## HYDRAULIC WATER STOP CEMENT



Rapid setting, high strength repair material designed to plug active water leaks instantly in concrete and masonry.

### Used for:

- Basement walls
- Retaining walls
- Swimming pools
- Instant anchoring
- Foundation walls

### Features:

- High strength (2000 psi in 30 minutes)
- 3-5 minute set

### COVERAGE

1 x 4.5 kg pail will fill a crack  
1/2" W x 1 1/2" D x 15' L

<b>Mfr. No.</b>	<b>112612</b>	<b>112606</b>	<b>112621</b>
<b>Ship Wt.</b>	<b>4.5 kg pail</b>	<b>9 kg pail</b>	<b>22 kg pail</b>
	<b>4 pails/case</b>		

## ANCHORING CEMENT



Rapid setting grout.

### Used for:

- Anchoring of posts, rails and bolts in concrete
- Filling of cracks and voids
- Patching concrete

### Features:

- High strength (2000 psi in 2 hours)
- Fast setting (10-30 minutes)
- Flowable

### COVERAGE

Each 10 lb (4.5 kg) pail will yield  
approximately 0.08 cu ft (2.4 L)

<b>Mfr. No.</b>	<b>124512</b>
<b>Ship Wt.</b>	<b>4.5 kg pail    4 pails/case</b>

## QUICK-SETTING CEMENT



For concrete repairs where rapid setting is required.

### Used for:

- Steps
- Curbs
- Walls
- Overhead

### Features:

- Sets fast (10-15 minutes)
- High strength, strong bond
- Can be applied horizontally, vertically and overhead
- Can be molded or sculpted

**Mfr. No. 124012**

**Ship Wt. 4.5 kg pail    4 pails/case**

### COVERAGE

When mixed as directed, each 4.5 kg (10 lb) pail of Quick Setting Cement will yield approx. 0.1 cu ft. (2.5 liters) of repair material

## CONCRETE BONDING ADHESIVE



Permanently bonds new concrete to existing concrete.

### Used for:

- Bonding new concrete to old concrete
- Bonding new plaster and stucco to old plaster and stucco

### Features:

- Indoor/Outdoor application
- Apply by brush roller or spray to the thickness of a coat of paint
- Concentrated

**Mfr. No.**

**990203**

**990216**

**Ship Wt.**

**3.8L bottle**

**0.95L bottle**

### COVERAGE

Paint-on application 14-28 m<sup>2</sup>  
(150-300 ft<sup>2</sup>) per 3.8L

Slurry coat application 7 m<sup>2</sup>  
(75 ft<sup>2</sup>) per 3.8L

---

## CONCRETE PATCHING COMPOUND



### COVERAGE

3.25 sq ft (0.3 M<sup>2</sup>) at a  
1/8" (3 mm) thickness.

A ready-to-use concrete repair for making repairs to cracks, holes and breaks (up to 1/4" wide) in concrete, stucco or masonry walls, sidewalks, patios, driveways, etc.

#### Used for:

- Repairs and fills spalls (surface imperfections) and cracks up to 1/4" (6 mm) deep in concrete, masonry, stucco, sidewalks, patios, walkways and steps.

#### Features:

- No mixing required
- Dries quickly to a durable and flexible finish
- Weather resistant
- Excellent adhesion
- Textured to blend with concrete surfaces
- Easy clean up with water before product dries
- Use for non-structural cosmetic repairs

**Mfr. No. 865036**

**946 ml - 12 per case**

---

## ZIP AND MIX REPAIR MORTAR



### COVERAGE

Each 1.36 kg bag will yield 0.03  
cubic feet of material

ZIP AND MIX Repair Mortar is a structural mortar repair.

#### Used for:

- Repairing concrete, masonry and stucco surfaces up to 2 inches in thickness. It can be used on driveways, sidewalks, patios, steps, concrete and masonry walls.

#### Features:

- Just add water to bag, mix and apply
- Use on vertical and horizontal surfaces
- Superior bonding
- 4500 psi in 28 days

**Mfr. No. 124116**

**Ship Wt. 1.36 kg bag 6 bags per case**

---

## PRE-MIXED STUCCO PATCH



A ready-to-use acrylic stucco repair.

### Used for:

- Making repairs to cracks, breaks and holes up to 1/4" (6 mm) thick in stucco surfaces.

### Features:

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco

**Mfr. No.** 865033

**Ship Wt.** 0.95 L pail 12 pails / case

---

### COVERAGE

Each 0.95 L (1 qt) pail will cover approximately 3.25 sq. ft (0.3 M2) at 1/8" (3 mm) thickness.

---

---

## EXTERIOR STUCCO PATCH



A finish coat stucco.

### Used for:

- Repairing broken, cracked or damaged stucco.

### Features:

- White in colour
- Resistant to shrinkage cracks
- Can be textured and colored to match existing stucco
- Paintable

---

### COVERAGE

4.5 kg (10lb) pail yields 5 m<sup>2</sup> (6 ft<sup>2</sup>) @ 1/4"

---

**Mfr. No.** 120145

**Ship Wt.** 4.5 kg pail 4 pails/case



# REPAIR PRODUCTS – JOINT AND CRACK REPAIR

## GREY CONCRETE CRACK SEALER



A latex formulation designed to adhere to horizontal concrete surfaces.

### Used for:

- Repairing cracks in concrete
- Sidewalks
- Patios
- Driveways

### Features:

- Flows well into cracks
- Easy to apply

### COVERAGE

3.8L fills approximately:  
72m (240 ft.) of crack at  $\frac{1}{4}$ " x  $\frac{1}{4}$ "

0.95L fills approximately:  
18m (60 ft) of crack at  $\frac{1}{4}$ " x  $\frac{1}{4}$ "

Mfr. No.	864038	864002
Ship Wt.	3.8L plastic bottle	946 ml squeeze bottle

## CONCRETE REPAIR



A superior sanded acrylic latex formulation for crack repair in concrete, including concrete, stucco or masonry walls, sidewalks, patios and driveways.

### Used for:

- Repairing and filling cracks up to 12 mm ( $\frac{1}{2}$ " in concrete, masonry, stucco, sidewalks, patios and driveways
- Vertical or horizontal surfaces

### Features:

- Dries quickly to a tough and flexible finish
- Helps prevent water and ice damage to concrete surfaces
- Weather resistant
- Excellent adhesion
- Textured to blend with concrete surfaces
- Easy clean up with water before product dries

### COVERAGE

296 ml tubes will yield about  
7.3 M at a 6 mm ( $\frac{1}{4}$ ") diameter  
bead or 3.7 M (12 lineal feet)  
for a 9mm ( $\frac{3}{8}$ ") diameter bead

Mfr. No. 862012  
Ship Wt: 296 ml - 12 tubes/case

## STUCCO CRACK REPAIR



Stucco Crack Repair is an easy to use crack repair for stucco.

### Used for:

- Filling and sealing cracks in stucco up to 1/2"

### Features:

- Blends with texture of surrounding stucco
- Paint after 24 hours
- Works on horizontal and vertical surfaces
- Excellent adhesion

**Mfr. No. 865011**

**Ship Wt. 296 ml      4 tubes / case**

## MORTAR REPAIR



Acrylic repair for mortar joints.

### Used for:

- Re-pointing and repairing mortar joints
- Concrete crack repair

### Features:

- Square applicator tip for easy application
- Flexible
- Strong bond
- Mortar grey
- Fits standard caulking gun

**Mfr. No. 862002**

**Packaging: 296 ml**

**Ship Wt. 540 g caulking cartridge   12 tubes/case**

### COVERAGE

One cartridge fills 10 ft of  
3/8" x 3/8" voids

## FIREPLACE MORTAR



### COVERAGE

Approximately 100 linear ft. (30.5 M)  
for a 1/8" (3 mm) diameter bead

A silicate based refractory cement caulk

#### Used for:

- Tuck-pointing damaged fireplace mortar joints
- Repairing cracked or chipped firebricks in fireplaces and wood-burning stoves.

#### Features:

- QUIKRETE® Fireplace Mortar provides excellent adhesion and when exposed to fire is strengthened to firebrick hardness.
- Meets ASTM E 136-04
- Fireplace safe to 2000 degrees F
- As strong as fire brick
- Easy clean-up while wet

Mfr. No. 862025

Ship Wt. 300 ml tube 12 tubes per case

## POLYURETHANE MORTAR JOINT SEALANT



### COVERAGE

Each 10.1 oz (300 ml) tube can be  
applied to approximately 12 linear feet  
(3.7 m) in a 3/8" (10 mm) bead

Mortar Joint Sealant is a high performance construction grade polyurethane sealant.

#### Used for:

- Waterproofing and sealing mortar joints and bonds to most construction materials.

#### Features:

- Excellent adhesion
- Non-sag formulation
- Dries to touch in 2 hours
- Flexible

Mfr. No. 862019

Ship Wt. 296 ml 12 tubes/case

## POLYURETHANE SEALANT GRAY – SELF LEVELLING



Polyurethane Self-Levelling Sealant is a high performance construction grade polyurethane sealant.

### Used for:

- Sealing cracks and joints in horizontal concrete surfaces. It can be used for concrete floors, driveways, patios, steps, basements, pool decks and more.

### Features:

- Superior adhesion
- Durable and flexible
- Resistant to moisture
- Virtually no shrinkage

**Mfr. No. 866012**

**300 ml tube**

**12 tubes / case**

**Mfr. No. 866032**

**858 ml tube**

**6 tubes / case**

### COVERAGE

12 linear feet (3.7 m) at ½" x ¼"  
(12 x 6 mm) joint

## POLYURETHANE SEALANT – NON-SAG



A high performance, construction grade polyurethane sealant designed for vertical and overhead surfaces.

### Used for:

- Vertical or horizontal expansion joints in concrete, stucco or masonry
- Caulking around window and door openings
- Sealing skylights and chimney flashings

### Features:

- The non-sag formula provides superior adhesion and flexibility. Meets ASTM C 920, Type S, Grade NS.

**Mfr. No. 866013**

**Ship Wt. 296 ml tube**

**12 tubes / case**

### COVERAGE

12 linear feet (3.7 m) at ½" x ¼"  
(12 x 6 mm) joint

## FASTSET™ ANCHORING EPOXY



FASTSET Anchoring Epoxy is a commercial grade, fast-setting, two component structural epoxy.

### Used for:

- Anchoring such things as bolts, rebar, railings, threaded rod, etc, in concrete, masonry and rock.

### Features:

- Sets fast (in 3-4 minutes)
- High strength
- Non-sag
- For vertical and horizontal applications
- Sets in sub-zero temperatures

**Mfr. No. 862032**

**Ship Wt. 296 ml tube 12 tubes / case**

### COVERAGE

Each 10.1 oz (296 ml) tube will yield 12 linear feet (3.7 M) at 1/4" (6 mm) bead.

## COMMERCIAL GRADE POLYURETHANE ADHESIVE



Commercial Grade Adhesive is a high performance, construction grade adhesive.

### Used for:

- Permanently bonding concrete masonry and all types of construction materials such as wood, glass, metal and plastic.

### Features:

- Superior bond
- Water resistant
- Freeze/thaw resistant
- Flexible

**Mfr. No. 990212**

**300 ml - 12 per case**

**Mfr. No. 990213**

**858 ml - 6 per case**

### COVERAGE

Each 10.1 oz (300 ml) tube can be applied to approximately 12 linear feet (3.7 m) in a 3/8" (10 mm) bead

# WATERPROOFING

## XYPEX HIGH 'N DRY



### COVERAGE

1 lb = 6 square feet

For permanent waterproofing of concrete.

#### Used for:

- Basement walls
- Retaining walls
- Concrete ponds

#### Features:

- Penetrates deep into concrete
- Withstands water pressures
- Easy to apply
- Works under wet conditions
- Can be applied to the inside or outside of basement walls

Mfr. No.	9991058	9991059	9991060
Ship Wt.	11 kg pail	5 kg pail	2.27 kg pail

## XYPEX PATCH 'N PLUG



### COVERAGE

1 lb = 6 square feet

A specially designed, fast setting, non-shrink, high-bond-strength, hydraulic cement compound for concrete patching and repair. Patch 'n Plug stops flowing water in seconds and is used to seal cracks, tie holes, and other defects in concrete.

#### Used for:

- Basements walls
- Retaining walls
- Swimming pools
- Instant anchoring
- Foundation walls

#### Features:

- High strength (2000 psi in 30 minutes)
- 3-5 minutes set
- Non metallic. Non toxic


Mfr. No.	9991062	9991063
Ship Wt.	2.27 kg pail – 6 per case	9 kg pail







## CONTACT INFORMATION

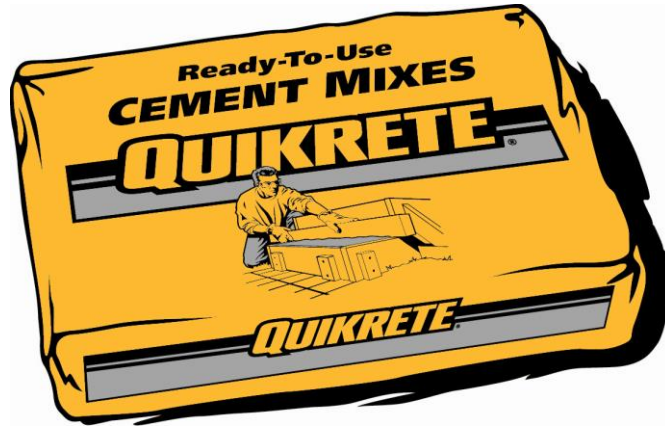

### FOR TECHNICAL AND SALES ASSISTANCE

---

<b>RANDY STONE</b>	<b>Tel:</b> 1 604 649 4242	<b>Email:</b> rstone@quikrete.ca
<b>MARA MARSDEN</b>	<b>Tel:</b> 1 604 417 2188	<b>Email:</b> mmarsden@quikrete.ca
<b>BRENT FOSTER</b>	<b>Tel:</b> 1 403 471 0529	<b>Email:</b> bfooster@quikrete.ca
<b>MIKE COGHILL</b>	<b>Tel:</b> 1 204 807 3172	<b>Email:</b> mcoghill@quikrete.ca

### PLANT LOCATIONS

---

<b>VANCOUVER PLANT:</b>	<b>Tel:</b> 1 604 856 7976	<b>Fax:</b> 1 604 856 7972
1080 Bradner Road Abbotsford, BC Canada V4X 1H8	<b>Toll Free:</b> 1 888 484 1258	<b>Orders:</b> AbbotsfordOrder@Quikrete.ca

---

<b>CALGARY PLANT:</b>	<b>Tel:</b> 1 403 279 8189	<b>Fax:</b> 1 403 279 4829
5150 90 Avenue, SE Calgary AB Canada T2C 2T2	<b>Toll Free:</b> 1 800 661 8482	<b>Orders:</b> CalgaryOrder@Quikrete.ca

---

<b>WINNIPEG PLANT:</b>	<b>Tel:</b> 1 204 654 8320	<b>Fax:</b> 1 204 654 8329
400 Pandora Avenue W Winnipeg MB Canada R2C 3A5	<b>Toll Free:</b> 1 855 654 8320	<b>Orders:</b> WinnipegOrder@Quikrete.ca