

Industrial Specification Grade Watertight Devices



2-Pole, 3-Wire Grounding
NEMA 5-15/20, 125V
NEMA 6-15/20, 125V
NEMA L5-15, 125V
NEMA L6-15, 250V
NEMA L7-15, 277V

Watertight Industrial Spec Grade Plugs, Connectors and Receptacles

FEATURES

- Thermoplastic elastomeric exteriors out-perform rubber when exposed to moisture, chemicals, oils, and the effects of ultraviolet radiation and ozone attack.
- Mated plug and connector or plug and receptacle form a water-tight seal that meets the requirements of NEMA 3R, 4, 4X, 5, 6, 6P & 12 IEC IP67 and withstands water spray test at 1000 psi.
- High visibility safety yellow for identification.
- Contacts, blades and terminal screws nickel plated for corrosion resistance.
- Quick drive, stainless steel assembly screws for corrosion resistance and fast installation.
- Color coded neoprene grommets for a watertight seal on a wide range of cord sizes.
- Receptacle has self-closing spring loaded flip lid cover.

M-11 Corrosion Resistant & Marine Grade Products

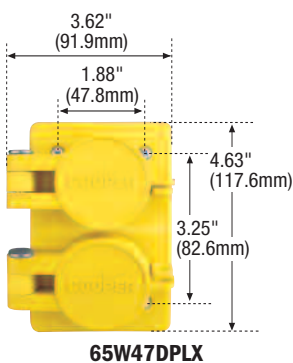

TESTING & CODE COMPLIANCE

• Receptacles: Listed to UL 498 (file no. E2458), cUL Certified to CSA C22.2 no. 42 (file no. E2458).
• Plugs and Connectors: Listed to UL 498 (file no. E3663), cUL Certified to CSA C22.2 no. 42 (file no. E3663).

MATERIAL CHARACTERISTICS

Plugs & Connectors: Thermoplastic elastomeric (TPE) exterior. Glass filled Nylon and glass filled polypropylene interior.
Receptacles: Wallplate & cover glass filled nylon, TPE liner, nylon device face.
Temperature Rating: -40°C to 75°C.

Watertight Yellow Straight Blade Devices

Rating A	V/AC	NEMA	Cord Diameter	Catalog No. Plug	Catalog No. Connector	Receptacle Single	Receptacle Duplex
15	125	5-15	0.30"-0.65" (7.6mm-16.5mm)	14W47	15W47	60W47	60W47DPLX
15	250	6-15	0.30"-0.65" (7.6mm-16.5mm)	14W49	15W49	60W49	60W49DPLX
20	125	5-20	0.30"-0.65" (7.6mm-16.5mm)	14W33	15W33	60W33	60W33DPLX
20	250	6-20	0.30"-0.65" (7.6mm-16.5mm)	14W48	15W48	60W48	60W48DPLX

Watertight Yellow Hart-Lock® Locking Devices

Rating A	V/AC	NEMA	Cord Diameter	Catalog No. Plug	Catalog No. Connector	Receptacle Single	Receptacle Duplex
15	125	L5-15	0.30"-0.65" (7.6mm-16.5mm)	24W47	25W47	65W47	65W47DPLX
15	250	L6-15	0.30"-0.65" (7.6mm-16.5mm)	24W49	25W49	65W49	65W49DPLX
15	277	L7-15	0.30"-0.65" (7.6mm-16.5mm)	24W34	25W34	65W34	65W34DPLX

Accessories for 15/20A Straight Blade & 15A Hart-Lock® Devices

Description	Catalog No.
Plug closure cap	14W
Replacement connector closure cap	15W
Wire Mesh Grip, Cord diameter 0.30-0.50"	WM115
Wire Mesh Grip, Cord diameter 0.50-0.62"	WM116

