

# FULL LINE CATALOG



**LOUISVILLE**  
LADDER



**LOUISVILLE**  
L A D D E R

[www.LOUISVILLELADDER.com](http://www.LOUISVILLELADDER.com)

7765 NATIONAL TURNPIKE • UNIT 190  
LOUISVILLE, KENTUCKY • 40214

<b>PHONE • USA &amp; CANADA</b>	1.800.666.2811
<b>PHONE</b>	1.502.636.2811
<b>FAX</b>	1.800.274.4566



*founded in*

**FOUNDED IN 1946,**

**Louisville Ladder, Inc.** is one of the largest manufacturers of ladders in North America. Our headquarters is located in Louisville, Kentucky.

We have a network of warehouses throughout the United States and Canada.

Since our beginnings, **Louisville Ladder** has been the industry leader in product innovation.

.....

*created by*

**AT LOUISVILLE LADDER  
WE'RE PROUD OF OUR HISTORY**

*some of our accomplishments:*

our first aluminum step ladder and extension ladder 1946

our first line of fiberglass ladders 1961

our first structural foam-molded step ladder top 1981

our first powder-coat paint on steel products 1989

the knocked-down rolling steel warehouse ladder 1959

the only fiberglass mobile work platform 1997

.....

*our patents*

**OUR PATENTS**

**DaBoot**

*Patent #7,000,731 B2*

**ProTop**

*Patent #7,753,170*

**QuickLatch**

*Patent #5,429,207*

# COMMUNITY



Ladder Selection Guide.....6  
 Ladder Safety Standards.....7  
 Product Feature Glossary.....8

**STEP LADDERS**

**FIBERGLASS**

FS1100HD STEP ..... 375lbs ..... 10  
 FS1300HD STEP ..... 375lbs ..... 10  
 FS1400HD STEP ..... 375lbs ..... 11  
 L-3016 STEP ..... 300lbs ..... 11  
 FS1500 STEP ..... 300lbs ..... 12  
 FS2000 STEP ..... 250lbs ..... 13  
 FS4000 STEP ..... 225lbs ..... 14  
 FM1100HD TWIN FRONT ..... 375lbs ..... 15  
 FM1400HD TWIN FRONT ..... 375lbs ..... 15  
 L-3431-MR TWIN FRONT MRI ..... 375lbs ..... 16  
 FM1500 TWIN FRONT ..... 250lbs ..... 16  
 FM2000 TWIN FRONT ..... 250lbs ..... 17  
 FMP1500 TWIN FRONT PLATFORM ..... 300lbs ..... 18  
 FMP2000 TWIN FRONT PLATFORM ..... 225lbs ..... 18  
 FP1100HD PLATFORM ..... 375lbs ..... 19  
 FP1400HD PLATFORM ..... 375lbs ..... 19  
 FXP1800HD PRO PLATFORM ..... 375lbs ..... 20  
 FXP1700 PRO PLATFORM ..... 300lbs ..... 21  
 FP1500 PLATFORM ..... 300lbs ..... 22

**ALUMINUM**

AS1100HD STEP ..... 375lbs ..... 24  
 AS1000 STEP ..... 300lbs ..... 24  
 AS3000 STEP ..... 300lbs ..... 25  
 AS2100 STEP ..... 250lbs ..... 26  
 AS4000 STEP ..... 225lbs ..... 27  
 AM1100HD TWIN FRONT ..... 375lbs ..... 27  
 L-2431-MR TWIN FRONT MRI ..... 375lbs ..... 28  
 AM1000 TWIN FRONT ..... 300lbs ..... 28  
 AMP1000 TWIN FRONT PLATFORM ..... 300lbs ..... 29  
 AP1100HD PLATFORM ..... 375lbs ..... 30  
 AP1000 PLATFORM ..... 300lbs ..... 30  
 AP5000 MOBILE PLATFORM ..... 300lbs ..... 31

**STEP STOOLS**

L-3433 FIBERGLASS TWIN FRONT STEP STOOL ..... 375lbs ..... 32  
 FY8000 FIBERGLASS INDUSTRIAL STEP STAND ..... 300lbs ..... 32  
 L-3041 FIBERGLASS MINI WORKING PLATFORM ..... 300lbs ..... 33  
 L-2433 ALUMINUM TWIN FRONT STEP STOOL ..... 375lbs ..... 33  
 AY8000 ALUMINUM INDUSTRIAL STEP STAND ..... 300lbs ..... 34  
 L-2241 ALUMINUM MINI WORKING PLATFORM ..... 225lbs ..... 34  
 AP8000 ALUMINUM PLATFORM LADDER ..... 200lbs ..... 35  
 L-2346 ALUMINUM EURO PLATFORM ..... 200lbs ..... 35

**EXTENSION LADDERS**

**FIBERGLASS**

FE4000HD EXTENSION ..... 375lbs ..... 36  
 FE3100 SINGLE ..... 300lbs ..... 36  
 FE3200 EXTENSION ..... 300lbs ..... 37  
 L-3022-PT EXTENSION ..... 300lbs ..... 37  
 FE7100 SINGLE ..... 300lbs ..... 38  
 FE7200 EXTENSION ..... 300lbs ..... 38  
 FE7500 SINGLE ..... 300lbs ..... 39

FE7600 EXTENSION ..... 300lbs ..... 39  
 L-3025 LIGHTWEIGHT EXTENSION ..... 300lbs ..... 40  
 FE1700 EXTENSION ..... 250lbs ..... 41  
 FE0600 EXTENSION ..... 225lbs ..... 41  
 FE8800 MANHOLE ..... 300lbs ..... 42  
 FH1000 SHELF ..... 300lbs ..... 42  
 FH1500 PRO SHELF ..... 300lbs ..... 43

**ALUMINUM**

AE1200HD EXTENSION ..... 375lbs ..... 44  
 AE2100 SINGLE ..... 300lbs ..... 44  
 AE2200 EXTENSION ..... 300lbs ..... 45  
 AE2800 EXTENSION ..... 300lbs ..... 45  
 AE3200 EXTENSION ..... 250lbs ..... 46  
 AE4100 SINGLE ..... 225lbs ..... 46  
 AE4200PG EXTENSION ..... 225lbs ..... 47  
 L-2321 EXTENSION ..... 200lbs ..... 48  
 L-2324 EXTENSION ..... 200lbs ..... 48  
 AE1600 3-SECTION EXTENSION ..... 300lbs ..... 49  
 AH1000 SHELF ..... 300lbs ..... 49

**ATTIC LADDERS**

PINNACLE ALUMINUM • AEE2X10 ..... 375lbs ..... 50  
 ELITE ALUMINUM • AA2X10 ..... 375lbs ..... 51  
 EVEREST ALUMINUM • AL2X8P ..... 350lbs ..... 51  
 BIG BOY WOOD • X305P ..... 350lbs ..... 52  
 CHAMPION WOOD • CS2X4 • CL2X4 ..... 300lbs ..... 52  
 PREMIUM WOOD • X224P • X254P ..... 250lbs ..... 53

**SPECIALTY LADDERS**

FC1200 FIBERGLASS STEP TO STRAIGHT ..... 375lbs ..... 54  
 FT1000 FIBERGLASS TRIPOD ..... 300lbs ..... 54  
 FX1100 FIBERGLASS TRESTLE ..... 300lbs ..... 55  
 AM8000 ALUMINUM AIRCRAFT MECHANIC CARRIER .. 300lbs ..... 55  
 AX1000 ALUMINUM TRESTLE ..... 300lbs ..... 56  
 L-2032 ALUMINUM SAWHORSE ..... 300lbs ..... 56  
 L-2095 ALUMINUM MULTIPURPOSE ..... 300lbs ..... 57

**WAREHOUSE LADDERS • SCAFFOLDS • PLANKS**

GSX1600 HEAVY-DUTY STEEL WAREHOUSE ..... 450lbs ..... 58  
 GSX2400 HEAVY-DUTY STEEL WAREHOUSE ..... 450lbs ..... 58  
 GSW SERIES STEEL ROLLING WAREHOUSE ..... 350lbs ..... 59  
 FW SERIES FIBERGLASS MOBILE PLATFORM ..... 300lbs ..... 60  
 SM SERIES STEEL ROLLING SCAFFOLD ..... 500lbs ..... 60  
 ST SERIES STEEL ROLLING TOWER SCAFFOLDS ..... 1000lbs ..... 61  
 MODULAR GUARDRAIL SYSTEMS ..... 62  
 P SERIES SCAFFOLD PLANKS & STAGE PLATFORMS ..... 63  
 L-P2 SERIES NESTABLE STAGES ..... 500lbs ..... 64  
 SCAF-A-DECK PD8000 • PD9200 ..... 64  
 LP-2921 SERIES TELESCOPING PLANK ..... 64  
 LADDER RACKS SRA10 ..... 64  
 LOGOLOCK SYSTEM ..... 65

Product Accessories ..... 66  
 C.L.I.M.B. Academy ..... 68  
 Warehouse Locations ..... 69

# HOW TO SELECT A LADDER

## A GUIDE

### 1 Select a Type



**STEP LADDER**

The most popular style of ladder. Used from medium to low heights. Utilize pail shelves and tops to hold tools for the job.



**TWIN FRONT LADDER**

Allows two users to work on the same ladder simultaneously. Easily accomplish tasks that would be more difficult for a single person.



**PLATFORM LADDER**

Combine step ladder and warehouse ladder technology. The non-pinch platform provides a large standing area for work.



**EXTENSION LADDER**

The most versatile style of ladder, found in a variety of sizes. Most commonly used for higher elevations.

### 2 Select a Height

STEP LADDERS		
LADDER SIZE	APPROX. HIGHEST STANDING LEVEL	MAXIMUM REACH*
4'	1' 11"	8' 6"
5'	2' 10"	9' 5"
6'	3' 9"	10' 4"
7'	4' 9"	11' 4"
8'	5' 8"	12' 3"
10'	7' 7"	14' 2"
12'	9' 6"	16' 1"
14'	11' 5"	18'
16'	13' 4"	19' 11"
18'	15' 3"	21' 10"
20'	17' 2"	23' 9"

EXTENSION LADDERS				
LADDER SIZE	MAXIMUM EXTENDED LENGTH	MAX. REACH*	WORKING RANGE TO TOP SUPPORT*	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE*
16'	13'	16' 1"	7 1/2' - 12 1/2'	4 1/2' - 9 1/2'
20'	17'	20'	9 1/2' - 16 1/2'	6 1/2' - 13 1/2'
24'	21'	23' 10"	11 1/2' - 20'	8 1/2' - 17'
28'	25'	27' 9"	13 1/2' - 24'	10 1/2' - 21'
32'	29'	31' 7"	15 1/2' - 28'	12 1/2' - 25'
36'	32'	34' 6"	17 1/2' - 31'	14' - 28'
40'	35'	37' 5"	19' - 33 1/2'	16' - 30 1/2'
44'	39'	41' 3"	21' - 37 1/2'	18' - 34 1/2'
48'	43'	45' 2"	23' - 41 1/2'	20' - 38 1/2'
60'(1)	48'	50'	23' - 46 1/2'	20' - 43 1/2'

\*Assumes 5'7" person with 12" vertical reach | ^When set up at the proper 75 1/2° angle | \*\*Three-section extension ladder

### 3 Select a Load Capacity

**TYPE IAA**  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**TYPE IAA:** Professional use. Extra heavy duty. Capable of supporting 375 lbs.  
**USES:** MRO and industrial construction.

**TYPE IA**  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**TYPE IA:** Professional use. Extra heavy duty. Capable of supporting 300 lbs.  
**USES:** Roofing, building maintenance, contracting and industrial construction.

**TYPE I**  
**250 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**TYPE I:** Industrial use. Heavy duty. Capable of supporting 250 lbs.  
**USES:** Building maintenance, general contracting and sheet rock.

**TYPE II**  
**225 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**TYPE II:** Commercial use. Medium duty. Capable of supporting 225 lbs.  
**USES:** Light commercial and general repair, painting and cleaning.

**TYPE III**  
**200 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**TYPE III:** Household use. Light duty. Capable of supporting 200 lbs.  
**USES:** Light cleaning and painting.

### 4 Select a Ladder Material



**DO NOT USE ALUMINUM LADDERS NEAR ELECTRICITY**

#### ALUMINUM

- ▶ Lightweight
- ▶ Long-lasting construction
- ▶ Resists corrosion
- ▶ Ideal for painting, roofing and siding



**FIBERGLASS LADDERS ARE SAFE FOR WORKING AROUND ELECTRICITY**

#### FIBERGLASS

- ▶ Non-conductive when clean and dry
- ▶ Strong and durable
- ▶ Weather-resistant
- ▶ Great for heavy-duty construction

**AT LOUISVILLE LADDER**, all of our products are designed and constructed to meet or exceed applicable standards and requirements of the American National Standards Institute (ANSI), Occupational Safety and Health Administration (OSHA), and Canadian Standards Association (CSA). Please read the information on this page before using our products. Your safety is important to us.

# HOW TO SAFELY USE OUR LADDERS

Louisville Ladder, Inc. manufactures products in compliance with the applicable safety codes of the **AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)**. There are a variety of ANSI safety codes depending on material and type of ladder. You can find a list of them in the figure on the right.

In addition, ANSI codes have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load. See section "Select Load Capacity" of page 6 for more information on ANSI Duty Ratings.

- ROLLING SCAFFOLDS: **ANSI A10.8**
- PLANKS & STAGES: **ANSI A10.8**
- WOOD LADDERS: **ANSI A14.1**
- METAL LADDERS: **ANSI A14.2**
- FIBERGLASS LADDERS: **ANSI A14.5**
- STEEL LADDERS: **ANSI A14.7**
- ATTIC LADDERS: **ANSI A14.9**



The **OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION (OSHA)** regulates the adequacy of ladders and the work practices followed by employees using them in five sections: Portable Wood (1910.25), Portable Metal (1910.26), Fixed Ladders (1910.27), Mobile Ladder Stands and Scaffolds (1910.29) and ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace, and the safe use of ladders on the job.

OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore, users should check with their own state OSHA representatives.



Where applicable, product meets or exceeds **CANADIAN STANDARDS INSTITUTE** testing requirements.

**SAFETY IS EVERYONE'S RESPONSIBILITY.** Even a rigidly constructed ladder can be involved in an accident if the proper cautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.

**PROPER SELECTION**

Select ladder of proper duty rating to support combined weight of user and materials. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs. Select ladder of proper length to safely reach desired height.

**INSPECTION BEFORE EACH USE**

- Inspect thoroughly for missing or damaged components. Never use a damaged ladder and never make temporary repairs.
- Inspect thoroughly for loose fasteners. Make sure all working parts are in good working order (lubricate if necessary).
- Clean ladder of all foreign material (wet paint, mud, snow, grease, oil, etc).
- Destroy ladder if damaged, worn, or exposed to fire or chemicals

**CONSIDER BEFORE EACH USE**

- Metal ladders conduct electricity. Keep away from electrical circuits.
- Consult manufacturer for use in chemical or other corrosive environments.
- Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. twin front ladders). Do not overload.
- Do not use in high winds or during storm
- Do not use if in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped
- Keep shoes clean. Leather soles should not be worn.
- Never leave ladder set up and unattended
- Pay close attention to what you are doing

**STEP LADDERS – PROPER SETUP AND USE**

- Use help in setting up ladder, if possible
- Make sure ladder is fully open and spreaders locked
- Set all feet on firm, level surface. Do not place on unstable, loose or slippery surfaces. Place ladder where access is not obstructed. Do

- not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure ladder, where possible, from excessive movement
- Make sure spreaders are locked and ladder is stable before climbing
- Climb only front side of ladder. Face ladder when climbing up or down. Maintain a firm grip. Use both hands in climbing.
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb, stand, or sit above second step from top. Do not climb, stand, or sit on spreader braces, ladder top, or pail shelf.
- Do not straddle front and back. Do not climb from one ladder onto another.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

For additional information see ANSI A14.1–Wood; A14.2–Aluminum; A14.5–Fiberglass. Twin front (mechanic) ladders and extension trestle ladders may be climbed from either side.

**SINGLE & EXTENSION LADDERS – PROPER SETUP AND USE**

- Use help in setting up ladder, if possible
- Set base of ladder on firm, level surface. Ladder leveling devices are available for use on uneven ground. Place ladder where access is not obstructed.
- Do not place on unstable, loose, or slippery surfaces. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure base section before raising ladder to upright position. Do not raise or lower with fly section extended.
- Extend fly section and engage runglcks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- Recommend lying bottom fly rung to adjacent base rung
- Extend and retract fly section only from ground and when no one is on ladder.

- Do not overextend. A minimum overlap of sections is required as follows:
  - ladder size up to and including 32'-3" overlap
  - over 32' up to and including 36'-4" overlap
  - over 36' up to and including 48'-5" overlap
  - sizes over 48'-0" overlap
- Position ladder against upper support surface. Make sure ladder does not lean to side. Ladder must make a 75 1/2° angle with the ground.
- To establish if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- Make sure top and bottom ends of ladder are firmly supported
- Check that top and bottom of ladder are properly supported. Make sure runglcks are engaged before climbing.
- Face ladder when climbing up or down. Maintain a firm grip.
- Use both hands in climbing
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

**PROPER CARE AND STORAGE**

- Hang ladder on racks at intervals of 6' for support
- Never store materials on ladder
- Never drop or apply an impact load to ladder
- Securely support ladder in transit
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.

**DANGER: Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.**

## PRODUCT FEATURES

### STEP LADDERS



#### CENTER-PULL SPREADER BRACE

Unique center-pull spreader brace designed for one-hand operation. Brace is steel-plated for extra durability.



#### MOLDED TOP w/RECESSED TRAY

Our non-conductive, structural molded top provides greater impact resistance and durability than aluminum tops. A large part-holder tray is recessed 1/4"-deep and has tool slots.



#### PINCH-RESISTANT SPREADER BRACES

A version of our heavy-duty spreader braces with steel plating and a double-rivet hinge to protect users from pinched fingers.

### DABOOT™

Polypropylene copolymer upper boot protects the rails of your fiberglass ladder. Thick, non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot to create a secure, slip-resistant footing. Inside, DaBoot™ has a unique open design that allows for quick and easy visual inspection of the ladder's rail.



### PROTOP™

ProTop™ is a versatile and durable ladder top designed to increase your productivity. It is multifunctional and includes a hardware tray, magnet tray, drill and tool slots, paint bucket holder, and pipe or 2x4-holder. The curved, ergonomic front surface of the ProTop™ gives you more leg room for maximum comfort.



#### DOUBLE-RIVET STEP CONSTRUCTION

Each step is secured with six solid, large-headed rivets for maximum strength. This feature gives your ladder 30% greater shear strength than solid aluminum rivets.



#### REINFORCEMENT PLATES

Another level of security for spreader braces, these Reinforcement Plates add extra strength to your ladder.



#### FULL METAL BOOT™

Extra-heavy-duty cast aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.



#### HEAVY-DUTY GUSSET BRACING

All our gussets are created with heavy-duty steel. The gussets are added to angle back braces and steps for extra support.



#### HEAVY-GAUGE METAL TOP

A metal tool tray top attached to the front rails of your ladder with four rivets, a shoulder bolt and nut-on-top hinge.



### SHOX™

SHOX™ is a side rail impact absorption system that reduces damage to the lowest, first step of your ladder. This helps prolong the life of the ladder.

Pair SHOX™ with our DaBoot™ rail protection feature for total security and defense against wear and tear from normal use.



#### INSIDE SPREADER BRACES

Spreader braces are mounted inside the fiberglass rails of your ladder to help protect braces from getting hooked or damaged in transit.



#### SLIP-RESISTANT RUBBER FEET

Angled, aluminum feet with a thick rubber tread on all four legs give you the security of sure footing.



#### MOLDED PAIL SHELF

Our optional Molded Pail Shelf features a variety of tool slots, a drill slot, and can securely hold a paint tray or any shape of paint bucket.



#### WIDE BACK BRACES

Vertically-mounted, U-shaped back braces provide maximum stability and discourage unsafe climbing. The bottom back brace provides heavy-duty strength to the ladder base.

**PRODUCT FEATURES**

**EXTENSION LADDERS**



**ALUMINUM PLATE CONNECTION RUNGS**

Tempered aluminum rungs are hydraulically double-crimped to an aluminum plate. Each plate is fastened to the ladder's rails with four aluminum rivets.



**CAST-ALUMINUM RAIL END CAPS**

Our rail ends (on 1200HD Series, and AE1660) feature extra-heavy-duty cast-aluminum caps to give your ladder the protection and durability needed for longevity.



**D-SHAPED RUNGS**

The flat top, D-shaped rung provides a greater standing area than round rungs. They are fully serrated to give you a slip-resistant standing surface.

**RUNG-TO-RAIL DIRECT CONNECTION**

The ladder's rung passes through a punched hole in the rail, and is hydraulically crimped on both sides to form a tight, twist-resistant connection. Unlike other systems, this method does not rely on separate rivets, brackets, or sleeves to connect to the rail. Rather than being dependent on small-diameter rivets, the rung is permanently connected to and supported by the rail, giving your extension ladder rigidity and stability.



**MODIFIED I-BEAM**

Side rails are full 3" extrusions shaped into a modified I-beam for lightweight strength. Interlocking rails keep fly and base sections from separating.




**OUTSIDE SLIDE GUIDES**

Two extra-heavy-duty outside slide guides are secured to the top of your extension ladder's base section with four rivets per guide. Protects you from overextending fly section.



**PROGRIP™**

Get a grip on your task! ProGrip's™ slip-resistant tread is integrated onto your ladder caps. This protects your support surface from damage. ProGrip™ includes easy-carry hand grips for your convenience.



**PROTOP™**

A multifunctional top designed to increase productivity. Featuring: corner grip, pole grip, integrated bumper, and work tray; all compact and accessible in a spacious design.



**QUICKLATCH®**

QuickLatch® Equipped RungLock provides a simple, intuitive method of securing the fly and base sections of your ladder when extended. You can operate QuickLatch® with one finger!



**DOUBLE ROPE & PULLEY**

All aluminum double pulley systems come with a rot-resistant manila rope for excellent performance in any conditions.



**FULL I-BEAM**

Side rails are extra-heavy-duty 3" I-beam extrusions for maximum strength.



**FULL METAL BOOT™**

Extra-heavy-duty cast aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.



**MAR-RESISTANT RAIL END CAPS**

All of our rail ends (on applicable products) feature impact-resistant caps that prevent work surfaces from marring and give you the protection and durability needed for longevity.



**ROUND RUNGS**

Round, tempered aluminum rungs are fully serrated for a slip-resistant surface. Each rung end is hydraulically double-crimped to your ladder's side rail.



**RUBBER FLY-SECTION SHOES**

Your extension ladder's fly section (on AE2800) is equipped with solid rubber end-cap shoes so you can use the fly section separately as a single ladder.



**STACKED ALUMINUM I-BEAM RAIL**

Extra-heavy-duty slide guides are secured to the top of your extension ladder's base section with four rivets per guide. (AE2800 Series only)



**SWIVEL SAFETY SHOES**

Heavy-duty steel plated shoes with thick rubber tread. The shoe can be used with the tread down or in a spiked position.

FS1106HD



ANSI  
Type IAA Stepladder  
American National Standard  
ANSI A14.5



TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FS1100HD**

**FIBERGLASS  
STEP  
LADDER**

FS1306HD



ANSI  
Type IAA Stepladder  
American National Standard  
ANSI A14.5



TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FS1300HD**

**FIBERGLASS  
STEP  
LADDER**



- 1 Molded top with recessed tray
- 2 Extra-heavy duty inside spreader braces
- 3 Heavy duty reinforcement plates
- 4 Double-rivet step construction with heavy-duty gusset bracing
- 5 SHOX™—superior impact absorption
- 6 Full Metal Boot™



- 1 Heavy-gauge metal top
- 2 Inside spreader braces
- 3 Double-rivet step construction
- 4 Heavy-duty gusset bracing
- 5 Slip-resistant boot

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1104HD	4'	3"	20 3/4"	28 1/2"	19	4.2'
FS1106HD	6'	3"	24"	42"	27	7.4'
FS1108HD	8'	3"	27 3/4"	52 3/4"	36	11.4'
FS1110HD	10'	3"	31"	64 3/4"	45	15.9'
FS1112HD	12'	3"	34 3/4"	76 1/4"	56	20.4'

Add suffix -SS1 to model number for optional molded Pail Shelf. Available on all sizes and most step models.

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1304HD	4'	3"	18 3/4"	29 1/4"	15	3.7
FS1305HD	5'	3"	20 3/4"	34 3/4"	18	4.6'
FS1306HD	6'	3"	21 3/4"	41 1/4"	21	6.5'
FS1308HD	8'	3"	24 3/4"	54"	28	9.7'
FS1310HD	10'	3"	27 3/4"	66 1/4"	40	13.8'
FS1312HD	12'	3"	31"	77"	41	18.4'

FS1406HD



ANSI  
Type IAA  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FS1400HD**

FIBERGLASS  
**STEP  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

L-3016-06



ANSI  
Type IA  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS


SERIES  
**L-3016**

FIBERGLASS  
**STEP  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 ProTop™—versatile and durable
- 2 Inside spreader braces
- 3 Wide back braces
- 4 Riveted step construction with gussets
- 5 SHOX™—superior impact absorption
- 6 DaBoot™—Patent #7,000,731 B2

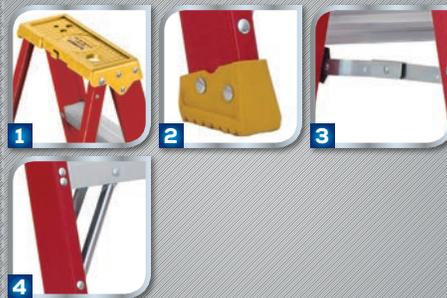

- 1 Molded top with handyman's tool slots
- 2 Slip-resistant boot
- 3 Inside spreader braces
- 4 Heavy-duty gusset bracing

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1403HD	3'	3"	17 3/4"	23 3/4"	12	2.6'
FS1404HD	4'	3"	19 3/4"	28"	15	3.7'
FS1405HD	5'	3"	20 3/8"	34 1/4"	17	5'
FS1406HD	6'	3"	22 1/2"	39 3/8"	21	6.4'
FS1407HD	7'	3"	24 1/8"	46 13/16"	25	7.5'
FS1408HD	8'	3"	25 1/8"	52 1/2"	26	9.5'
FS1410HD	10'	3"	28 3/4"	65"	42	13.6'
FS1412HD	12'	3"	38 3/8"	76 1/2"	53	21.8'

Add suffix -S51 to model number for optional molded Pail Shelf. Available on all sizes and most step models

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3016-04	4'	3"	19"	28 3/4"	14	1.8'
L-3016-06	6'	3"	21 1/4"	40 3/8"	18	5.2'
L-3016-08	8'	3"	24 3/4"	52 1/2"	26	8'
L-3016-10	10'	3"	28"	64 3/8"	36	11.3'
L-3016-12	12'	3"	31"	77"	47	15'

SERIES

# FS1500

**FIBERGLASS  
STEP  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



FS1506

**ANSI**  
Marked to conform to requirements of American National Standards Institute ANSI A14.5



**OSHA**



**ProTop™** – versatile and durable



Wide back braces



Inside spreader braces



Double-rivet step construction



**SHOX™** – superior impact absorption



**DaBoot™** – Patent #7,000,731 B2

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1502*	2'	3"	17"	18 1/4"	8	2'
FS1503	3'	3"	18"	24 3/4"	11	2.8'
FS1504	4'	3"	19 3/8"	28 3/4"	14	3.9'
FS1505	5'	3"	21"	35"	17	5.3'
FS1506	6'	3"	22 3/8"	40 1/2"	20	6.7'
FS1507	7'	3"	24"	46 3/8"	22	8.2'
FS1508	8'	3"	25 3/8"	53"	26	10'
FS1510	10'	3"	28 1/2"	65"	29	14.1'
FS1512	12'	3"	31 3/8"	77"	46	18.5'

ALSO AVAILABLE

## FS1502 FOLDING STEP STOOL



\*FS1502 is a folding step stool and is not equipped with the ProTop or molded pail shelf. Add suffix -SS1 to model number for optional molded Pail Shelf. Not available on model FS1502.

SERIES

**FS2000**

**FIBERGLASS  
STEP  
LADDER**



FS2006

**ANSI**  
Safety Standard for Ladders  
ANSI A14.5



**ProTop™** – versatile and durable



Pinch-resistant spreader braces



Double-rivet step construction



**SHOX™** – superior impact absorption



Slip-resistant boot



Molded pail shelf (OPTIONAL)



**FS2002  
FOLDING  
STEP  
STOOL**

ALSO AVAILABLE

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS2002*	2'	3"	17"	18 1/4"	7	2.1'
FS2004	4'	3"	19 1/4"	28 1/4"	12	4'
FS2005	5'	3"	20 3/4"	34 1/4"	14	5.4'
FS2006	6'	3"	22 1/4"	40 1/4"	17	6.9'
FS2007	7'	3"	23 3/4"	46"	19	8.6'
FS2008	8'	3"	25 1/4"	52"	23	10.5'

\*FS2002 is a folding step stool and is not equipped with the ProTop or molded pail shelf. Add suffix -S51 to model number for optional molded Pail Shelf. Not available on model FS1002.

SERIES

# FS4000

**FIBERGLASS  
STEP  
LADDER**



**FS4006**



**ANSI**  
American National Standards Institute  
ANSI A14.5



**OSHA**  
Occupational Safety and Health Administration



**ProTop™** – versatile and durable



Pinch-resistant spreader braces



**SHOX™** – superior impact absorption



Slip-resistant boot



Molded pail shelf (OPTIONAL)

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS4004	4'	3"	19 1/8"	28 1/4"	11	3.3'
FS4005	5'	3"	20 5/8"	34 1/8"	13	4.5'
FS4006	6'	3"	22 1/8"	40 1/8"	16	5.8'
FS4007	7'	3"	23 5/8"	46"	19	7.1'
FS4008	8'	3"	25 1/4"	52"	21	8.7'

\*ProTop does not have magnet feature on FS4000 series  
Add suffix -S51 to model number to order optional Molded Pail Shelf

FM1106HD



ANSI  
Full Duty Ladders  
of Fiberglass Reinforced Plastic  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

FM1406HD



ANSI  
Full Duty Ladders  
of Fiberglass Reinforced Plastic  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FM1100HD**

FIBERGLASS  
**TWIN FRONT  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

SERIES  
**FM1400HD**

FIBERGLASS  
**TWIN FRONT  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials



- 1 Heavy-gauge steel hinges
- 2 Inside spreader braces
- 3 Reinforcement plates
- 4 Double-rivet step construction with heavy-duty gusset bracing
- 5 SHOX™—superior impact absorption
- 6 Full Metal Boot™



- 1 Heavy-gauge steel hinges
- 2 Inside spreader braces
- 3 Heavy-duty gusset bracing
- 4 Riveted step construction
- 5 SHOX™—superior impact absorption
- 6 DaBoot™—Patent #7,000,731 B2

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1104HD	4'	3"	21 1/2"	38 3/4"	28	5.5'
FM1106HD	6'	3"	24 3/4"	53 3/4"	32	9.5'
FM1108HD	8'	3"	28 3/4"	68 1/4"	48	14.5'
FM1110HD	10'	3"	31 1/2"	83 1/4"	64	20.2'
FM1112HD	12'	3"	35 1/2"	97 1/4"	78	26.9'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1404HD	4'	3"	19 3/4"	38 3/4"	19	4.7'
FM1405HD	5'	3"	20 7/8"	46 1/2"	23	6.4'
FM1406HD	6'	3"	22 1/2"	54"	26	8.3'
FM1407HD	7'	3"	23 7/8"	61"	32	10.1'
FM1408HD	8'	3"	25 3/4"	68 1/2"	38	12.3'
FM1410HD	10'	3"	28 3/4"	83 1/4"	54	17.1'
FM1412HD	12'	3"	31 1/2"	97 1/4"	75	23.1'
FM1414HD*	14'	3"	34 1/2"	113 3/4"	80	29.1'
FM1416HD*	16'	3"	37 3/4"	129"	87	36'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

L-3431-06MR



ANSI  
Type IAA  
ANSI A14.5

OSHA  
REQUIREMENTS

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**L-3431-MR**

**FIBERGLASS  
TWIN FRONT  
MRI LADDER**

FM1506



ANSI  
Type IA  
ANSI A14.5

OSHA  
REQUIREMENTS

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FM1500**

**FIBERGLASS  
TWIN FRONT  
LADDER**



- 1 Heavy-gauge aluminum hinges
- 2 Aluminum spreader braces
- 3 Aluminum riveted step construction
- 4 Heavy duty aluminum gusset bracing
- 5 DaBoot™ – Patent #7,000,731 B2



- 1 Heavy-gauge steel hinges
- 2 Inside spreader braces
- 3 Double-rivet step construction
- 4 SHOX™ – superior impact absorption
- 5 DaBoot™ – Patent #7,000,731 B2

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3431-06MR	6'	3"	23"	53 1/2"	26	7.9'
L-3431-08MR	8'	3"	26"	67 1/2"	34	11.4'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.



MR Conditional

Non-clinical testing demonstrated that these products are MR Conditional and can be used in the MRI environment according to the following conditions:  
 ▶ Static magnetic field of 3-Tesla or less  
 ▶ Spatial gradient magnetic field of 720-Gauss/cm or less

**IMPORTANT NOTE:** This product is intended for use inside the MRI environment (in the MR system room, close to the scanner). However, this ladder is NOT intended to be used directly inside of the MR system itself (for example, inside of the bore of the scanner). As such, the assessment of magnetic field interactions for this product specifically involved a qualitative evaluation of translational attraction in relation to exposure to a 3-Tesla MR system.

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1503	3'	3"	17 3/4"	31"	15	3.2'
FM1504	4'	3"	18 3/4"	37 7/8"	19	4.5'
FM1505	5'	3"	21"	45 1/2"	22	6.3'
FM1506	6'	3"	22 1/2"	53 3/4"	26	8.2'
FM1507	7'	3"	24 1/4"	60 3/4"	30	10.3'
FM1508	8'	3"	25 1/4"	68 3/8"	35	12.2'
FM1510	10'	3"	27 3/4"	83 7/8"	44	16.8'
FM1512	12'	3"	31 3/4"	98 1/8"	62	22.9'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.



Heavy-gauge steel hinges



Pinch-resistant spreader braces



Double-rivet step construction



Steel gusset bracing



Angled aluminum slip-resistant rubber feet



SERIES

**FM2000**

**FIBERGLASS  
STEP  
LADDER**

TYPE I  
**250 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**FS2008**


**ANSI**  
For a complete listing of products that meet the requirements of ANSI A14.5




**FM2006**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM2004	4'	3"	19 1/4"	37 1/2"	17	4.7'
FM2006	6'	3"	24"	52 1/2"	24	9'
FM2008	8'	3"	23 3/4"	67 1/4"	34	11.8'
FM2010	10'	3"	28"	82"	45	17.4'
FM2012	12'	3"	30 3/4"	97 1/2"	55	23'

FMP1504-4C

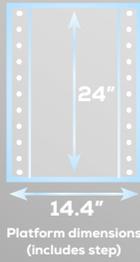

FMP2004

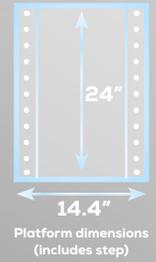

ANSI  
SAFETY STANDARD  
FOR PORTABLE LADDERS  
ANSI A14.5

MEETS  
OSHA  
REQUIREMENTS

ANSI  
SAFETY STANDARD  
FOR PORTABLE LADDERS  
ANSI A14.5

MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FMP1500**

FIBERGLASS  
**TWIN FRONT  
PLATFORM LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FMP2000**

FIBERGLASS  
**TWIN FRONT  
PLATFORM LADDER**

TYPE I  
**250 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Top rail guard
- 2 Gapless, slip-resistant platform
- 3 Heavy-gauge steel hinge
- 4 Double-rivet step construction
- 5 DaBoot™ – Patent #7,000,731 B2
- 6 Heavy-duty casters (on -4C models only)



- 1 Top rail guard
- 2 Gapless, slip-resistant platform
- 3 Heavy-gauge steel hinge
- 4 Double-rivet step construction
- 5 DaBoot™ – Patent #7,000,731 B2
- 6 Heavy-duty casters (on -4C models only)


MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)		APPROX. CUBES
					STANDARD MODEL	-4C MODEL	
FMP1504	3' 10"	3"	25 3/4"	53 3/4"	30	38	9.7'
FMP1506	5' 8"	3"	28 3/4"	69 1/2"	41	49	14.4'
FMP1508	7' 7"	3"	31 3/4"	85"	59	66	19.9'
FMP1510	9' 6"	3"	34 3/4"	100 1/4"	72	79	26.2'

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)		APPROX. CUBES
					STANDARD MODEL	-4C MODEL	
FMP2002	1' 11"	3"	22 1/4"	39"	21.9	29.3	5.7'
FMP2003	2' 10"	3"	23 3/4"	46 1/4"	25.1	32.6	7.6'
FMP2004	3' 10"	3"	25 3/4"	54 1/4"	28.6	36.1	9.7'
FMP2006	5' 8"	3"	28 3/4"	69 1/2"	36.2	43.7	14.4'
FMP2008	7' 7"	3"	31 3/4"	85"	48.7	64.6	19.8'

Add suffix -4C to FMP1500 model numbers to indicate 4-caster model. All casters are 3" size. Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

Add suffix -4C to FMP2000 model numbers to indicate 4-caster model. All casters are 3" size. Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

FS1104HD

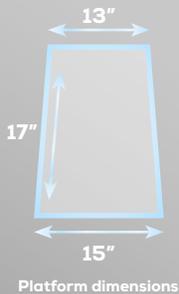


ANSI  
Type I Commercial  
Step Ladders  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

FP1404HD

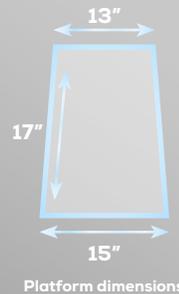

ANSI  
Type I Commercial  
Step Ladders  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FP1100HD**

**FIBERGLASS  
PLATFORM  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FP1400HD**

**FIBERGLASS  
PLATFORM  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Top rail guard
- 2 Slim, gapless slip-resistant platform
- 3 Double-rivet step construction
- 4 Heavy-duty gusset bracing
- 5 SHOX™—superior impact absorption
- 6 Full Metal Boot™



- 1 Top rail guard
- 2 Slim, gapless slip-resistant platform
- 3 Riveted step construction
- 4 Heavy-duty gusset bracing
- 5 SHOX™—superior impact absorption
- 6 DaBoot™—Patent #7,000,731 B2

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FP1104HD	3' 10"	3"	24 3/4"	40 1/4"	25	4.9'
FP1106HD	5' 8"	3"	27 3/4"	52 3/4"	36	8.3'
FP1108HD	7' 7"	3"	30 1/4"	65"	49	11.9'
FP1110HD*	9' 6"	3"	33 3/4"	75 1/2"	61	16.6'
FP1112HD*	11' 5"	3"	36 1/4"	82 1/2"	73	21.6'

\*Special duty: manufacturer tested to 375 lbs.


MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FP1403HD	2' 10"	3"	23 3/4"	38 3/4"	19	5.9'
FP1404HD	3' 9"	3"	24 3/4"	44 3/4"	21	7.4'
FP1405HD	4' 9"	3"	26 3/4"	50"	24	9.1'
FP1406HD	5' 8"	3"	27 3/4"	56"	27	11'
FP1408HD	7' 7"	3"	30 3/4"	67 3/4"	41	15.3'
FP1410HD*	9' 6"	3"	33 3/4"	79 3/4"	57	20'
FP1412HD*	11' 5"	3"	36 3/4"	91 1/2"	68	25.3'

\*Special duty: manufacturer tested to 375 lbs.

SERIES

**FXP1800HD**

**FIBERGLASS  
PRO  
PLATFORM  
LADDER**



Platform dimensions (includes step)

**EXTENDED  
HANDRAIL**

**FOR ADDED  
SAFETY**

Front handrails are 36"-tall from top to platform.

**50%**

**LARGER  
PLATFORM  
AREA**

**FOR ADDED  
COMFORT**

Platform is 50% larger than on FPI404HD model.



**ProTop™** – versatile and durable



Wide back braces



Double-rivet step construction



**SHOX™** – superior impact absorption



**DaBoot™** – Patent #7,000,731 B2



**ANSI**  
Approved by the American National Standards Institute  
ANSI A14.5



**FXP1804HD**



MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1802HD	1' 11"	3"	21 3/4"	36"	21	8'
FXP1803HD	2' 10"	3"	23 3/4"	42"	25	10.3'
FXP1804HD	3' 10"	3"	24 3/4"	48"	27	12.8'
FXP1805HD	4' 9"	3"	26 3/8"	54 1/2"	29	15.4'
FXP1806HD	5' 8"	3"	27 3/4"	61 1/2"	36	18.3'
FXP1808HD	7' 7"	3"	30 3/4"	74"	47	24.7'
FXP1810HD*	9' 6"	3"	33 3/4"	88"	65	31.9'
FXP1812HD*	11' 5"	3"	36 3/4"	101 1/2"	76	40.1'

\*Special duty; manufacturer tested to 375 lbs.

**FXP1804HD**





**ProTop™** — versatile and durable

**30%**  
**LARGER PLATFORM AREA**  
FOR ADDED **COMFORT**

Platform is 30% larger than on FPI404HD model.



Wide back braces



Double-rivet step construction




**SHOX™** — superior impact absorption



**DaBoot™** — Patent #7,000,731 B2

**EXTENDED HANDRAIL**  
FOR ADDED **SAFETY**

Front handrails are 30"-tall from top to platform.



Platform dimensions (includes step)

SERIES

**FXP1700**

**FIBERGLASS PRO PLATFORM LADDER**



**FXP1704**



**FXP1704**

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1702	1' 11"	3"	21 1/4"	32 1/2"	18	7.1'
FXP1703	2' 10"	3"	23 1/4"	38"	22	9.3'
FXP1704	3' 10"	3"	24 3/4"	43 3/4"	24	11.7'
FXP1705	4' 9"	3"	26 1/2"	50 3/4"	27	14.3'
FXP1706	5' 8"	3"	27 3/4"	56 3/4"	30	17'
FXP1708	7' 7"	3"	30 3/4"	70"	46	23.3'
FXP1710	9' 6"	3"	33 3/4"	82 1/4"	60	30.4'
FXP1712	11' 5"	3"	36 3/4"	92"	72	38.4'

SERIES

# FP1500

**FIBERGLASS  
PLATFORM  
LADDER**



**ANSI**  
American National Standards Institute  
ANSI A14.5



FP1504



Top rail guard



Gapless, slip-resistant platform



Double-rivet step construction



**SHOX™** – superior impact absorption



**DaBoot™** – Patent #7,000,731 B2

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FP1502	1' 11"	3"	21 7/8"	28 5/8"	16	3.8'
FP1503	2' 10"	3"	23 3/8"	34 1/4"	19	5.1'
FP1504	3' 10"	3"	24 7/8"	39 7/8"	21	6.6'
FP1505	4' 9"	3"	26 1/8"	45 3/4"	25	8.1'
FP1506	5' 8"	3"	27 3/4"	52"	28	9.8'
FP1508	7' 7"	3"	30 7/8"	63 3/4"	39	13.6'
FP1510	9' 6"	3"	33 7/8"	75 1/2"	57	17.8'
FP1512	11' 5"	3"	36 7/8"	86 5/8"	68	22.8'

FP1504



# CHECK OUT THESE INDUSTRY FAVORITES

SERIES

**FXP1800HD**

**FIBERGLASS  
PRO  
PLATFORM  
LADDER**

SEE ON PAGE 20



SERIES

**FS1500**

**FIBERGLASS  
STEP  
LADDER**

SEE ON PAGE 12



AS1106HD



ANSI  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.2



SERIES  
**AS1100HD**

**ALUMINUM  
STEP  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

AS1006



ANSI  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.2



SERIES  
**AS1000**

**ALUMINUM  
STEP  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials



- 1 Molded top with recessed tray
- 2 Full set of back braces
- 3 Inside spreader braces
- 4 Double-ribose step construction
- 5 Full set of heavy-duty double gusset bracing\*
- 6 Angled aluminum slip-resistant rubber feet



- 1 Molded top with recessed tray\*
- 2 Inside spreader braces
- 3 Double-ribose step construction
- 4 Heavy-duty gusset bracing
- 5 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS1106HD	6'	3"	22 1/2"	40"	22	6.3'
AS1108HD	8'	3"	25 3/4"	53"	30	9.8'
AS1110HD	10'	3"	28 3/4"	64 1/2"	37	13.6'
AS1112HD	12'	3"	31 3/4"	75 3/4"	46	18.1'

\*AS1110HD and AS1112HD only

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS1003	3'	3"	18 1/2"	24"	11	2.6'
AS1004	4'	3"	19 3/4"	30 1/2"	14	3.8'
AS1006	6'	3"	22 3/4"	42 3/4"	19	6.5'
AS1008	8'	3"	25 3/4"	55 3/4"	24	9.8'
AS1010	10'	3"	29"	68 1/2"	30	13.6'
AS1012	12'	3"	32"	81"	38	17.8'
AS1014"	14'	3 3/4"	34 1/2"	93 3/4"	60	30.6'
AS1016"	16'	3 3/4"	37 3/4"	102 3/4"	70	38.1'
AS1018"	18'	3 3/4"	40 1/4"	114 3/4"	81	45.9'
AS1020"	20'	3 3/4"	43 1/4"	126 1/2"	92	54.8'

\*Molded top only available on 3' to 12' models. 14'-20' models have aluminum top. Add suffix -S51 to model number for optional molded Pail Shelf. Not available on 14'-20' models.

SERIES

**AS3000****ALUMINUM  
STEP  
LADDER**

TYPE IA

**300 lbs**

LOAD CAPACITY

includes weight of user  
plus materials

AS3010

ANSI  
Safety Standard  
American National Standard  
ANSI A14.2OSHA  
RECOMMENDS**ProTop™** —  
versatile and durable

Molded pail shelf\*

Center-pull spreader  
braces\*\*Heavy-duty gusset  
bracingAngled aluminum  
slip-resistant rubber  
feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS3002*	2'	3"	16 1/2"	18 1/2"	6	1.5'
AS3003	3'	3"	17 1/4"	22 3/4"	11	2.9'
AS3004	4'	3"	18 1/2"	28 3/4"	13	4.1'
AS3005	5'	3"	20 1/2"	34 3/4"	15	5.5'
AS3006	6'	3"	21 1/2"	40 3/4"	17	6.9'
AS3008	8'	3"	24 3/4"	52 3/4"	22	10.5'
AS3010	10'	3"	27 1/2"	64 3/4"	29	14.5'

\*AS3002 is a folding step stool and is not equipped with the ProGrip or molded pail shelf  
 \*\*Center-pull spreader is only available on 3'-6' models—those outside spreader brace otherwise

SERIES

# AS2100

ALUMINUM  
STEP  
LADDER

TYPE I

**250 lbs**

LOAD CAPACITY

includes weight of user plus materials



AS2106

ANSI  
American National Standards Institute  
ANSI A14.2



MEETS  
OSHA  
REQUIREMENTS



ProTop™ — versatile and durable



Molded pail shelf



Pinch-resistant spreader braces



Steel gusset bracing



Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS2104	4'	3"	18"	17 3/4"	12	3.5'
AS2106	6'	3"	20 3/4"	20 1/2"	15	6.1'
AS2108	8'	3"	23 3/4"	23 1/4"	22	9'
AS2110	10'	3"	25 3/4"	64 3/4"	28	12.5'

AS2106



AS4006



ANSI  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.2



AM1106HD



ANSI  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.2



SERIES  
**AS4000**

ALUMINUM  
**STEP  
LADDER**

TYPE II  
**225 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**AM1100HD**

ALUMINUM  
**TWIN FRONT  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Molded top with handyman's tool slots
- 2 Molded pail shelf
- 3 Pinch-resistant spreader braces
- 4 Steel gusset bracing
- 5 Slip-resistant rubber feet



- 1 Heavy-gauge steel hinges
- 2 Inside spreader braces
- 3 Double-rivet step construction
- 4 Heavy-duty gusset bracing
- 5 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS4003	3'	3"	16 1/2"	21 1/4"	8	1.9'
AS4004	4'	3"	17 1/2"	27 1/2"	10	2.7
AS4005	5'	3"	19 1/2"	33 3/4"	11	3.6'
AS4006	6'	3"	20 3/4"	47 1/4"	14	4.7
AS4008	8'	3"	23 3/4"	51 1/4"	18	7.1'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AM1104HD	4'	3"	20"	38"	23	4.6'
AM1106HD	6'	3"	23"	53 1/2"	31	7.8'
AM1108HD	8'	3"	24 1/2"	69 3/4"	42	11.6'
AM1110HD	10'	3"	28 1/2"	84 3/4"	52	16.3'
AM1112HD	12'	3"	31 1/4"	99 3/4"	68	25'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

L-2431-06MR



**ANSI**  
Rated to exceed the requirements of American National Standards Institute ANSI A14.2

**OSHA**  
SAFETY

**WARNING**  
AVOID CONTACT WITH ELECTRICAL

TYPE IAA

**375 lbs**

LOAD CAPACITY

includes weight of user plus materials

SERIES  
**L-2431-MR**

**ALUMINUM TWIN FRONT MRI LADDER**

AM1006



**ANSI**  
Rated to exceed the requirements of American National Standards Institute ANSI A14.2

**OSHA**  
SAFETY

**WARNING**  
AVOID CONTACT WITH ELECTRICAL

TYPE IA

**300 lbs**

LOAD CAPACITY

includes weight of user plus materials

SERIES  
**AM1000**

**ALUMINUM TWIN FRONT LADDER**



- 1 Heavy-gauge aluminum hinges
- 2 Aluminum spreader braces
- 3 Aluminum riveted step construction
- 4 Heavy duty aluminum gusset bracing
- 5 DaBoot™ – Patent #7,000,731 B2



- 1 Heavy-gauge steel hinges
- 2 Double-rivet step construction
- 3 Inside spreader braces
- 4 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2431-06MR	6'	3"	23"	53 1/2"	24	8.5'
L-2431-08MR	8'	3"	26"	67 1/2"	33	12.5'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AM1003	3'	3"	18 3/4"	31 3/4"	14	3.3'
AM1004	4'	3"	19 3/4"	38 3/4"	17	4.8'
AM1005	5'	3"	21 3/4"	46"	20	6.4'
AM1006	6'	3"	22 3/4"	54"	24	8.2'
AM1008	8'	3"	25 3/4"	67 3/4"	32	12.4'
AM1010	10'	3"	28 3/4"	82 3/4"	40	17.6'
AM1012	12'	3"	31 3/4"	96"	58	22.9'
AM1014	14'	3 3/8"	34 3/8"	114 3/4"	77	29.5'
AM1016	16'	3 3/8"	37 3/4"	130 3/4"	101	36.5'
AM1020	20'	3 3/8"	43 3/8"	166 3/4"	114	52.9'

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.



Non-clinical testing demonstrated that these products are MR Conditional and can be used in the MRI environment according to the following conditions:  
 > Static magnetic field of 3-Tesla or less  
 > Spatial gradient magnetic field of 720-Gauss/cm or less


**IMPORTANT NOTE:** This product is intended for use inside the MRI environment (in the MR system room, close to the scanner). However, this ladder is NOT intended to be used directly inside of the MR system itself (for example, inside of the bore of the scanner). As such, the assessment of magnetic field interactions for this product specifically involved a qualitative evaluation of translational attraction in relation to exposure to a 3-Tesla MR system.

Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

SERIES

**AMP1000**

**ALUMINUM  
TWIN FRONT  
PLATFORM  
LADDER**




AMP1004-4C

ANSI  
TYPE I A LADDER  
COMPLYING WITH  
ANSI A14.2

MEETS  
OSHA  
REQUIREMENTS

MEETS  
CONSTRUCTION  
SAFETY  
REQUIREMENTS



Top rail guard



Gapless, slip-resistant platform



Heavy-gauge steel hinge



Double-rivet step construction



DaBoot™—  
Patent #7,000,731 B2



Heavy-duty casters  
(ON -4C MODELS ONLY)

ALSO  
AVAILABLE




**AMP1002**  
FOLDING  
STEP  
STOOL

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	STANDARD MODEL	APPROX. WEIGHT (LBS) -4C MODEL	APPROX. CUBES
AMP1002*	2'	3"	22 3/4"	38 3/4"	20	27	5.8'
AMP1004	3' 10"	3"	25 1/2"	53 3/4"	26	34	9.7
AMP1006	5' 8"	3"	28 1/2"	69 1/2"	37	45	14.4'
AMP1008	7' 7"	3"	31 1/2"	85"	53	60	19.7'
AMP1010	9' 6"	3"	34 3/4"	100 1/4"	66	76	25.6'

Add suffix -4C to AMP1000 model numbers to indicate 4-caster model. All casters are 3" size. Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.

AP1104HD

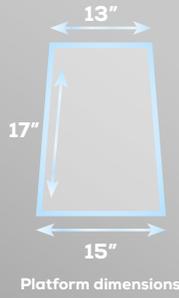

ANSI  
Meets or exceeds requirements  
of American National Standard  
ANSI A14.2



OSHA  
RECOMMENDED




SERIES  
**AP1100HD**

**ALUMINUM  
PLATFORM  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

AP1004

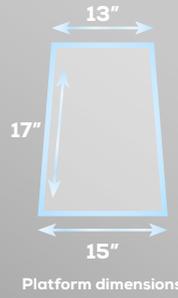

ANSI  
Meets or exceeds requirements  
of American National Standard  
ANSI A14.2



OSHA  
RECOMMENDED



SERIES  
**AP1000**

**ALUMINUM  
PLATFORM  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Top rail guard
- 2 Slim, gapless, slip-resistant platform
- 3 Double-riquet step construction
- 4 Heavy-duty gusset bracing
- 5 Angled aluminum slip-resistant rubber feet




- 1 Top rail guard
- 2 Slim, gapless, slip-resistant platform
- 3 Double-riquet step construction
- 4 Heavy-duty gusset bracing
- 5 Angled aluminum slip-resistant rubber feet

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP1104HD	3' 10"	3"	24 3/4"	40 1/4"	22	6.7
AP1106HD	5' 8"	3"	27 3/4"	51 1/4"	29	10.1
AP1108HD	7' 7"	3"	30 3/4"	62 1/4"	38	13.9

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP1002	1' 11"	3"	21 1/4"	28 3/4"	18	3.9
AP1003	2' 10"	3"	22 3/4"	34 1/4"	19	5
AP1004	3' 10"	3"	24 3/4"	40 1/4"	20	6.3
AP1005	4' 9"	3"	25 3/4"	45 3/4"	23	7.8
AP1006	5' 8"	3"	27 3/4"	51 1/4"	27	9.5
AP1008	7' 7"	3"	30 3/4"	62"	35	13.2
AP1010	9' 6"	3"	33 3/4"	75 1/4"	46	17.4
AP1012	11' 5"	3 1/4"	36 3/4"	89 1/4"	64	24.8
AP1014	13' 4"	3 1/4"	39 3/4"	101"	75	30.7
AP1016	15' 3"	3 1/4"	42 3/4"	112 1/4"	84	37.1

AP5006



Platform dimensions

**ANSI**  
2018 compliance  
 of new standards  
 ANSI A14.2

**SP**

**OSHA**  
RECOGNIZED

**ALUMINUM CASTERS  
 ACTIVATED**

SERIES  
**AP5000**

**ALUMINUM  
 MOBILE PLATFORM  
 LADDER**

TYPE IA

**300 lbs**

LOAD CAPACITY

includes weight of user  
 plus materials



- 1 Top rail guard
- 2 Handrails
- 3 Slip-resistant platform
- 4 Double-rivet step construction
- 5 Heavy-duty gusset bracing
- 6 **BODYWEIGHT**  
ACTIVATED CASTER TECHNOLOGY

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP5004	3' 10"	3"	25 1/2"	44"	42	14.9'
AP5006	5' 8"	3"	27 1/4"	55 1/4"	56	21.2'
AP5008	7' 7"	3"	30 1/4"	67 1/4"	68	29.4'
AP5010	9' 6"	3"	32 5/8"	79 1/2"	82	38'

All casters are 3" size.

L-3433-02



SERIES  
**L-3433**

**FIBERGLASS  
TWIN FRONT  
STEP STOOL**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Heavy gauge steel hinges
- 2 Double-rivet step construction
- 3 Heavy-duty gusset bracing
- 4 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3433-02	2'	3"	21 1/4"	23"	11	2.5'

Each side of the L-3433-02 model supports the weight of one person plus materials—up to 375lbs per side.

FY8002



SERIES  
**FY8000**

**FIBERGLASS  
INDUSTRIAL  
STEP STAND**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Large molded top
- 2 Large aluminum steps
- 3 Double-rivet step construction
- 4 Heavy-duty gusset bracing
- 5 Optional casters (555) and handle (556)\*\*

MODEL	HEIGHT TO TOP STEP	TOP SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FY8001	1'	14" x 9 1/4"	6"	14 7/8"	15 1/2"	8	1.8'
FY8002	1' 11"	14" x 9 1/4"	6"	17 3/8"	20 1/2"	13	2.6'
FY8003	2' 09"	14" x 9 1/4"	6"	19 1/2"	26 1/2"	17	4.4'

\*Casters (555) and handle (556) option not available for FY8001 model  
\*\*To purchase FY8002 with both options (casters and handle), use suffix FY8002-S55556

L-3041-03



SERIES  
**L-3041**

**FIBERGLASS  
MINI WORKING  
PLATFORM**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 12" wide slip-resistant standing surface
- 2 Easy-use locking hinge
- 3 Durable non-conductive fiberglass rails
- 4 Slip-resistant rubber feet

MODEL	HEIGHT TO PLATFORM	WORK AREA	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3041-03	2' 10"	12" x 37 1/4"	16 1/4"	46 1/4"	13	2.1

L-2433-02



SERIES  
**L-2433**

**ALUMINUM  
TWIN FRONT  
STEP STOOL**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Heavy gauge steel hinges
- 2 Double-rivet step construction
- 3 Heavy-duty gusset bracing
- 4 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2433-02	2'	3"	21"	23"	10.6	2'

Each side of the L-2433-02 model supports the weight of one person plus materials—up to 375lbs per side.

AY8002



SERIES  
**AY8000**

**ALUMINUM  
INDUSTRIAL  
STEP STAND**

**TYPE IA**  
**300 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials

L-2241-03



SERIES  
**L-2241**

**ALUMINUM  
MINI WORKING  
PLATFORM**

**TYPE II**  
**225 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials



- 1 Large molded top
- 2 Large aluminum steps
- 3 Double-rievet step construction
- 4 Heavy-duty gusset bracing
- 5 Optional casters (555) and handle (556)\*\*



- 1 Slip-resistant surface
- 2 Easy-use locking hinge
- 3 Slip-resistant rubber feet

MODEL	HEIGHT TO TOP STEP	TOP SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AY8001	1'	14" x 9 1/4"	6"	15 9/16"	15 3/8"	8	12'
AY8002	1' 11"	14" x 9 1/4"	6"	17 3/4"	20 1/2"	13	2.6'
AY8003	2' 9"	14" x 9 1/4"	6"	19 1/4"	26 1/4"	17	4.3'

MODEL	HEIGHT TO PLATFORM	WORK AREA	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2241-03	1' 9"	12" x 37 1/4"	16 1/4"	47 7/8"	11	2.4'

\*Casters (555) and handle (556) option not available for AY8001 model  
\*\*To purchase AY8002 with both options (casters and handle), use suffix AY8002-55556

AP8005



SERIES  
**AP8000**

**ALUMINUM  
STEP  
LADDER**

TYPE III  
**200 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials

L-2346-04



SERIES  
**L-2346**

**ALUMINUM  
EURO PLATFORM  
LADDER**

TYPE III  
**200 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials



- 1 Top rail guard
- 2 Slip-resistant platform
- 3 Riveted step construction
- 4 Heavy-duty gusset bracing
- 5 Slip-resistant rubber feet



- 1 Top rail guard
- 2 Slip-resistant platform
- 3 Heavy-duty gusset bracing
- 4 Slip-resistant rubber feet

MODEL	HEIGHT TO PLATFORM	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP8004	3' 10"	18 3/4"	24 1/2"	7	1.7
AP8005	4' 9"	20 1/4"	33 1/4"	10	2.2'

MODEL	HEIGHT TO PLATFORM	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2346-02	1' 11"	17 1/2"	21 1/4"	8	2'
L-2346-03	2' 10"	18 1/2"	32"	9	2.7'
L-2346-04	3' 10"	19 3/4"	38 3/4"	11	3.4'

FE4220HD



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FE4000HD**

**FIBERGLASS  
EXTENSION  
LADDER**

FE3110



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FE3100**

**FIBERGLASS  
SINGLE  
LADDER**



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 Aluminum rung connector plates
- 4 QuickLatch™ – Patent #5429207
- 5 Aluminum swivel safety shoes with Full Metal Boot™



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Steel swivel safety shoes with metal shield
- 4 Direct rung - rail connection

D-RUNG MODELS	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE4216HD*	16'	8'	13'	41	7.2'
FE4220HD	20'	10'	17'	50	8.9'
FE4224HD	24'	12'	21'	58	10.6'
FE4228HD	28'	14'	25'	67	12.3'
FE4232HD	32'	16'	29'	81	14'

ROUND RUNG MODELS	FE4620HD	FE4624HD*	FE4628HD*	FE4632HD
APPROX. WEIGHT (LBS)	48	56	64	73

RAIL DEPTH	16'-28' models	
	32' model	3 3/4" / 3 7/8"
STACK HEIGHT	16'-28' models	
	32' model	6" / 6 7/8"
INSIDE WIDTH	BASE	FLY
	15 5/8"	13 7/16"
OUTSIDE WIDTH	BASE	FLY
	17 3/4"	16 1/4"

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3108	8'	16	4.3'
FE3110	10'	21	5.4'
FE3112	12'	25	6.4'
FE3114	14'	28	7.4'
FE3116	16'	37	8.5'
FE3118	18'	41	9.5'
FE3120*	20'	49	10.6'

INSIDE WIDTH	8'-14' models	
	16'-20' models	3 1/4" / 3 3/8"
RAIL DEPTH	8'-14' models	14 1/16"
	16'-20' models	15 5/16"
OUTSIDE WIDTH	8'-14' models	17 1/16"
	16'-20' models	17 1/16"

\*D-shaped or round rungs

\*Does not include rope and pulley  
\*\*Special order item

FE3220



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FE3200**

FIBERGLASS  
EXTENSION  
LADDER

L-3022-20PT



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**L-3022-PT**

FIBERGLASS  
EXTENSION  
LADDER



ProTop™ –  
versatile and durable



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Steel swivel safety shoes with metal shield
- 6 Direct rung - rail connection



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Steel swivel safety shoes with metal shield
- 6 Direct rung - rail connection

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3216*	16'	8'	13'	31	7.8'
FE3220	20'	10'	17'	42	9.6'
FE3224	24'	12'	21'	51	11.5'
FE3228	28'	14'	25'	60	13.4'
FE3232	32'	16'	29'	67	16.2'
FE3236	36'	18'	32'	84	15.8'
FE3240	40'	20'	35'	92	17.5'

RAIL DEPTH		STACK HEIGHT	
16'-28' models	3 1/4"	16'-28' models	6 1/4"
32' model	3 3/4"	32'-40' models	6 3/4"
36'-40' models	3 1/2"		
INSIDE WIDTH		BASE	FLY
16'-28' models	14 1/8"	13 1/8"	14 3/8"
32'-40' model	15 5/8"		
OUTSIDE WIDTH		BASE	FLY
16'-28' models	17 1/8"	16 1/8"	
32'-40' model	18 3/4"	16 1/8"	

\*Does not include rope and pulley

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	42	8'
L-3022-24PT	24'	12'	21'	51	9.5'
L-3022-28PT	28'	14'	25'	60	11'
L-3022-32PT	32'	16'	29'	67	12.9'

RAIL DEPTH		STACK HEIGHT	
20'-28' models	3 1/4"	16'-28' models	6 1/4"
32' model	3 3/4"	32'-40' models	6 3/4"
INSIDE WIDTH		BASE	FLY
20'-28' models	14 1/8"	13 1/8"	14 3/8"
32' model	15 5/8"		
OUTSIDE WIDTH		BASE	FLY
20'-28' models	17 1/8"	16 1/8"	
32' model	18 3/4"	16 1/8"	

FE7108



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FE7100**

**FIBERGLASS  
SINGLE  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials

\*D-shaped rungs



- 1 Mar-resistant rail end caps
- 2 Aluminum rung connector plates
- 3 Aluminum swivel safety shoes with Full Metal Boot™

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7108	8'	17	4.8'
FE7110	10'	22	5.9'
FE7112	12'	28	7
FE7114	14'	31	8.2'
FE7116	16'	36	9.3'
FE7118	18'	50	10.4'
FE7120	20'	54	11.6'

RAIL DEPTH  
3 1/4"

INSIDE WIDTH  
15"

OUTSIDE WIDTH  
17 3/8"

FE7220



ANSI  
American National Standards Institute  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FE7200**

**FIBERGLASS  
EXTENSION  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials

\*D-shaped rungs



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 Aluminum rung connector plates
- 4 QuickLatch™ – Patent #5429207
- 5 Aluminum swivel safety shoes with Full Metal Boot™

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7216*	16'	8'	13'	32	8.1'
FE7220	20'	10'	17'	44	10'
FE7224	24'	12'	21'	53	12'
FE7228	28'	14'	25'	57	13.9'
FE7232	32'	16'	29'	74	15.8'
FE7236	36'	18'	32'	104	21'
FE7240	40'	20'	35'	124	23.3'

RAIL DEPTH  
16'-28' models: 3 1/4"  
32' model: 3 3/8"  
36'-40' models: 3 1/2"

STACK HEIGHT  
6 1/4"

INSIDE WIDTH  
BASE: 15"  
FLY: 13 3/8"

OUTSIDE WIDTH  
BASE: 17 3/8"  
FLY: 16 1/8"

\*Does not include rope or pulley

FE7512



ANSI  
Type I Commercial  
Aluminum Ladder Series  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

FE7620



ANSI  
Type I Commercial  
Aluminum Ladder Series  
ANSI A14.5



MEETS  
OSHA  
REQUIREMENTS

SERIES  
**FE7500**

FIBERGLASS  
SINGLE  
LADDER

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FE7600**

FIBERGLASS  
EXTENSION  
LADDER

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

\*Round rungs

\*Round rungs



- 1 Mar-resistant rail end caps
- 2 Aluminum rung connector plates
- 3 Aluminum swivel safety shoes with Full Metal Boot™



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 Aluminum rung connector plates
- 4 QuickLatch™ – Patent #5429207
- 5 Aluminum swivel safety shoes with Full Metal Boot™

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7508	8'	17	4.8
FE7510	10'	22	5.9
FE7512	12'	28	7'
FE7514*	14'	31	8.2'
FE7516*	16'	36	9.3'

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
3 1/4"	15"	17 3/8"

\*Special order item

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7616*	16'	8'	13'	34	8.1'
FE7620	20'	10'	17'	44	10'
FE7624	24'	12'	21'	52	12'
FE7628	28'	14'	25'	60	13.9'
FE7632	32'	16'	29'	73	15.8'
FE7636	36'	18'	32'	100	21'
FE7640	40'	20'	35'	108	23.3'

RAIL DEPTH	STACK HEIGHT
16"-28" models	3 1/4"
32" model	3 3/4"
36"-40" models	3 1/2"

INSIDE WIDTH	BASE	FLY
15 3/4"	13 1/2"	

OUTSIDE WIDTH	BASE	FLY
17 3/4"	16 1/4"	

\*Does not include rope or pulley

SERIES

# L-3025

LIGHTWEIGHT  
FIBERGLASS  
EXTENSION  
LADDER



UP TO **18%**  
LIGHTER  
than FE7228 when compared to L-3025-28 model (an extension ladder of the same size and duty rating)



L-3025-20

ANSI  
Approved by the  
American National Standards Institute  
ANSI A14.5



OSHA  
Approved



Mar-resistant rail end caps



Outside slide guides



D-shaped rungs



Direct rung - rail connection



QuickLatch™ - Patent #5429207



Steel swivel safety shoes with shield

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3025-20	20'	10'	17'	39	7.4'
L-3025-24	24'	12'	21'	45	9'
L-3025-28	28'	14'	25'	51	10.5'

RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH	BASE	FLY	OUTSIDE WIDTH	BASE	FLY
3 3/4"	6 3/4"		14 1/4"	13 3/16"		16 1/2"	15 3/16"

L-3025-20




FE1720



ANSI  
American National Standards Institute  
ANSI A14.5

OSHA  
Occupational Safety and Health Administration

FE0620

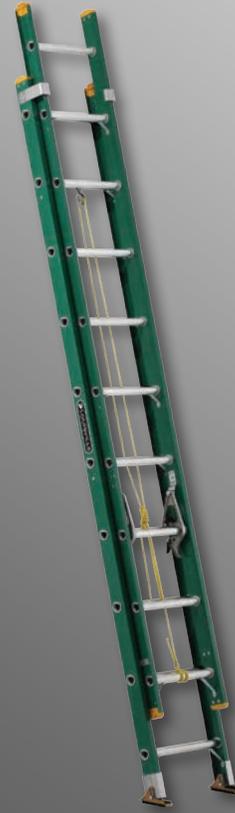

ANSI  
American National Standards Institute  
ANSI A14.5

OSHA  
Occupational Safety and Health Administration

SERIES  
**FE1700**

FIBERGLASS  
EXTENSION  
LADDER

TYPE I

**250 lbs**  
LOAD CAPACITY

Includes weight of user plus materials

SERIES  
**FE0600**

FIBERGLASS  
EXTENSION  
LADDER

TYPE II

**225 lbs**  
LOAD CAPACITY

Includes weight of user plus materials



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Steel swivel safety shoes with metal shield
- 6 Direct rung - rail connection



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Steel swivel safety shoes with metal shield
- 6 Direct rung - rail connection

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE1716*	16'	8'	13'	28	6.3'
FE1720	20'	10'	17'	43	7.8'
FE1724	24'	12'	21'	50	9.3'
FE1728	28'	14'	25'	56	10.8'

RAIL DEPTH		STACK HEIGHT			
16'-20' models	3 3/4"	3 3/4"	6 3/4"		
24'-28' models	3 3/4"	3 3/4"	6 3/4"		
INSIDE WIDTH		BASE		FLY	
16'-20' models	14 1/8"	14 1/8"	13 1/8"	13 1/8"	13 1/8"
24'-28' models	15 5/8"	15 5/8"	14 5/8"	14 5/8"	14 5/8"
OUTSIDE WIDTH		BASE		FLY	
16'-20' models	17 1/8"	17 1/8"	16 1/8"	16 1/8"	16 1/8"
24'-28' models	17 1/8"	17 1/8"	16 1/8"	16 1/8"	16 1/8"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE0616*	16'	8'	13'	28	6.9'
FE0620	20'	10'	17'	39	7.6'
FE0624	24'	12'	21'	48	9.1'
FE0628**	28'	14'	25'	53	10.6'

RAIL DEPTH		STACK HEIGHT			
3 3/4"	3 3/4"	6 3/4"	6 3/4"		
INSIDE WIDTH		BASE		FLY	
14 1/8"	14 1/8"	13 1/8"	13 1/8"	13 1/8"	13 1/8"
OUTSIDE WIDTH		BASE		FLY	
17 1/8"	17 1/8"	16 1/8"	16 1/8"	16 1/8"	16 1/8"

\*Does not include rope and pulley

\*Does not include rope and pulley  
\*\*Special order item

FE8910



SERIES  
**FE8900**

**FIBERGLASS  
MANHOLE  
LADDER**

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials

FH1006



SERIES  
**FH1000**

**FIBERGLASS  
SHELF  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
Includes weight of user plus materials



- 1 Convenient 14 1/2" -width design
- 2 Rail protectors
- 3 Rung design
- 4 Heavy duty slip-resistant shoes



- 1 Rubber bumper
- 2 Angled steps
- 3 Serrated aluminum steps
- 4 Double-rivet step construction
- 5 Heavy-duty gusset bracing
- 6 Angled aluminum slip-resistant rubber feet

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE8908	8'	17.5	2.5'
FE8910	10'	21	3.2'
FE8912	12'	24.5	3.8'
FE8914	14'	28	4.4'
FE8916	16'	34.3	5'
FE8918	18'	38.9	5.7'
FE8920	20'	43	6.3'

**RAIL DEPTH**

3 1/2"

**INSIDE WIDTH**

12 1/2"

**OUTSIDE WIDTH**

14 1/2"

MODEL	LADDER SIZE	STEP DEPTH	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FH1004	4'	3"	15 3/8"	6	1.5'
FH1005	5'	3"	15 3/8"	8	1.9'
FH1006	6'	3"	15 3/8"	9	2.4'
FH1007	7'	3"	15 3/8"	10	2.7'
FH1008	8'	3"	15 3/8"	12	3'
FH1010	10'	3"	15 3/8"	20	3.6'
FH1012	12'	3"	15 3/8"	23	4.5'
FH1014	14'	3"	15 3/8"	25	5.2'
FH1016	16'	3"	15 3/8"	29	6.1'

SERIES

**FH1500**

**FIBERGLASS  
PRO SHELF  
LADDER**



FH1506



**ProTop™** – versatile and durable



Double-rivet step construction



**SHOX™** – superior impact absorption



**DaBoot™** – Patent #7,000,731 B2




Flared bottom for stability



FH1506

MODEL	LADDER SIZE	STEP DEPTH	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FH1504	4'	3"	19 3/4"	8	3.5'
FH1506	6'	3"	22 3/4"	13	6'
FH1508	8'	3"	25 3/4"	23	9.1'

AE1220HD

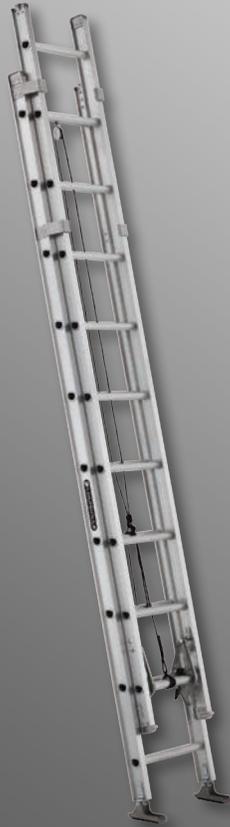

ANSI  
Rated to 300 lbs. Max. Wt. of user plus materials.  
 ANSI A14.2



TYPE IAA  
**375 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**AE1200HD**

ALUMINUM  
**EXTENSION**  
 LADDER

AE2110



ANSI  
Rated to 300 lbs. Max. Wt. of user plus materials.  
 ANSI A14.2



TYPE IA  
**300 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**AE2100**

ALUMINUM  
**SINGLE**  
 LADDER



- 1 Aluminum caps rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Full I-beam
- 6 Swivel safety shoes



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Full I-beam
- 4 Swivel safety shoes

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1216HD*	16'	8'	13'	38	7.3'
AE1220HD	20'	10'	17'	44	9.1'
AE1224HD	24'	12'	21'	52	10.7'
AE1228HD	28'	14'	25'	58	13.4'
AE1232HD	32'	16'	29'	74	15.3'
AE1236**	36'	18'	32'	82	17.1'
AE1240**	40'	20'	35'	90	19.6'
AE1248***	48'	24'	43'	122	29.1'

RAIL DEPTH	3"	4"
16'-40' models	5 1/4"	6 1/4"
44'-48' models	6 1/4"	6 3/4"

INSIDE WIDTH	BASE	FLY
16'-40' models	16 1/8"	14 5/8"
44'-48' models	18"	15 1/8"

OUTSIDE WIDTH	BASE	FLY
16'-40' models	19 1/8"	16 1/8"
44'-48' models	20 3/8"	18 3/8"

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2108	8'	15	3'
AE2110	10'	18	3.8'
AE2112	12'	22	4.5'
AE2114	14'	28	5.3'
AE2116	16'	30	6.1'
AE2118	18'	38	6.8'
AE2120	20'	42	7.6'


RAIL DEPTH  
 3"

INSIDE WIDTH  
 15 5/8"

OUTSIDE WIDTH  
 17 1/8"

\*Does not include rope or pulley  
 \*\*300lbs. Type IA-rated standard ladder  
 \*\*\*250 lbs. Type I-rated standard ladder

AE2220

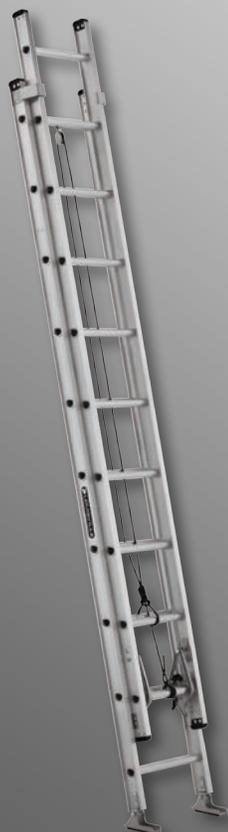

**ANSI**  
Meets or exceeds requirements of American National Standards Institute  
 ANSI A14.2

**OSHA**  
Approved

**SAFETY**  
 DANGER  
SAFETY

AE2820



**ANSI**  
Meets or exceeds requirements of American National Standards Institute  
 ANSI A14.2

**OSHA**  
Approved

**SAFETY**  
 DANGER  
SAFETY

SERIES  
**AE2200**

ALUMINUM  
 EXTENSION  
 LADDER

TYPE IA  
**300 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**AE2800**

ALUMINUM  
 EXTENSION  
 LADDER

TYPE IA  
**300 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials



- 1 Mar-resistant rail end caps
- 2 Outside slide guides
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Full I-beam
- 6 Swivel safety shoes



- 1 Mar-resistant rail end caps
- 2 Stacked aluminum I-beam rail
- 3 D-shaped rungs
- 4 QuickLatch™ – Patent #5429207
- 5 Rubber fly section shoes
- 6 Swivel safety shoes

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2216*	16'	8'	13'	30	6.8'
AE2220	20'	10'	17'	37	8.4'
AE2224	24'	12'	21'	43	10'
AE2228	28'	14'	25'	52	11.6'
AE2232	32'	16'	29'	60	13.2'
AE2236	36'	18'	32'	76	14.8'
AE2240	40'	20'	35'	84	16.4'

RAIL DEPTH	STACK WEIGHT	
	BASE	FLY
3"	5 3/4"	
INSIDE WIDTH	18"-24" models	15 3/8"
	28"-40" models	15 3/4"
OUTSIDE WIDTH	18"-24" models	17 1/8"
	28"-40" models	18"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2816*	16'	8'	13'	32	12.6'
AE2820	20'	10'	17'	39	16.3'
AE2824	24'	12'	21'	46	20.1'
AE2828	28'	14'	25'	59	23.9'
AE2832	32'	16'	29'	66	27.6'
AE2836	36'	18'	32'	80	30.5'
AE2840	40'	20'	35'	89	33.3'

RAIL DEPTH	RAIL DEPTH	
	BASE	FLY
3"	6"	
INSIDE WIDTH	15 3/8"	15 3/4"
	18"	18"

\*Does not include rope or pulley

\*Does not include rope or pulley

AE3220



ANSI  
Based on current requirements  
of the International Standards for use  
ANSI A14.2



SERIES  
**AE3200**

**ALUMINUM  
EXTENSION  
LADDER**

TYPE I  
**250 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

AE4110



ANSI  
Based on current requirements  
of the International Standards for use  
ANSI A14.2



SERIES  
**AE4100**

**ALUMINUM  
SINGLE  
LADDER**

TYPE II  
**225 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Modified I-beam
- 4 QuickLatch™ – Patent #5429207
- 5 Swivel safety shoes



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Modified I-beam
- 4 Swivel safety shoes

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE3216*	16'	8'	13'	27	7.1'
AE3220	20'	10'	17'	32	8.9'
AE3224	24'	12'	21'	38	10.6'
AE3228	28'	14'	25'	53	12.3'
AE3232	32'	16'	29'	60	14'
AE3236	36'	18'	32'	72	15.7'
AE3240	40'	20'	35'	80	17.4'

RAIL DEPTH	STACK HEIGHT
3"	5 1/4"

INSIDE WIDTH	BASE	FLY
	15 1/4"	13 1/8"

OUTSIDE WIDTH	BASE	FLY
	17 1/2"	16 3/8"

MODEL	TOTAL LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE4110	10'	17	5.8'
AE4112	12'	20	6.9'
AE4114	14'	23	8'
AE4116	16'	29	9.1'
AE4118	18'	31	10.3'
AE4120	20'	36	11.4'

RAIL DEPTH
3"

INSIDE WIDTH
15 1/4"

OUTSIDE WIDTH
17 1/4"

\*Does not include rope or pulley

SERIES

**AE4200PG****ALUMINUM  
EXTENSION  
LADDER**

TYPE II  
**225 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

AE4220PG

ANSI  
American National Standards Institute  
ANSI A 14.2OSHA  
Occupational Safety and Health Administration

**ProGrip™** – get a grip  
on your task!



D-shaped rungs



Modified I-beam



**QuickLatch™** –  
Patent #5429207



Swivel safety shoes



AE4220PG

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE4216PG**	16'	8'	13'	27	6.2
AE4220PG	20'	10'	17'	32	7.7
AE4224PG	24'	12'	21'	38	9.1
AE4228PG	28'	14'	25'	48	10.5
AE4232PG	32'	16'	29'	58	12'
AE4236PG	36'	18'	32'	71	13.4
AE4240PG	40'	20'	35'	80	14.9

RAIL DEPTH  
3"STACK HEIGHT  
5 1/4"

INSIDE WIDTH

BASE  
15 1/4"FLY  
14 5/16"

OUTSIDE WIDTH

BASE  
17 1/8"FLY  
16 3/16"

L-2321-16



ANSI  
Meets or exceeds requirements  
of American National Standard  
ANSI A14.2



SERIES  
**L-2321**

**ALUMINUM  
EXTENSION  
LADDER**

TYPE III  
**200 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

L-2324-20



ANSI  
Meets or exceeds requirements  
of American National Standard  
ANSI A14.2



SERIES  
**L-2324**

**ALUMINUM  
EXTENSION  
LADDER**

TYPE III  
**200 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Fixed runglock
- 4 Slip-resistant feet



- 1 Mar-resistant rail end caps
- 2 D-shaped rungs
- 3 Aluminum runglock
- 4 Slip-resistant rubber feet

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2321-16*	16'	8'	13'	17	5.6'

\*Does not include rope or pulley

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2324-16*	16'	8'	13'	21	5'
L-2324-20*	20'	10'	17'	26	6.5'
L-2324-24*	24'	12'	21'	39	7.8'
L-2324-28*	28'	14'	25'	41	9.1'

\*Does not include rope or pulley

SERIES

# AE1660

**ALUMINUM  
3-SECTION  
EXTENSION  
LADDER**

TYPE I  
**250 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



**ANSI**  
with a mark of compliance  
of American National Standards Institute  
ANSI A14.2

**CS**

**OSHA**  
REQUIREMENTS

**ALUMINUM**  
**OSHA**  
REQUIREMENTS  
**SAFETY**

AH1006



SERIES

# AH1000

**ALUMINUM  
SHELF  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

**OSHA**  
REQUIREMENTS

**ALUMINUM**  
**OSHA**  
REQUIREMENTS  
**SAFETY**



- 1 Aluminum cast rail end caps
- 2 Round rungs
- 3 Double rope and pulley
- 4 Full I-beam
- 5 Swivel safety shoes



- 1 Rubber bumper
- 2 Angled steps
- 3 Double-rivet step construction
- 4 Heavy-duty gusset bracing
- 5 Angled aluminum slip-resistant rubber feet

MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	RAIL DEPTH	STACK HEIGHT	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1660	60'	48'	4"	8 1/4"	169	33.8'

SECTION	LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
BASE	22'	18"	21 1/2"
CENTER	20'	15 3/8"	18 13/16"
FLY	18'	12 3/4"	16 1/4"


MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AH1004	4'	3"	15 1/8"	6	1.6'
AH1005	5'	3"	15 1/8"	8	2'
AH1006	6'	3"	15 1/8"	10	2.3'
AH1007	7'	3"	15 1/8"	11	2.7'
AH1008	8'	3"	15 1/8"	12	3.1'
AH1010	10'	3"	15 1/8"	16	3.5'
AH1012	12'	3"	15 1/8"	20	3.9'
AH1014	14'	3"	15 1/8"	23	4.3'
AH1016	16'	3"	15 1/8"	26	4.6'

SERIES

# PINNACLE

ALUMINUM  
ATTIC  
LADDER

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

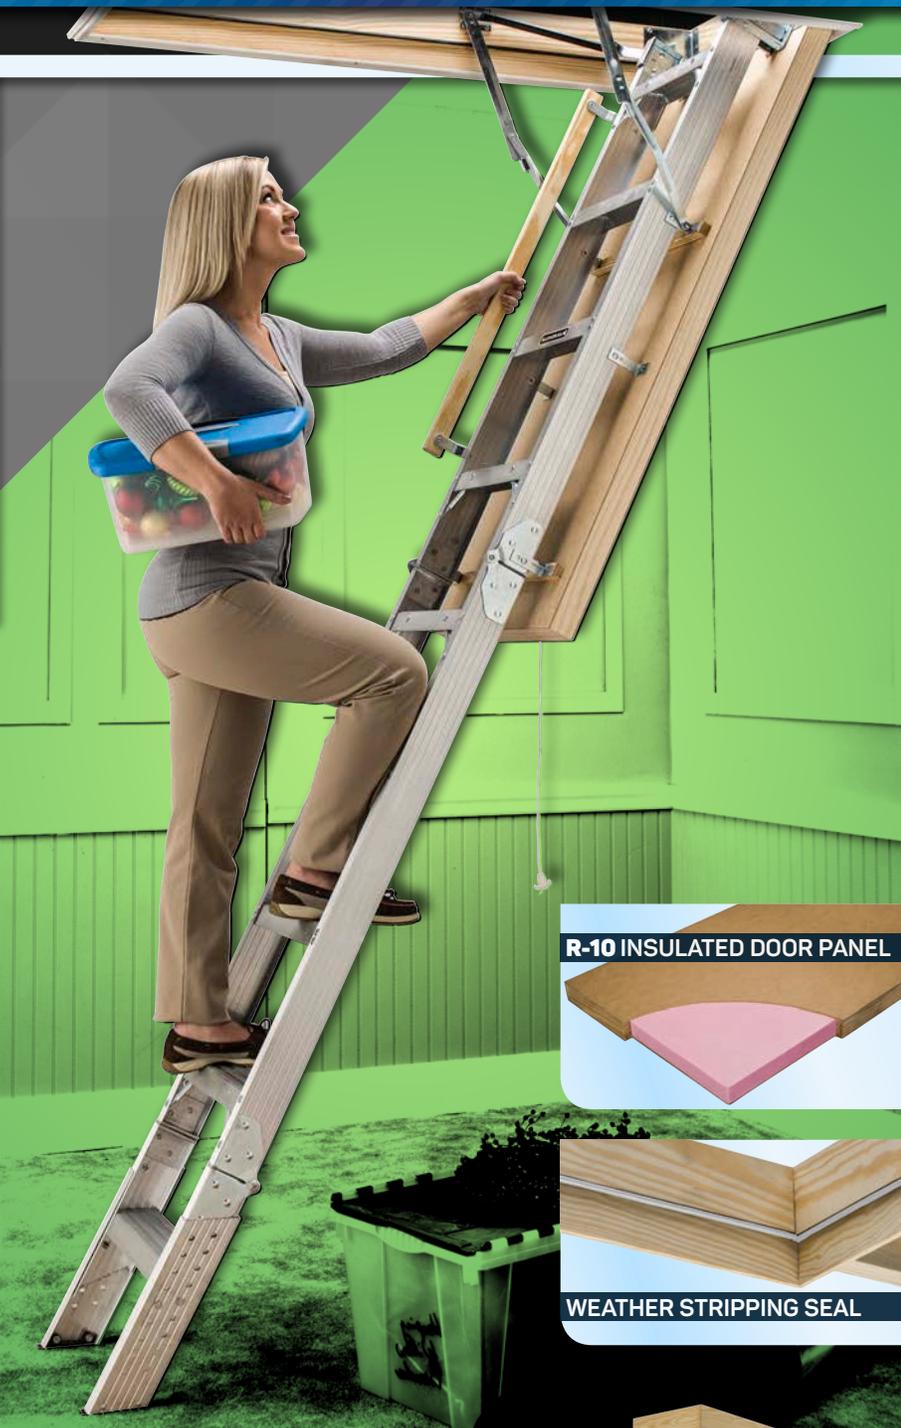


AEE2210

ANSI  
Approved by the American National Standards Institute  
ANSI A14.9



R-10 INSULATED DOOR PANEL

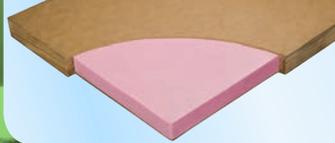

WEATHER STRIPPING SEAL



Wider clearance



Advanced cylinder design



Ergonomic T-Handle




Slip-resistant cross-tread steps



Adjustable shoes

SWING CLEARANCE

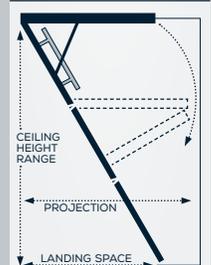

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
	MIN	MAX					
AEE2210	77"	10'3"	22½" X 54"	69"	74"	57	9.2'
AEE2510	77"	10'3"	25½" X 54"	69"	74"	61	10.5'
AEE3010	77"	10'3"	30" X 54"	69"	74"	73.2	13.4'

**STEP DEPTH**  
3 ¼"

**RAIL SIZE**  
3 ½"

AEE2210



SERIES

# ELITE

**ALUMINUM  
ATTIC  
LADDER**


AA2210

TYPE IAA  
**375 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

**ANSI**  
Type IAA ladders are certified  
to meet the requirements of  
ANSI A14.9



**SWING CLEARANCE**

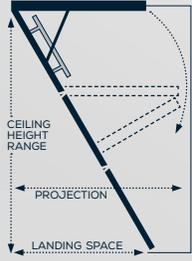

SERIES

# EVEREST

**ALUMINUM  
ATTIC  
LADDER**


AL228P

TYPE IAA  
**350 lbs**  
LOAD CAPACITY  
includes weight of user  
plus materials

**ANSI**  
Type IAA ladders are certified  
to meet the requirements of  
ANSI A14.9



**SWING CLEARANCE**

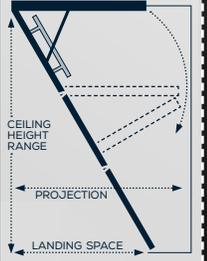

- 1 Wide clearance
- 2 Advanced cylinder design
- 3 Ergonomic T-handle
- 4 Slip-resistant cross-tread steps
- 5 Adjustable shoes



- 1 Easy-hang strap
- 2 R3.8 insulated door
- 3 Hook and pole for easy door opening
- 4 Multiple handrails
- 5 Heavy-duty hinges
- 6 Adjustable shoes

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	STEP DEPTH
	MIN	MAX						3 1/4"
AA2210	78"	10'3"	22 1/2" x 54"	67"	74"	45	7.9'	RAIL SIZE
AA2510	78"	10'3"	25 1/2" x 54"	67"	74"	47	9'	3 1/4"

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	STEP DEPTH
	MIN	MAX						3 1/4"
AL228P	10'	12'	22 1/2" x 63"	84"	90"	61	8.3'	RAIL SIZE
AL258P	10'	12'	25 1/2" x 63"	84"	90"	66	10.1'	3 1/4"



All Elite ladders are available with optional fireproofing treatment feature. Add prefix **FT** before each model to order (e.g. **FTAA2210**)



All Everest ladders are available with optional fireproofing treatment feature. Add prefix **FT** before each model to order (e.g. **FTAL228P**)

SERIES

**BIG BOY**


**WOOD  
ATTIC  
LADDER**

L305P

**350 lbs**  
LOAD CAPACITY

includes weight of user plus materials

**SWING CLEARANCE**

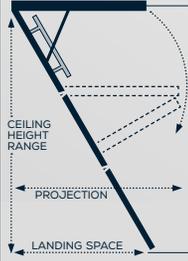

ANSI  
American National Standards Institute  
ANSI A14.9

SERIES

**CHAMPION**


**WOOD  
ATTIC  
LADDER**

CS224P

TYPE IA  
**300 lbs**  
LOAD CAPACITY

includes weight of user plus materials

**SWING CLEARANCE**

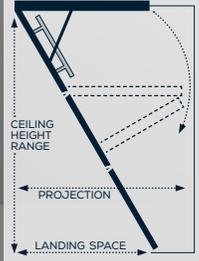

ANSI  
American National Standards Institute  
ANSI A14.9



- 1 Easy-hang strap
- 2 30"-wide opening
- 3 Adjustable spring
- 4 Ergonomic T-handle
- 5 Extra-deep 5 1/4" reinforced steps



- 1 Easy-hang strap
- 2 Adjustable spring
- 3 Sturdy handrail
- 4 Ergonomic T-handle
- 5 Extra-deep 5 1/4" reinforced steps

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	STEP DEPTH
	MIN	MAX						5 3/4"
S305P	7'	8'9"	30" x 60"	61"	71"	75	14.2'	RAIL SIZE
L305P	8'9"	10'	30" x 60"	70"	79"	82	14.2'	3/4" x 4 3/8"

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	STEP DEPTH
	MIN	MAX						5 3/4"
CS224(I/P)	7'	8'9"	22 1/2" x 54"	61"	71"	64	9.9'	RAIL SIZE
CL224(I/P)	8'9"	10'	22 1/2" x 54"	70"	79"	70	9.9'	3/4" x 4 3/8"
CS254(I/P)	7'	8'9"	25 1/2" x 54"	61"	71"	67	11.3'	
CL254(I/P)	8'9"	10'	25 1/2" x 54"	70"	79"	74	11.3'	



All Champion ladders are available with optional fireproofing treatment feature. Add prefix **FT** before each model to order (e.g. **FTCS224P**)

**CS2X4P** STANDARD OPTION      **CS2X4I** INCLUDES R3.8 INSULATED DOOR



All Champion ladders are available with optional fireproofing treatment feature. Add prefix **FT** before each model to order (e.g. **FTCS224P**)

SERIES

**PREMIUM**

**WOOD  
ATTIC  
LADDER**

WA2210

TYPE I


**250 lbs**  
LOAD CAPACITY

includes weight of user plus materials

**ANSI**  
American National Standards Institute  
ANSI A14.9



**SWING CLEARANCE**

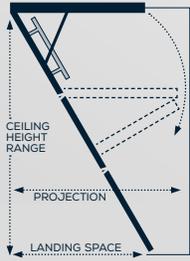

SERIES

**PREMIUM**

**WOOD  
ATTIC  
LADDER**


L224P

TYPE I


**250 lbs**  
LOAD CAPACITY

includes weight of user plus materials

**ANSI**  
American National Standards Institute  
ANSI A14.9

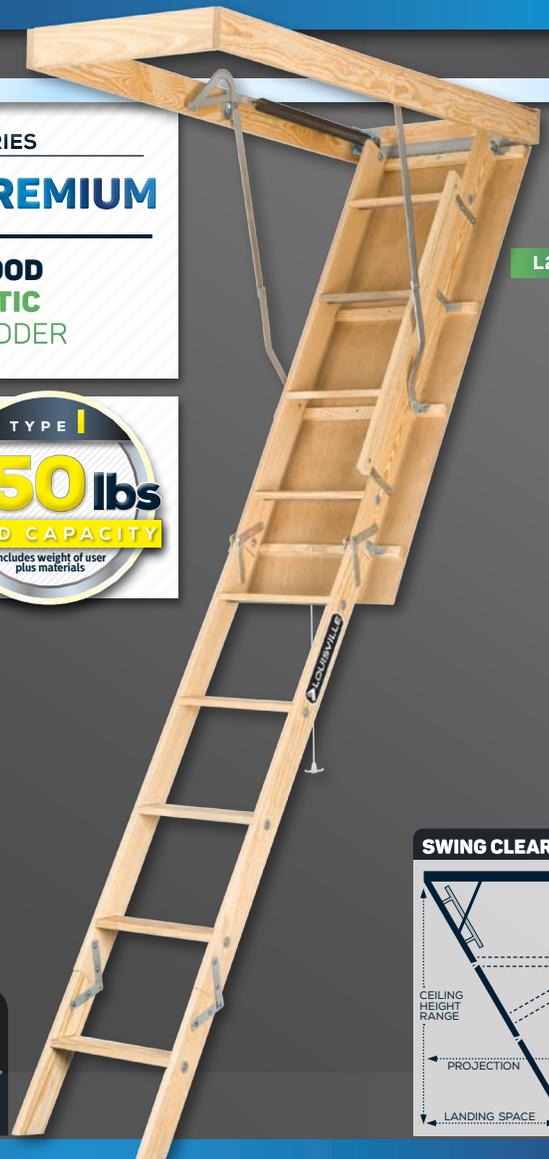

**SWING CLEARANCE**

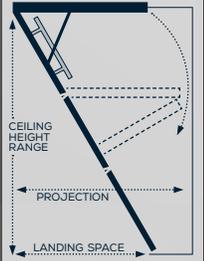

- 1 Secure step assembly
- 2 Reinforced steps
- 3 3 1/2"-deep steps
- 4 Slip-resistant rubber foot pads



- 1 Easy-hang strap
- 2 R3.8 insulated door
- 3 Hook and pole for easy door opening
- 4 3 1/2"-deep reinforced steps

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
	MIN	MAX					
WA2210	7' 11"	10' 3"	22 1/2" x 54"	64.5"	74"	49	7.8'

**STEP DEPTH**

3"

**RAIL SIZE**

3/4" x 3 3/8"

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
	MIN	MAX					
S224P	7'	8' 9"	22 1/2" x 54"	61"	71"	53	7.7'
L224P	8' 9"	10'	22 1/2" x 54"	70"	79"	57	7.7'
S254P	7'	8' 9"	25 1/2" x 54"	61"	71"	56	8.8'
L254P	8' 9"	10'	25 1/2" x 54"	70"	79"	59	8.8'

**STEP DEPTH**

3 3/8"

**RAIL SIZE**

3/4" x 3 3/8"



All Premium ladders are available with optional fireproofing treatment feature. Add prefix **FT** before each model to order (e.g. **FTS224P**)

FC1206



TYPE IAA  
**375 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FC1200**

**FIBERGLASS**  
**STEP TO STRAIGHT**  
 LADDER

FT1006



TYPE IA  
**300 lbs**  
 LOAD CAPACITY  
includes weight of user plus materials

SERIES  
**FT1000**

**FIBERGLASS**  
**TRIPOD**  
 LADDER



- 1 Standard pole grip
- 2 Hinging mechanism
- 3 Runglock
- 4 Double-rivet step construction
- 5 Utility-style safety shoes



- 1 Center-pull spreader brace
- 2 Outrigger rail brackets
- 3 Double-rivet step construction
- 4 Steel-reinforced outrigger
- 5 Heavy-duty gusset bracing
- 6 Full Metal Boot™

MODEL	LADDER SIZE	MAX. EXTENDED LENGTH	FLARED SECTION MIN. OUTSIDE DIMENSION	FLARED SECTION MAX. OUTSIDE DIMENSION	PARALLEL SECTION OUTSIDE DIMENSION	APPROX. WEIGHT (LBS)	APPROX. CUBES
FC1206	6'	9' 7"	18"	24 1/4"	15"	34	5.9'
FC1207	7'	11' 7"	18"	25 1/4"	15"	37	7.3'
FC1208	8'	13' 7"	18"	26"	15"	42	8.6'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FT1004	4'	3"	32 1/2"	28 1/4"	16	5.8'
FT1005	5'	3"	34"	34 1/4"	19	7.6'
FT1006	6'	3"	35 1/2"	42 1/4"	23	10.1'
FT1007	7'	3"	40 5/8"	46"	25	12.7'
FT1008	8'	3"	41 5/8"	52"	30	15.7'
FT1010	10'	3"	52 1/4"	63 3/4"	48	23.3'
FT1012	12'	3"	55 1/4"	77 1/2"	50	29.6'

FX1108



ANSI  
Standard for Safety  
of Ladders  
ANSI A14.5



OSHA  
RECOGNIZED

SERIES  
**FX1100**

**FIBERGLASS  
TRESTLE  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

AM8008



OSHA  
RECOGNIZED



SERIES  
**AM8000**

**ALUMINUM  
AIRCRAFT  
MECHANIC CARRIER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Locking bail
- 2 Heavy-duty trestle top hinge
- 3 Slide guides and spreader braces
- 4 Heavy-duty gusset bracing
- 5 Aluminum angle slip-resistant rubber feet



- 1 Extra large top platform
- 2 Double-rivet step construction
- 3 Tilt and roll
- 4 Premium construction
- 5 Durable design
- 6 Slip-resistant rubber feet

MODEL	LADDER SIZE	MAX. EXTENDED LENGTH	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	WIDTH INSIDE	WIDTH OUT	FLY	APPROX. WEIGHT (LBS)	APPROX. CUBES
FX1108	8'	12' 6"	3"	33 1/2"	70 1/2"	15 1/2"	18 1/4"	65	22.8'	
FX1110	10'	15' 6"	3"	39 1/2"	85 3/4"	15 1/2"	18 1/4"	90	39.8'	
FX1112	12'	19' 6"	3"	45 1/2"	100"	15 1/2"	18 1/4"	115	54.1'	

MODEL	LADDER SIZE	HEIGHT TO PLATFORM	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AM8003	3'	2' 10"	3 3/4"	24 1/4"	43 1/2"	44	7
AM8004	4'	3' 10"	3 3/4"	25 1/4"	50 1/2"	55	9.9'
AM8006	6'	5' 8"	3 3/4"	28 1/4"	65 1/4"	69	16.4'
AM8008	8'	7' 7"	3 3/4"	31 1/4"	80 1/4"	84	16.5'
AM8010	10'	9' 6"	3 3/4"	34 1/4"	95"	100	33'
AM8012	12'	11' 5"	3 3/4"	37 1/4"	109 3/4"	115	43'

\*Optional guard rail required for top platform access (PK714) unless used in an enclosed area

AX1008



ANSI  
Type I A  
ANSI A14.2



OSHA  
COMPLIANT



SERIES  
**AX1000**

**ALUMINUM  
TRESTLE  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

L-2032-03



OSHA  
COMPLIANT



SERIES  
**L-2032**

**ALUMINUM  
SAWHORSE  
LADDER**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Locking bail
- 2 Heavy-duty trestle top hinge
- 3 Slide guides and spreader braces
- 4 Double-riquet step construction
- 5 Angled aluminum slip-resistant rubber feet



- 1 Extra-wide work surface
- 2 Heavy-gauge steel hinges
- 3 Pinch-resistant spreader braces
- 4 Double-riquet step construction
- 5 Heavy-duty gusset bracing
- 6 Angled aluminum slip-resistant rubber feet

MODEL	LADDER SIZE	MAX. EXTENDED LENGTH	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	WIDTH INSIDE	WIDTH OUT	FLY (LBS)	APPROX. CUBES
AX1008	8'	12' 6"	3"	33 1/2"	70 1/2"	15 5/8"	17 3/4"	58	27.8'
AX1010	10'	15' 6"	3"	39 1/2"	85 3/8"	15 5/8"	17 3/4"	74	39.8'
AX1012	12'	19' 6"	3"	45 1/2"	100"	15 5/8"	17 3/4"	90	54.1'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2032-02	2'	3"	33 1/4"	22 1/2"	14	3.6'
L-2032-03	3'	3"	34 3/4"	30 1/4"	20	6.5'
L-2032-04	4'	3"	36 1/4"	37 3/4"	24	9'

L-2095-17



ANSI  
width or width equivalent  
 of frame to meet Section 191.101  
 ANSI A14.2



OSHA  
COMPLIANT



SERIES  
**L-2095**

**ALUMINUM  
 MULTIPURPOSE  
 LADDER**

TYPE IA  
**300 lbs**  
 LOAD CAPACITY  
includes weight of user  
 plus materials



- 1 Easy operation with lightweight aluminum design
- 2 Wider footprint provides more stability
- 3 Easy-to-use flip and lock hinges
- 4 Slip-resistant rubber feet

MODEL	LADDER SIZE	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	FOLDED DIMENSIONS (H x W x D)
L-2095-13	13'	24	20 7/8"	3.3'	39" x 20 7/8" x 7"
L-2095-17	17'	29	24 1/8"	5'	51" x 24 1/8" x 7"
L-2095-22	22'	35	27 1/2"	7'	63" x 27 1/2" x 7"

\*Width is based on widest point (bottom)

MODEL	ADJUSTABLE STEP LADDER	STAIRWAY	SCAFFOLDING	EXTENSION
L-2095-13	3' - 5'	3' - 5'	1' - 2'	7' - 11'
L-2095-17	4' - 7'	4' - 7'	1' - 3'	9' - 15'
L-2095-22	5' - 9'	5' - 9'	1' - 4'	11' - 19'



GSW2408



GSW1601A-W04



16" x 10" PLATFORM  
NO HANDRAILS

OPTIONAL FEATURES & ACCESSORIES

EXTRA-DEEP TOP

(16"- and 24"-wide models)

Accessory #W01: adds 10" for a total of 20"

Accessory #W02: adds 20" for a total of 30"

HANDRAIL & GUARDRAIL

Accessory #W03

HANDRAIL & OUTRIGGER

Mandatory when local codes require 3:1 height-to-base ratio

5 step (16"-wide only): GRCAL05EC-B

5-9 step: GRCAL0509-B

10-12 step: GRCAL1012-B

13-15 step: GRCAL1315-B

GSW SERIES

STEEL ROLLING WAREHOUSE LADDER

450 lbs  
LOAD CAPACITY  
Includes weight of user plus materials

ANSI  
PUBLISHED BY THE  
AMERICAN NATIONAL STANDARDS INSTITUTE  
ANSI A14.7

OSHA  
RECOMMENDATION

ALLIANCE FOR SAFETY  
LADDER  
CERTIFIED



1



2



3

- 1 Toeboard\*
- 2 Spring-loaded casters\*\*
- 3 Locking device

with HANDRAILS

without HANDRAILS

MODEL	STEPS	STEP WIDTH	HEIGHT TO PLATFORM	TOTAL DIMENSIONS			APPROX. WEIGHT (LBS)	APPROX. CUBES
				WIDTH	HEIGHT	DEPTH		
GSW1603A-W03	3	1'4"	2'6"	5'6"	2'3"	1'8"	46	5'
GSW2403-W03	3	2'	2'6"	5'6"	2'3"	2'4"	56	8.1'
GSW1604-W03	4	1'4"	3'4"	6'4"	2'11"	1'11"	60	8.3'
GSW2404-W03	4	2'	3'4"	6'4"	2'11"	2'7"	69	10.4'
GSW1605	5	1'4"	4'2"	7'2"	3'6"	2'3"	70	10.1'
GSW2405	5	2'	4'2"	7'2"	3'6"	2'11"	81	12.6'
GSW2406	6	2'	5'	8'	4'2"	2'11"	116	14.9'
GSW2407	7	2'	5'10"	8'10"	4'8"	2'11"	128	17.2'
GSW2408	8	2'	6'8"	9'8"	5'3"	2'11"	155	19.4'
GSW2409	9	2'	7'6"	10'6"	5'8"	2'11"	166	21.7'
GSW2410	10	2'	8'4"	11'4"	6'3"	2'11"	181	23.9'
GSW2411	11	2'	9'2"	12'2"	6'10"	2'11"	196	26.2'
GSW2412	12	2'	10'	13'	7'5"	2'11"	213	28.5'
GSW2413	13	2'	10'10"	13'10"	7'11"	3'4"	231	30.7'
GSW2414	14	2'	11'8"	14'8"	8'6"	3'4"	243	33'
GSW2415	15	2'	12'6"	15'6"	9'1"	3'4"	263	35.2'

MODEL	STEPS	STEP WIDTH	HEIGHT TO PLATFORM	TOTAL DIMENSIONS			APPROX. WEIGHT (LBS)	APPROX. CUBES
				WIDTH	HEIGHT	DEPTH		
GSW1601A-W04	1	1'4"	1'	1'5"	1'7"	1'6"	16	1.9'
GSW1602	2	1'4"	1'8"	1'8"	1'7"	1'8"	25	3.4'
GSW2402	2	2'	1'8"	1'8"	1'7"	2'4"	30	8.1'
GSW2403	3	2'	2'6"	2'6"	2'3"	2'4"	41	8.1'
GSW1604	4	1'4"	3'4"	3'4"	2'11"	1'11"	42	8.3'
GSW2404	4	2'	3'4"	3'4"	2'11"	2'7"	55	10.4'

\*Only available on models larger than 12' • \*\*Only available on models between 1-5 steps

FW2408



**ANSI**  
With a safety margin of 100% above rated load  
ANSI A14.7



**FW SERIES**

**FIBERGLASS SAFEGUARD MOBILE PLATFORM**

TYPE IA  
**300 lbs**  
LOAD CAPACITY  
includes weight of user plus materials

SM1504



**ANSI**  
With a safety margin of 100% above rated load  
ANSI A14.7



**SM SERIES**

**STEEL ROLLING SCAFFOLD**

**500 lbs**  
LOAD CAPACITY  
includes weight of user plus materials



- 1 Forward-descent design
- 2 Non-conductive platform assembly
- 3 Reinforced back
- 4 Heavy-duty base assembly
- 5 Heavy-duty, slip-resistant steps
- 6 Step-lock safety feature

FW2400 SERIES: 24" X 17" PLATFORM

MODEL	LADDER SIZE	HEIGHT TO PLATFORM	MAX. LENGTH	MAX. WIDTH	MAX. HEIGHT w/RAILS	SHIPPING WEIGHT (LBS)	APPROX. CUBES
FW2404	3'11"	3'	53"	28 1/2"	6' 8 1/2"	159	11.5'
FW2406	6'	4.7'	70"	32 5/8"	8' 3 1/2"	189	17.4'
FW2408	8'1"	6.2'	87"	32 5/8"	9' 10 1/2"	258	23.4'
FW2410	10'1"	7.9'	105"	32 5/8"	11' 5 1/2"	404	29.4'
FW2412	12'2"	9.4'	122"	32 5/8"	13' 1 1/2"	440	35.4'
FW2414	14'3"	14'3"	139"	39 1/2"	14' 7 1/2"	530	41.2'
FW2415	15'3"	15'3"	147"	39 1/2"	15'5"	545	44.3'



Folds flat for easy storage

Great for painting, wallpapering and general repairs

Transforms into sturdy and durable workbench

Platforms can be customized for use at many levels

MODEL	HEIGHT WITH CASTERS	LENGTH WITH CASTERS	NUMBER OF CASTERS	TOTAL WIDTH	FOLDED UNIT WIDTH	PLANK LENGTH	PLANK WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
SM1504	50"	47"	4	22"	5"	46"	8.25 (2), 16.5 total	50	3.5'

# ST SERIES

**STEEL ROLLING TOWER SCAFFOLDS**



**ANSI**  
SAFETY STANDARD FOR  
 STEEL ROLLING SCAFFOLDS  
 ANSI A10.8

**OSHA**  
RECOMMENDED

**SAFETY**  
CONSTRUCTION

**12' TOWER**

**ST0606A**



**ONLY ONE PERSON REQUIRED FOR ASSEMBLY!**



- 1** Fits through 30" door opening
- 2** Locking pins prevent accidental unlocking
- 3** Deck pin secures platform

## REQUIRED MATERIALS

### 12' TOWER

- > Two (2) 6' Scaffolds (ST0606A)
- > One (1) 4-pack of Outriggers (PK735A)\*
- > One (1) Guardrail (PK736A)\*

### 15' TOWER

- > Two (2) 6' Scaffolds (ST0606A)
- > One (1) 3' Scaffold (ST0306A)
- > One (1) 4-pack of Outriggers (PK735A)\*
- > One (1) Guardrail (PK736A)\*

\*Outriggers and Guardrail sold separately. Outriggers do not come with casters. Do not combine more than two (2) 6' Scaffolds and (1) 3' Scaffold (for a maximum total of 15'). Each set of end frames require one pair of trusses and platform.

### END FRAMES WITHOUT CASTERS

Full-height unit: WIDTH: 29" HEIGHT: 65"  
 Half-height unit: WIDTH: 29" HEIGHT: 35 1/2"

### ASSEMBLED WIDTH

with casters: 29 1/2"  
 with casters and outriggers: 66 3/4"

### PLATFORM

6' unit: WIDTH: 28 3/4" DEPTH: 67"  
 > Exterior grade, edge protected  
 > 3/8"-thick plywood

### MAXIMUM PLATFORM HEIGHT WITH CASTERS

6' unit: 6'  
 12' unit: 11'5"  
 15' unit: 14'5"

**GUARDRAIL HEIGHT: 39"**

MODEL	SIZE	APPROX. WEIGHT (LBS)	APPROX. CUBES
ST0306A*	3' x 6'	115	7.3'
ST0606A	6' x 6'	132	7.3'

\*Does not include casters

# MODULAR GUARDRAIL SYSTEMS

FOR  
PLANKS  
AND STAGES



ANSI  
A10.8

OSHA

### SINGLE-SIDED SYSTEM\*

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01
5'	2	2	0	1	0	2**
6'	2	2	0	1	0	2**
8'	2	2	0	1	0	2**
10'	2	0	2	0	1	2**
12'	3	0	2	0	1	3**
14'	3	0	2	0	1	3**
16'	3	4	0	2	0	3**
18'	3	0	4	0	2	3**
20'	4	6	0	3	0	4**
24'	4	6	0	3	0	4**
28'	5	4	2	2	1	0**
30'	5	8	0	4	0	0**
32'	5	4	4	2	2	0**
36'	6	10	0	5	0	0**
40'	6	6	4	3	2	0**

### 3-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02**
5'	4	2	0	1	0	2**	2
6'	4	2	0	1	0	2**	2
8'	4	2	0	1	0	2**	2
10'	4	0	2	0	1	2**	2
12'	5	0	2	0	1	3**	2
14'	5	0	2	0	1	3**	2
16'	5	4	0	2	0	3**	2
18'	5	0	4	0	2	3**	2
20'	6	6	0	3	0	4**	2
24'	6	6	0	3	0	4**	2
28'	7	4	2	2	1	0**	2
30'	7	8	0	4	0	0**	2
32'	7	4	4	2	2	0**	2
36'	8	10	0	5	0	0**	2
40'	8	6	4	3	2	0**	2

### RAIL END CAPS

RAIL SIZE	MODEL	APPROX. WEIGHT (LBS)
Caps for 4" Rail	PK740A	0.65 Ea.
Caps for 5" Rail	PK740B	0.80 Ea.
Caps for 6" Rail	PK740C	1.07 Ea.
(2 end caps and hardware per kit)		
Caps for 7" Rail	PRO64226	0.8 Ea.

### PRODUCT WEIGHTS

ITEM	APPROX. WEIGHT (LBS)
MPT-01	0.56
MGR-09	2.31
MGR-13	3.33
MTB-09	2.38
MTB-13	3.44
MRF-01	1.13
MER-01	2.00
MER-02	2.84

### 4-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02**
5'	4	4	0	2	0	2**	2
6'	4	4	0	2	0	2**	2
8'	4	4	0	2	0	2**	2
10'	4	0	4	0	2	2**	2
12'	6	0	4	0	2	3**	2
14'	6	0	4	0	2	3**	2
16'	6	8	0	4	0	3**	2
18'	6	0	8	0	4	3**	2
20'	8	12	0	6	0	4**	2
24'	8	12	0	6	0	4**	2
28'	10	8	4	4	2	0**	2
30'	10	16	0	8	0	0**	2
32'	10	8	8	4	4	0**	2
36'	12	20	0	10	0	0**	2
40'	12	12	8	6	4	0**	2

### PT SERIES GUARDRAIL


HANDRAIL SOCKET WITH HARDWARE	MODEL	APPROX. WEIGHT (LBS)
3" Handrail socket w/ hardware	PRO98004C	1

\*Double all quantities, except for web brace assembly, for 2-Sided Systems

\*\*Required on planks with side rails of less than 6"-height

\*\*\*MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

\*\*\*MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

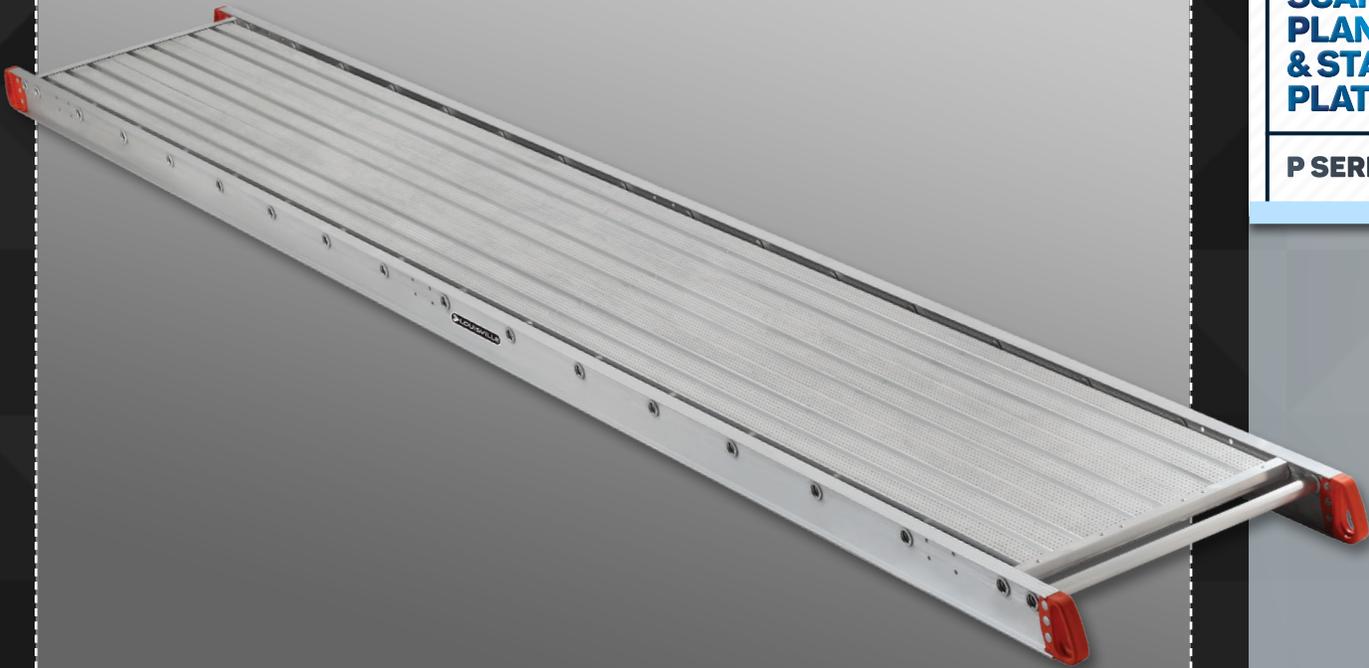

**SCAFFOLD  
PLANKS  
& STAGE  
PLATFORMS**

**P SERIES**

**ANSI**  
Z39.5-2001  
American National Standard  
SAFETY STANDARDS FOR  
ANSI A10.8

MEETS  
**OSHA**  
REQUIREMENTS



**P1 SERIES 1-PERSON DECORATOR PLANK 250lbs LOAD CAPACITY**



SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)
8'	4"	P11208	27	P11408	29	P12008	36
16'	4"	P11216	51	P11416	53	P12016	62
20'	5"	P11220	76	P11420	65	P12020	88
24'	5"	P11224	88	P11424	90	P12024	100

**P2 SERIES 2-PERSON SCAFFOLD PLANK & STAGE 500lbs LOAD CAPACITY**



SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
5'	4"	-	-	-	-	-	-	-	-	P22805	26
6'	4"	P21206	15	-	-	-	-	-	-	P22806	31
12'	4"	P21212	41	P21412	45	P22012	52	P22412	57	P22812	60
14'	5"	-	-	-	-	-	-	-	-	P22814	76
16'	5"	P21216	60	P21416	65	P22016	69	P22416	81	P22816	85
20'	6"	P21220	97	P21420	103	P22020	115	P22420	124	P22820	129
24'	6"	P21224	112	P21424	118	P22024	133	P22424	142	P22824	151
28'	6"	P21228	142	P21428	149	P22028	166	P22428	176	P22828	185
30'	6"	-	-	-	-	-	-	-	-	P22830	199
32'	6"	P21232	160	P21432	167	P22032	181	P22432	197	P22832	213

**P3 SERIES 3-PERSON STAGE PLATFORM 750lbs LOAD CAPACITY**



SIZE	SIDE RAIL DEPTH	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
16'	6"	P32016	87	P32416	101	P32816	111
20'	6"	P32020	119	P32420	133	P32820	139
24'	6"	P32024	135	P32424	149	P32824	163
28'	7"	P32028	217	P32428	225	P32828	239
32'	7"	-	-	P32432	252	P32832	275
40'	7"	-	-	-	-	P32840	367



1



2



3



4

- 1 Ergonomic, easy-grip molded handles/rungs
- 2 Reinforcing web braces
- 3 Slip-resistant decking
- 4 Optional modular handrail system

## NESTABLE STAGES

**L-P2 SERIES 2-PERSON PLANK**  
500lbs. LOAD CAPACITY



- 1 Interlocking nestable system
- 2 End caps provide a smooth, continuous walkway
- 3 Durable, lightweight aluminum end caps

MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	APPROX. WEIGHT (LBS)
L-P21212A	12'	12"	6"	55
L-P21216A	16'	12"	6"	75
L-P21220A	20'	12"	6"	97
L-P21224A	24'	12"	6"	112
L-P22012A	12'	20"	6"	66
L-P22016A	16'	20"	6"	90
L-P22020A	20'	20"	6"	117
L-P22024A	24'	20"	6"	134

## SCAF-A-DECK


**PD8000 SERIES**  
**PD9200 SERIES**



MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	CAPACITY (LBS/FT²)	APPROX. WEIGHT (LBS)
PD8007	7'	19"	3"	75	29
PD8008	8'	19"	3"	75	33
PD8010	10'	19"	3"	50	39
PD9207	7'	19 1/4"	2"	75	32
PD9208	8'	19 1/4"	2"	75	35
PD9210	10'	19 1/4"	2"	50	42

## MEDIUM-DUTY TELESCOPING PLANK

**LP-2921 SERIES**

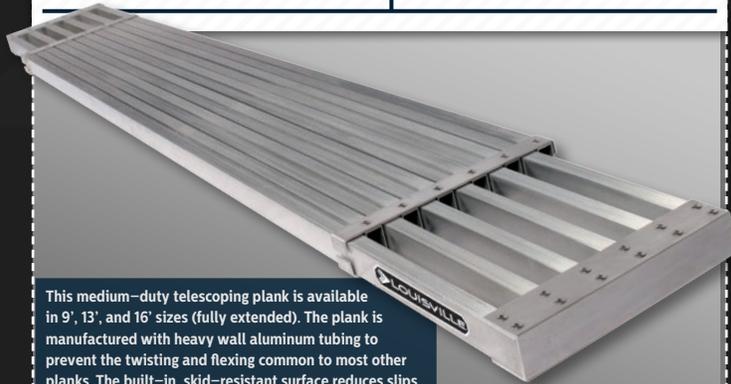

This medium-duty telescoping plank is available in 9', 13', and 16' sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

MODEL	PLANK LENGTH	PLANK WIDTH	STANDARD EXTENSION	APPROX. WEIGHT (LBS)
LP-2921-09A	9'	12"	6' - 9'	29
LP-2921-13A	13'	12"	8' - 13'	38
LP-2921-16A	16'	12"	10' - 16'	49

## LADDER RACKS

**SRA10 SERIES**

Louisville Ladder's SRA10 ladder rack merchandisers are designed specifically to increase ladder sales. Holds up to six ladders. Easy to assemble. Ladders and accessories not included.



MODEL	LADDER CAPACITY	FOOTPRINT	APPROX. WEIGHT (LBS)
SRA10-03	3	26" x 23 3/4"	22
SRA10-04	4	26" x 30 3/4"	25
SRA10-06	6	26" x 46"	38



**LOGOLOCK**

**SYSTEM  
FOR  
FIBERGLASS  
LADDERS**

**LogoLock**®

**ONLY AT LOUISVILLE LADDER**

**PROMOTE YOUR  
CUSTOMER'S  
NAME WITH THE  
LogoLock™ SYSTEM!**

LogoLock™ embeds a long-lasting image into the fiberglass rail of your ladders.

**WHY USE LogoLock™?**

- ▶ Increase awareness and scope of your brand
- ▶ Refresh your company's image
- ▶ Deter theft by displaying your company's logo

**HOW TO ORDER LogoLock™**

- ▶ \$6.00 fee for each logo (added to the price of each ladder)
- ▶ Each ladder will have one custom logo applied to each side rail
- ▶ Logo dimensions should be a maximum of 7 1/16" x 2 3/8"
- ▶ One-time \$25.00 setup fee for each logo
- ▶ Minimum order of six fiberglass ladders (any model)
- ▶ Artwork must be provided in vector format OR in ".tif" or ".jpg" format at a MINIMUM of 300 dpi (dots per inch) resolution. Submit detailed instructions for logo display including color, placement, size and other customization.
- ▶ After we review your images, we'll provide a customized part number and distributor pricing
- ▶ Lead time is from 5 to 10 business days

### COMBINATION POLE GRIP & CABLE HOOK

**FIBERGLASS ONLY.** A rigid steel-plated V-shaped pole grip covered with rubber tread, combined with cable hook assembly.

<b>FACTORY</b>	<b>FIELD</b>	PK-E03A (16'-28')	APPROX. WEIGHT	3 LBS
<b>E03</b>		PK-E03B (32'-40')	APPROX. WEIGHT	3 LBS

### RIGID POLE GRIP

**FIBERGLASS ONLY.** 3/16" x 1" steel-plated bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.

<b>FACTORY</b>	<b>FIELD</b>	PK-E04A (16'-28')	APPROX. WEIGHT	1.9 LBS
<b>E04</b>		PK-E04B (32'-40')	APPROX. WEIGHT	1.7 LBS

### WEB POLE GRIP

**FIBERGLASS ONLY.** Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Helps to hold top of ladder against poles, pipes or corners.

<b>FACTORY</b>	<b>FIELD</b>	PK-E05R (16'-40')	APPROX. WEIGHT	0.7 LBS
<b>E05</b>				

### LADDER LASH

**FIBERGLASS ONLY.** Lash for wrapping around objects up to 17" in diameter. Made of 2" Dacron webbing with forged steel snaps and a quick adjustment with clip.

<b>FACTORY</b>	<b>FIELD</b>	PK-E11R (16'-40')	APPROX. WEIGHT	1.1 LBS
<b>E11</b>				

### WHEEL SPURS

**FIBERGLASS ONLY.** Wheel spurs are available as an alternative to our standard cast swivel safety shoe.

<b>FACTORY</b>	<b>FIELD</b>	PK-E30A (16'-28')	APPROX. WEIGHT	0.9 LBS
<b>E30</b>				

### AUTOMATIC-ADJUSTING LEVELER

Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.

<b>FACTORY</b>	<b>FIELD</b>	PR091006C-B-PY	APPROX. WEIGHT	6.3 LBS
<b>E34</b>				

### COMBINATION SPUR & SHOE

**FIBERGLASS ONLY.** This accessory allows the use of either a spur or a shoe with thick rubber tread.

<b>FACTORY ONLY</b>	<b>E38</b>
---------------------	------------

### FRONT-MOUNTED PULLEY

**FIBERGLASS ONLY.** Large diameter pulley sheave assembly mounted between slide guides allows fly section to be extended and lowered from front side of ladder.

<b>FACTORY ONLY</b>	<b>E55</b>
---------------------	------------

### PROGRIP™ ACCESSORY

**FIVE PAIRS PER CARTON.** Slip-resistant design that easily replace your ladder's current end caps. They protect the support surface from damage while including easy-carry hand grips.

<b>FIELD ONLY</b>	<b>PK709</b>
-------------------	--------------

### LADDER STABILIZER

Fits extension and single ladders with rail up to 4" x 1 3/4". Holds ladder 12" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.

<b>MODEL NUMBER</b>	<b>LP-2200-00</b>	<b>APPROX. WEIGHT</b>	<b>6 LBS</b>
---------------------	-------------------	-----------------------	--------------

### ADJUSTABLE STABILIZER

Fits extension and single ladders with rail up to 4" x 1 3/4". Aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.

<b>MODEL NUMBER</b>	<b>LP-2210-00</b>	<b>APPROX. WEIGHT</b>	<b>6 LBS</b>
---------------------	-------------------	-----------------------	--------------

### PROGUARDS™

ProGuards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™. PATENT #6,499,563 B1

<b>MODEL NUMBER</b>	<b>LP-5510-00</b>	<b>APPROX. WEIGHT</b>	<b>1.4 LBS</b>
---------------------	-------------------	-----------------------	----------------

### LADDER JACK (SHORT BODY)

Short body ladder jacks (1 pair) span 2 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.

<b>MODEL NUMBER</b>	<b>LP-2100-23</b>	<b>APPROX. WEIGHT</b>	<b>14 LBS</b>
---------------------	-------------------	-----------------------	---------------

### LADDER JACK (LONG BODY)

Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.

<b>MODEL NUMBER</b>	<b>LP-2100-13</b>	<b>APPROX. WEIGHT</b>	<b>16 LBS</b>
---------------------	-------------------	-----------------------	---------------

### LEVELOK® LADDER STABILIZER & LEVELER

**KEYLOK® QUICK CONNECT SYSTEM.** The Levelok® is one of the easiest to use ladder levelers in the market. It can be installed on almost any fiberglass or aluminum extension ladder, and can be operated using only your foot – freeing your hands to hold the ladder.

<b>MODEL NUMBER</b>	<b>LP-2220-01</b>	<b>APPROX. WEIGHT</b>	<b>8 LBS</b>
---------------------	-------------------	-----------------------	--------------

### PAIL SHELF STEP LADDER ACCESSORY

**ONLY FOR STEP LADDERS.** Fits all louisville / davidson brand step ladders. Detailed instructions and supplied hardware make installation easy.

<b>MODEL NUMBER</b>	<b>LP-2400-00</b>	<b>APPROX. WEIGHT</b>	<b>1.5 LBS</b>
---------------------	-------------------	-----------------------	----------------

	FE3200	FE7000	FE1700	FE0600	FE4000HD	AE1200HD	AE2800	AE2000	AE1600	AE3200	AE4000
<b>ACCESSORY #E03 COMBINATION POLE GRIP &amp; CABLE HOOK</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E04 RIGID POLE GRIP</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E05 WEB POLE GRIP</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E11 LADDER LASH</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E30 WHEEL SPURS</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E34 AUTOMATIC ADJUSTING LEVELER FACTORY MOUNT</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶
<b>ACCESSORY #PR091006C-B-PY AUTOMATIC ADJUSTING LEVELER FIELD MOUNT</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶
<b>ACCESSORY #E38 COMBINATION SPUR &amp; SHOE</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶						
<b>ACCESSORY #E55 FRONT-MOUNTED PULLEY</b>	▶▶▶	▶▶▶*			▶▶▶						
<b>MODEL #PK709 PROGRIP™</b>										▶▶▶	▶▶▶
<b>MODEL #LP-2200-00 LADDER STABILIZER</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶
<b>MODEL #LP-2210-00 ADJUSTABLE STABILIZER</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶
<b>MODEL #LP-5510-00 PROGUARDS™</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶
<b>MODEL #LP-2100-23 LADDER JACK SHORT BODY</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	
<b>MODEL #LP-2100-13 LADDER JACK LONG BODY</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	
<b>MODEL #LP-2220-01 LEVELOK® LADDER STABILIZER &amp; LEVELER</b>	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶	▶▶▶		▶▶▶	▶▶▶

For availability, please contact Customer Service. Specify ladder size and model. To order factory-mount accessories, add the 3-digit accessory number and size.  
 EXAMPLE: FE3220-E05, 20' Fiberglass Extension Ladder with Web Pole Grip.


\*Only fits 16'-32' models

## REDUCE

THE RISK OF

## ACCIDENTS & FINES

AT THE WORKSITE

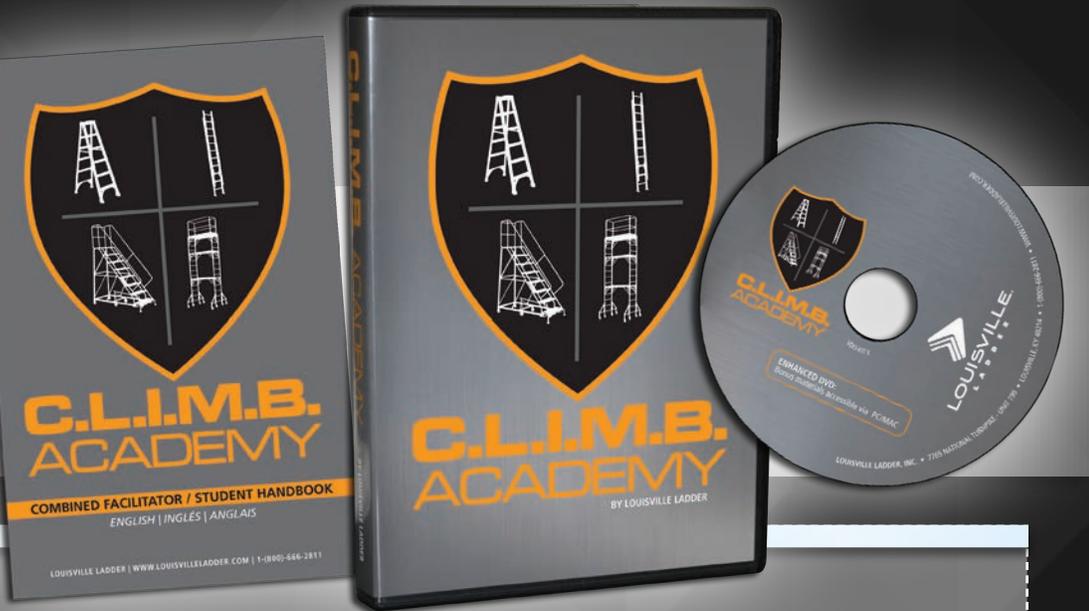

Louisville Ladder's **C.L.I.M.B. ACADEMY** teaches fundamental principles of using step ladders, extension ladders, rolling warehouse ladders, rolling tower scaffolding, and aluminum walkboards. In addition to **C.L.I.M.B. ACADEMY** our customers benefit from free ladder condition assessments and ladder use audits. Several of our customers have saved thousands of dollars voiding OSHA fines and ladder-related accidents.

**150,000 people** are involved in a ladder-related accident each year  
**\$80,000 USD** – the average full cost of an accident

**CHOOSE** the right equipment  
**LOOK** for damaged or missing parts  
**INSURE** a safe setup  
**MOVE** safely using three points of contact  
**BE** a climbing safety expert; **NOT** a statistic!

## TERMS AND CONDITIONS OF SALE

Louisville Ladder, Inc. is herein referred to as the "Seller" and the customer or person or entity purchasing goods ("Goods") from Seller is referred to as the "Buyer". These Terms and Conditions, any quotation or acknowledgment from Seller relevant to the sale of the Goods and all documents incorporated by specific reference therein, constitute the complete and exclusive statement of the terms of the agreement governing the sale of Goods by Seller to Buyer. Any other language proposed by Buyer, including Buyer's Purchase Order language shall not control over these Terms. Buyer's acceptance of the Goods will manifest Buyer's assent to these Terms and Conditions.

- PRICES:** All prices are exclusive of taxes, transportation and insurance, which are to be borne by Buyer.
- TAXES:** Any tax or governmental charge affecting Seller's costs of production, sale, or delivery shall be for Buyer's account and shall be added to the price.
- TERMS OF PAYMENT:** Unless otherwise specified by Seller, terms are 1% ten (10), net thirty (30) days from date of Seller's invoice in U.S. currency. Seller shall have the right, among other remedies, either to terminate this agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment. When due Buyer shall be liable for all expenses, including attorney's fees, relating to the collection of past due amounts. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries and for the Goods theretofore delivered.
- FREIGHT POLICY:** Freight prepaid on shipments to one destination within the continental U.S. that total 1000 pounds or more of fiberglass and/or aluminum products or 1000 pounds of any combination including wood and steel.
- SHIPMENT AND DELIVERY:** Deliveries are made F.O.B. Seller's shipping point. Risk of loss or damage and responsibility shall pass from Seller to Buyer upon delivery. Any claims for shortages or damages suffered in transit shall be submitted by the Buyer directly to the carrier. While Seller will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller reserves the right to make partial shipments. Seller, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided shipping instructions. If the shipment of the Goods is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other

additional expenses resulting therefrom.

- LIMITED WARRANTY:** Subject to the limitations of Section 7, Seller warrants that the Goods manufactured by Seller will be free from defects in material and under normal use and regular service and maintenance for a period of one year from the date of shipment of the Goods by Seller, unless otherwise specified by Seller in writing. THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY SELLER WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE. THIS WARRANTY DOES NOT EXTEND TO ANY LOSSES OR DAMAGES DUE TO MISUSE, ACCIDENT, ABUSE, NEGLECT, NORMAL WEAR AND TEAR, BUYER'S NEGLIGENCE, UNAUTHORIZED MODIFICATION OR ALTERATION, USE BEYOND RATED CAPACITY, OR IMPROPER INSTALLATION, MAINTENANCE OR APPLICATION. To the extent that Seller has relied upon any specifications, information, representation of operating conditions or other data supplied by Buyer or its agents to Seller in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer and relied upon by Seller, any warranties or other provisions contained herein which are affected by such conditions shall be null and void. If within thirty (30) days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing, Seller shall, at its option, repair, correct or replace F.O.B. point of manufacture, that portion of the Goods found by Seller to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranty for the remainder of the original warranty period or ninety (90) days, whichever is longer. Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.
- LIMITATION OF REMEDY AND LIABILITY:** THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HERELUNDER (OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7) SHALL BE LIMITED, AT SELLER'S OPTION, TO REPAIR, CORRECTION OR REPLACEMENT UNDER SECTION

5. SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include but not be limited to, loss of anticipated profits, business interruption, loss of use or revenue, cost of capital or loss or damage to property or equipment. It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

8. **PATENTS AND COPYRIGHTS:** Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as are made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notify Seller of any claim or suit involving Buyer in which such infringement is alleged, and that Buyer cooperate fully with Seller and permit Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to use only applies to infringements arising solely out of the inherent operation of such Goods. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right at its option and expense to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them.


9. **EXCUSE OF PERFORMANCE:** Seller shall not be liable for delays in performance or for non-performance due to acts of God, acts of Buyer, war, fire, flood, weather, sabotage, strikes, or labor or civil disturbances; governmental requests, restrictions, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or canceled by

Seller upon notice to Buyer in the event of any of the foregoing, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing. If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom. Seller reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer.

10. **ASSIGNMENT:** Buyer shall not assign its rights or delegate its duties hereunder or any interest therein or any rights hereunder without the prior written consent of the Seller, and any such assignment, without such consent, shall be void.

11. **GENERAL PROVISIONS:** These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment, or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of the Seller. No conditions, usage or trade, course of dealing or performance, understanding or agreement, purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification shall be affected by the Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction. The validity, performance, and all other matters relating to the interpretation and effect of this agreement shall be governed by the law of the state of Kentucky. Buyer and Seller agree that the proper venue for all actions arising in connection herewith shall be only in the State where the Goods involved in such actions were manufactured and the parties agree to submit to such jurisdiction.

# WAREHOUSE LOCATIONS

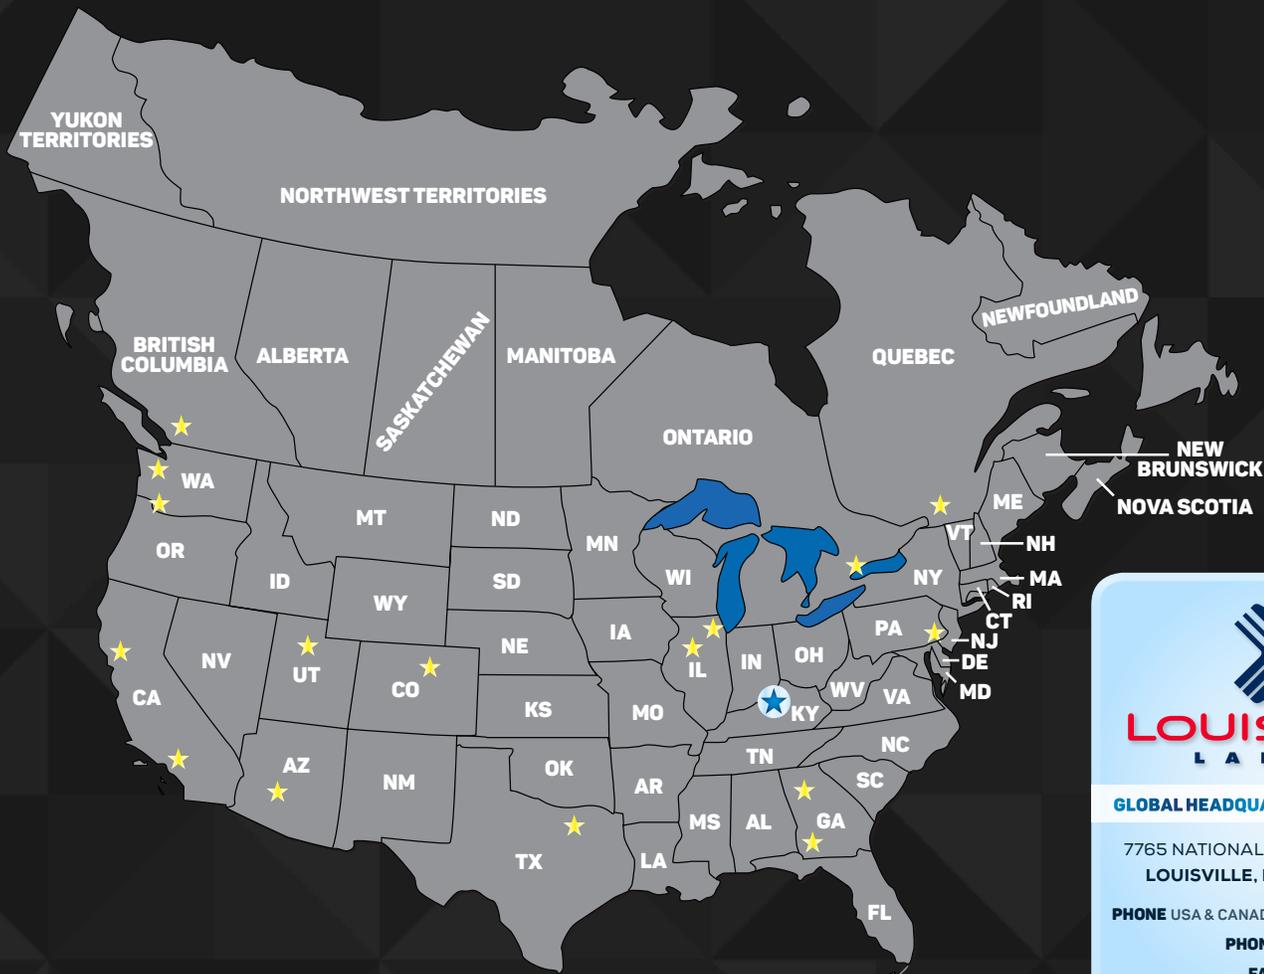

## GLOBAL HEADQUARTERS & WAREHOUSE

7765 NATIONAL TURNPIKE • UNIT 190  
LOUISVILLE, KENTUCKY • 40214

PHONE USA & CANADA 1.800.666.2811  
PHONE 1.502.636.2811  
FAX 1.800.274.4566

## REGIONAL WAREHOUSES

### ▶ ATLANTA, GA

2689A Mountain Industrial Blvd.  
Tucker, GA 30084  
PHONE: (770) 491-1515

### ▶ CHICAGO, IL

1011 Asbury Dr.  
Buffalow Groove, IL 60089  
PHONE: (847) 808-8400  
FAX: (847) 264-7920

### ▶ DALLAS, TX

801 Heinz Way  
Grand Prairie, TX 75051  
PHONE: (972) 602-4400

### ▶ DENVER, CO

11551 East 45th Ave. Unit B  
Denver, CO 80239  
PHONE: (720) 445-1660

### ▶ HAYWARD, CA

2192 West Winton Ave.  
Hayward, CA 94545  
PHONE: (510) 750-2651

### ▶ LAREDO, TX

8705 Killam Industrial Blvd.  
Laredo, TX 78045  
PHONE: (956) 523-6500

### ▶ LOS ANGELES, CA

10013 East 8th Street, Suite R  
Rancho Cucamonga, CA 91730  
PHONE: (909) 941-0623

### ▶ PEORIA, IL

7921 North Hale Ave.  
Peoria, IL 61615  
PHONE: (309) 692-1895

### ▶ PHILADELPHIA, PA

855 Dunks Ferry Road  
Bensalem, PA 19020  
PHONE: (215) 638-8904

### ▶ PHOENIX, AZ

1120 North 47th Ave, Suite 100  
Phoenix, AZ 85043  
PHONE: (602) 682-1047

### ▶ SALT LAKE CITY, UT

760 West Layton Ave.  
Salt Lake City, UT 84104  
PHONE: (801) 854-8949

### ▶ SEATTLE, WA

920 S. Doris Street  
Seattle, WA 98108  
PHONE: (206) 762-4888  
FAX: (206) 767-4386

### ▶ VALDOSTA, GA

1617 James P. Rodgers Drive  
Valdosta, GA 31601  
PHONE: (229) 245-0669

### ▶ VANCOUVER, WA

7509 North East 47th Ave.  
Vancouver, WA 98661  
PHONE: (206) 762-4888  
FAX: (206) 767-4386

## CANADA

### ▶ QUEBEC

2001 Francis Hughes  
Laval, QC H7S 2G2  
PHONE: (450) 668-4610  
FAX: (450) 668-4611

### ▶ ONTARIO

100 Engelhard Drive  
Aurora, ON L4G 3V2  
PHONE: (800) 867-5233  
USA: (888) 252-3337  
FAX: (905) 727-7271

### ▶ BRITISH COLUMBIA

7205 Brown Street  
Delta, BC V4G 1G5  
PHONE: (604) 940-2972  
FAX: (604) 940-2973

[www.LOUISVILLELADDER.com](http://www.LOUISVILLELADDER.com)

7765 NATIONAL TURNPIKE, UNIT 190  
LOUISVILLE, KENTUCKY 40214

USA & CANADA ..... 1 800 666 2811  
PHONE ..... 1 502 636 2811  
FAX ..... 1 800 274 4566

Copyright 2015 Louisville Ladder • Printed in USA

OCTOBER 2015