



FLOOR COVERING INSTALLATION SYSTEMS

- Patching and Skimcoating Products
- Self-Leveling Underlayments and Primers
- Slope and Deep-Fill Products
- Sound-Reduction Products
- Carpet Installation Adhesives
- Resilient Flooring Adhesives
- Moisture-Control Products

80
years
1937-2017



www.mapei.com



TABLE OF CONTENTS

Introduction	2
--------------------	---

Technology Logos Index	3
------------------------------	---

PRODUCT SELECTION CHARTS

Patching and Skimcoating Compounds .	4
--------------------------------------	---

Moisture Control	4
------------------------	---

Self-Leveling Underlayments.....	5
----------------------------------	---

Primers for Self-Leveling Materials	6
---	---

Carpet Adhesives.....	7
-----------------------	---

Resilient Flooring Adhesives	8
------------------------------------	---

PRODUCT INFORMATION

Patching and Skimcoating Products

Planipatch®	9
-------------------	---

Planipatch Plus®	9
------------------------	---

Planiprep™ SC.....	9
--------------------	---

Mapecem® Quickpatch.....	10
--------------------------	----

Self-Leveling Underlayments and Primers

Novoplan® SP.....	10
-------------------	----

Novoplan 2 Plus.....	10
----------------------	----

Novoplan Easy Plus.....	11
-------------------------	----

Ultraplan® M20 Plus.....	11
--------------------------	----

Ultraplan 1 Plus.....	11
-----------------------	----

Ultraplan Easy	12
----------------------	----

Ultraplan Extreme 2.....	12
--------------------------	----

Ultraplan LSC	12
---------------------	----

Ultraplan Lite.....	13
---------------------	----

Ultraplan QuickTraffic	13
------------------------------	----

Primer L™	13
-----------------	----

Primer T™	14
-----------------	----

ECO Prim Grip™	14
----------------------	----

Primer WE™	14
------------------	----

Primer E™	15
-----------------	----

Primer CE™	15
------------------	----

Planibond® EBA.....	15
---------------------	----

Mapelath™	16
-----------------	----

Slope and Deep-Fill Products

Topcem™ Premix.....	16
---------------------	----

Mapecem® Premix.....	16
----------------------	----

Sound-Reduction Products

MAPEI SM Primer™	17
------------------------	----

MAPEI SM Primer Fast.....	17
---------------------------	----

Mapeguard® 2	17
--------------------	----

Mapesonic™ 2.....	18
-------------------	----

Carpet Installation Adhesives

Ultrabond ECO® 20.....	18
------------------------	----

Ultrabond ECO 120.....	18
------------------------	----

Ultrabond ECO 220.....	19
------------------------	----

Ultrabond ECO 85.....	19
-----------------------	----

Ultrabond ECO 185.....	19
------------------------	----

Ultrabond ECO 285.....	20
------------------------	----

Ultrabond ECO 420.....	20
------------------------	----

Ultrabond ECO 810.....	20
------------------------	----

Ultrabond® Spray 810	21
----------------------------	----

Ultrabond ECO 885	21
-------------------------	----

Resilient Flooring Adhesives

Ultrabond ECO 290	21
-------------------------	----

Ultrabond ECO 390	22
-------------------------	----

Ultrabond ECO 300	22
-------------------------	----

Ultrabond ECO 350.....	22
------------------------	----

Ultrabond ECO 360	23
-------------------------	----

Ultrabond ECO 373.....	23
------------------------	----

Ultrabond Spray 360.....	23
--------------------------	----

Ultrabond ECO 560	24
-------------------------	----

Ultrabond ECO 570.....	24
------------------------	----

Ultrabond ECO 611	24
-------------------------	----

Ultrabond ECO 711	25
-------------------------	----

Ultrabond ECO 575.....	25
------------------------	----

Ultrabond G15.....	25
--------------------	----

Ultrabond G17.....	26
--------------------	----

Ultrabond G19.....	26
--------------------	----

Ultrabond G21.....	26
--------------------	----

Moisture-Control Products

Planiseal® Easy	27
-----------------------	----

Planiseal VS.....	27
-------------------	----

Planiseal VS Fast.....	27
------------------------	----



THE WORLD OF MAPEI

Originally established in 1937, today MAPEI is a privately owned global corporation headquartered in Milan, Italy, with 81 subsidiaries including 70 plants in 32 countries. The company specializes in manufacturing chemical products for building,

including waterproofing products, specialty mortars and admixtures for concrete, products for the restoration of historic buildings, and special decorative and protective coatings for concrete surfaces. In addition, MAPEI is the world leader in the manufacturing of mortars, grouts, adhesives and complementary products for the installation of all types of floor and wall coverings. MAPEI Corporation, the division responsible for supporting the North American markets, is based in Deerfield Beach, Florida, and employs over 1,100 team members – ranging from Manufacturing and R&D to Technical Services and Sales.




SUPERIOR PRODUCTS

FULL-BREADTH PRODUCT LINES

MAPEI produces the most innovative products for the construction market. Around 1,500 products (adhesives, sealants, mortars, admixtures, latex, etc.) are manufactured in MAPEI's plants, which produce the world's most complete range of building products. Diversified, high-quality chemical products –



9 PRODUCT LINES

-  **TILE & STONE** INSTALLATION SYSTEMS
-  **FLOOR COVERING** INSTALLATION SYSTEMS
-  PRODUCTS FOR **WOOD** FLOORING
-  **BELOW-GRADE WATERPROOFING** SYSTEMS
-  **CONCRETE RESTORATION** SYSTEMS
-  PRODUCTS FOR **STRUCTURAL STRENGTHENING**
-  **ADMIXTURES** FOR **CONCRETE**
-  PRODUCTS FOR **UNDERGROUND CONSTRUCTION**
-  **CEMENT ADDITIVES** DIVISION

from powdered adhesives, to liquid and paste products, to polymers – are created with the aim of meeting the requirements of more than 60,000 customers around the world.

SUPERIOR-QUALITY PRODUCTS

MAPEI is an ISO 9001-2000 certified company. Our products are produced according to exacting standards, strictly adhering to process and procedural guidelines with documented compliance. This rigid production format is vigilantly followed to ensure that every product is produced uniformly from batch to batch.



PROFESSIONAL SUPPORT NETWORK

KNOWLEDGEABLE SALES FORCE

MAPEI brings you the largest, most highly trained sales force within the industry to serve your needs for product application/installation recommendations. Our sales representatives are focused on supporting you with product knowledge, product demonstrations, product information, marketing support materials and other relevant tools to help you generate sales.

TECHNICAL EXPERTISE

An in-house Technical Services Call Center responds to customers' telephone inquiries with answers to installation challenges in real time. In addition, MAPEI can offer field support for job start-ups, product training and on-site problem resolution.



CUSTOMER SERVICE PLUS

MAPEI's standards for customer service are best-in-class. Our leadership includes such service innovations as:

- Customer-friendly, efficient processes
- One-call resolution
- Employee commitment to effective customer dialog



INNOVATIVE RESEARCH & DEVELOPMENT

Worldwide, more than 12% of MAPEI employees are involved in the development of new technologies and product innovations, keeping our customers at the forefront of the industry. The company has taken the additional initiative of focusing its R&D efforts on environmentally sustainable solutions.

To remain on the cutting edge of innovation, MAPEI reinvests 5% of its

annual revenues into researching and developing new products and technologies; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which meet LEED requirements.

BEST-BACKEDSM WARRANTY PROGRAM

To bring it all together, MAPEI complements the industry's best products with simple, easy-to-understand requirements for a variety of warranty options.



Products developed with MAPEI's "green innovation" are LEED-compliant, helping to contribute valuable points toward LEED-certified projects.



MAPEI's BioBlock technology has been added to select products to help protect them from mold and mildew.



Green Label Plus identifies adhesives that have been certified to meet low chemical emissions criteria for indoor air quality.



MAPEI's FastTrack Ready products reduce the required steps of an installation and/or perform more quickly than current technology.



Products developed with Ultralite Technology are lightweight, high-performing and easy to use, and provide extended coverage at the same product weight as traditional products.



Products featuring High-Hydrated Cement Technology (HCTTM) offer high early strength, excellent workability, ultra fast curing, unmatched long-term durability and efflorescence-free curing.



Products featuring the UL Classified logo are certified for fire resistance by Underwriter Laboratories standards.

Patching, Skimcoating and Deep Fill Compounds

	Thickness of repair	Waiting time before installation	
		Ceramic, tile and stone	Carpet, resilient and wood
Planipatch® Fast-Setting, Polymer-Modified, Cement-Based Patching Compound	Featheredge to 1/2" (12 mm)	60 minutes	60 minutes
Planiprep SC High-Performance, Fiber-Reinforced Skimcoating Compound	Featheredge to 1" (2,5 cm)	30 to 60 minutes	30 to 60 minutes
Mapecem® Quickpatch High-Performance Concrete Patch	Featheredge to 3" (7,5 cm)	2 hours	16 hours
Topcem™ Premix Ready-to-Use, Accelerated-Cure Screed	1/4" to 2" (6 mm to 5 cm)	24 hours	48 hours
Mapecem Premix Fast-Setting Screed Mortar	1/4" to 4" (6 mm to 10 cm)	3 to 4 hours	16 to 18 hours

Moisture Control

	Surface profiling requirements	Moisture reduction
Planiseal® VS Alkali-Resistant, Epoxy Moisture-Reduction Barrier	CSP 3 to 4	Up to 25 lbs. (11,3 kg) MVER and 100% RH
Planiseal® VS Fast Fast-Track, Alkali-Resistant, Epoxy Moisture-Reduction Barrier	CSP 3 to 4	Up to 25 lbs. (11,3 kg) MVER and 100% RH
Planiseal Easy Standard Fresh Concrete Treatment	No profiling required	For use on fresh concrete with diminishing MVER and RH values less than 8 lbs. (3,63 kg) MVER or 90% RH





Self-Leveling Underlayments

	Requires surface profiling	Single-lift application range	Waiting time before installation		Compression strength*
			Ceramic, tile and stone	Carpet, resilient and wood	
Novoplan® SP Standard-Performance Self-Leveling Underlayment	Yes	1/8" to 1/2" (3 to 12 mm)	24 hours	24 hours	> 3,600 psi (24,8 MPa)
Novoplan 2 Plus Professional Self-Leveling Underlayment	Yes	1/8" to 1" (3 mm to 2,5 cm)	16 to 24 hours	16 to 24 hours	> 4,200 psi (29,0 MPa)
Novoplan Easy Plus Easy-Preparation, Self-Leveling Underlayment	No	Featheredge to 1" (2,5 cm)	16 hours	36 hours	> 3,500 psi (24,1 MPa)
Ultraplan® 1 Plus High-Performance, Quick-Setting, Self-Leveling Underlayment	Yes	Featheredge to 1-1/2" (3,8 cm)	3 hours	16 to 24 hours	> 4,150 psi (28,6 MPa)
Ultraplan Easy High-Performance, Easy-Preparation, Self-Leveling Underlayment	No	1/16" to 2" (1,5 mm to 5 cm)	3 hours	16 to 24 hours	> 4,100 psi (28,3 MPa)
Ultraplan M20 Plus Quick-Setting, High-Compressive-Strength Underlayment	Yes	1/8" to 2" (3 mm to 5 cm)	3 hours	16 hours	> 5,000 psi (34,5 MPa)
Ultraplan Lite Lightweight, Self-Leveling Underlayment	Yes	1/8" to 2" (3 mm to 5 cm)	6 hours	48 to 72 hours	> 3,500 psi (24,1 MPa)
Ultraplan LSC High-Flow, Fast-Setting, Self-Leveling Liquid Skimcoat	Yes	1/16" to 1/2" (1,5 to 12 mm)	3 hours	12 hours	> 4,150 psi (28,6 MPa)
Ultraplan QuickTraffic Extremely Fast-Setting, Self-Leveling Underlayment	Yes	1/8" to 1/2" (3 to 12 mm)	1 hour	3 hours	> 7,250 psi (50 MPa)
Ultraplan Extreme 2 Weather-Resistant, High-Compressive-Strength, Self-Leveling Underlayment	Yes	1/8" to 1" (3 mm to 2,5 cm)	3 hours	24 to 36 hours	> 5,600 psi (38,6 MPa)

* Compression strength at 28 days (ASTM C109)



Primers for Self-Leveling Materials

		Primer L™ Advanced-Technology, Acrylic Latex Primer for Concrete	Primer WE™ Water-Based Epoxy Primer	Primer T™ All-Purpose Primer for Self-Leveling Underlayments	Primer E™ High- Performance, 100%-Solids Epoxy Primer	Primer CE™ Ultra Low- Viscosity, Consolidating Epoxy Primer	Planibond® EBA High-Modulus Bonding Agent (using sand broadcast method only)	ECO Prim Grip™ Multipurpose, Bond- Promoting Primer
SUBSTRATES	Absorbent concrete	Yes	No	Yes	Yes	Yes	Yes	Yes
	Nonabsorbent concrete	No	Yes	Yes	Yes	Yes	Yes	Yes
	Exterior-grade plywood	No	Yes	Yes	Yes	Yes	Yes	Yes
	Ceramic	No	Yes	Yes	Yes	Yes	Yes	Yes
	VCT	No	Yes	Yes	Yes	Yes	No	Yes
	Terrazzo	No	No	Yes	Yes	Yes	Yes	Yes
	Steel	No	No	No	Yes	Yes	Yes	No
	Use with epoxy moisture barriers.	No	Yes	Yes	Yes	Yes	Yes	Yes
	Approximate coverage	600 to 800 sq. ft. per U.S. gal. (55,7 to 74,3 m² per 3,79 L) (per application; many substrates require multiple applications)	200 to 400 sq. ft. per U.S. gal. (18,6 to 37,2 m² per 3,79 L)	200 to 400 sq. ft. per U.S. gal. (18,6 to 37,2 m² per 3,79 L)	150 to 200 sq. ft. per U.S. gal. (13,9 to 18,6 m² per 3,79 L)	80 to 140 sq. ft. per U.S. gal. (7,43 to 13,0 m² per 3,79 L)	50 to 100 sq. ft. per U.S. gal. (4,65 to 9,29 m² per 3,79 L)	150 to 300 sq. ft. per U.S. gal. (13,9 to 27,9 m² per 3,79 L)
	Cure time at 73°F (23°C)	3 hours	> 2 hours	2 to 5 hours	6 to 7 hours	5 to 6 hours	12 hours	15 to 60 minutes
	Window to install self-leveling materials	3 to 18 hours	2 to 18 hours	Up to 24 hours	Next day	Next day	24 hours	24 hours

While the primers listed are suitable on the substrates indicated, many variables impact final performance. Review the specific primers' Technical Data Sheets for specific instructions. On large projects, consult with a MAPEI technical consultant to ensure that the best primer is selected for your application.

Carpet Adhesives

	ActionBac	Unitary with ActionBac	Outdoor carpet	Jute	Urethane-foam-backed	Enhancer-backed	Latex unitary	Urethane unitary	Woven interlock	Woven	Hot-melt-backed	Wilton	Karastan/Karaloc backing	Vinyl-backed carpet tile	Non-PVC -backed carpet tile	Vinyl-backed carpet	Wall carpeting
Ultrapond ECO® 20 Standard Flooring Adhesive	○	○		○	○	○	○										
Ultrapond ECO 120 Professional Flooring Adhesive	●	●		●	●	●	●	●	●	●	●						
Ultrapond ECO 220 Premium Flooring Adhesive	●	●		●	●	●	●	●	●	●	●	●	●				
Ultrapond ECO 85 Standard, Quick-Grab Carpet Adhesive	○	○		○	○	○	○										
Ultrapond ECO 185 Professional Carpet Adhesive	●	●		●	●	●	●	●	●	●	●						
Ultrapond ECO 285 Premium, Wet-Set Carpet Adhesive	●	●		●	●	●	●	●	●	●	●						
Ultrapond ECO 420 Professional, Outdoor Carpet Adhesive	●	●	●	●			●	●									
Ultrapond ECO 810 Professional Carpet Tile Adhesive														●			
Ultrapond® Spray 810 Spray Adhesive for Vinyl-Backed Carpet Tile														●			
Ultrapond ECO 885 Premium Polyolefin-Backed Carpet Adhesive															●		
Ultrapond ECO 300 Professional, Solid Vinyl Flooring Adhesive																●	
Ultrapond ECO 350 Professional Solid Vinyl Flooring Adhesive																●	
Ultrapond ECO 360 Premium, High-Performance Adhesive for Solid Vinyl Sheet, Tile and Plank																●	
Ultrapond ECO 373 Universal Pressure-Sensitive Multi-Flooring Adhesive														●	●	●	
Ultrapond ECO 575 Premium Wall-Base Adhesive																	●

LEGEND ○ = Standard ● = Professional ● = Premium

Resilient Flooring Adhesives

	Vinyl composition tile (VCT)	Solid vinyl tile	Luxury vinyl tile	Solid vinyl plank	Solid vinyl sheet	Conductive flooring	Fiberglass-reinforced vinyl sheet	Felt-backed residential sheet flooring	Felt-backed commercial sheet flooring	Fibrous-backed linoleum sheet flooring	Rubber tile	Rubber sheet flooring	Rubber stair treads, stringers and risers	Rubber and vinyl wall base	Reground rubber flooring
Ultrabond ECO® 20 Standard Flooring Adhesive								○							
Ultrabond ECO 120 Professional Flooring Adhesive								●	●						
Ultrabond ECO 220 Premium Flooring Adhesive								●	●						
Ultrabond ECO 290 Professional, Felt-Backed Vinyl Sheet Flooring Adhesive								●	●						
Ultrabond ECO 390 Premium Linoleum Flooring Adhesive										●					
Ultrabond ECO 511 Standard, Clear, Thin-Spread VCT Adhesive	○														
Ultrabond ECO 611 Standard, Black, Thin-Spread VCT Adhesive	○														
Ultrabond ECO 711 Premium, Clear, Thin-Spread VCT Adhesive	●														
Ultrabond ECO 300 Professional Adhesive for Solid Vinyl and Rubber Flooring		●		●	●						●	●			
Ultrabond ECO 350 Professional Solid Vinyl Sheet and Tile Adhesive		●	●	●	●										
Ultrabond ECO 360 Premium, High-Performance Adhesive for Solid Vinyl Sheet, Tile and Plank		●	●	●	●										
Ultrabond Spray 360 Spray Adhesive for Vinyl Plank and Tile		●	●	●	●										
Ultrabond ECO 373 Universal Pressure-Sensitive Multi-Flooring Adhesive	●	●	●	●	●		●	●	●						●
Ultrabond ECO 560 Premium, Universal Rubber-Flooring Adhesive		●	●	●	●			●	●		●	●			
Ultrabond ECO 810 Professional Carpet Tile Adhesive			●				●								
Ultrabond® G15 Premium, Fast-Setting Epoxy Flooring Adhesive	★	★		★	★						★	★	★		
Ultrabond G17 Conductive Epoxy Flooring Adhesive	●					●									
Ultrabond G19 Professional, Two-Part Urethane Flooring Adhesive		★		★	★						★	★	★		
Ultrabond G21 Premium, Two-Part Urethane Flooring Adhesive		★		★	★						★	★	★		
Ultrabond ECO 575 Premium Wall-Base Adhesive														●	
Ultrabond ECO 570 Premium, Urethane Rubber-Sports-Flooring Adhesive															●

LEGEND ○ = Standard ● = Professional ● = Premium ★ = Superior



Planipatch®

Fast-Setting, Polymer-Modified, Cement-Based Patching Compound

Planipatch is an ultra fast-drying, self-curing, polymer-modified, cement-based patching compound that rapidly develops high compressive strength. When *Planipatch* is mixed with *Planipatch Plus*®, the *Planipatch Plus* System can be used as an embossing leveler or as a patch to fill voids over properly prepared vinyl sheet goods, vinyl composition tile (VCT) and cement terrazzo before the direct glue-down installation of floor coverings.



Planipatch Plus®

High-Performance Additive for Planipatch®

Planipatch Plus is an acrylic latex additive for use with *Planipatch*. When *Planipatch* is mixed with *Planipatch Plus*, the *Planipatch Plus* System can be used as an embossing leveler or as a patch to fill voids over properly prepared vinyl sheet goods, vinyl composition tile (VCT) and cement terrazzo before the direct glue-down installation of floor coverings.



Planiprep™ SC

High-Performance, Fiber-Reinforced Skimcoating Compound

Planiprep SC is a high-performance, polymer-modified, fiber-reinforced, cement-based skimcoating and patching compound. Use *Planiprep SC* to skimcoat and smooth minor surface variations and defects on common substrates. *Planiprep SC* creates a strong, durable surface ready for almost any floor application. Its unique formulation mixes easily with water and produces an easy-to-apply patching compound. Rapid-setting *Planiprep SC* allows for fast-track flooring installations in 30 to 60 minutes after application, depending on thickness and environmental conditions.

	Product Code	Packaging
Canada	10922000	Bag: 22.7 lbs. (10 kg)
	10910000	Bag: 10 lbs. (4.54 kg)
	10940000	Bag: 4.4 lbs. (2.0 kg)

	Product Code	Packaging
Canada	7050005	Pail: 5 U.S. gals. (18.9 L)
	7050001	Jug: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
Canada	37411	Bag: 10 lbs. (4.54 kg)





Mapecem® Quickpatch

High-Performance Concrete Patch

Mapecem Quickpatch is a versatile, fast-setting, cementitious material used for the patching of interior/exterior concrete surfaces including concrete floors, residential driveways, sidewalks and concrete pads. *Mapecem Quickpatch* features ease of placement, with a variable water ratio and outstanding workability. Light gray *Mapecem Quickpatch* can be applied from featheredge to 3" (7,5 cm) in confined areas. *Mapecem Quickpatch* sets fast for easy and cost-efficient patching of horizontal substrates before application of self-leveling underlayments, thus minimizing jobsite turnaround time.

	Product Code	Packaging
Canada	10510000	Bag: 10 lbs. (4,54 kg)
	10525000	Bag: 25 lbs. (11,3 kg)
	10550	Bag: 50 lbs. (22,7 kg)



Novoplan® SP

Standard-Performance Self-Leveling Underlayment

Novoplan SP is a standard-performance, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors.

	Product Code	Packaging
Canada	2732123	Bag: 50 lbs. (22,7 kg)



Novoplan® 2 Plus

Professional Self-Leveling Underlayment

Novoplan 2 Plus is a high-strength, self-leveling cement-based underlayment and repair mix with quicker curing time, for interior concrete and engineer-approved floors.

	Product Code	Packaging
Canada	1785156	Bag: 50 lbs. (22,7 kg)





Novoplan® Easy Plus

Easy-Preparation, Self-Leveling Underlayment

Novoplan Easy Plus is an improved, high-strength, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors. Its unique formulation allows for direct application on substrates that are clean, securely bonded and properly primed.



Ultraplan® M20 Plus

Quick-Setting, High-Compressive-Strength Underlayment

Ultraplan M20 Plus is an HCT™ (High-Hydrated Cement Technology) calcium-aluminate-based, quick-setting, self-leveling, self-drying material. It is specially formulated for the resurfacing and construction of interior horizontal surfaces as a high-compressive-strength underlayment with maximum resistance to wheel tracking and indentations experienced in softer underlayments. *Ultraplan M20 Plus* is suitable for use as a commercial wear topping in warehouse and alternate industrial applications where an exceptional flat and smooth concrete surface is desired.



Ultraplan® 1 Plus

High-Performance, Quick-Setting, Self-Leveling Underlayment

Ultraplan 1 Plus is an HCT™ (High-Hydrated Cement Technology)-based, quick-setting, self-leveling, self-drying underlayment and repair mix for interior concrete and engineer-approved floors. *Ultraplan 1 Plus* has high strength and is abrasion-resistant, able to withstand light foot traffic after 2 to 3 hours and vehicular rubber-wheel traffic after 3 days.

	Product Code	Packaging
Canada	2731923	Bag: 50 lbs. (22,7 kg)

	Product Code	Packaging
Canada	19250000	Bag: 50 lbs. (22,7 kg)

	Product Code	Packaging
Canada	17350000	Bag: 50 lbs. (22,7 kg)





Ultraplan® Easy

High-Performance, Easy-Preparation, Self-Leveling Underlayment

Ultraplan Easy is an HCT™ (High-Hydrated Cement Technology)-based, quick-setting, self-leveling underlayment that typically requires only a clean, soundly bonded substrate before application. Typically requiring reduced surface preparation, *Ultraplan Easy* provides lower installation costs and fast turnaround on jobsites. It features high strength and is able to withstand light foot traffic after 2 to 3 hours of installation.



Ultraplan® Extreme 2

Weather-Resistant, High-Compressive-Strength, Self-Leveling Underlayment

Ultraplan Extreme 2 is an advanced hydraulic-cement-based, self-leveling compound designed for fast-track underlayment applications. It is especially formulated for leveling interior horizontal concrete surfaces where environmental controls are not operational or the building is not enclosed. Once installed, *Ultraplan Extreme 2* is not affected by exposure to intermittent rain exposure after 6 hours or to freezing temperatures after 3 days of curing. Its high compressive strength is designed to allow it to be exposed to traffic as a temporary wear layer until the floor is covered with floor covering. *Ultraplan Extreme 2* has no moisture vapor emission limitations and can be installed without testing on properly prepared concrete substrates. It is the self-leveling compound of choice for use under moisture-controlling adhesive systems and epoxy moisture barriers.



Ultraplan® LSC

High-Flow, Fast-Setting, Self-Leveling Liquid Skimcoat

Ultraplan LSC is a super fluid, high-flow, calcium-aluminate-cement-based underlayment designed for thin-coat applications over large surfaces. Unique flow properties allow *Ultraplan LSC* to spread easily and quickly, potentially eliminating the need for hand-applied skimcoats. This product cures to a hard and flat surface that typically requires no further touchup or repair, accelerating floor-covering installation and reducing the need for additional patching or skimcoating materials.

	Product Code	Packaging
Canada	24350000	Bag: 50 lbs. (22,7 kg)

	Product Code	Packaging
Canada	0348823	Bag: 50 lbs. (22,7 kg)

	Product Code	Packaging
Canada	7492823	Bag: 50 lbs. (22,7 kg)





Ultraplan® Lite

Lightweight, Self-Leveling Underlayment

Ultraplan Lite is a polymer-modified, calcium-aluminate-based, lightweight, self-drying, self-leveling underlayment. It has been specifically designed for use for leveling substrates that are not rated to carry the full weight of a traditional self-leveling underlayment. *Ultraplan Lite* mixes easily and flows out to a suitable finish with a final dry density of about 67 lbs. per cu. ft. (1 073 kg per m³) at 28 days.



Ultraplan® QuickTraffic

Extremely Fast-Setting, Self-Leveling Underlayment

Ultraplan QuickTraffic is an extremely fast-setting, high-flow, calcium-aluminate-cement-based underlayment designed for rapid subfloor preparation. Easily mixed and poured, *Ultraplan QuickTraffic* is suitable for all types of floor-covering installations in as soon as 1 to 3 hours after placement.



Primer L™

Advanced-Technology, Acrylic Latex Primer for Concrete

Primer L is a concentrated, solvent-free acrylic primer used before the installation of underlayments. It is green for easy identification. *Primer L* improves the bond between a properly prepared and profiled concrete substrate, and a self-leveling underlayment. *Primer L* can also be used as a primer for gypsum-based underlayments and patches.

	Product Code	Packaging
Canada	7492911	Bag: 25 lbs. (11,3 kg)

	Product Code	Packaging
Canada	0350123	Bag: 50 lbs. (22,7 kg)

	Product Code	Packaging
Canada	36068000	Pail: 5 U.S. gals. (18,9 L)
	36053000	Pail: 1 U.S. gal. (3,79 L)





Primer T™

All-Purpose Primer for Self-Leveling Underlayments

Primer T is a low-VOC, water-based acrylic primer that enhances the performance and adhesion of self-leveling underlayments (SLUs) on nonabsorbent surfaces such as ceramic tile, vinyl composition tile (VCT), epoxy moisture barriers and adhesive residue, as well as profiled, absorbent surfaces. Suitable for a wide variety of substrates, *Primer T* combines excellent versatility with an easy, low-odor application.



ECO Prim Grip™

Multipurpose, Bond-Promoting Primer

ECO Prim Grip is a ready-to-use, low-VOC, synthetic resin-based primer with bond-promoting silica aggregates suspended in a dispersion. It enhances the performance and adhesion of mortars to existing ceramics and difficult-to-bond-to substrates. Plus, it improves bonding of self-leveling underlayments (SLUs) and bonds of render coats over cementitious substrates. Suitable for a wide variety of substrates, *ECO Prim Grip* combines excellent versatility with an easy, low-odor application.



Primer WE™

Water-Based Epoxy Primer

Primer WE is a two-component, polymer-modified, water-based epoxy primer for enhanced adhesion to nonporous substrates before the application of MAPEI self-leveling materials. It improves adhesion over smooth, nonabsorbent and difficult-to-bond-to substrates such as properly prepared ceramic tile, epoxy moisture barriers, cement-based terrazzo, old cutback adhesive residue and approved plywood subfloors.

	Product Code	Packaging
Canada	36657	Jug: 2 U.S. gals. (7,57 L)

	Product Code	Packaging
Canada	36153000	Pail: 1 U.S. gal. (3,79 L) (4 pails per case)
	36163000	Pail: 3.5 U.S. gals. (13,2 L)

	Product Code	Packaging
Canada	45457000	Kit: 2 U.S. gals. (7,57 L)
	45468000	Part A, Pail: 5 U.S. gals. (18,9 L)
	45568000	Part B, Pail: 5 U.S. gals. (18,9 L)





Primer E™

High-Performance, 100%-Solids Epoxy Primer

Primer E is a two-component, 100%-solids epoxy primer and bonding agent designed for MAPEI self-leveling underlayments when using a sand broadcast method. *Primer E* is the most effective method for bonding to nonporous, dense substrates before installing self-leveling underlayments subject to high stress. *Primer E*'s low viscosity makes installation fast and easy, and provides excellent penetration into the substrate and therefore a tenacious bond.



Primer CE™

Ultra Low-Viscosity, Consolidating Epoxy Primer

Primer CE is an ultra low-viscosity, two-component, 100%-solids, surface-consolidating epoxy primer. *Primer CE* effectively penetrates and consolidates the surface of weak concrete or gypsum substrates. Applied in a single-coat application, *Primer CE* is designed to restore structural integrity to friable substrates such as weak gypsum-based underlayments or lightweight concretes before the application of underlayments, toppings or floor finishes. Once installed, *Primer CE* is compatible with a wide number of primers and adhesives typically used with flooring installations, such as with tile, vinyl composition tile (VCT), carpet, sheet vinyl, wood and other floor-finishing products.



Planibond® EBA

High-Modulus Epoxy Bonding Agent

Planibond EBA is a two-component, multipurpose high-modulus epoxy bonding agent. *Planibond EBA* is nonshrink, 100%-solids and moisture-insensitive. *Planibond EBA* is used primarily as a bonding agent for screeds and repair mortars, with applications for anchoring and crack repair. *Planibond EBA* meets ASTM C881 requirements.

	Product Code	Packaging
Canada	36564	Part A, Pail: 2.06 U.S. gals. (7.80 L)
	36553	Part B, Jug: 0.94 U.S. gal. (3.56 L)

	Product Code	Packaging
Canada	36864	Part A: 2.2 U.S. gals. (8.33 L)
	36853	Part B: 0.8 U.S. gal. (3.03 L)

	Product Code	Packaging
Canada	40158000	Kit: 2 U.S. gals. (7.57 L)
	40169000	Part A: 5 U.S. gals. (18.9 L)
	40269000	Part B: 5 U.S. gals. (18.9 L)





Mapelath™

Synthetic Lath

Mapelath is a lightweight, noncorroding, alkali-resistant synthetic lath used as a substitute for traditional metal lath. It is lighter and easier to work with.



Topcem™ Premix

Ready-to-Use, Accelerated-Cure Screed

Topcem Premix is a ready-to-use mortar suitable for interior and exterior applications, bonded as well as unbonded. It has an accelerated set, allowing for installation of ceramic flooring in 1 day after placement, and nonbreathable flooring systems in 2 days. *Topcem Premix* can easily be screeded or sloped, and has the workability and working time of conventional screed mortars with a much faster setting time. It is ideal for interior or exterior repairs such as filling trenches, re-sloping balconies, and forming screeds that may or may not receive subsequent flooring installations.



Mapecem® Premix

Fast-Setting Screed Mortar

Mapecem Premix is a fast-setting, premixed cement-based mortar for concrete repairs and subfloor preparation work. Mixed exclusively with water, *Mapecem Premix* provides an easy-to-use, high-compressive-strength, fast-setting mortar that sets completely within 24 hours without shrinkage cracks. When properly used, *Mapecem Premix* will allow installation of ceramic tile and natural-stone flooring after only 3 to 4 hours and installation of floor covering (such as vinyl, wood, rubber, linoleum and carpet) after 16 to 18 hours.

	Product Code	Packaging
Canada	02702000	Roll: 27" x 75' (68,6 cm x 22,9 m)

	Product Code	Packaging
Canada	15740000	Bag: 40 lbs. (18,1 kg)

	Product Code	Packaging
Canada	2060019	Bag: 40 lbs. (18,1 kg)





MAPEI SM Primer™

Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer is a ready-to-use, fast-drying, water-based, latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.



MAPEI SM Primer™ Fast

Fast-Tacking, Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer Fast is a ready-to-use, fast-drying, quick-tacking, water-based, pressure-sensitive, nonhydrolyzable latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer Fast greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.



Mapeguard® 2

Premium Crack-Isolation and Sound-Reduction Sheet Membrane

Mapeguard 2 is a next-generation, flexible, thin, 40-mil, lightweight, load-bearing, fabric-reinforced "peel-and-stick" crack-isolation membrane. After application, ceramic tile or stone can be installed immediately with any polymer-modified cement-based mortar. Glue-down wood flooring can also be installed with any MAPEI urethane adhesive.

Mapeguard 2 helps to prevent existing or future in-plane floor cracks (with movement up to 3/8" [10 mm] wide) from transmitting through grout, ceramic tile or natural stone. It also reduces the transmission of impact sound (footsteps, dropped objects, etc.) and airborne sound (voice, TV, etc.) through floors when installed under ceramic tile, stone or wood-floor coverings.

	Product Code	Packaging
Canada	7071001	Jug: 1 U.S. gal. (3.79 L) – 4 jugs per case
	7071005	Pail: 5 U.S. gals. (18.9 L)

	Product Code	Packaging
Canada	33354	Jug: 1 U.S. gal. (3.79 L) – 4 jugs per case

	Product Code	Packaging
Canada	04051	Roll: 39.4" x 68.6' (1 x 20.9 m)





Mapesonic™ 2

Premium Sound-Reduction and Crack-Isolation Sheet Membrane

Mapesonic 2 is a patent-pending, next-generation, flexible, 76-mil thin, lightweight, load-bearing, fabric-reinforced “peel-and-stick” sound-reduction and crack-isolation membrane. Application of *Mapesonic 2* can be immediately followed by installation of flooring: ceramic tile or stone with a recommended MAPEI polymer-modified, cement-based mortar; luxury vinyl tile or luxury vinyl plank with an appropriate MAPEI flooring adhesive; or glue-down wood flooring with any MAPEI urethane or hybrid-polymer-based wood adhesive.



Ultrabond ECO® 20

Standard Flooring Adhesive

Ultrabond ECO 20 has been designed to provide both value and performance in a standard flooring adhesive. Its unique formulation provides ample working time for installing felt-backed vinyl sheet flooring. *Ultrabond ECO 20* also has been designed to install most basic carpet in residential and light commercial applications. *Ultrabond ECO 20* is suitable for installing carpets with ActionBac, jute, latex-foam and sponge-rubber backings. In addition, *Ultrabond ECO 20* is ideally suited for flooring installations that may need removal within 2 to 3 years, such as installations in rental properties as well as main-street commercial and retail outlets.



Ultrabond ECO® 120

Professional Flooring Adhesive

Ultrabond ECO 120 is designed for the mainstream installations of most broadloom carpet and felt-backed sheet flooring. Competitively priced, *Ultrabond ECO 120* delivers both value and performance. Its formulation has been specifically crafted to provide ample working time for carpets with patterns as well as for the positioning of felt-backed vinyl sheet flooring.

	Product Code	Packaging
Canada	04140000	Roll: 39" x 49.2' (99 cm x 15 m)

	Product Code	Packaging
Canada	92064	Pail: 4 U.S. gals. (15,1 L)
	96820000	Pail: 5 U.S. gals. (18,9 L)

	Product Code	Packaging
Canada	91264	Pail: 4 U.S. gals. (15,1 L)
	95312000	Pail: 1 U.S. gal. (3,79 L)
	96812000	Pail: 5 U.S. gals. (18,9 L)





Ultrabond ECO® 220

Premium Flooring Adhesive

Ultrabond ECO 220 is designed specifically for installing most carpet and felt-backed sheet flooring. Its high-solids formulation is perfectly suited for commercial flooring applications where heavy traffic is expected. *Ultrabond ECO 220* also exhibits an extended working time, making it ideal for the installation of patterned carpets. *Ultrabond ECO 220* may be used in both direct and double glue-down installation methods for carpet.



Ultrabond ECO® 85

Standard, Quick-Grab Carpet Adhesive

Ultrabond ECO 85 has been redesigned for the value-conscious carpet installer. *Ultrabond ECO 85* provides quick leg development and good bond strength for most carpet backing types and felt-backed vinyl sheet flooring.



Ultrabond ECO® 185

Professional Carpet Adhesive

Ultrabond ECO 185 is a longtime favorite adhesive of the commercial carpet installer with fast grab, excellent leg development and superb bond strength. *Ultrabond ECO 185* is FastTrack Ready™, making it suitable for use over fresh concrete slabs with diminishing moisture vapor emission rates (MVERs) up to 8 lbs. per 1,000 sq. ft. (3,63 kg per 92,9 m²) per 24 hours and 90% relative humidity. Use to install carpets with jute, polypropylene (ActionBac), latex-unitary, sponge-rubber, hot-melt (Unibond), needle-punched, woven, closed-cellular urethane and Enhancer backings.

	Product Code	Packaging
Canada	92264000	Pail: 4 U.S. gals. (15,1 L)

	Product Code	Packaging
Canada	98564	Pail: 4 U.S. gals. (15,1 L)
	98568000	Pail: 5 U.S. gals. (18,9 L)

	Product Code	Packaging
Canada	96818000	Pail: 5 U.S. gals. (18,9 L)





Ultrabond ECO® 285

Premium, Wet-Set Carpet Adhesive

Ultrabond ECO 285 is a FastTrack Ready™ product designed specifically for the installation of carpet with hot-melt backings. Its high-solids formulation has been developed for use in the wet-lay installation method, so that no flash time is required. Its rapid tack development and superior bond strength make *Ultrabond ECO 285* the adhesive of choice for virtually all carpet installations.



Ultrabond ECO® 420

Professional, Outdoor Carpet Adhesive

Ultrabond ECO 420 is MAPEI's long-standing favorite for installing most types of outdoor carpet products. Excellent moisture resistance, freeze/thaw stability and superb bond strength make *Ultrabond ECO 420* the perfect choice for residential and light commercial installations of outdoor carpet. *Ultrabond ECO 420* is easy to trowel and has plenty of working time, even in the warmest installation conditions. Nonflammable and CRI Green Label Plus certified, *Ultrabond ECO 420* is MAPEI's best recommendation for outdoor carpet installations over concrete, wood and fiberglass.



Ultrabond ECO® 810

Professional Carpet Tile Adhesive

Ultrabond ECO 810 provides quick drying times and an enhanced, aggressive tack for fast-track installations of vinyl-backed carpet tile. Flooring can be installed into *Ultrabond ECO 810* in its wet state for permanent bonding. *Ultrabond ECO 810* can also be allowed to dry to its tacky phase for releasable installations. Install *Ultrabond ECO 810* by spray, roller or trowel, depending on the installation application. This adhesive is suitable for use over fresh concrete slabs with diminishing moisture vapor emission rates (MVERs) up to 8 lbs. per 1,000 sq. ft. (3,63 kg per 92,9 m²) per 24 hours and 90% relative humidity.

	Product Code	Packaging
Canada	92865000	Pail: 4 U.S. gals. (15,1 L)

	Product Code	Packaging
Canada	1042001	Pail: 4 U.S. gals. (15,1 L)
	1042002	Pail: 1 U.S. gal. (3,79 L)
	94291000	Pail: 1 U.S. qt. (946 mL)

	Product Code	Packaging
Canada	98164	Pail: 4 U.S. gals. (15,1 L)
	98053000	Pail: 1 U.S. gal. (3,79 L)
	96880000	Pail: 5 U.S. gals. (18,9 L)





Ultrabond® Spray 810

Spray Adhesive for Vinyl-Backed Carpet Tile

Ultrabond Spray 810 is an aerosolized, water-based, high-performance acrylic adhesive designed for the installation of vinyl-backed carpet tile. Its unique application method provides bond performance using considerably less material in much less time.



Ultrabond ECO® 885

Premium Polyolefin-Backed Carpet Adhesive

Ultrabond ECO 885 has been specifically designed to provide both permanent and releasable bonds for carpet and carpet tile with non-PVC, polyolefin and most "eco-type" backings. Its unique formulation has been developed to provide a very aggressive bond to polyolefin-type carpet backings where traditional adhesives will not work. *Ultrabond ECO 885* can be installed into wet for permanent bonding and allowed to dry to its tacky phase for releasable installations. *Ultrabond ECO 885* also can be used in fast-track construction practices where the MVER and RH are less than 8 lbs. (3,63 kg) and 90% respectively, and show diminishing results over time.



Ultrabond ECO® 290

Professional, Felt-Backed Vinyl Sheet Flooring Adhesive

Ultrabond ECO 290 is based on MAPEI's advanced acrylic polymer technology. This adhesive has excellent open time that allows for the positioning of felt-backed vinyl sheet flooring and is perfectly suited for commercial or residential installations. *Ultrabond ECO 290* is non-staining, easy to trowel, light in color, low in volatile organic content (VOCs) and provides a strong, durable bond for a secure flooring installation in heavy traffic conditions.

	Product Code	Packaging
Canada	1950257	Can: 22 U.S. oz. (650 mL)

	Product Code	Packaging
Canada	96582000	Pail: 4 U.S. gals. (15,1 L)

	Product Code	Packaging
Canada	92964	Pail: 4 U.S. gals. (15,1 L)
	1002104	Pail: 1 U.S. gal. (3,79 L)
	1002101	Pail: 1 U.S. qt. (946 mL)





Ultrabond ECO® 390

Premium Linoleum Flooring Adhesive

Ultrabond ECO 390 is a specially formulated adhesive designed for the installation of linoleum flooring. Its high solids content, strong leg development and aggressive tack make it perfect to install linoleum flooring. *Ultrabond ECO 390*'s fast-grab characteristics hold onto the linoleum backing during installation, reducing the need for continual rolling to ensure proper contact and bond. Easy to trowel, *Ultrabond ECO 390* has low volatile organic content (VOCs), is low in odor and is water-based, making it suitable for use in occupied buildings such as hospitals and schools. The high-performance characteristics of *Ultrabond ECO 390* make it perfect for residential and commercial use.



Ultrabond ECO® 300

Professional Adhesive for Solid Vinyl and Rubber Flooring

Ultrabond ECO 300 is a hard-set acrylic adhesive that locks flooring into place while offering excellent indentation resistance. *Ultrabond ECO 300* develops a strong bond to limit flooring movement, offers outstanding compatibility with vinyl and rubber flooring, and will not stain.



Ultrabond ECO® 350

Professional Solid Vinyl Flooring Adhesive

Ultrabond ECO 350 is a proprietary formulation based on a MAPEI acrylic polymer. It offers the unique flexibility of installing floor coverings after a short flash time or once the adhesive exhibits pressure-sensitive characteristics. Easy to apply and low in odor, *Ultrabond ECO 350* is perfectly suited for the installation of flooring in occupied environments.

	Product Code	Packaging
Canada	96539000	Pail: 4 U.S. gals. (15,1 L)

	Product Code	Packaging
Canada	93064	Pail: 4 U.S. gals. (15,1 L)
	93053000	Pail: 1 U.S. gal. (3,79 L)
	1003001	Pail: 1 U.S. qt. (946 mL)

	Product Code	Packaging
Canada	1006001	Pail: 1 U.S. qt. (946 mL)





Ultrabond ECO® 360

Premium, High-Performance Adhesive for Solid Vinyl Sheet, Tile and Plank

Ultrabond ECO 360 is a proprietary, high-performance, wet-lay and pressure-sensitive adhesive designed specifically for installing homogeneous and heterogeneous solid vinyl flooring. With its strong, durable, moisture-resistant and alkali-resistant bond, it is ideal for commercial and institutional applications. *Ultrabond ECO 360* has an excellent open time, develops strength quickly, performs well under rolling loads and resists indentation. Its low volatile organic content makes it ideal for use in occupied buildings such as hospitals and medical centers.



Ultrabond ECO® 373

Universal Pressure-Sensitive Multi-Flooring Adhesive

Ultrabond ECO 373 is a super-aggressive, pressure-sensitive adhesive that is designed for the installation of a wide variety of resilient flooring types. *Ultrabond ECO 373* has been specifically formulated to provide extended working time and can be applied using a trowel or roller, depending on the level of tack that is required for the flooring that is being installed.



Ultrabond® Spray 360

Spray Adhesive for Vinyl Plank and Tile

Ultrabond Spray 360 is an aerosolized, water-based, high-performance acrylic adhesive designed for the installation of solid vinyl tile, luxury vinyl tile, vinyl composition tile (VCT) and vinyl plank. Its unique application method provides bond performance using considerably less material in much less time.

	Product Code	Packaging
Canada	93564	Pail: 4 U.S. gals. (15.1 L)
	1006004	Pail: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
Canada	1942315	Pail: 4 U.S. gals. (15.1 L)
	1942304	Pail: 1 U.S. gal. (3.79 L)

	Product Code	Packaging
Canada	1950157	Can: 22 U.S. oz. (650 mL)





Ultrabond ECO® 560

Premium, Universal Rubber-Flooring Adhesive

Ultrabond ECO 560 is a proprietary acrylic polymer-based adhesive with enhanced bonding characteristics specifically for rubber sheet and tile flooring. It can also be used to bond solid vinyl sheet, plank and tile; vinyl composition tile (VCT); and felt-backed vinyl sheet flooring. *Ultrabond ECO 560* flashes quickly to its tacky phase and is suitable for use over porous and nonporous substrates. Its unique performance characteristics, non-hazardous components and low volatile organic content make it suitable for use when two-component urethane products cannot be recommended.



Ultrabond ECO® 570

Premium, Urethane Rubber-Sports-Flooring Adhesive

Ultrabond ECO 570 is a moisture-curing, one-component, polyurethane polymer adhesive specifically designed for the direct bonding of high-performance reground-rubber sports flooring in interior or exterior applications. Its unique formulation is perfectly suited for most types of reground-rubber sports flooring and provides an aggressive and durable bond. *Ultrabond ECO 570* utilizes rapidly renewable raw materials as part of the formulation and is free of phthalate plasticizers.



Ultrabond ECO® 611

Standard, Black, Thin-Spread VCT Adhesive

Ultrabond ECO 611 is a traditional, latex-modified asphalt emulsion adhesive specifically designed for the value-conscious installer of vinyl composition tile (VCT). Quick drying times, superb tack and easy trowelability make *Ultrabond ECO 611* an excellent choice for VCT installations. Use over approved substrates including properly prepared existing cutback adhesive residue and existing VCT. *Ultrabond ECO 611* also can also be used directly over MAPEI's *Planiseal® EMB* moisture-reduction barrier when installing VCT over it, provided that the surface is smooth and flat.

	Product Code	Packaging
Canada	95664	Pail: 4 U.S. gals. (15,1 L)
	95653	Pail: 1 U.S. gal. (3,79 L)

	Product Code	Packaging
Canada	95568	Pail: 5 U.S. gals. (18,9 L)

	Product Code	Packaging
Canada	96168	Pail: 5 U.S. gals. (18,9 L)
	96153	Pail: 1 U.S. gal. (3,79 L)





Ultrabond ECO® 711

Premium, Clear, Thin-Spread VCT Adhesive

Ultrabond ECO 711 has been reformulated to provide even faster drying times, enhanced grab and greater slip resistance. Use to install vinyl composition tile (VCT) on approved substrates as well as over an existing single layer of VCT. Now a FastTrack Ready™ product, *Ultrabond ECO 711* has been formulated for higher moisture resistance, making it suitable for use over fresh concrete slabs with moisture vapor emission rates (MVERs) up to 8 lbs. per 1,000 sq. ft. (3,63 kg per 92,9 m²) per 24 hours.



Ultrabond ECO® 575

Premium Wall-Base Adhesive

Ultrabond ECO 575 is a premium wall-base adhesive specifically designed to provide superior bond and impact resistance for rubber, vinyl and carpet wall base. *Ultrabond ECO 575* also has been recently reformulated to offer even greater grab and wet strength, keeping corners wrapped tight. Its acrylic-based, light-colored formulation won't stain even the whitest wall base. In addition, *Ultrabond ECO 575* can be used to install various types of carpet in vertical/wall applications.



Ultrabond® G15

Premium, Fast-Setting Epoxy Flooring Adhesive

Ultrabond G15 is a fast-setting, two-part reactive epoxy adhesive with low volatile organic compounds (VOCs), designed for the installation of virgin rubber and vinyl flooring. *Ultrabond G15* provides the ultimate in bond and shear strength, and is recommended for high-traffic installations and for superior indentation resistance.

	Product Code	Packaging
Canada	97168	Pail: 5 U.S. gals. (18,9 L)
	97391000	Pail: 1 U.S. qt. (946 mL)

	Product Code	Packaging
Canada	1005015	Pail: 4 U.S. gals. (15,1 L)
	1005004	Pail: 1 U.S. gal. (3,79 L)
	1005001	Cartridge: 28.7 U.S. oz. (849 mL)
	1005002	Cartridge: 11 U.S. oz. (325 mL)

	Product Code	Packaging
Canada	92353	Kit: 1 U.S. gal. (3,79 L)





Ultrabond® G17

Conductive Epoxy Flooring Adhesive

Ultrabond G17 is a two-part reactive epoxy adhesive with low volatile organic compounds (VOCs), designed for the installation of electrostatic dissipative or conductive flooring.



Ultrabond® G19

Professional, Two-Part Urethane Flooring Adhesive

Ultrabond G19 is a two-part reactive adhesive specifically designed for installing floor coverings that demand a high-performance adhesive, such as sports flooring. *Ultrabond G19* is excellent for installing indoor/outdoor floor coverings that demand reliable results in various weather conditions. This adhesive aggressively adheres all types of floor coverings to properly prepared metal, asphalt pavement and many other difficult-to-bond-to substrates.



Ultrabond® G21

Premium, Two-Part Urethane Flooring Adhesive

Ultrabond G21 is a two-part reactive adhesive with low volatile organic compounds (VOCs), designed for extreme indoor and outdoor flooring installations. This adhesive aggressively adheres all types of floor coverings to properly prepared metal, asphalt pavement and many other difficult-to-bond-to substrates.

	Product Code	Packaging
Canada	93753	Kit: 1 U.S. gal. (7.57 L)

	Product Code	Packaging
Canada	3050006	Pail: 1 U.S. gal. (3.79 L)
	3050007	Pail: 2 U.S. gals. (7.57 L)

	Product Code	Packaging
Canada	3090007	Pail: 2 U.S. gals. (7.57 L)





Planiseal® Easy

Standard Fresh Concrete Treatment

Planiseal Easy is a proprietary MAPEI acrylic polymer specifically designed to treat concrete slabs from 14 days to 1 year old that exhibit moisture vapor emission rates (MVERs) up to 8 lbs. per 1,000 sq. ft. (3.63 kg per 92.9 m²) per 24 hours (ASTM F1869) or up to 90% relative humidity (ASTM F2170) and reduces transmission rates to 3 lbs. (1.36 kg) or less. Tinted green, *Planiseal Easy* is easy to apply with a 1/4" (6 mm) nap roller. This FastTrack Ready™ product dries quickly, allowing for floor-covering installations within 2 to 3 hours.

	Product Code	Packaging
Canada	45964	Pail: 4 U.S. gals. (15.1 L)



Planiseal® VS

Alkali-Resistant, Epoxy Moisture-Reduction Barrier

Planiseal VS is an alkali-resistant, two-component, 100%-solids epoxy coating that effectively stops moisture-related problems with floor coverings. In addition, *Planiseal VS* expedites floor-covering installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for installations.

	Product Code	Packaging
Canada	46364 46353	Part A, Pail: 2.20 U.S. gals. (8.33 L) Part B, Jug: 0.8 U.S. gal. (3.03 L)



Planiseal® VS Fast


Fast-Track, Alkali-Resistant, Epoxy Moisture-Reduction Barrier

Planiseal VS Fast is a fast-curing, alkali-resistant, two-component, 100%-solids epoxy coating that effectively stops moisture-related problems over concrete that impact floor coverings. In addition, it significantly expedites floor installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for floor-covering installation.

	Product Code	Packaging
Canada	46964 46953	Part A, 1.97 U.S. gals. (7.46 L) Part B, 1 U.S. gal. (3.79 L)



Gear up with
MAPEI
Get in the
KNOW

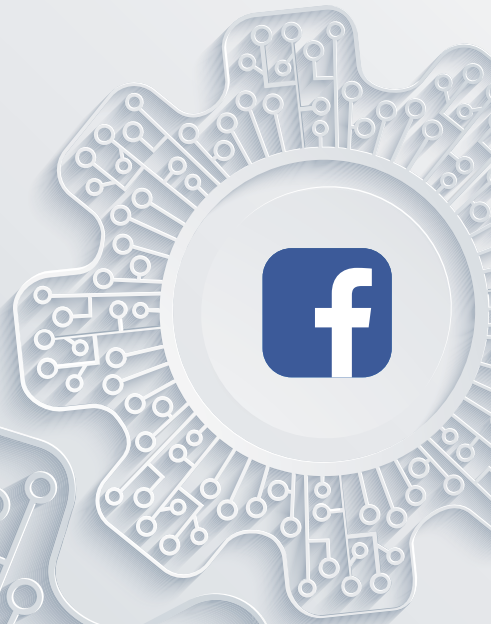

Download our
free mobile app.





80
years
1937-2017



MAPEI has manufactured chemical products for the construction industry since 1937 and, over the years, has become a point of reference for the global market. MAPEI's long, proud history has always been closely connected to its capacity for groundbreaking research and innovation. And, thanks to the inherent quality and innovation of its products and technology, MAPEI is the ideal partner for designers, contractors, workmen and clients operating on prestigious, eco-sustainable projects and sites. We are proud to celebrate our significant milestone of 80 years in the construction industry.



MAPEI Headquarters of the Americas

1144 East Newport Center Drive
Deerfield Beach, Florida 33442
1-888-US-MAPEI (1-888-876-2734) /
(954) 246-8888

Technical Services

1-800-361-9309 (Canada)
1-800-992-6273 (U.S. and Puerto Rico)

Customer Service

1-800-42-MAPEI (1-800-426-2734)

Services in Mexico

0-1-800-MX-MAPEI (0-1-800-696-2734)

Copyright ©2017 by MAPEI Corporation ("MAPEI") and all rights are reserved. All intellectual property rights and other information contained in this document are the exclusive property of MAPEI (or its parent or related companies), unless otherwise noted. No part of this document may be reproduced or transmitted in any form without the prior written consent of MAPEI.

Edition Date: February 13, 2017

PR: 8247 MKT: 16-2590 Printed in the USA.



Keyword: MAPEI Americas