

SUPERPRO₂₁₀₀

Premium Grade Stainless Steel Factory-Built Chimney

*For the Chimney Professional
Who Demands the Best.*



SuperPro 2100 offers the latest technology in factory-built chimney design-providing superior performance, durability and safety.

FEATURES

- Superior Performance
- 2" of Solid Pack Insulation
- Premium Grade Stainless Steel
- Certified to CAN/ULC S-629 & UL 103 HT for All Fuel Use



SuperPro 2100 Premium Grade Stainless Steel Chimney

For the Chimney Professional Who Demands the Best...

High Tech Chimney for Hi Tech Wood Stoves

The SuperPro 2100 is designed for today's Wood Stoves which are engineered to produce low emissions, provide less heat up the chimney and more heat into the room. A high insulating value allows SuperPro to maintain a strong draft, even when faced with these low stack temperatures. Superven's continuous research has produced the advanced technology utilized to construct SuperPro chimney.

TEST STANDARDS

SuperPro 2100 has been tested and listed to ULC Standard S629 requiring this system to withstand temperatures of up to 2100 degrees F (1150 degrees C) for three, thirty minute intervals. SuperPro Chimney is also listed and tested to Type HT requirements of Underwriters Laboratories, Inc., Standard ANSI/UL 103 HT. SuperPro Chimney conforms to the installation code for solid fuel burning appliances CSA B365. The minimum clearances shown are proven safe during the fire tests conducted with the component supports and spacers in actual contact with combustible framing. Proper installation must be followed with the instructions provided using each support assembly. Although primarily used in venting solid fuel applications, SuperPro is an all-fuel chimney also intended for venting gas or liquid fuel residential type appliances and building heating appliances.

Premium Supports with Brass Trim

Deluxe chimney support components will enhance any installation. Brass Trims embellish the chimney support components that are installed inside the room.


Supports/Framing

All SuperPro 2100 Supports are designed to carry four times the combined weight of each system at maximum allowable height.

Support and Framing Dimensions Table				
Support	Ceiling Support	Wall Support	Cath. Ceiling Support	Roof Support
Support	40'	33'	18'	39'
Diameter	Framing Dimensions			
6" Dia.	14-3/8" x 14-3/8"	14-3/8" x 14-3/8"	14" x 14"	14" x 14"
7" Dia.	14-3/8" x 14-3/8"	14-3/8" x 14-3/8"	15" x 15"	15" x 15"
8" Dia.	14-3/8" x 14-3/8"	14-3/8" x 14-3/8"	16" x 16"	16" x 16"

Smart Choice Lifetime Warranty

The SuperPro 2100 Smart Choice Lifetime Warranty applies to all Chimney components (not just insulated lengths) making SuperPro 2100 chimney the smart choice, every time. (See written Warranty for details).

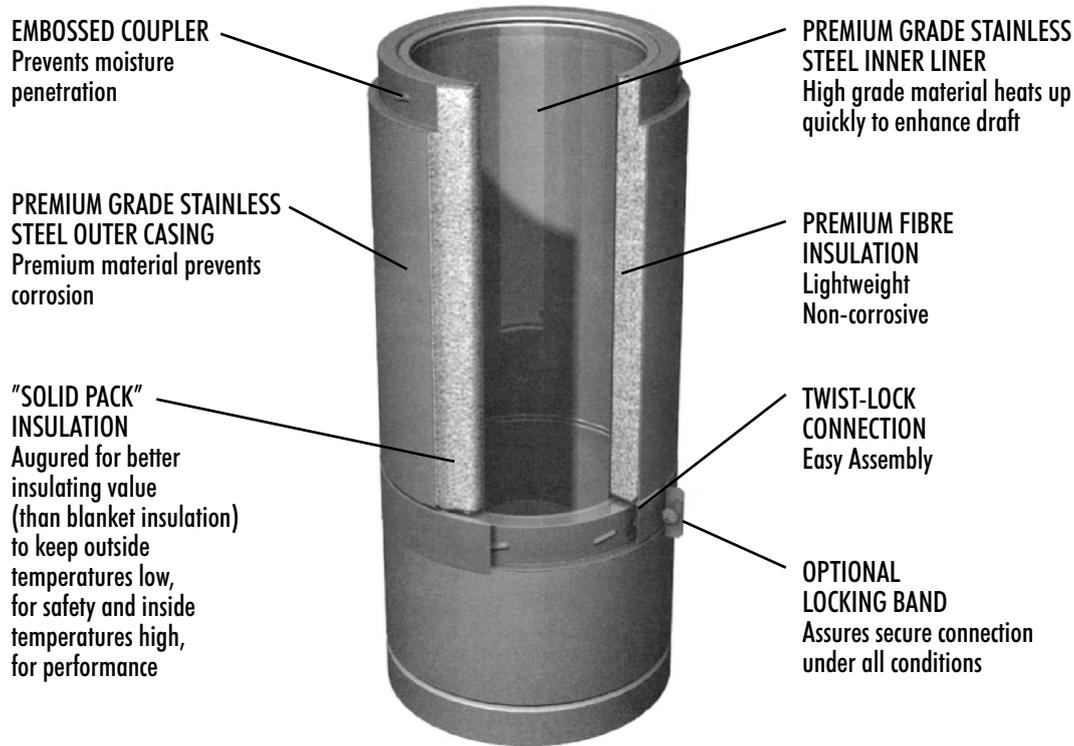



Smart Choice Lifetime Warranty

The SuperPro 2100 Smart Choice Lifetime Warranty applies to all Chimney components (not just insulated lengths) making SuperPro 2100 chimney the smart choice, every time. (See written Warranty for details).

Stainless Steel Chimney Lengths

HEIGHT REQUIREMENTS



The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.

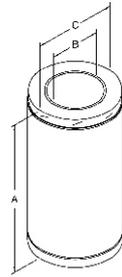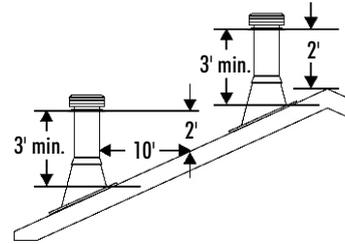

- Available in 36", 24", 18", 12" and 6" lengths.
- SuperPro 2100 has a 2" wall thickness
- Secure twist-lock design couples chimney sections together with just a 1/8 turn.
- Sectional overlap of 1-1/8".
- Chimneys are sized according to the inner diameter and are available in 6, 7, & 8 inch diameters.
- Insulated chimney requires 2" clearance to combustible material.

Size	Dimensions			Product Code	Pack
	A	B	C		
6" x 36"	36"	6"	10"	ALT636	1
6" x 24"	24"	6"	10"	ALT624	1
6" x 18"	18"	6"	10"	ALT618	1
6" x 12"	12"	6"	10"	ALT612	1
6" x 6"	6"	6"	10"	ALT606	2
7" x 36"	36"	7"	11"	ALT736	1
7" x 24"	24"	7"	11"	ALT724	1
7" x 18"	18"	7"	11"	ALT718	1
7" x 12"	12"	7"	11"	ALT712	1
7" x 6"	6"	7"	11"	ALT706	2
8" x 36"	36"	8"	12"	JM8S36	1
8" x 24"	24"	8"	12"	JM8S24	1
8" x 18"	18"	8"	12"	JM8S18	1
8" x 12"	12"	8"	12"	JM8S12	1
8" x 6"	6"	8"	12"	JM8S6	2

STAINLESS STEEL LOCKING BANDS

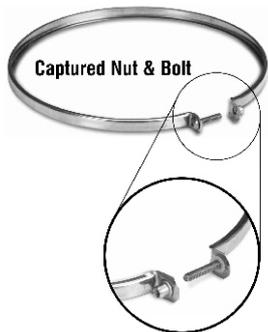


- Two flanges engage the grooves in each end of the adjoining sections holding them securely together.
- New design with convenient Captured Nut & Bolt.
- Locking Bands must be used:
 - on all sections that make up an offset.
 - on tee branch to attach a chimney length.
 - on any length suspended below the Cathedral or Roof Support.
- While Locking Bands are not required on other chimney lengths, their use is recommended for added safety and stability. It also provides a more attractive appearance.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10"	7/16"	ALT6SLB	5
7"	11"	7/16"	ALT7SLB	5
8"	12"	7/16"	JM8SLB	5

Stainless Steel Elbows & Tees

CHIMNEY OFFSET CHARTS

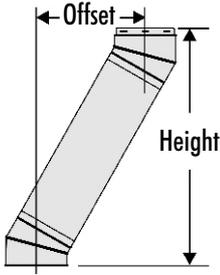

This chart has three columns for elbow angle required to achieve your desired offset. The first column ("Offset") is the horizontal measurement, at the chimney center line, of the offset needed to get around an obstacle. The second column ("Height") is the height of the assembled offset elbow to the top of the return elbow. Column 3 shows the appropriate lengths required.

1. Determine the distance of the offset required.
 2. On the chart, find the predetermined distance required for the 15° elbow kit under the corresponding chimney diameter. For greater offset, use the 30° elbow kit.
 3. After finding the offset, follow across the chart to find the specified height and appropriate chimney lengths required under their corresponding diameters.
- All measurements in inches. Offset tolerances ± one inch.

15° OFFSET CHART

Offset			Height			Lengths Required				
6"	7"	8"	6"	7"	8"	6"	12"	18"	24"	36"
1-1/4	1-5/16	1-5/8	10-5/8	11	11-3/8	-	-	-	-	-
2-1/16	2-1/4	2-1/2	15-3/8	15-3/4	15-3/4	1	-	-	-	-
4-1/16	4-1/8	4-1/8	21-1/4	21-1/2	21-13/16	-	1	-	-	-
5-5/8	5-11/16	5-11/16	27-3/16	27-3/8	27-5/8	-	-	1	-	-
7-1/4	7-1/4	7-1/4	33	33-1/8	33-3/8	-	-	-	1	-
8-7/16	8-7/16	8-1/2	37-5/8	37-7/8	38-3/16	1	1	1	-	-
10-1/4	10-1/4	10-3/8	44-1/2	44-3/4	45-1/16	-	-	-	-	1
11-1/2	11-9/16	11-11/16	49-1/4	49-3/8	49-3/4	1	-	1	1	-
13-1/8	13-1/8	13-1/4	55	55-1/4	55-5/8	-	1	-	-	1
14-11/16	14-5/8	14-3/4	60-3/4	61-1/4	61-5/8	-	-	1	-	1
16-1/4	16-3/16	15-5/16	66-3/4	66-7/8	67-1/8	-	-	-	1	1
17-1/2	17-1/2	17-1/2	71-11/16	71-5/8	71-3/4	1	1	1	-	1
19	19	19	77-5/16	77-9/16	77-11/16	-	1	-	1	1

30° OFFSET CHART

Offset			Height			Lengths Required				
6"	7"	8"	6"	7"	8"	6"	12"	18"	24"	36"
3-9/16	3-3/4	3-7/8	14-3/16	15-1/2	15-3/8	-	-	-	-	-
5-7/8	6-1/4	6-3/8	18-5/16	19-1/2	19-3/4	1	-	-	-	-
8-7/8	9-1/4	9-3/8	23-9/16	24-3/4	25	-	1	-	-	-
11-15/16	12-5/16	12-7/8	28	29-13/16	30-1/16	-	-	1	-	-
14-15/16	15-5/16	15-7/16	34-1/16	35-3/8	35-1/4	-	-	-	1	-
17-5/16	17-5/8	17-9/16	38-5/16	39-3/16	39-5/8	1	1	1	-	-
20-7/8	21-1/4	21-7/16	44-9/16	45-5/8	46-1/16	-	-	-	-	1
23-5/16	23-11/16	23-7/8	48-15/16	49-3/4	50-3/16	1	-	1	1	-
26-5/16	26-11/16	26-7/8	54-1/8	54-15/16	55-9/16	-	1	-	-	1
29-5/16	29-11/16	29-9/16	59-5/16	60-1/8	60-3/4	-	-	1	-	1
32-5/16	32-9/16	32-5/8	64-3/8	64-5/8	65-1/4	-	-	-	1	1
34-5/8	35-1/8	35	68-1/2	68-3/4	69	1	1	1	-	1
37-13/16	38-1/8	38	73-13/16	74-1/16	74-5/16	-	1	-	1	1

INSULATED 15° AND 30° ELBOWS


- The insulated elbow is used when offset is required.
- Locking bands must be used on sections that make up an offset.
- Offsets cannot be more than 30° off the vertical.
- A maximum of 6 feet is allowable between offsets.
- Elbow is fully insulated and can be used at the same 2" clearance as chimney lengths.
- Elbow support must be used with all offset installations.
- Elbows do not have locking ridges and can be rotated to attain optimum positioning offset, and allow chimney to return to correct vertical alignment, prior to installing locking bands.

ELBOW KITS INCLUDE:

- 2 elbows, 4 Locking Bands & 1 Elbow Support




15° ELBOW




Size	Dimensions			Product Code	Pack
	A	B	C		
15° - 6"	3-7/16"	2-1/2"	2"	ALT6E15K	2
15° - 7"	3-7/16"	2-9/16"	2-1/16"	ALT7E15K	2
15° - 8"	3-7/16"	2 5/8"	2-1/8"	JM8SEK	2

30° ELBOW



Size	Dimensions			Product Code	Pack
	A	B	C		
30° - 6"	4 1/4"	3-3/4"	3-1/8"	ALT6E30K	2
30° - 7"	4-1/4"	3-3/4"	3-1/2"	ALT7E30K	2
30° - 8"	4-1/4"	4-1/8"	3"	JM8SE3K	2

INSULATED TEE WITH PLUG

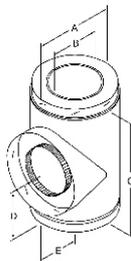


- The insulated chimney tee is used for through-the-wall installations using a wall support.
- A chimney length is attached to the tee branch using a locking band to pass safely through a wall.

Size	Dimensions					Product Code	Pack
	A	B	C	D	E		
6"	13-1/4"	6-1/2"	6-1/2"	6"	10"	ALT6T	1
7"	14-1/4"	7"	7"	7"	11"	ALT7T	1
8"	15-1/4"	7-1/2"	7-1/2"	8"	12"	JM8SIT	1

Stainless Steel Elbows & Tees Continued

INSULATED TEE PLUG




- Twist locks into bottom of insulated tee.
- Removable to provide easy access for chimney maintenance or inspection.
- Insulated to help maintain flue gas temperature.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	10"	6"	3"	J62TPI	1
7"	11"	7"	3"	J72TPI	1
8"	12"	8"	3"	J82TPI	1

Supports


ADJUSTABLE WALL SUPPORT



- Used to support the chimney on a wall installation.
- Supports up to 33 feet of chimney. If chimney extends over 33 feet, Adjustable Intermediate Wall Support must also be used.
- Includes wall support top plate with female coupler attached, male coupler, side brackets and hardware.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	17-1/8"	13"	16"	JM6AWS	1
7"	17-1/8"	14"	16"	JM7AWS	1
8"	17-1/8"	15"	16"	JM8AWS	1


ADJUSTABLE INTERMEDIATE WALL SUPPORT



- Used as supplementary support when chimney system height exceeds maximum height allowed by wall support.
- Supports an additional 33 feet of chimney.
- Includes Top Plate, Support Band, Side Brackets and Hardware.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	17-1/8"	13"	16"	JM6AIWS	1
7"	17-1/8"	14"	16"	JM7AIWS	1
8"	17-1/8"	15"	16"	JM8AIWS	1


ADJUSTABLE WALL SUPPORT WITH INSULATED TEE CAP

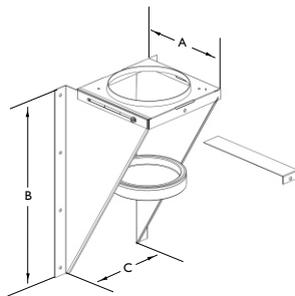

- Used to support chimney on a through-the-wall installation.
- Will support between 16 feet and 34 feet of chimney height based on size & orientation from wall
- Adjustment of 2" to 6" from a vertical wall
- Includes wall support top plate, side brackets, hardware, non-twist lock insulated tee cap, and L-bracket to contain tee cap.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	21-7/8"	11-1/4"	11-1/2"	JM6WS	1
7"	23-9/16"	12-1/4"	12-1/2"	JM7WS	1
8"	25-1/4"	13-1/4"	13-1/2"	JM8WS	1

CATHEDRAL CEILING SUPPORT BOX




- Used in pitched ceiling support installations.
- Supports up to 12 feet of chimney.
- Matte black finish.
- Includes 4 Trim Angles for an attractive interior finish.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	10-3/16"	14"	17"	ALT6CB	1
7"	10-3/16"	15"	17"	ALT7CB	1
8"	12-3/16"	16"	17"	JM8CCSB	1

Supports Continued


ROOF SUPPORT

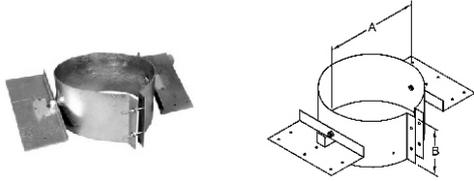

- The roof support may be used on a floor, ceiling or roof and adjusts to any roof pitch.
- It may be used above an offset to support the offset or as a supplementary support when the chimney height exceeds that of the primary support.
- The roof support will support a total height of 39 feet of chimney.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10"	5"	JM6RS	1
7"	11"	5"	JM7RS	1
8"	12"	5"	JM8RS	1


DECORATOR CEILING SUPPORT

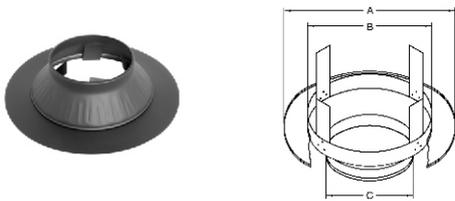

- For use in flat ceiling support installations.
- Supports up to 40 feet of chimney.
- Matte black support gives a premium finished appearance.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	19-7/8"	14-3/8"	10"	ALT6CS-1	1
7"	19-7/8"	14-3/8"	11"	ALT7CS-1	1
8"	19-7/8"	14-3/8"	12"	JM8DCS-1	1

ADAPTOR PLATE

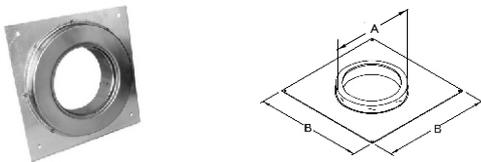


- The adaptor plate is used to adapt the chimney to zero clearance fireplaces.

Size	Dimensions		Product Code	Pack
	A	B		
6"	6"	11-5/8"	JM6AP	1
7"	7"	13"	JM7AP	1
8"	8"	13"	JM8AP	1

Shields

ATTIC INSULATION SHIELD

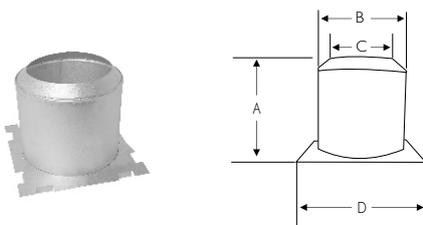


Add JUSI (pg. 10) to the Attic Insulation Shield for increased performance and safety.

- The AIS must be installed where the chimney enters the attic space in any installation.
- Designed to keep insulation away from the chimney, and to maintain the mandatory 2" clearance to combustibles.
- Must be used when installing through a second floor.

Size	Dimensions				Product Code	Pack
	A	B	C	D		
6"	10"	13"	10-3/32"	14"	JM6AIS	1
7"	10"	14"	11-3/32"	15"	JM7AIS	1
8"	10"	15"	12-3/32"	16"	JM8AIS	1

RAFTER RADIATION SHIELD

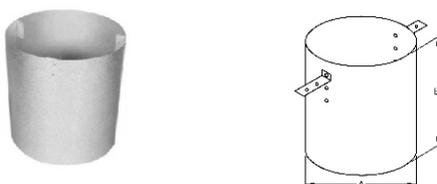


- The RRS must be installed where the chimney is enclosed immediately below the roof line

Size	Dimensions		Product Code	Pack
	A	B		
6"	12"	12"	JM6RRS	1
7"	13"	12"	JM7RRS	1
8"	14"	12"	JM8RRS	1

Shields Continued

BLACK WALL THIMBLE

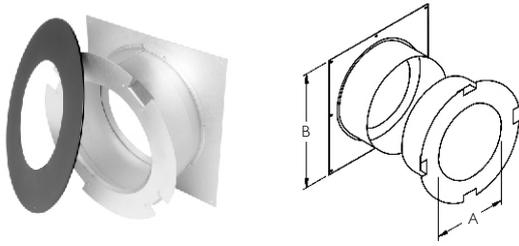


Add JUSI (pg. 10) to the Wall Thimble for increased performance and safety.

- Used in a wall support installation.
- Radiation shield is included with spacers which maintain the mandatory 2" clearance to combustibles.
- Attractive matte black finishing trim is included.
- Extends to fit 7" wall thickness.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10-1/8"	17"	ALT6AT	1
7"	11-1/8"	17"	ALT7AT	1
8"	12-1/8"	17"	JM8WT	1

Flashings and Storm Collars


ROOF FLASHING SELECTION CHART

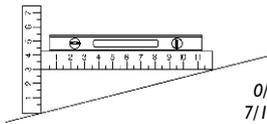

In this example, the pitch is 3/12.
 0/12 - 6/12 Roof Pitch = JM 6 or 7 AAF
 7/12 - 12/12 Roof Pitch = JM 6 or 7 AF2

To determine what roof flashing you'll require, you must work out the pitch of your roof. To determine the pitch, you'll need two rulers and a level. Measure the number of inches from the end of the level down to the roof.


ADJUSTABLE FLASHING ASSEMBLY- FLAT to 6/12

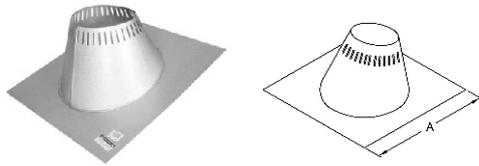

- Used where the chimney passes through a roof with a pitch of 1/12 to 6/12.
- Comes complete with storm collar.
- All seams are sealed with silicone.
- Galvalume construction.

Size	Dimensions		Product Code	Pack
	A			
6"	27-1/2" x 27-1/2"		JM6AAF	1
7"	27-1/2" x 27-1/2"		JM7AAF	1
8"	27-1/2" x 27-1/2"		JM8AAF	1
6"	27-1/2" x 27-1/2"		JM6AAF-3	3
7"	27-1/2" x 27-1/2"		JM7AAF-3	3
8"	27-1/2" x 27-1/2"		JM8AAF-3	3

ADJUSTABLE FLASHING ASSEMBLY- 6/12 to 12/12

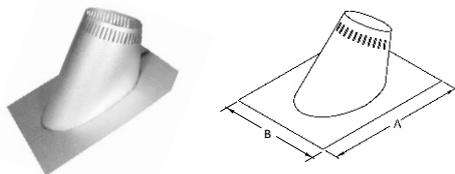


- Used where the chimney passes through a roof with a pitch of 6/12 to 12/12.
- Comes complete with storm collar.
- All seams are sealed with silicone.
- Galvalume construction.

Size	Dimensions		Product Code	Pack
	A	B		
6"	30"	21-1/2"	JM6AF2	1
7"	30"	21-1/2"	JM7AF2	1
8"	30"	21-1/2"	JM8AF2	1
6"	30"	21-1/2"	JM6AF2-3	3
7"	30"	21-1/2"	JM7AF2-3	3
8"	30"	21-1/2"	JM8AF2-3	3

Flashings and Storm Collars


TALL CONE FLASHING - FLAT TO 1/12

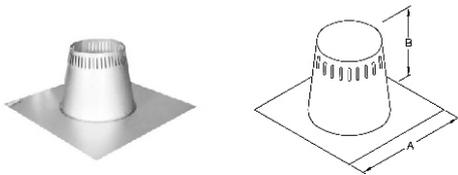

- Used on flat roof surfaces.
- Comes complete with Storm Collar.
- All seams are sealed with silicone.

Size	Dimensions		Product Code	Pack
	A	B		
6"	27"	12"	JM6ATC	1
7"	27"	12"	JM7ATC	1
8"	27"	12"	JM8ATC	1


PEAK FLASHING ASSEMBLY - 3/12 TO 6/12

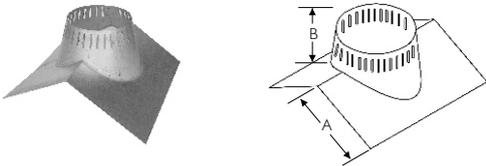

- Required where the chimney passes through a peaked roof with a pitch of 3/12 to 6/12.
- Comes complete with storm collar.
- Seams are sealed with silicone.
- Galvalume construction.

Size	Dimensions		Product Code	Pack
	A	B		
6"	24"	10"	JM6P1	1
7"	24"	10"	JM7P1	1
8"	24"	10"	JM8P1	1

PEAK FLASHING ASSEMBLY - 6/12 TO 9/12

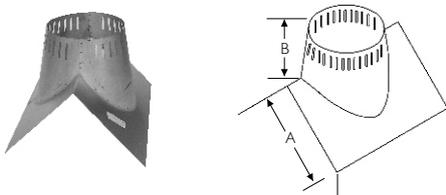

- Required where the chimney passes through a peaked roof with a pitch of 6/12 to 9/12.
- Comes complete with storm collar.
- Seams are sealed with silicone.
- Galvalume construction.

Size	Dimensions		Product Code	Pack
	A	B		
6"	21-1/2"	11-1/2"	JM6P2	1
7"	21-1/2"	12"	JM7P2	1
8"	21-1/2"	12-1/2"	JM8P2	1

RUBBER BOOT FLASHING KIT




THIS KIT INCLUDES:

- Special Storm Collar
- Rubber Boot
- Spacer Kit
- Special Boot Mounting Screws

- This kit fits 5", 6", 7" and 8" Chimneys
- Required where the chimney passes through a corrugated roof.
- Rubber Boot Flashing fits roof pitches up to 12/12" (10/12 for 8").

Size	Product Code	Pack
ALL	200275	1


ALUMINUM STORM COLLAR

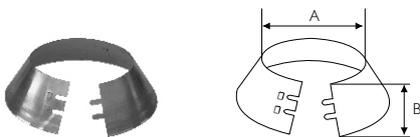

- Used in conjunction with roof flashing to keep precipitation out.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10"	5-1/2"	JM6ASC-1	1
7"	11"	5-1/2"	JM7ASC-1	1
8"	12"	5-1/2"	JM8ASC-1	1

CAULKING FOR STORM COLLAR

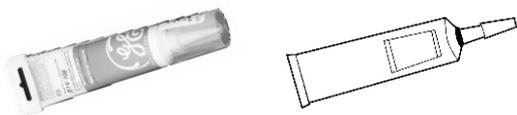


- Used to seal storm collar to chimney length above cone of flashing.
- 3 ounce tube.

Size	Product code	Pack
1 Tube	JRTV	1

Rain Caps


PREMIUM RAIN CAP



- Advanced design, premium quality 304 stainless steel.
- Provides protection against precipitation and creates a venturi effect to enhance draught.
- Twist-lock connection for secure installation.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	10"	7-1/2"	13-1/4"	ALT6PRC	1
7"	11"	7-1/2"	14-1/4"	ALT7PRC	1
8"	12"	7-1/2"	17-1/4"	JM8DRC	1

SPARK ARRESTOR




- Stainless steel mesh wire fits inside Premium Rain Cap.

Size	Dimensions		Product Code	Pack
	A	B		
6"	4-1/2" x 26"		JSC6SPAR	10
7"	4-1/2" x 29"		JSC7SPAR	10
8"	4-1/2" x 32"		JSC8SPAR	10

Parts and Accessories


WALL BAND



- Stainless steel construction.
- Provides lateral support for the chimney when installed adjacent to a wall.
- Maintains the mandatory 2" clearance to combustibles.
- Used 1st length above the tee, then every 8 feet thereafter.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10"	17"	JM6WB	1
7"	11"	17"	JM7WB	1
8"	12"	17"	JM8WB	1



BLACK STOVE PIPE ADAPTER



- For use with free-standing fireplaces and stoves for a quick and easy transition from black stove pipe or Double Wall black stove pipe to factory-built chimney.
- Easy connection to the stove.
- Twist-lock for easy connection.
- Stainless steel.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	10"	6"	5-5/8"	JM6ASE	1
7"	11"	7"	5-5/8"	JM7ASE	1
8"	12"	8"	5-5/8"	JM8ASE	1

FINISHING PLATE



- Used where the chimney passes through a soffit to provide a finished appearance.
- Maintains the mandatory 2" clearance to combustibles.

Size	Dimensions		Product Code	Pack
	A	B		
6"	10-3/16"	16"	JM6FP	10
7"	10-3/16"	17"	JM7FP	10
8"	12-3/16"	18"	JM8FP	10

Parts and Accessories Continued


ADJUSTABLE UNIVERSAL ROOF GUY KIT



- Designed to provide extra stability for chimney system above roof line
- Required when the chimney extends 5 feet or more above the roof. Use one kit every 5 feet.
- Telescoping legs can adjust from 5' to 9'
- Support band adjusts to fit 6", 7", and 8" chimney

Size	Dimensions	Product Code	Pack
6" to 8"		08439001	1


JUSI-UNIVERSAL SHIELDING INSULATION

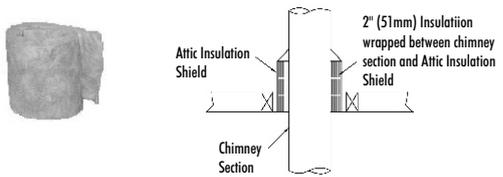

- Insulation for use with:
 - Attic Insulation Shield (JM*AIS)
 - Wall Thimble (ALT*AT and JM8WT)
 - Cathedral Ceiling Support Box (ALT*CB and JM8CCSB)
- Stops cold air infiltration into the dwelling.
- Provides additional protection against heat from the chimney.

Size	Product Code	Pack
Universal	JUSI	1

MASONRY ADAPTOR KIT

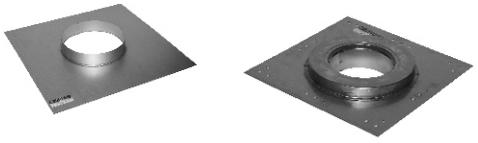

- Kit includes Anchor Plate, Masonry Flashing and Storm Collar.
- Used to extend the height of a masonry chimney using SuperPro 2100 chimney.
- Available in 6", 7" and 8" diameters.

Size	Product Code	Pack
6"	JM6MAK	1
7"	JM7MAK	1
8"	JM8MAK	1

Support Kits

SuperPro has put together 3 chimney kits to get your project done . . .

We often hear "Kits don't work" from our Hearth customers!

. . . Here is the strategy behind our SuperPro Kits - and why they make sense for you.

- **A Kit is available for each of the 3 main methods of supporting a chimney system.**
- **Each Kit ONLY includes the parts that are used in the majority of every installation.**
- **Kits do NOT include any parts that may vary in different applications, such as Roof Flashings, Chimney Lengths, etc.**

Simply decide which of these scenarios fits your need, then pick up your chimney lengths, roof flashing and elbows (if required).

CEILING SUPPORT KIT

When your chimney goes up through a ceiling, then thru the roof, you may choose the MODEL SPR DECORATOR CEILING SUPPORT INSTALLATION KIT - ALT*DCSP

- Deluxe Rain Cap
- Attic Insulation Shield
- Decorator Ceiling Support
- Stove Pipe Adaptor

NOTE: In Canada, for a two story application, purchase the Ceiling Support Installation Kit and install an additional Firestop Radiation Shield to provide proper fire stopping. In USA, for a two story application, purchase the Ceiling Support Installation Kit and install an additional Firestop Radiation Shield to provide proper fire stopping.

. . . Now you just need your roof flashing and chimney lengths.

SIZE	PRODUCT CODE
6"	ALT6DCSP
7"	ALT7DCSP
8"	ALT8DCSP




Cathedral Ceiling Support Kit

When your chimney goes out a cathedral or open beam ceiling, you may choose the MODEL SPR CATHEDRAL CEILING SUPPORT INSTALLATION KIT - ALT*CCSK

- Deluxe Rain Cap
- Cathedral Ceiling Support
- Draw Band
- Trim Kit
- Stove Pipe Adaptor

. . . Now you just need your roof flashing and chimney lengths

SIZE	PRODUCT CODE
6"	ALT6CCSK
7"	ALT7CCSK
8"	ALT8CCSK

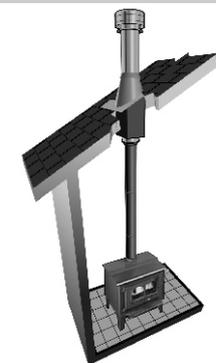

Wall Support Kit


When your chimney goes out a wall and then runs straight up, you'll need the MODEL SPR WALL SUPPORT INSTALLATION KIT - ALT*WSP

- Deluxe Rain Cap
- Wall Bands (2)
- Stove Pipe Adaptor
- Wall Thimble
- Stainless Steel Tee with Plug
- Adjustable Wall Support

. . . Now you just need:

- Vertical Chimney lengths
- Through the wall length (must extend at least 3" into the room)
- 12" chimney length or insulated tee plug (installed below the stainless steel tee)

SIZE	PRODUCT CODE
7"	ALT7WSP
8"	ALT8WSP

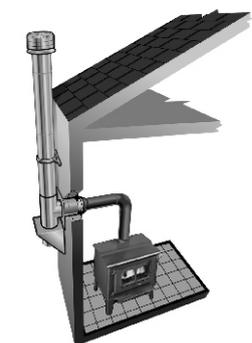


Typical Installations




DECORATOR CEILING SUPPORT INSTALLATIONS


One Storey

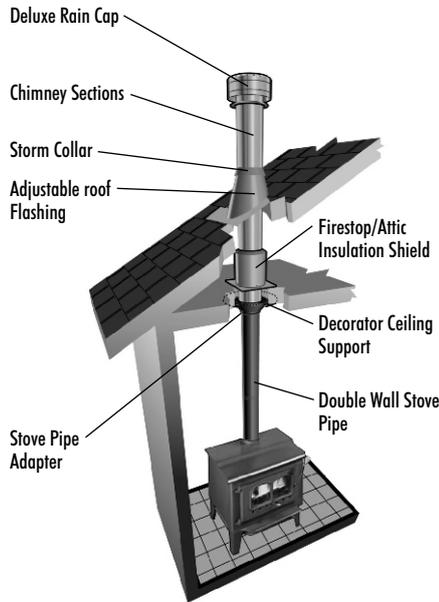

Two Storey

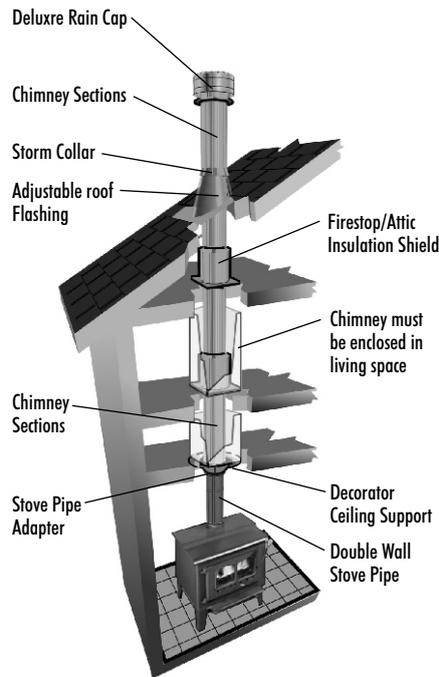


Elbow Installation

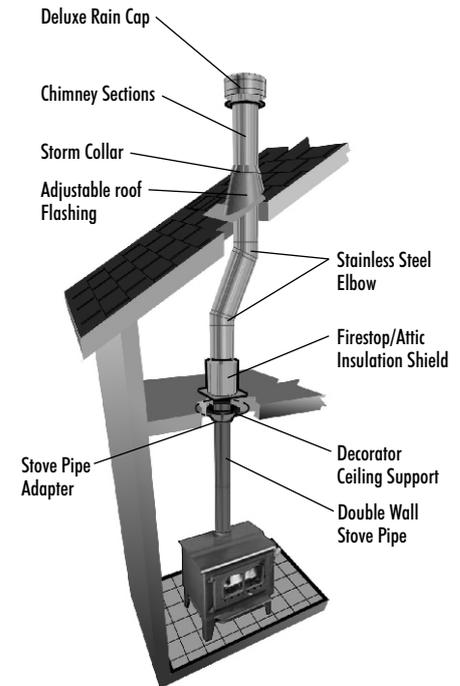


WALL SUPPORT INSTALLATIONS

One Storey

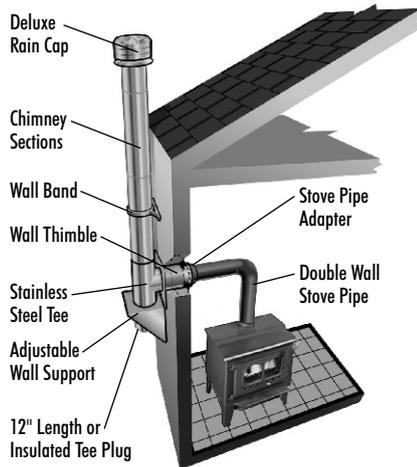


Through a soffit

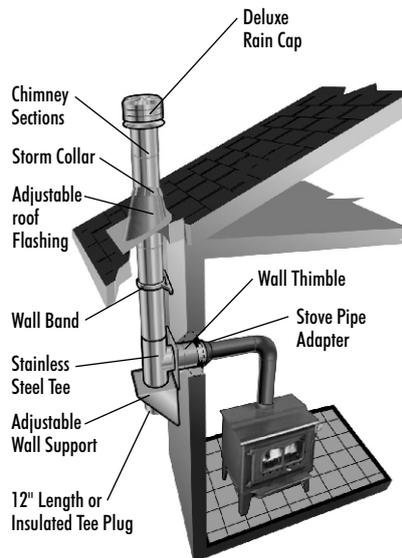

CATHEDRAL SUPPORT INSTALLATION

With Cathedral Ceiling Support Box

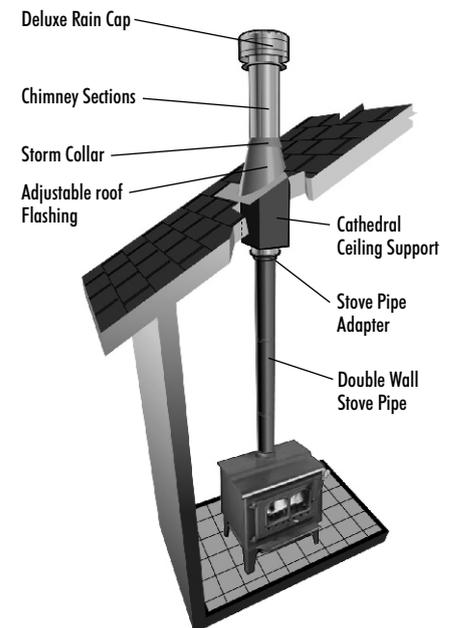

Selkirk Corporation
5030 Corporate Exchange Blvd.
Grand Rapids, MI 49512
Toll Free: 1.800.433.6341
Info@selkirkcorp.com



www.selkirkcorp.com



Selkirk Canada Corporation
P.O. Box 526, Depot 1
Hamilton, ON L8L 7X6
Toll Free: 1.888.SELKIRK (735.5475)
Info@selkirkcanada.com