

BOSTITCH®



FASTENING CATALOG



WHY BOSTITCH?

WE TORTURE OUR TOOLS TO MAKE THEM BETTER. WE DROP THEM, DRAG THEM, PUMMEL THEM, SHAKE THEM, AND EVEN FREEZE THEM UNDER SUB-ZERO CONDITIONS. WHY GO TO THESE EXTREMES? BECAUSE WE KNOW THAT YOU DEMAND SUPERIOR PERFORMANCE. BOSTITCH IS UP TO YOUR CHALLENGE; YOU CAN DEPEND ON US. . . NO EXCUSES.



TABLE OF CONTENTS

CORDLESS NAILERS	7-9
FRAMING NAILERS	11-15
ROOFING NAILERS	17
FINISH & TRIM NAILERS	19-23
FLOORING NAILERS	25-27
SPECIALTY NAILERS & STAPLERS	29-31
PNEUMATIC STAPLERS	33-35
COMPRESSORS & COMBO KITS	37-41
MANUAL FASTENING TOOLS	43-45
AIR ACCESSORIES & AIR HOSES	47-51
FASTENERS	53-64

IMPORTANT – READ CAREFULLY

You, and others working around you, can be seriously injured by fastener driving tools if you do not follow the instructions provided on the tool and in the operations manual. Used properly, these tools provide easy, safe, and efficient methods for driving nails and staples for all kinds of construction projects.

REFER to your Operations Manual, Parts List, or call BOSTITCH® Customer Service: 1-800-556-6696 if any of the terms used below are unfamiliar to you.

EYE PROTECTION which conforms to ANSI Z87.1 specifications and provides protection against flying particles both from the FRONT and SIDE should ALWAYS be worn by the operator and others in the work area when connecting to air supply, loading, operating or servicing fastener driving tools. Eye protection is required to guard against flying fasteners and debris, which could cause severe eye injury.

THE CONTACT TRIP, SEQUENTIAL TRIP AND SELECTABLE TRIGGER

BOSTITCH® offers three types of triggers for pneumatic tools: Contact Trip (black trigger), Sequential Trip (silver-gray trigger) and Selectable Trigger. Each trigger has specific advantages. For example, the Contact Trip is best suited for high-volume, rapid nailing or stapling where exact placement of the fastener is not important. The Sequential Trip is best suited for applications where rapid nailing is not required or where the exact placement of the fasteners is important. You should evaluate your construction project to determine which trigger type is best for you. Tools equipped with selectable trigger allow easy selection of contact or sequential trip with the turn of a dial.

CONTACT TRIP

A BOSTITCH® tool with the Contact Trip (black trigger) installed will drive a nail whenever both the trip and the trigger are depressed at the same time.

The tool can be used to rapidly drive nails by holding the trigger pulled and repeatedly bumping the trip against the work to be nailed (Bump Nailing). A nail is driven each time the trip is bumped against the work.

The Contact Trip will not prevent a nail from being accidentally driven if the trigger is held, pulled and the trip is bumped against any object or person. Never hold or carry the tool with your finger on the trigger unless driving fasteners.

The Contact Trip can also be operated by holding the tool against the work with the trip depressed and then pulling the trigger (Place Nailing). When using a Contact Trip for Place Nailing, the tool may bounce due to recoil, and if the tool is allowed to recontact the work surface while you are holding the trigger pulled, a second nail will be driven. The operator should allow the tool to recoil far enough to release the trip and avoid a second cycle. Don't push the tool down extra hard; let the tool do the work.

SEQUENTIAL TRIP

The Sequential Trip (silver-gray trigger) offers a positive safety advantage since it will not accidentally drive a nail if the tool is bumped against any surface or anybody while the operator is holding the tool with the trigger pulled.

It also allows Place Nailing without the possibility of driving a second nail on recoil as described under "Contact Trip."

The Sequential Trip gets its name from the "sequence" required to operate the tool. To drive a nail, the operator must first depress the trip against the work and then pull the trigger. To drive a second nail, the operator must lift the tool from the work, release the trigger, and then repeat the above sequence.

If further information is required, call BOSTITCH® Customer Service at 1-800-556-6696 or write to: BOSTITCH® Customer Service, 480 Myrtle Street, New Britain, Connecticut 06053.



LIMITED WARRANTY — U.S. and Canada Only

Effective December 1, 2005 BOSTITCH®, L.P. warrants to the original retail purchaser that the product purchased is free from defects in material and workmanship, and agrees to repair or replace, at BOSTITCH® option, any defective BOSTITCH® branded pneumatic stapler or nailer for a period of seven (7) years from date of purchase, (two [2] years from the date of purchase for BOSTITCH® branded cordless gas nailers and staplers, one [1] year from the date of purchase for compressors and tools used in production applications). Warranty is not transferable. Proof of purchase date required. This warranty covers only damage resulting from defects in material or workmanship; it does not cover conditions or malfunctions resulting from normal wear, neglect, abuse, accident or repairs attempted or made by other than our national repair center or authorized warranty service centers. Driver blades, bumpers, o-rings, pistons and piston rings are considered normally wearing parts. For optimal performance of your BOSTITCH® tool, always use genuine BOSTITCH® fasteners and replacement parts.

This warranty IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES AND with respect to compressors and tools used in production applications, limits to a period of one (1) year from the date of purchase all implied warranties INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. BOSTITCH® SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.


Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state and country to country.

To obtain warranty service in the U.S., return the product, together with proof of purchase, to the U.S. BOSTITCH® National Repair Center. In the U.S. you may call us at 1-800- 556-6696 or visit www.BOSTITCH.com for address information. In Canada please call us at 1-800-567-7705 or visit www.BOSTITCH.com.


BOSTITCH® manufactures over 2000 types of fasteners. Each fastener is engineered for optimal performance in BOSTITCH® tools, and for exceeding the performance expectations of our customers. Our goal is to continually increase efficiency, productivity, and quality, and to ensure building code compliance through reports ESR-2020, ESR-1539, ESR-1482, ESR-2122 and ER-120. Our team of engineers leads the industry in innovation and design. Utilizing our advanced laboratory, our team of engineers conducts **environmental testing** to study the effects of storm forces and other weather conditions, **withdrawal testing** to evaluate new coatings, **penetration testing** to evaluate drive characteristics, and **development testing** to optimize withdrawal, shear and pull-through performance.

Selecting the Proper BOSTITCH® Nails


Examples of BOSTITCH® Stick Nails

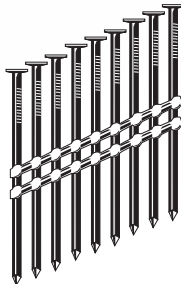


Plastic Collation

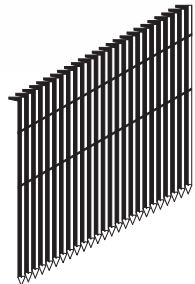

Wire Collation

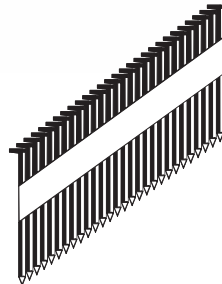


Paper Collation

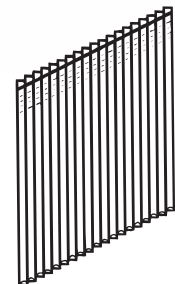


Adhesive Collation

BOSTITCH® Stick Nails are designed, engineered and manufactured in four different forms and are generally identified by collation material – plastic, wire, paper or adhesive. Adhesive collation is used on finish nails and brads for trim and fine woodwork. Finish nails and brads range in length from 3/8" to 2-1/2" with diameters ranging from 15 to 23 gauge. The plastic, wire and paper collated nails are used for general framing and crating applications. Stick nails range in length from 1-1/2" to 6-1/4" with diameters ranging from 0.113" to 0.165".

Examples of BOSTITCH® Coil Nails

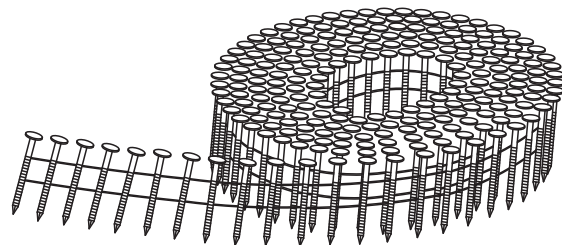


Wire Collation

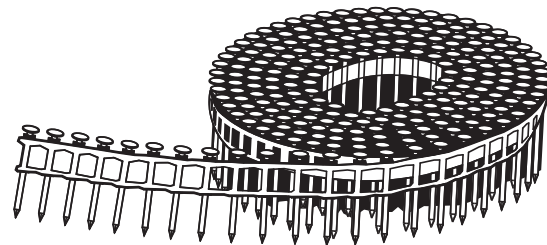

Plastic Collation

BOSTITCH® Coil Nails are made at a 15° angle, joined together with wire or plastic, and range from 3/4" to 4" in length with diameters ranging from 0.080" to 0.148". Applications typically include roofing, siding, fencing, framing and crating.



There are three types of **nail shanks** – smooth, ring and screw. A **smooth shank** has a withdrawal capacity that is adequate for most applications. During the manufacturing of smooth shank nails, a coating is applied, which eases penetration resistance and ultimately helps improve the holding power of the fastener. However, when more holding power is necessary, a ring or screw shank should be used. A **ring shank** is designed for increased withdrawal strength in softwoods. The **screw shank** works well at improving the withdrawal capacity in hardwoods.


The metal and coating used on the shank of the nail are important when selecting the proper nail for the application. BOSTITCH® offers nails manufactured out of cold-worked carbon steel, cold-worked hardened steel, aluminum and stainless steel. Cold-worked carbon steel is most commonly used when corrosion resistance is not a concern; cold-worked hardened steel is most commonly used when attaching material to very hard substrates; and aluminum and stainless steel are most commonly used when severe corrosion resistance is needed due to the wood or environment in which the nail is installed.

Exclusive to BOSTITCH® is the THICKCOAT™ galvanization which provides a consistent, high-performance, corrosion-resistant coating. BOSTITCH® THICKCOAT™, as recognized in the exclusive code report ESR-1482, is designed to meet or exceed the performance of ASTM A153 hot dipped galvanized nails. THICKCOAT™ fasteners are available in all sizes of wire weld, coil and stick, and are specifically designed for use in ALL pressure treated lumber and exterior applications.




Nail Point


There are four basic point styles to consider for an application – diamond, blunt diamond, chisel, and blunt chisel. Proper selection is important as the nail point can cause the wood to split, rob the tool of power or affect the withdrawal capacity of the nail.




Diamond Point
General purpose point with best holding power



Blunt Diamond Point
Effective at reducing wood splitting in hardwood applications




Chisel Point
Preferred point for trim applications



Blunt Chisel Point
Effective at reducing wood splitting in hardwood applications

Selecting the proper BOSTITCH® Staples



All staples are joined with an adhesive coating that holds the staple together, aids the staple in penetration and keeps it from withdrawing from the wood. Light wire staples are measured in thousandths and heavy wire staples are measured by gauge. Staple gauges range from 15 to 18 and the lengths range from 1/2" to 2-1/2". Both light wire and heavy wire staples are available in steel, coated, and stainless steel, and are typically classified by the crown width. In some cases, staples are less expensive and may reduce material splitting as compared to nails.



CORDLESS NAILERS

CORDLESS NAILERS

Cordless 15 GA Angled Finish Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour

15
GA
BOSTITCH NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1564K	4.2 lbs.	332 in.-lbs.	100	"FN" 15 GA Angled	1-1/4" - 2-1/2"
				See Pg. 58	

Cordless 16 GA Straight Finish Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour

16
GA
STRAIGHT NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1664K	4.0 lbs.	309 in.-lbs.	100	16 GA Straight	1" - 2-1/2"
				See Pg. 58	

Cordless 18 GA Straight Brad Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- 3.6V li-ion battery charges in one hour

18
GA
BRAD NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GBT1850K	4.0 lbs.	185 in.-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	

Finish Fuel Cell

- Fuel contains synthetic lubricants for optimal operation under high temperature conditions
- Yellow accented canister allow for easy identification of fuel type
- Comes in a package of four fuel cells



SKU #	COMPATABILITY
9B12062R	BOSTITCH® GFN1564K, GFN1664K, GBT1850K Paslode® 900600, 902000, 901000, Hitachi®: NT65GS, NT50GS

Paslode is a registered trademark of Illinois Tool Works, Inc.
Senco is a registered trademark of Senco Products, Inc.
Hitachi is a registered trademark of Hitachi, Ltd.

Framing Fuel Cell

- Fuel contains synthetic lubricants for optimal operation under high temperature conditions
- Red accented canister allow for easy identification of fuel type
- Comes in a package of two fuel cells



SKU #	COMPATABILITY
9B12061R	BOSTITCH® GF28WW Paslode® 900420, Hitachi® NR90GR, NR90GC, NR90GC2 and Senco® GT90CH, GT90FRH

Paslode is a registered trademark of Illinois Tool Works, Inc.
Senco is a registered trademark of Senco Products, Inc.
Hitachi is a registered trademark of Hitachi, Ltd.

3.6 V Lithium-Ion Battery

- Rechargeable battery for cordless finish tools: GBT1850K, GFN1664K, GFN1564K
- Ultra-fast 60 minute charge
- For use with BOSTITCH® charger 9B12071R only



SKU #	POWER	BATTERY TYPE
9B12070R	3.6 V	Li-ion

7.2 V Nickel-Cadmium Battery

- 7.2V nickel cadmium rechargeable battery for cordless framing tool: GF28WW
- Ultra-fast 60 minute charge
- For use with BOSTITCH® charger 9B12073R only



SKU #	POWER	BATTERY TYPE
9B12072R	7.2 V	Ni-Cd



30° Low Profile Paper Collated Framing Nailer

- Low profile design for getting in-between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- Last nail retention magnet prevents last nail from dropping out of the nose



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF33PT	7.6 lbs.	840 in-lbs.	92	30° Paper Collated	2" - 3-1/4"
				See Pg. 54	

21° Low Profile Plastic Collated Framing Nailer

- Low profile design for getting in between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- Last nail retention magnet prevents last nail from dropping out of the nose



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF21PL	7.6 lbs.	840 in-lbs.	64	21° Plastic Collated	2" - 3-1/4"
				See Pg. 56	

FRAMING NAILERS

28° Low Profile Wire Weld Framing Nailer

- Low profile design for getting in between rafters & tight spaces
- Tool-free selectable trigger allows for single-drive (Sequential Nailing) or multi-drive (Bump Nailing) modes with the flip of a switch
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- Internal air filter protects engine from harmful contaminants such as dirt and debris
- Adjustable rafter hook designed so end-users can use both hands when needed
- Last nail retention magnet prevents last nail from dropping out of the nose



Nails available in brite

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LPF28WW	7.6 lbs.	840 in-lbs.	92	28° Wire Collated	2" - 3-1/4"
					See Pg. 53

21° Plastic Collated Framing/Metal Connector Nailer

- Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- Lightweight magnesium design for durability
- Two nailers in one: optional quick change nose pieces (sold separately) to convert tool to either framing or metal connector applications

MCN-KIT2: Metal Connector Kit



Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F21PL2	8.1 lbs.	1050 in-lbs.	60	21° Plastic Framing & Metal Connector	2" - 3-1/2" 1-1/2" - 2-1/2"	.113" - .162" .131" - .162"
					See Pg. 56	

28° Wire Weld Framing Nailer

- Notched 16" layout indicator on magazine helps achieve correct distance between studs
- Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- Lightweight magnesium design for added durability



Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F28WW	7.6 lbs.	1050 in-lbs.	100	28° Wire Weld	2" - 3-1/2"	.113" - .131"
				See Pg. 53		

33° Paper Tape Framing/Metal Connector Nailer

- Two nailers in one: optional quick change nose pieces (sold separately) to convert tool to either framing or metal connector applications
- Designed to drive into engineered lumber
- Patented push button adjustable depth guide sets nail to desired depths
- Lightweight magnesium design for added durability

MCN-KIT2: Metal Connector Kit



Nails available in brite and galvanized

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
F33PT	7.9 lbs.	1050 in-lbs.	80	33° Paper Framing & Metal Connector	2" - 3-1/2" 1-1/2" - 2-1/2"	.113" - .162" .131" - .162"
					See Pg. 54	

35° Metal Connector Nailer

- Exposed nail tip places fastener point directly into connector holes for a fast and precise application
- Compact design fits easily into hard to reach spaces - MCN150 only 10-1/2" tall
- Lightweight design for minimal fatigue
- In-line magazine offers balance for maneuverability
- MCN250 also available with compact single stick magazine - MCN250S



MCN250

Nails available in brite and galvanized

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
MCN150	4.6 lbs.	450 in-lbs.	29	35° Paper Metal Connector	1-1/2"	.131" - .148"
MCN250	6.0 lbs.	600 in-lbs.	53	35° Paper Metal Connector	1-1/2" & 2-1/2"	.131" - .162"
					MCN150 See Pg. 54	MCN250 See Pg. 54

15° Coil Framing Nailer

- Lightweight magnesium design for durability
- Patented push button adjustable depth guide sets nail to desired depths quickly and conveniently
- Adjustable exhaust directs air away from the user
- Coil magazine holds up to 300 nails for high production applications



N89C-HQ

Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N89C-1	8.0 lbs.	1050 in-lbs.	225 - 300	15° Coil Framing	2" - 3-1/2"	.099" - .148"
				N89C-1 See Pg. 55	N89C-HQ See Pg. 55	

15° Coil Framing Nailer

- Lightweight aluminum design for durability
- Heavy-duty, quick-open canister designed to survive falls
- Aggressive toe-nailing teeth grip lumber for slip-free nailing
- Coil magazine holds up to 300 nails for high production applications



Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N80CB-1	8.4 lbs.	880 in-lbs.	225 - 300	15° Coil Framing	1-1/2" - 3-1/4"	.099" - .148"
				See Pg. 55		

15° Coil Sheathing/Siding Nailer

- Perfect for high-volume nailing of wall and roof sheathing
- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Lightweight aluminum design
- Drives 15° wire weld collated and plastic inserted nails with shank diameters of .090" - .131"



Nails available in brite, galvanized and stainless

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N75C-1	5.2 lbs.	630 in-lbs.	225 - 300	15° Coil Framing & Plastic Inserted Siding	1-1/2" - 3"	.090" - .131"
				See Pg. 55		

21° Plastic Collated Heavy-Duty Timber Framing Nailer

- Drives plastic collated framing nails for timber framing and crating
- Tool-free adjustable exhaust to direct air away from users
- Smooth trip design for fast cycling
- Secondary handle for ergonomics and control
- Built-in hanging hook for high-production use
- No nail lockout to prevent dry fires and extend tool life



Nails available in brite

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
BRT130	13.75 lbs.	1800 in-lbs.	50	21° Plastic Framing	4" - 5-1/8"	.131" - .165"
				See Pg. 56		



15° Coil Roofing Nailer

- Zero nail lockout feature eliminates dry-firing and indicates when to reload the magazine
- Nosepiece features carbide inserts for long-life performance
- Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- Quick-set adjustable depth guide sets nails to desired depths quickly and conveniently
- Patented, single-action, side-load canister for fast, one-step nail loading
- Adjustable shingle guide for quick shingle spacing



Nails available in galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
RN46-1	4.9 lbs.	410 in.-lbs.	120	15° Coil Roofing	3/4" - 1-3/4"	.120"
				See Pg. 57		

18 GA Wide Crown Roofing Stapler

- Jam-free magazine
- Power control valve adjusts power by 30%
- Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- Nosepiece features carbide inserts for long-life performance
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable shingle guide for quick shingle spacing



Staples available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
438S2R-1	4.7 lbs.	230 in.-lbs.	160	1" Crown Staple	1/2" - 1-1/2"	16 Ga
				See Pg. 57		

ROOFING NAILERS



FINISH & TRIM NAILERS

Cordless 15 GA Angled Finish Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour

15
GA
BOSTITCH NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1564K	4.2 lbs.	332 in.-lbs.	100	"FN" 15 GA Angled	1-1/4" - 2-1/2"
				See Pg. 58	

Cordless 16 GA Straight Finish Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- Low nail lock-out prevents dry fire and extends tool life
- 3.6V li-ion battery charges in one hour

16
GA
STRAIGHT NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GFN1664K	4.0 lbs.	309 in.-lbs.	100	16 GA Straight	1" - 2-1/2"
				See Pg. 58	

Cordless 18 GA Straight Brad Nailer

- Energy efficient gas combustion engine
- Lightweight design
- Overmolded rubber grip maximizes comfort and minimizes fatigue
- Tool-free adjustable depth guide sets nails to desired depths
- Tool-free jam clearance feature allows for quick and easy fastener removal
- Belt hook allows user to hang tool when not in use
- 3.6V li-ion battery charges in one hour

18
GA
BRAD NAIL



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
GBT1850K	4.0 lbs.	185 in.-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	

15 GA "DA" Style Angled Finish Nailer Kit

- LED work-light for working in closets and dark spaces
- Rear exhaust to direct air away from the user
- Integrated air blower allows user to clear away debris from work surface
- Adjustable trigger with safety lock-out allows the user to choose between single or multiple fastener drive mode
- 16" on-center gauge flips out for quick and easy installation of baseboard
- Other features include: Oil-free operation, rear trip design for clear line-of-sight and dial-a-depth adjustment for precise fastener placement
- Kit includes: tool, carry case, fasteners, 2 standard no-mar tips, 4 profile no-mar tips, hose connection, and steel belt hook
- Drives 15 GA "DA" style angled finish nails



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
DA1564K	4.15 lbs.	380 in-lbs.	100	15GA "DA" Style Angled Finish Nails	1-1/4" - 2-1/2"
				See Pg. 58	

15 GA "FN" Style Angled Finish Nailer Kit

- LED work-light for working in closets and dark spaces
- Rear exhaust to direct air away from the user
- Integrated air blower allows user to clear away debris from work surface
- Adjustable trigger with safety lock-out allows the user to choose between single or multiple fastener drive mode
- 16" on-center gauge flips out for quick and easy installation of baseboard
- Other features include: Oil-free operation, rear trip design for clear line-of-sight and dial-a-depth adjustment for precise fastener placement
- Kit includes: tool, carry case, fasteners, 2 standard no-mar tips, 4 profile no-mar tips, hose connection, and steel belt hook
- Drives 15 GA "FN" style angled finish nails



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
N62FNK-2	4.15 lbs.	375 in-lbs.	130	15GA "FN" Style Angled Finish Nails	1-1/4" - 2-1/2"
				See Pg. 58	

16 GA Straight Finish Nailer Kit

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Dial-A-Depth™ control for precise countersinking
- Quick release nosepiece for fast and easy jam clearing
- Rear trip design for precise fastener placement
- Rear exhaust directs air away from the user
- Selectable trigger system converts from sequential to contact operation
- Low nail lockout prevents dry firing
- Kit includes: finish nailer, 1/4" air fitting, fasteners 4 Profile tips, carrying case & belt hook



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
FN1664K	3.9 lbs.	285 in-lbs.	100	16 GA Straight	1-1/4" - 2-1/2"
				See Pg. 58	

16 GA Straight Finish Nailer Kit

- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Quick release nose door for fast jam clearing
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- Kit includes: finish nailer, fasteners, carrying case



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-1664FN	4.0 lbs.	300 in-lbs.	100	16 GA Straight	1-1/4" - 2-1/2"
				See Pg. 58	

18 GA Brad Nailer Kit

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Selectable trigger system converts from sequential to contact operation
- Rear exhaust directs air away from the user
- Low nail lockout prevents dry firing
- Kit includes: brad nailer, 1/4" air fitting, fasteners, carrying case & belt hook



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
BT1855K	2.7 lbs.	160 in-lbs.	100	18 GA Brads	5/8" - 2-1/8"
				See Pg. 59	

18 GA Brad Nailer Kit

- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- No-mar tip protects work surface
- Kit includes: brad nailer, fasteners, 1/4" air fitting, & carrying case



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-1850BN	2.7 lbs.	145 in-lbs.	100	18 GA Brads	5/8" - 2"
				See Pg. 59	

18 GA 2in1 Brad Nailer/Finish Stapler Kit

- Drives both 18-gauge brads and narrow crown finish staples for versatility
- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- Kit includes: nailer, 1/4" air fitting, fasteners, carrying case, & extra no-mar tip



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-2IN1	2.6 lbs.	135 in-lbs.	100	18 GA Brads	5/8" - 1-5/8"
				18 GA "SX" Staples	1/2" - 1-1/2"
				See Pg. 59	See Pg. 59

23 GA Headless Pin Nailer Kit

- Adjustable high/low power control sets pin depth without changing compressor setting
- Low profile nosepiece tapers down to contact point for clear line-of-sight
- Kit includes: nailer, 1/4" air fitting, fasteners, carrying case, & belt hook



Nails available in coated

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
HP118K	2.3 lbs.	60 in-lbs.	200	23 GA Pins	1/2" - 1-3/16"
				See Pg. 60	

18 GA Finish Stapler Kit

- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Selectable trigger system converts from sequential to contact operation
- Rear exhaust directs air away from the user
- Low nail lockout prevents dry firing
- Kit includes: finish stapler, 1/4" air fitting, fasteners, carrying case, & belt hook



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SX1838K	3.0 lbs.	160 in-lbs.	100	18 GA "SX" Staples	1/2" - 1-1/2"
				See Pg. 59	

18 GA Finish Stapler Kit

- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- Bottom load magazine for fast loading and easy jam clearing
- No-mar tip protects work surface
- Kit includes: finish stapler, 1/4" air fitting, fasteners, & carrying case



Nails available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
SB-150SX	2.6 lbs.	135 in-lbs.	100	18 GA "SX" Staples	1/2" - 1-1/2"
				See Pg. 59	



15.5 GA Hardwood Flooring Stapler Kit

- High-speed mallet actuated pneumatic operation increases productivity over manual methods
- Extra-wide composite base plate for stability (1/2", 5/8" and 3/4" base plates included)
- Long-reach handle for comfort and control (short handle optional)
- Kit includes: stapler, graphite mallet, pre-finished flooring adapter foot



Staples available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MIIIIFS	11.2 lbs.	420 in-lbs.	92	15.5 GA BCS Flooring Staple	1-1/2" - 2"
				See Pg. 60	

16 GA Hardwood Flooring Cleat Nailer Kit

- High-speed mallet actuated pneumatic operation increases productivity over manual methods
- Extra-wide composite base plate for stability (1/2", 5/8" and 3/4" base plates included)
- Long-reach handle for comfort and control (short handle optional)
- Kit includes: nailer, graphite mallet, pre-finished flooring adapter foot



Nails available in coated

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MIIIFN	11.2 lbs.	420 in-lbs.	110	16 GA L-Shaped Flooring Cleat	1-1/2" - 2"
				See Pg. 60	

16 GA Manual Hardwood Flooring Cleat Nailer Kit

- Selectable drive mode to choose between single or multi-blow options
- Graphite mallet with ergonomic comfort grip
- Installs 1/2", 5/8" and 3/4" flooring
- Rubber bumpers protect pre-finished floors against marring
- Kit includes: nailer, graphite mallet, flooring adapters (for 1/2" & 5/8" flooring), carrying case & hex wrenches



Nails available in coated

SKU #	WEIGHT	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MFN-201	8.6 lbs.	120	16 GA L-Shaped Flooring Cleat	1-1/2" - 2"
			See Pg. 60	

FLOORING NAILERS

18 GA Engineered Flooring Stapler Kit

- Adjustable knobs allow tool-free adjustment from 5/16" - 7/16" for solid hardwood and 1/2" - 5/8" for engineered hardwood and engineered bamboo
- High visibility tongue engagement for faster installation
- Non-marring profile tips to prevent floor scratches
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Rear exhaust directs air away from the user



Staples available in coated and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
EHF1838K	3.47 lbs.	160 in.-lbs.	100	18 GA "SX" Staples	1" - 1-1/2"
				See Pg. 59	

20 GA Engineered Flooring Stapler Kit

- Adjustable knobs allow tool-free adjustment from 1/4" to 1/2" engineered flooring
- High visibility tongue engagement for faster installation
- Non-marring profile tips to prevent floor scratches
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains
- Rear exhaust directs air away from the user



Staples available in coated

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
LHF2025K	2.9 lbs.	122 in.-lbs.	125	20 GA 97 Series Staple	1"
				See Pg. 60	

Graphite Hardwood Flooring Mallets

- Beveled face to set board ends and protect wear layer
- Soft replaceable face to protect flooring and tool
- Jacketed graphite handle adds strength and durability while providing the feel of wood
- Flared comfort fit handle for firm grip



SKU #	WEIGHT	LENGTH
HFM-3	45 oz.	14.8"
HFM-4	59 oz.	16.1"
HFMF-SW	Replacement Mallet Face	

2-in-1 Hardwood Flooring Jack

- Tool-free rotating knob allows adjustment between application modes
- Non-marring base pad designed for pre-finished flooring
- Angled handle for easy release close to walls
- Over-molded handle designed for comfort and control
- Pre-drilled holes for fast attachment to sub-flooring



SKU #	WEIGHT	CLAMPING POWER
MIII-JACK	7.65 lbs.	Up to 2,000 lbs.

Flooring Cleat Nailer Conversion Kit

- Includes kit to convert the MIIIFS Flooring Stapler to an MIIIFN Flooring Cleat Nailer



SKU #	WEIGHT	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH
MIIIFN-KIT	4.0 lbs.	110	L-Shaped Flooring Cleat	1-1/2" - 2"
			See Pg. 60	



SPECIALTY NAILERS & STAPLERS

SPECIALTY NAILERS & STAPLERS

15° Coil Siding Nailer

- Drives wire weld and plastic inserted coil nails
- Adjustable depth guide sets nails to desired depths quickly and conveniently
- Lightweight aluminum design for durability
- Soft rubber foot prevents damage to softer woods
- Tool-free adjustable exhaust conveniently directs exhaust away from the user



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N66C-1	4.7 lbs.	500 in-lbs.	300	15° Coil Siding & Plastic Inserted Siding	1-1/4" - 2-1/2"	.080" - .092"
				See Pgs. 61, 62		

18 GA Cap Stapler

- Designed to be the preferred method of securing felt, house wrap and thin foam
- Adjustable depth of drive sets staples to desired depths quickly & conveniently
- Selectable trigger operation converts from sequential to contact operation
- Includes internal air filter for maximum reliability
- 1" diameter caps offer holding power for productivity
- The BOSTITCH® Cap method can work faster than nailing by hand



Staples available in coated

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
SL1838BC	3.9 lbs.	170 in-lbs.	160	5/16" Crown Staples	See Pg. 61	1" - 1-1/2"
			100	BOSTITCH® Caps	See Pg. 62	

15° BOSTITCH® Cap Nailer

- Tool-free depth of drive adjustment sets nails to desired depths quickly and conveniently
- Lightweight aluminum design for added durability
- Quick-load magazine feature provides fast and easy loading of caps and nails
- Tool-free adjustable exhaust conveniently directs exhaust away from the user
- 1" diameter caps offer superior hold power and increased productivity
- The BOSTITCH® Cap method is faster than nailing by hand



Nails available in brite, galvanized and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
N66BC-1	5.8 lbs.	500 in-lbs.	300	Coil Framing & Siding and BOSTITCH® Caps	1-1/4" - 2-1/2"	.080" - .092"
				See Pgs. 61, 62		

Mini Impact Nailer

- Rubber grip designed to insulate and reduce vibration
- Weighs only 1 pound
- 360° Swivel exhaust fitting for maximum accessibility
- Front exhaust directs air away from user's palm



SKU #	WEIGHT	FASTENER TYPE
PN50	1.0 lbs.	Bulk Finish, Framing & Timber Nails

15° Coil Sheathing-to-Steel Nailer

- Designed for fastening sheathing to light gauge steel studs
- Sheathing types – gypsum, steel, plywood, osb
- Optimized pneumatic engine for high production and power to drive through steel
- Fastener centering jaws for drive quality in all sheathing products
- Tool-free depth of drive adjustment designed for precise sinking of fasteners
- One-piece nail canister door for faster loading
- Driving guidance to preserve sheathing



SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
SF150C	6.8 lbs.	430 in-lbs.	200	15° Coil	1" - 1-1/2"	.100"
				See Pg. 62		

Impact Nailer Kit

- Ideal for driving common bulk nails into confined areas or nailing metal connectors and joist hangers
- Magnetic nose with recessed nail slot holds nails stable for accurate fastener placement
- Hardened steel nose for durability
- Kit includes: impact nailer, standard nose, finish nail nose, large bore nose, leather comfort glove, nose wrench, hex wrench, tool lubricant and spare o-rings



SKU #	WEIGHT	FASTENER TYPE
PN100K	2.9 lbs.	Bulk Finish, Framing & Timber Nails

Concrete Nailer

- Lightweight aluminum design for added durability
- High-speed pneumatic power increases productivity over other fastening methods
- Makes fastening of wood furring strips to concrete fast and easy
- High-capacity magazine reduces reload time



Nails available in hardened & stiff

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER DIAMETER
MIII812CNCT	7.1 lbs.	420 in-lbs.	66	T-Nail	9/16" - 2-1/4"	.097"
				See Pg. 62		

*Maximum initial battery voltage (measured without a workload) is 12 volts. Nominal voltage is 10.8



PNEUMATIC STAPLERS

Wide Crown Stapler

- AntiJam™ magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas
- Nosepiece features carbide inserts for long-life performance

16
GA
MEDIUM CROWN
STAPLE



Staples available in brite, galvanized, and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
438S2-1	4.5 lbs.	230 in.-lbs.	160	1" Crown Staple	1/2" - 1-1/2"	16
				See Pg. 57		

Wide Crown Lathing Stapler

- AntiJam™ magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas

16
GA
MEDIUM CROWN
STAPLE



Staples available in brite, galvanized, and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
450S2-1	4.5 lbs.	230 in.-lbs.	160	1" Crown Staple	1/2" - 2"	16
				See Pg. 57		

Construction Stapler

- AntiJam™ magazine to minimize downtime
- Power control valve to set staples to desired depths quickly and conveniently
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Reduced height for stapling in tight areas

16
GA
MEDIUM CROWN
STAPLE



Staples available in brite, galvanized, and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
438S4-1	4.0 lbs.	230 in.-lbs.	160	1/2" Crown Staple	3/4" - 1-1/2"	16
				See Pg. 63		

1/2" Construction Stapler

- AntiJam™ magazine to minimize downtime
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable exhaust conveniently directs exhaust away from user
- Adjustable depth guide sets staples to desired depths



Staples available in brite, galvanized, and stainless steel

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
650S4-1	4.5 lbs.	340 in-lbs.	160	1/2" Crown Staple	1" - 2"	16
				See Pg. 63		

7/16" Construction Stapler

- AntiJam™ magazine to minimize downtime
- Over-molded rubber grip maximizes comfort and minimizes fatigue
- Adjustable exhaust conveniently directs exhaust away from user
- Adjustable depth guide sets staples to desired depths



Staples available in brite, and galvanized

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
650S5-1	4.5 lbs.	390 in-lbs.	160	7/16" Crown Staple	1" - 2"	16
				See Pg. 63		

7/16" Construction Stapler

- Lightweight at just 4.2-Pound
- Tool-free jam clearance reduces downtime
- Depth of drive adjustment to control fastener depth
- Compatible with optional adaptor for vinyl siding



Staples available in brite, and galvanized

SKU #	WEIGHT	POWER	MAGAZINE CAPACITY	FASTENER TYPE	FASTENER LENGTH	FASTENER GAUGE
651S5	4.2 lbs.	390 in-lbs.	160	7/16" Crown Staple	1" - 2"	16
				See Pg. 63		

Heavy-duty 3/8" Crown Stapler

- Combination of pneumatic tacker and brad nailer uses both T50 staples and brad nails for wide range of applications
- Staples lengths :1/4", 5/16", 3/8", 1/2" and 9/16" and Brads 1/2" to 5/8"
- Dual trigger design incorporates safety and comfort for all day use
- Oil-free operation requires no regular maintenance and eliminates the risk of oil stains on material
- Bottom loading for quick reloads
- Low fastener indicator to quickly assess when it's time to reload
- Kit includes: Stapler/Brad nailer, Staple Samples



SKU #	WEIGHT	MAGAZINE CAPACITY	FASTENER SERIES	FASTENER RANGE	FASTENER TYPE	FASTENER GAUGE
BTFP71875	2.3 lbs.	84	BTA700 Series	1/4" - 9/16"	3/8" Crown Staple	18
			SWKBN Series	1/2" - 5/8"	Brad	18
					See Pgs. 59,63	



1.2 Gallon, 150 Max PSI, Oil-Free, High-Output Trim Compressor

- High-output oil-free pump delivers 2.8 SCFM @ 90 PSI and 150 max PSI operating pressure for multiple finish tool operation
- 1.5 max HP (Running) motor draws 12 amps for easy start up without tripping circuit breakers
- 1.2 gallon compact design weighs 23.5 lbs. for easy portability
- Integrated control panel with roll cage protects gauges from jobsite damage
- LED ON/OFF switch lets you know when the compressor is on to eliminate low-pressure misfires
- On-board tool and hose storage
- Convenient storage pocket for hand tools, fasteners and fittings
- Integrated cord wrap for easy storage
- Non-marring rubber feet



TOOLS SOLD SEPARATELY



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FINISH	

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
CAP1512-OF	23.5 lbs.	1.2 Gallons	2.8 SCFM	150 PSI	1.5 HP (Running)

2.5-Gallon, 150 Max PSI, 2-Man Trim Compressor

- 2.0 SCFM* delivered @ 90 PSI pump, 2.5 gallon tank and 150 max PSI enables many nails to be fired with quick recovery
- Durable oil-free pump provides extended maintenance-free operation
- Low 82 dBA** allows for quiet operation
- Roll cage and control panel provide protection to key compressor components
- BOSTITCH® high efficiency/low amp motor for easy start up in cold weather or extension cord application [12GA 50 ft. (15.2 m) or less]
- Lightweight (32 lbs), thin (13") and compact design is easy to carry and store
- Ball valve drain allows for quick and thorough tank draining
- Two quick couplers to easily support 2 nailers
- BOSTITCH® high flow regulator and couplers to maximize nailer performance



Can be run in either vertical (higher pick-up) or horizontal position (Low CG)



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FRAMING	
ROOFING	
FINISH	

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP01012	32 lbs.	2.5 Gallons	2.0 SCFM	150 PSI	.8 HP (Running)

*tested per ISO1217

**tested per ISO3744

COMPRESSORS & COMBO KITS

6-Gallon, 150 Max PSI, Oil-Free Pancake Compressor

- 150 max PSI 6.0-gallon tank (22.7 L) and 2.6 SCFM* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA** operational noise level for a quiet work environment
- 32 lb weight makes unit easy to carry and store
- BOSTITCH® high flow regulator and couplers to maximize air tool performance
- Two universal couplers to easily support two users
- Controls are inset in shroud to provide protection
- Console cover is removable to allow easy repair of controls
- Convenient cord wrap for easy storage
- Ball drain valve allows for quick and thorough tank draining



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FRAMING	1
ROOFING	2
FINISH	3

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02011	32 lbs.	6 Gallons	2.6 SCFM	150 PSI	.8 HP (Running)

4 Gallon, 135 Max PSI, Oil-Lube Stack Tank Compressor

- Oil-lubricated pump delivers 4.0 SCFM @ 90 PSI and 135 max PSI operating pressure for improved tool performance
- 1.5 HP (Running) motor draws only 13.5 amps for easy start up without tripping circuit breakers
- 4-gallon reserve tank for multi-tool use
- Roll cage style handle protects components from jobsite damage
- Cold start valve for easy start up in cold weather climates
- Oil level site glass with cast in fill and drain funnels for added convenience



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FRAMING	1
ROOFING	2
FINISH	3

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
CAP2040ST-OL	58 lbs.	4 Gallons	4.0 SCFM	135 PSI	1.5 HP (Running)

*tested per ISO1217

**tested per ISO3744

6-Gallon, 135 Max PSI, Horizontal Compressor

- 135 max PSI 6.0 gallon tank (22.7 L) and 3.8 SCFM* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Durable oil lube pump provides extended life
- Low 82 dBA** for quiet operation
- Pull handle and wheels allow easy movement around the work site
- Ball valve drain allows for quick tank draining
- High-flow regulator for performance



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FRAMING	1
ROOFING	2
FINISH	3

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02006	59 lbs.	6 Gallons	3.8 SCFM	135 PSI	1.1 HP (Running)

26-Gallon, 150 Max PSI, Oil-Free, Vertical Compressor

- 4.1 SCFM* delivered @ 90 PSI pump, 26 gallon tank and 150 MAX PSI enables all household and most professional applications
- Long life oil free pump for ease of operation and no oil maintenance
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [12GA 50 ft. (15.2 m) or less]
- Welded pull handle and large 10" wheels allow easy movement around the home or pro shop
- Vertical tank configuration takes up less space
- Pull handle serves as cord wrap
- Ball valve drain allows for quick and thorough tank draining



RECOMMENDED TOOL CAPACITY	
APPLICATION	NUMBER OF TOOLS
FRAMING	1
ROOFING	2
FINISH	3

SKU #	WEIGHT	TANK SIZE	SCFM @90 PSI	MAX TANK PSI	MAX HORSEPOWER
BTFP02028	125 lbs.	26 Gallons	4.1 SCFM	150 PSI	1.6 HP (Running)

*tested per ISO1217

**tested per ISO3744

3-Tool/Compressor Combo Pack

BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA** operational noise level for a quiet work environment

- **SB-1664FN** - 16 GA 2-1/2" Straight Finish Nailer
- **SB-1850BN** - 18 GA 2" Brad Nailer
- **BTFP71875** – Heavy-duty 3/8" Crown Stapler

Includes:

- Compressor, 18 GA 2" brad nailer, 3/8" crown stapler, 16 GA 2-1/2" straight finish nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners

SKU #	TOOLS	COMPRESSOR	TANK SIZE	WEIGHT	MAX HORSE POWER
BTFP72646	SB-1664FN, SB-1850BN, BTFP71875	BTFP02011	6 Gallons	32 Lbs.	.8 HP (Running)
		See Pg. 38			



2-Tool/Compressor Combo Pack

BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA** operational noise level for a quiet work environment

- **SB-1664FN** - 16 GA 2-1/2" Straight Finish Nailer
- **SB-1850BN** - 18 GA 2" Brad Nailer

Includes:

- Compressor, 18 GA 2" brad nailer, 16 GA 2-1/2" straight finish nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners

SKU #	TOOLS	COMPRESSOR	TANK SIZE	WEIGHT	MAX HORSE POWER
BTFP12605	SB-1664FN, SB-1850BN	BTFP02011	6 Gallons	32 Lbs.	.8 HP (Running)
		See Pg. 38			



1-Tool/Compressor Combo Pack

BTFP02011

- 150 max PSI 6.0 gallon tank (22.7 L) and 2.6 SCFM* delivered @ 90 PSI pump enable long tool run time with quick recovery
- Long-life oil-free, maintenance free pump for convenient use
- BOSTITCH® high efficiency motor for easy start up in cold weather or extension cord application [14 GA or larger, 50 ft. (15.2 m) or less]
- 80 dBA** operational noise level for a quiet work environment

- **SB-1850BN** - 18 GA 2" Brad Nailer

Includes:

- Compressor, 18 GA 2" brad nailer, 1/4"x25' heavy-duty airline with fittings, and sample fasteners

SKU #	TOOLS	COMPRESSOR	TANK SIZE	WEIGHT	MAX HORSE POWER
BTFP72665	SB-1850BN	BTFP02011	6 Gallons	32 Lbs.	.8 HP (Running)
		See Pg. 38			



*tested per ISO1217

**tested per ISO3744

*tested per ISO1217

**tested per ISO3744



MANUAL FASTENING

PowerSlam™ PowerCrown™ Hammer Tacker

- Long-reach knuckle saver handle with comfortable non-slip grip
- High-capacity quick-load magazine holds up to two full sticks of staples, minimizing reloading
- Die-cast frame and through hardened steel components for durability
- AntiJam™ design for maximum productivity



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
PC2K	2.25 lbs.	168	STCR5019	1/4" - 3/8"
			See Pg. 64	

PowerCrown™ Hammer Tacker with Holster

- Die-cast frame and through hardened steel components for durability
- Quick load magazine
- Tool-free jam clearing



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
H30-8D6	2.25 lbs.	84	STCR5019	1/4" - 3/8"
			See Pg. 64	

PowerCrown™ Hammer Tacker

- Die-cast frame and through hardened steel components for durability
- Quick load magazine
- Tool-free jam clearing



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	REF. PAGE	FASTENER LENGTH
H30-8	1.8 lbs.	84	STCR5019	See Pg. 64	1/4" - 3/8"
H30-6	1.7 lbs	84	STCR2619	See Pg. 64	1/4" - 3/8"

Heavy-duty Tackers

- Breathable AntiJam™ magazine
- Patented easy-squeeze mechanism
- Lightweight die-cast aluminum design
- Steel handle with overmolded rubber grip for comfort
- Convenient bottom loading for quick and easy reloading
- Nickel chrome plated steel magazine and core provides a smooth, durable sliding surface for staples



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE	CLINCH TYPE
T6-8	1.9 lbs.	84	STCR5019	1/4" - 3/8"	See Pg. 64	Straight
T6-80C2	1.8 lbs.	84	STCR5019	1/4" - 3/8"	See Pg. 64	Outward
T6-60C2	1.8 lbs.	84	STCR2619	1/2"	See Pg. 64	Outward

PowerCrown™ Stapling Plier

- Case-hardened steel components for durability
- Ergonomic design and patented easy squeeze bearing system for ease-of-use
- Quick-load magazine



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P6C-8	1 lbs.	84	STCR5019 Staples	1/4" -3/8"
			See Pg. 64	

PowerCrown™ Light Wire Stapling Plier

- Case-hardened steel components for durability
- Ergonomic design and patented easy squeeze bearing system for ease-of-use
- Quick-load magazine



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P6C-6	1 lbs.	84	STCR2619 Staples	1/4" -3/8"
			See Pg. 64	

Heavy-duty Light Wire Stapling Plier

- Case-hardened steel components for durability
- Ergonomic design for ease-of-use
- AntiJam™ design for maximum productivity
- Quick-load magazine



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
P3-IND	0.5 lbs.	208	SP191/4 Staple	1/4" -3/8"
			See Pg. 64	

Collated Ring Plier

- Case-hardened steel components for durability
- Easy one-hand operation
- Automatic feed system for ease-of-use and productivity



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER GAUGE
P7	0.8 lbs.	50	C-Rings	16 Ga
			See Pg. 64	

BOSTITCH® Heavy Duty Staple Gun


- Heavy Duty with convenient handle lock for storage
- Chrome plated steel construction is durable and weather resistant
- Bottom-load magazine saves reload time and prevents loss of pusher



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
BT110	1.67 lbs.	84	BTA700 or Arrow® T50 HD Staples	1/4" – 9/16"	See Pg. 63

BOSTITCH® 2-in-1 Heavy Duty Staple/Brad Gun

- Aircraft grade aluminum housing is lightweight and durable
- Easy-squeeze handle reduces hand fatigue
- Bottom-load magazine saves reload time and prevents loss of pusher
- High/Low power switch for added versatility



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
BT160HL	1.36 lbs.	84	BTA700 or Arrow® T50 HD Staples	1/4" – 9/16"	See Pg. 63
			18 GA. Brads	1/2" – 5/8"	See Pg. 63

BOSTITCH® 2-in-1 Heavy Duty Cable Tacker

- Ideal for stapling low voltage wires such as telecom, alarm systems, and bell wire
- Built-in guide prevents damage to wires
- Aircraft grade aluminum housing is lightweight and durable
- Bottom-load magazine saves reload time and prevents loss of pusher
- High/Low power switch for added versatility



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH
BCT10X	1.36 lbs.	84	STANLEY CT100 Series Round Crown Cable Staples	3/8" – 9/16"
			STANLEY CT300 Series Flat Crown Cable Staples	3/8" – 1/2"

BOSTITCH® Manual Hammer Tacker

- Durable heavy duty steel construction
- Comfortable rubber handle adds grip and reduces arm fatigue
- Uses Heavy Duty (BTA700 or T50) staples 1/4", 5/16" and 3/8"



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
BHT150	2.07 lbs.	168	BTA700 or Arrow® T50 HD Staples	1/4" – 3/8"	See Pg. 63

BOSTITCH® Heavy Duty Hammer Tacker

- Chrome-plated steel construction frame for corrosion resistance and durability
- Bottom-load magazine saves reload time and prevents loss of pusher
- Surface guard prevents underlayment damage
- Ergonomic comfort rubber handle minimizes fatigue and maximizes comfort
- Uses Heavy Duty staples, 5/16", 3/8" and 1/2"



SKU #	WEIGHT	CAPACITY	FASTENER TYPE	FASTENER LENGTH	REF. PAGE
BHT250	2.41 lbs.	168	BTA700 or Arrow® T50 HD Staples	5/16" – 1/2"	See Pg. 63



INDUSTRIAL FITTINGS

Pre-applied thread sealant for airtight connections. Simplifies field installation by eliminating the need for thread sealant tape
Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers)
6-ball coupler design for balanced, strong, secure connections

SKU #	SPECIFICATION		NPT	
	SERIES	STYLE	SIZE	THREAD
BTFP72318	1/4"	Plug	1/4"	Male
IP-14M-BM 50 pc Bulk Pack	1/4"	Plug	1/4"	Male
BTFP72319	1/4"	Plug	1/4"	Female
IP-14F-BM 50 pc Bulk Pack	1/4"	Plug	1/4"	Female
IP38-38M	3/8"	Plug	3/8"	Male
IP38-38F	3/8"	Plug	3/8"	Female
ISWIVEL-14M	1/4"	Swivel Plug	1/4"	Male
IC-14M	1/4"	Coupler	1/4"	Male
IC-14M-BM 50 pc Bulk Pack	1/4"	Coupler	1/4"	Male
IC-14F	1/4"	Coupler	1/4"	Female
IC-14F-BM 50 pc Bulk Pack	1/4"	Coupler	1/4"	Female
IHKIT-14F	1/4"	Contains one BTFP72319 and one IC-14F	1/4"	Female

AIR ACCESSORIES & AIR HOSES



Plug Coupler
1/4" Series, 1/4" Male Thread



Swivel Plug
1/4" Series, 1/4" Male Thread



Plug Coupler
1/4" Series, 1/4" Female Thread

AUTOMOTIVE FITTINGS

Pre-applied thread sealant for airtight connections. Simplifies field installation by eliminating the need for thread sealant tape
 Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers)
 6-ball design (1/4" coupler series and 8-ball design (3/8" coupler series) for balanced, strong, secure connections

SKU #	SPECIFICATION			NPT	
	SERIES	STYLE	SIZE	THREAD	
AP-14M	3/8"	Plug	1/4"	Male	
AP-14F	3/8"	Plug	1/4"	Female	
AP-38M	3/8"	Plug	3/8"	Male	
AP-38F	3/8"	Plug	3/8"	Female	



Plug Coupler
3/8" Series, 1/4" Male Thread

Plug Coupler
3/8" Series, 1/4" Female Thread

UNIVERSAL COUPLERS

SKU #	SPECIFICATION			NPT	
	SERIES	STYLE	SIZE	THREAD	
BTFP72320	1/4"	Push-to-Connect	1/4"	Male	
BTFP72321	1/4"	Push-to-Connect	1/4"	Female	
UC38-14M	3/8"	Push-to-Connect	1/4"	Male	
UC38-14F	3/8"	Push-to-Connect	1/4"	Female	



Universal Coupler
1/4" Series, 1/4" Female Thread

Universal Coupler
3/8" Series, 1/4" Female Thread

COMPRESSOR ACCESSORIES

SKU #	DESCRIPTION	NPT	
		SIZE	THREAD
BTFP72326	Regulator & Gauge Kit	1/4"	N/A
IREGULATOR	Industrial Regulator & Gauge	1/4"	Female
BTFP72328	1-1/2" Pressure Gauge	1/4"	Female
TIRE-14F	Tire Chuck	1/4"	Female
TEE-14F	Tee Fitting	1/4"	Female
BTFP72641	Inline Lubricator	1/4"	Male
BTFP72330	Safety Blow Gun	1/4"	Female
BTFP72327	Ball Type Drain Valve	1/4"	Male
3WAY-RND	3-Way Manifold	3/8" NPT Inlet to 1/4" NPT Outlet	



REDUCERS & BUSHINGS

SKU #	DESCRIPTION	NPT	
		SIZE	THREAD
14M-14M	Hex Nipple	1/4"	Male
14F-14F	Hex Coupler	1/4"	Female
38M-38M	Hex Nipple	3/8"	Male
38M-14F	Hex Reducer Bushing	3/8" Male Thread to 1/4" Female Thread	
38M-14M	Hex Reducer Nipple	3/8" Male Thread to 1/4" Male Thread	
38F-14F	Hex Reducer Coupler	3/8" Female Thread to 1/4" Female Thread	
38F-14M	Hex Adaptor	3/8" Female Thread to 1/4" Male Thread	


REPAIR ACCESSORIES

SKU #	DESCRIPTION	NPT	
		SIZE	THREAD
THREADTAPE	Thread Sealant Tape	1 Roll	


Hoses

SKU #	DESCRIPTION	
PRO-1450	1/4" x 50' Premium Quality Ribbed Polyurethane Air Hose	
PRO-14100	1/4" x 100' Premium Quality Ribbed Polyurethane Air Hose	
PRO-3850	3/8" x 50' Premium Quality Ribbed Polyurethane Air Hose	
PRO-38100	3/8" x 100' Premium Quality Ribbed Polyurethane Air Hose	
HOPB1450	1/4" x 50' PVC And Rubber Blend Air Hose	
HOPB14100	1/4" x 100' PVC And Rubber Blend Air Hose	
HOPB3850	3/8" x 50' PVC And Rubber Blend Air Hose	
HOPB38100	3/8" x 100' PVC And Rubber Blend Air Hose	


Hose Repair Kits

SKU #	DESCRIPTION	
PRO-14 REPAIR	Repair Kit for 1/4" PROZ-HOSE Ribbed Polyurethane Air Hose	
PRO-38 REPAIR	Repair Kit for 3/8" PROZ-HOSE Ribbed Polyurethane Air Hose	
HREPAIR-38	Repair Kit for 3/8" Round Polyurethane Air Hose	


Lubricants

SKU #	DESCRIPTION	
PREMOIL-40Z	4 oz. Premium Grade Pneumatic Tool Lubricant	
PREMOIL-200Z	20 oz. Premium Grade Pneumatic Tool Lubricant	
WINTEROIL-40Z	4 oz. Winter Grade Pneumatic Tool Lubricant	
WINTEROIL-200Z	20 oz Winter Grade Pneumatic Tool Lubricant	
PREMCOMOIL-320Z	Non-Detergent Air Compressor Lubricant	
SYNCOMOIL-200Z	All-Season Synthetic Lubricant	
9B12147R	Gas Cordless Tool Oil	


O-Ring Kits

SKU #	DESCRIPTION	
N88ORK	N88 O-Ring Kit	
N89ORK	F21PL, F28WW, F33PT, N89C O-Ring Kit	
ORK1	N50FN, N59FN, N60FN, T40, T50 O-Ring Kit	
ORK6	MIIIFS, MIIIFN O-Ring Kit	
ORK10	S32, BT35, BT50, PC5000 O-Ring Kit	
ORK11	N79, N80, N90, N95 O-Ring Kit	
ORK12	N63, N64, SDCN14 O-Ring Kit	
ORK13	RN45 O-Ring Kit	
120965	PN100 O-Ring Kit	
186190	PN50 O-Ring Kit	

Rebuild Kits

SKU #	DESCRIPTION	
BOSCAP-RK	SB150SLBC, SB-1664FN Rebuild Kit	
BT55/SX38-RK	BT1855K/SX1838K Rebuild Kit	
B125K-RK	BT125 Rebuild Kit	
BT200-RK	BT200 Rebuild Kit	
FN16250K-RK	BT16250 Rebuild Kit	
FN1664-RK	FN1664K Rebuild Kit	
MCN-RK	MCN150/MCN250 Rebuild Kit	
MIIISK	MIIIFS, MIIIFN Rebuild Kit	
N62-RK	N62 Rebuild Kit	
N66C-RK	N66BC, N66C, N66, N75 Rebuild Kit	
RN46-RK	RN46 Rebuild Kit	
SX150-RK	SX150 Rebuild Kit	
N62FNB-RK	N62FNB Rebuild Kit	
DA1564K-RK	DA1564K Rebuild Kit	

Vinyl Siding & Depth Kits

SKU #	DESCRIPTION	
108551	650S4 Vinyl Siding Trip	
108550	438S4/538S4 Vinyl Siding Trip	
VSA4	RN46 Vinyl Siding Adaptor	
DC3	N80CB Dial-A-Depth Kit	



FRAMING

28° 28° Wire Weld Full Round Head Stick Framing Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
S6D-FH	2" x .113"	Smooth	Coated	Diamond	2000	BOSTITCH® N79WW, N80SB, N86S, N88WWB, N100S, F28WW, GF28WW, LPF28WW
S6DGAL-FH	2" x .113"	Smooth	Thickcoat™	Diamond	2000	
S6DR113-FH	2" x .113"	Ring	Coated	Diamond	2000	
S6DR113GAL-FH	2" x .113"	Ring	Thickcoat™	Diamond	2000	
S8D-FH	2-3/8" x .120"	Smooth	Coated	Diamond	2000	
S8DGAL-FH	2-3/8" x .120"	Smooth	Thickcoat™	Diamond	2000	
S8DR-FH	2-3/8" x .120"	Ring	Coated	Diamond	2000	
S8DRGAL-FH	2-3/8" x .120"	Ring	Thickcoat™	Diamond	2000	
S8D131GAL-FH	2-3/8" x .131"	Smooth	Hot dipped	Diamond	2000	
S10D-FH	3" x .120"	Smooth	Coated	Diamond	2000	
S10DGAL-FH	3" x .120"	Smooth	Thickcoat™	Diamond	2000	
S10DR-FH	3" x .120"	Ring	Coated	Diamond	2000	
S10DRGAL-FH	3" x .120"	Ring	Thickcoat™	Diamond	2000	
S10DS-FH	3" x .120"	Screw	Coated	Diamond	2000	
S10D131-FH	3" x .131"	Smooth	Coated	Diamond	2000	
S10D131GAL-FH	3" X .131"	Smooth	Hot dipped	Diamond	2000	
S12D-FH	3-1/4" x .120"	Smooth	Coated	Diamond	2000	
S12DGAL-FH	3-1/4" x .120"	Smooth	Thickcoat™	Diamond	2000	
S12DS-FH	3-1/4" x .120"	Screw	Coated	Diamond	2000	
S12DSGAL-FH	3-1/4" x .120"	Screw	Thickcoat™	Diamond	2000	
S12D131-FH	3-1/4" x .131"	Smooth	Coated	Diamond	2000	
S12DR131-FH	3-1/4" x .131"	Ring	Coated	Diamond	2000	
S12D131GAL-FH	3-1/4" X .131"	Smooth	Hot dipped	Diamond	2000	
S12DR131GAL-FH	3-1/4" X .131"	Ring	Hot dipped	Diamond	2000	
S16D131-FH	3-1/2" x .131"	Smooth	Coated	Diamond	2000	BOSTITCH® N79WW, N80SB, N86S, N88WWB, N100S, F28WW, GF28WW
S16D131GAL-FH	3-1/2" x .131"	Smooth	Thickcoat™	Diamond	2000	

FITS COMPETITOR TOOLS Hitachi NR90AF • Max SN883CH/28, SN890CH/28 • Grip Rite GRTFW83

FASTENERS

FRAMING



33° Paper Collated Stick Framing Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS	
PT-6D113FH5	2" x .113"	Smooth	Coated	Diamond	5000	BOSTITCH® F33PT, N90PT, LPF33PT, GF33PT	
PT-8D113FH5	2-3/8" x .113"	Smooth	Coated	Diamond	5000		
PT-8D113GFH2	2-3/8" x .113"	Smooth	Hot dipped	Diamond	2000		
PT-8DR113FH5	2-3/8" x .113"	Ring	Coated	Diamond	5000		
PT-8DR113GFH2	2-3/8" x .113"	Ring	Hot dipped	Diamond	2000		
PT-10D120FH25	3" x .120"	Smooth	Coated	Diamond	2500		
PT-10D120GFH2	3" x .120"	Smooth	Hot dipped	Diamond	2000		
PT-10D131FH25	3" x .131"	Smooth	Coated	Diamond	2500		
PT-10DR120GFH2	3" x .120"	Ring	Hot dipped	Diamond	2000		
PT-12D120FH25	3-1/4" x .120"	Smooth	Coated	Diamond	2500		
PT-12D131FH25	3-1/4" x .131"	Smooth	Coated	Diamond	2500		
PT-12D131GFH2	3-1/4" x .131"	Smooth	Hot dipped	Diamond	2000		
PT-16D131FH2	3-1/2" x .131"	Smooth	Coated	Diamond	2000		BOSTITCH® F33PT, N90PT, GF33PT
PT-16D131GFH2	3-1/2" x .131"	Smooth	Hot dipped	Diamond	2000		

FITS COMPETITOR TOOLS
 DeWALT® D51825, DCN692, D51822 • Paslode F350S, CF325, CF325LI, PF350S, IM350, IM90i • Hitachi NR83AA3, NR90AD, NR90GC • Porter-Cable® FC350A, FC350B • Senco SN901XP, SN951XP, FP701XP, FP601 • Ridig R350CHA • Max SN890CH/34, SN883CH/34 • Gripripte GRTCH350, GRTFC83



STRAPSHOT™ 35° Paper Collated Metal Connector Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
PT-MC13115-1M	1-1/2" x .131"	Smooth	Brite Heat Treated	Diamond	1000	BOSTITCH® F33PT, MCN150, MCN250
PT-MC13115G-1M	1-1/2" x .131"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC14815-1M	1-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC14815G-1M	1-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	
PT-MC14825G-1M	2-1/2" x .148"	Smooth	Brite Heat Treated	Diamond	1000	BOSTITCH® F33PT, MCN250

FITS COMPETITOR TOOLS
 Hitachi NR65AK • Paslode F250S-PP • Rap-A-Nail RN150, RN250

FRAMING



15° Coil Framing Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
C4PSTIF	1-1/2" x .099"	Smooth	Stiff	Diamond	3600	BOSTITCH® N75C, N80CB
AC4D113BDP	1-1/2" x .113"	Smooth	Coated	Blunt Diamond	7500	
C6P99D	2" x .099"	Smooth	Coated	Diamond	3600	BOSTITCH® N80CB, N89C, N100C, N75C
C6P99DG	2" x .099"	Smooth	Thickcoat™	Diamond	3600	
C6R99BC	2" x .099"	Ring	Coated	Blunt Chisel	3600	
C6R99BCG	2" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C6R99BDSS	2" x .099"	Ring	Stainless	Blunt Diamond	3600	
C7R99BCG	2-1/4" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C7PSTIF	2-1/4" x .099"	Smooth	Stiff	Diamond	3600	
C8P99D	2-1/2" x .099"	Smooth	Coated	Diamond	3600	
C8P99DG	2-1/2" x .099"	Smooth	Thickcoat™	Diamond	3600	
C8R99BCG	2-1/2" x .099"	Ring	Thickcoat™	Blunt Chisel	3600	
C8R99BD	2-1/2" x .099"	Ring	Coated	Blunt Diamond	3600	
C8R99BDSS	2-1/2" x .099"	Ring	Stainless	Blunt Diamond	3600	
C8R113DG	2-3/8" x .113"	Smooth	Thickcoat™	Diamond	2700	
C8P120D	2-1/2" x .120"	Smooth	Coated	Diamond	2700	
C8P131D-4.5M	2-1/2" x .131"	Smooth	Coated	Diamond	4500	
C10P120D	3" x .120"	Smooth	Coated	Diamond	2700	
C10P120DG	3" x .120"	Smooth	Thickcoat™	Diamond	2700	
C10P131D	3" x .131"	Smooth	Coated	Diamond	2700	
C8P99D	2-3/8" x .099"	Smooth	Coated	Diamond	3600	
C8R113BD	2-3/8" x .113"	Ring	Coated	Blunt Diamond	2700	
AC10DR	3" x .120"	Ring	Coated	Blunt Diamond	4500	
C10R120DSS	3" x .120"	Ring	Stainless	Diamond	2700	
C10S120DG	3" x .120"	Screw	Thickcoat™	Diamond	2700	
C12P120D	3-1/4" x .120"	Smooth	Coated	Diamond	2700	
C12P120DG	3-1/4" x .120"	Smooth	Thickcoat™	Diamond	2700	
C12R120DSS	3-1/4" x .120"	Ring	Stainless	Diamond	2700	
AC12DS	3-1/4" x .120"	Screw	Coated	Blunt	4500	
C12S120DG	3-1/4" x .120"	Screw	Thickcoat™	Diamond	2700	
C12P131D	3-1/4" x .131"	Smooth	Coated	Diamond	2700	
C16P131D	3-1/2" x .131"	Smooth	Coated	Diamond	2700	
C16P131DG	3-1/2" x .131"	Smooth	Thickcoat™	Diamond	2700	
C20S120D	4" x .120"	Screw	Coated	Diamond	2700	
C20P131D	4" x .131"	Smooth	Coated	Diamond	2700	
C20P131DG	4" x .131"	Smooth	Thickcoat™	Diamond	2700	

FITS COMPETITOR TOOLS
 DUOFAST CNW-75 • Hitachi NV83A • Makita AN901 • Max 890C • Paslode F275C, P275C, F325C, P325C, 5300C • PORTER-CABLE® Coil350 • Senco SCN60, SCN65

FRAMING

MC 21° Plastic Collated Metal Connector Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
RH-MC14815G-S	1-1/2" x .148"	Smooth	Thickcoat™ Heat Treated	Diamond	1000	BOSTITCH® N88RH-2MCN, F21PL

21° 21° Plastic Collated Full Round Head Framing Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
RH-S6DEP	2" x .113"	Smooth	Coated	Diamond	6000	BOSTITCH® N88RH, F21PL, LPF21PL
RH-S8D113EP	2-3/8" x .113"	Smooth	Coated	Diamond	5000	
RH-S8D113HDG	2-3/8" x .113"	Smooth	Hot Dipped	Diamond	5000	
RH-S8DR113EP	2-3/8" x .113"	Ring	Coated	Diamond	5000	
RH-S8DR113HDG	2-3/8" x .113"	Ring	Hot Dipped	Diamond	5000	
RH-S8D131EP	2-1/2" x .131"	Smooth	Coated	Diamond	5000	
RH-S8D131HDG	2-1/2" x .131"	Smooth	Hot Dipped	Diamond	5000	
RH-S10D120EP	3" x .120"	Smooth	Coated	Diamond	4000	
RH-S10D120HDG	3" x .120"	Smooth	Hot Dipped	Diamond	4000	
RH-S10DR120HDG	3" x .120"	Ring	Hot Dipped	Diamond	4000	
RH-S10D131EP	3" x .131"	Smooth	Coated	Diamond	4000	
RH-S10D131HDG	3" x .131"	Smooth	Hot Dipped	Diamond	4000	
RH-S10DR131EP	3" x .131"	Ring	Coated	Diamond	4000	
RH-S10DR131HDG	3" x .131"	Ring	Hot Dipped	Diamond	4000	
RH-S12D120EP	3" x .148	Smooth	Coated	Diamond	3000	
RH-S12D120EP	3-1/4" x .120	Smooth	Coated	Diamond	4000	
RH-S12D131EP	3-1/4" x .131	Smooth	Coated	Diamond	4000	
RH-S12D131HDG	3-1/4" x .131	Smooth	Hot Dipped	Diamond	4000	
RH-S16D131EP	3-1/2" x .131	Smooth	Coated	Diamond	4000	
RH-S16D131HDG	3-1/2" x .131	Smooth	Hot Dipped	Diamond	4000	BOSTITCH® F21PL, N79RH, N88RH-2MCN, N88RH, N95RHN
S38-100B	4" x .150	Smooth	Coated	Diamond	1250	
S38-115B	4-1/2" x .150	Smooth	Coated	Diamond	1250	BOSTITCH® KN85PP, BIGBERTA160, BRT130
S34S-115B	4-1/2" x .134	Screw	Coated	Diamond	1250	
S38-130B	5-1/8" x .150	Smooth	Coated	Diamond	1250	
S42-130B	5-1/8" x .165	Smooth	Coated	Diamond	660	
S42-160B	6-1/4" x .165	Smooth	Coated	Diamond	660	

FITS COMPETITOR TOOLS

DEWALT D51845, D51850 • DUOFAST CN350B • Hitachi NR83A, MR90AC • Makita AN922, AM8300 • Paslode 5300, F350SRH
PORTER-CABLE® F350, FR350MAG, DR350B • Ridgid R350RHA • Senco SCN60, SCN65, SN65C, FramePro FRH

ROOFING

15° 15° Coil Roofing Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
CR19GAL	3/4"	Smooth	Galvanized	Diamond	7200	BOSTITCH® RN45B, RN46
CR2DCGAL	7/8"	Smooth	Galvanized	Diamond	7200	
CR2DGAL	1"	Smooth	Galvanized	Diamond	7200	
CR3DGAL	1-1/4"	Smooth	Galvanized	Diamond	7200	
CR3DSS	1-1/4"	Smooth	Stainless Steel	Diamond	7200	
CR4DGAL	1-1/2"	Smooth	Galvanized	Diamond	7200	
CR4DSS	1-1/2"	Smooth	Stainless Steel	Diamond	7200	
CR5DGAL	1-3/4"	Smooth	Galvanized	Diamond	7200	

FITS COMPETITOR TOOLS

ATRO CN134, Roofing Roll • CRAFTSMAN 18324, 154500 • DEWALT D51321 • Paslode 3175RCU • Hitachi NV45AB, NV45AC, NV45AB2
• Hitachi NV45AB, NV45AC, NV45AB2 • PORTER-CABLE® F350 • Ridgid R350CHA • Senco SN2+, SN3, SN325+, SN4, SN70, FramePro

STAPLES

16 16-Gauge 1" Crown Construction Staples

SKU #	SIZE	CROWN	FINISH	POINT STYLE	QUANTITY	FITS	
16S2-16	21/32"	1"	Brite	Chisel	15000	BOSTITCH® 438S2R, 438S2, 450S2, T40S2	
16S2-16GAL	21/32"	1"	Galvanized	Chisel	15000		
16S2-19	3/4"	1"	Brite	Chisel	13500		
16S2-19GAL	3/4"	1"	Galvanized	Chisel	13500		
16S2-22	7/8"	1"	Brite	Chisel	12000		
16S2-22GAL	7/8"	1"	Galvanized	Chisel	12000		
16S2-25	1"	1"	Brite	Chisel	10500		
16S2-25GAL	1"	1"	Galvanized	Chisel	10500		
16S2-31	1-1/4"	1"	Brite	Chisel	9000		
16S2-31GAL	1-1/4"	1"	Galvanized	Chisel	9000		
16S2-38	1-1/2"	1"	Brite	Chisel	7500		
16S2-38GAL	1-1/2"	1"	Galvanized	Chisel	7500		
16S2-44	1-3/4"	1"	Brite	Chisel	6000		BOSTITCH® 450S2, T40S2
16S2-50GAL	2"	1"	Galvanized	Chisel	6000		

FINISH & TRIM

15
GA
BOSTITCH NAIL

15-Gauge "FN" Style Angled Finish Nails

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
FN1520-1M	1-1/4"	Chisel	Coated	1000	BOSTITCH® GFN1564K, N59FN, N60FN, N62FN
FN1520	1-1/4"	Chisel	Coated	3655	
FN1524-1M	1-1/2"	Chisel	Coated	1000	
FN1524-1MSS	1-1/2"	Chisel	Stainless	1000	
FN1524	1-1/2"	Chisel	Coated	3655	
FN1528	1-3/4"	Chisel	Coated	3655	
FN1532-1M	2"	Chisel	Coated	1000	
FN1532-1MSS	2"	Chisel	Stainless	1000	
FN1532	2"	Chisel	Coated	3655	
FN1536	2-1/4"	Chisel	Coated	3655	
FN1540-1M	2-1/2"	Chisel	Coated	1000	
FN1540-1MSS	2-1/2"	Chisel	Stainless	1000	
FN1540	2-1/2"	Chisel	Coated	3655	

15
GA
ANGLED NAIL

15-Gauge "DA" Style Angled Finish Nails

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
DA-1520	1-1/4"	Chisel	Coated	4000	BOSTITCH® DA1564K
DA-1524	1-1/2"	Chisel	Coated	4000	
DA-1532	2"	Chisel	Coated	4000	
DA-1540	2-1/2"	Chisel	Coated	4000	

FITS COMPETITOR TOOLS PORTER-CABLE® DA250C, DA250B, DA250A, Dewalt D51276K, D51275K, DC628K

16
GA
STRAIGHT NAIL

16-Gauge Straight Finish Nails

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
SB16-1.25-1M	1-1/4"	Chisel	Coated	1000	BOSTITCH® GFN1664K, FN16250K, SB-1664FN, FN1664K
SB16-1.5-1M	1-1/2"	Chisel	Coated	1000	
SB1615SS	1-1/2"	Chisel	Stainless	500	
SB16-1.50	1-1/2"	Chisel	Coated	2500	
SB16-1.75-1M	1-3/4"	Chisel	Coated	1000	
SB16-2.00-1M	2"	Chisel	Coated	1000	
SB1620SS	2"	Chisel	Stainless	500	
SB16-2.00	2"	Chisel	Coated	2500	
SB16-2.5-1M	2-1/2"	Chisel	Coated	1000	
SB1625SS	2-1/2"	Chisel	Stainless	500	
SB16-2.50	2-1/2"	Chisel	Coated	2500	

FITS MOST OTHER 16-GAUGE STRAIGHT FINISH NAILERS

FINISH & TRIM

18
GA
BOSTITCH BRAD NAIL

18-Gauge Brads

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
BT1300B-1M	5/8"	Chisel	Coated	1000	BOSTITCH® GBT1850K, SB-1850BN, SB-2IN1, BT125K-2, BT200K-2, BT1855K, BTFP71875
BT1300B	5/8"	Chisel	Coated	3000	
BT1303B-1M	3/4"	Chisel	Coated	1000	
BT1303B	3/4"	Chisel	Coated	3000	
BT1309B-1M	1"	Chisel	Coated	1000	
BT1309B	1"	Chisel	Coated	3000	
BT1314B-1M	1-3/16"	Chisel	Coated	1000	
BT1314B	1-3/16"	Chisel	Coated	3000	
BT1332B-1M	1-1/4"	Chisel	Coated	1000	
BT1332SS	1-1/4"	Chisel	Stainless	500	
BT1335B-1M	1-3/8"	Chisel	Coated	1000	
BT1335B	1-3/8"	Chisel	Coated	3000	
BT1338B-1M	1-1/2"	Chisel	Coated	1000	
BT1338B	1-1/2"	Chisel	Coated	2000	
BT1340B	1-9/16"	Chisel	Coated	2000	
BT1342B-1M	1-5/8"	Chisel	Coated	1000	
BT1345B-1M	1-3/4"	Chisel	Coated	1000	
BT1345B	1-3/4"	Chisel	Coated	2000	
BT1350B-1M	2"	Chisel	Coated	1000	
BT1350SS	2"	Chisel	Stainless	500	
BT1350B	2"	Chisel	Coated	2000	

FITS COMPETITOR TOOLS PORTER-CABLE® BN138, BN125A, BN200B, BN200A, Dewalt D51236K, D51238K, DC608K

18
GA
BOSTITCH STAPLE

18-Gauge 7/32" Crown Staples

SKU #	SIZE	CROWN	FINISH	QTY.	FITS
SX50351/2G-7M	1/2"	7/32"	Coated	7000	BOSTITCH® SX1838K, SX150K-1, SB-150SX, SB-2IN1, EHF1838K, S32SX-BHF-2, SX150-BHF-2
SX50355/8G	5/8"	7/32"	Coated	5000	
SX50353/4G	3/4"	7/32"	Coated	5000	
SX50357/8G	7/8"	7/32"	Coated	5000	
SX50351G	1"	7/32"	Coated	5000	
SX50351SS-1M	1"	7/32"	Stainless	1000	
SX50351-1/8G	1-1/8"	7/32"	Coated	3000	
SX50351-3/16G	1-3/16"	7/32"	Coated	3000	
SX50351-1/4G	1-1/4"	7/32"	Coated	3000	
SX50351-3/8G	1-3/8"	7/32"	Coated	3000	
SX503513/8SS1M	1-3/8"	7/32"	Stainless	1000	
SX503511/2G	1-1/2"	7/32"	Coated	3000	



FINISH & TRIM

23
GA.
PIN NAIL

23-Gauge Pin Nails

SKU #	SIZE	POINT STYLE	FINISH	QUANTITY	FITS
PT-2312-3M	1/2"	Chisel	Coated	3,000	BOSTITCH® TU-216-2330, HP118K
PT-2319-3M	3/4"	Chisel	Coated	3,000	
PT-2325-3M	1"	Chisel	Coated	3,000	
PT-2330-3M	1-3/16"	Chisel	Coated	3,000	
FITS COMPETITOR TOOLS PORTER-CABLE® PIN100, PIN138					

SPECIALTY & FLOORING

FS
FLOORING STAPLE

15.5-Gauge 1/2" Crown Hardwood Flooring Staples

SKU #	SIZE	CROWN	FINISH	POINT STYLE	QUANTITY	FITS
BCS1512	1-1/2"	1/2"	Coated	Chisel	9600	BOSTITCH® M111FS
BCS1512-1M	1-1/2"	1/2"	Coated	Chisel	1000	
BCS1514	1-3/4"	1/2"	Coated	Chisel	7728	
BCS1516	2"	1/2"	Coated	Chisel	7728	
BCS1516-1M	2"	1/2"	Coated	Chisel	1000	
BCS1516SS-1M	2"	1/2"	Stainless	Chisel	1000	
BCS1516-SQ	2"	1/2"	Coated	Chisel	500	

FC
FLOORING CLEAT

L-Shaped Hardwood Flooring Cleats

SKU #	SIZE	FINISH	QUANTITY	FITS
FLN-150	1-1/2"	Coated	1000	BOSTITCH® M111FN, MFN-200, MFN-201
FLN-200	2"	Coated	1000	

FS
FLOORING STAPLE

20-Gauge Flooring Staple

SKU #	SIZE	CROWN	FINISH	QUANTITY	POINT STYLE	FITS
SB97-1GLS	1"	3/16"	Coated	5000	Chisel	BOSTITCH® LHF2025K, LHF97125-2, S3297-LHF-2

SPECIALTY

15
GA.
WIRE WELD

15° Wire Weld Coil Siding Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
AC3D080BDP	1-1/4" x .080	Smooth	Coated	Blunt Diamond	14000	BOSTITCH® N63CP, N64C, N66C, N66BC
AC3DR080BDP	1-1/4" x .080	Ring	Coated	Blunt Diamond	14000	
C3R80BDG	1-1/4" x .080	Ring	Thickcoat™	Blunt Diamond	4200	
C3R90BDSS	1-1/4" x .090"	Ring	Stainless	Blunt Diamond	3600	
C3R90BDSS-316	1-1/4" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
AC4D080BDP	1-1/2" x .080	Smooth	Coated	Blunt Diamond	14000	
AC4DR080BDP	1-1/2" x .080	Ring	Coated	Blunt Diamond	14000	
C4R80BDG	1-1/2" x .080	Ring	Thickcoat™	Blunt Diamond	4200	
AC5D080BDP	1-3/4" x .080	Smooth	Coated	Blunt Diamond	14000	
AC5DR080BDP	1-3/4" x .080	Ring	Coated	Blunt Diamond	14000	
C5R80BDG	1-3/4" x .080	Ring	Thickcoat™	Blunt Diamond	4200	BOSTITCH® N63CP, N64C, N66C, N66BC, N75C
C4R90BDSS	1-1/2" x .090"	Ring	Stainless	Blunt Diamond	3600	
C4R90BDSS-316	1-1/2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
C5R90BDSS	1-3/4" x .092	Ring	Stainless	Blunt Diamond	3600	
C5R90BDSS-316	1-3/4" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
AC6D090BDP	2" x .092	Smooth	Coated	Blunt Diamond	12000	
C6P90BDG	2" x .092	Smooth	Thickcoat™	Blunt Diamond	3600	
AC6DR090BDP	2" x .092	Ring	Coated	Blunt Diamond	12000	
C6R90BDG	2" x .092	Ring	Thickcoat™	Blunt Diamond	3600	
C6R90BDSS	2" x .092	Ring	Stainless	Blunt Diamond	3600	
C6R90BDSS-316	2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
C7P90BDG	2-3/16" x .092	Smooth	Thickcoat™	Blunt Diamond	3600	
C7R90BDG	2-3/16" x .092	Ring	Thickcoat™	Blunt Diamond	3600	
C7R90BDSS	2-3/16" x .092	Ring	Stainless	Blunt Diamond	3600	
C7R90BDSS-316	2-3/16" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
C8P90BDG	2-1/2" x .092	Smooth	Thickcoat™	Blunt Diamond	3600	
C8R90BDG	2-1/2" x .092	Ring	Thickcoat™	Blunt Diamond	3600	
AC8DRSS	2-1/2" x .092	Ring	Stainless	Blunt Diamond	3600	
C8R90BDSS-316	2-1/2" x .090"	Ring	316 - Stainless	Blunt Diamond	1800	
FITS COMPETITOR TOOLS Hitachi NV65AH, Max CN565, Makita AN611, PORTER-CABLE® COIL200, COIL250						

18
GA.
STAPLE

18-Gauge 5/16" Crown Staples

SKU #	SIZE	CROWN	FINISH	QUANTITY	FITS
SL51351G	1"	5/16"	Coated	5000	BOSTITCH® SB1838BC, SL1838BC
SL51351-1/2G	1-1/2"	5/16"	Coated	3000	



SPECIALTY

16° BOSTITCH® Caps

SKU #	DESCRIPTION	QUANTITY	FITS
SB-CAPS	BOSTITCH® Caps	1000	BOSTITCH® SL1838BC, SB150SLBC, N66BC
CAPPAK-1M	BOSTITCH® Caps & 1" Staples	1000 each	BOSTITCH® SB150SLBC, SL1838BC
CAPPAK-5M	BOSTITCH® Caps & 1" Staples	5000 each	

15° Plastic Inserted Coil Siding Nails

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
ACP5DSALM	1-3/4" x .099"	Screw	Aluminum	Diamond	2400	BOSTITCH® N63CP, N65CP, N66C, N66BC, N75C
ACP6D090BDG	2" x .090"	Ring	Galvanized	Diamond	3600	
FITS COMPETITOR TOOLS Hitachi NV65AH, Max CN565, Makita AN611, Senco SCN55S						

MC T-Nails for Drywall Track or Wood into Concrete, Block or Masonry

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
BT484GXH-2.5M	9/16" x .097"	Hardened/ Coated	Smooth	Diamond	2500	BOSTITCH® MIII812CNCT
BT461H-2.5M	5/8" x .097"	Stiff	Smooth	Diamond	2500	
BT461XH-2.5M	5/8" x .097"	Hardened	Smooth	Diamond	2500	
BT488XH-2.5M	3/4" x .097"	Hardened	Smooth	Diamond	2500	
BT490XH-2.5M	1-1/8" x .097"	Hardened	Smooth	Diamond	2500	
BT499H-2.5M	1-3/8" x .097"	Hardened	Smooth	Diamond	2500	
BT493XH-2.5M	1-3/8" x .097"	Stiff	Smooth	Diamond	2500	
BT471XH-2.5M	1-1/2" x .097"	Hardened	Smooth	Diamond	2500	
BT481H-2.5M	2-1/4" x .097"	Stiff	Smooth	Diamond	2500	

15° 15° Coil Pins for Gypsum, Plywood, OSB and Steel Sheathing to Steel Framing

SKU #	SIZE	SHANK	FINISH	POINT STYLE	QUANTITY	FITS
GC4S100BG	1-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH® SF150C, N75C-1, N89CB-1, N89C-1
C4S100BG	1-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	
GC6S100BG	2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH® N75C-1, N89CB-1, N89C-1
GC8S100BG	2-1/2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	
C6S100BG	2" x .100"	Helix	Hot Dipped	Ballistic Point	3600	BOSTITCH® SF150C
C2S100BG	1" x .100"	Helix	Hot Dipped	Ballistic Point	3600	

STAPLES

16° 16-Gauge 1/2" Crown Construction Staples

SKU #	SIZE	CROWN	FINISH	POINT	QTY.	FITS
16S4-19	3/4"	1/2"	Brite	Chisel	25650	BOSTITCH® 438S4
16S4-19GAL	3/4"	1/2"	Galvanized	Chisel	25650	
16S4-25	1"	1/2"	Brite	Chisel	19950	BOSTITCH® 438S4, 650S4
16S4-25GAL	1"	1/2"	Galvanized	Chisel	19950	
16S4-31	1-1/4"	1/2"	Brite	Chisel	17100	
16S4-31GAL	1-1/4"	1/2"	Galvanized	Chisel	17100	
16S4-34	1-3/8"	1/2"	Brite	Chisel	14250	
16S4-34GAL	1-3/8"	1/2"	Galvanized	Chisel	14250	
16S4-38	1-1/2"	1/2"	Brite	Chisel	14250	
16S4-38GAL	1-1/2"	1/2"	Galvanized	Chisel	14250	
16S4-38SS-1M	1-1/2"	1/2"	Stainless	Chisel	1050	
16S4-41	1-5/8"	1/2"	Brite	Chisel	11400	
16S4-41GAL	1-5/8"	1/2"	Galvanized	Chisel	14250	BOSTITCH® 650S4
16S4-44	1-3/4"	1/2"	Brite	Chisel	11400	
16S4-44GAL	1-3/4"	1/2"	Galvanized	Chisel	11400	
16S4-50	2"	1/2"	Brite	Chisel	11400	
16S4-50GAL	2"	1/2"	Galvanized	Chisel	11400	

16° 16-Gauge 7/16" Crown Construction Staples

SKU #	SIZE	CROWN	FINISH	POINT	QTY.	FITS
16S5-44	1-3/4"	7/16"	Brite	Chisel	19800	BOSTITCH® 438S5, 538S5, 650S5, 651S5, T40S5, T50S5
16S5-44GAL	1-3/4"	7/16"	Galvanized	Chisel	16500	
16S5-50	2"	7/16"	Brite	Chisel	16500	
16S5-50GAL	2"	7/16"	Galvanized	Chisel	16500	

BTA700 Series Heavy Duty Staples

SKU #	LEG LENGTH	CROWN WIDTH	POINT TYPE	QUANTITY	FITS
BTA704TLS	1/4"	3/8"	Chisel	1500	BOSTITCH® BT110, BT160HL, BHT150, BTFP71875
BTHT73529	1/4"	3/8"	Chisel	1250	
BTA705TLS	5/16"	3/8"	Chisel	1500	BOSTITCH® BT110, BT160HL, BHT150, BHT250, BTFP71875
BTHT73530	5/16"	3/8"	Chisel	1250	
BTA706TLS	3/8"	3/8"	Chisel	1500	
BTHT73531	3/8"	3/8"	Chisel	1250	
BTA708TLS	1/2"	3/8"	Chisel	1500	BOSTITCH® BT110, BT160HL, BHT250, BTFP71875
BTHT73532	1/2"	3/8"	Chisel	1250	
BTA709TLS	9/16"	3/8"	Chisel	1500	BOSTITCH® BT110, BT160HL, BTFP71875
BTHT73533	9/16"	3/8"	Chisel	1250	

FASTENERS

STAPLES



Heavy-Duty PowerCrown™ Staples

SKU #	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
STCR50191/4-1M	.050" x .019"	7/16"	1/4"	1000	BOSTITCH® T6-8, T6-80C1, PC4000, PC4000C1, PC5000, H30-8, P6C-8, US056-1
STCR50191/4-6M	.050" x .019"	7/16"	1/4"	6000	
STCR50195/16-5M	.050" x .019"	7/16"	5/16"	5000	
STCR50193/8-1M	.050" x .019"	7/16"	3/8"	1000	
STCR50193/8-5M	.050" x .019"	7/16"	3/8"	5000	
STCR50191/2-1M	.050" x .019"	7/16"	1/2"	1000	BOSTITCH® T6-8, T6-80C2, PC3000, PC4000, PC4000C2, PC5000, PC3000, US056-1
STCR50191/2-4M	.050" x .019"	7/16"	1/2"	4000	BOSTITCH® T6-8, T6-80C2, PC4000, PC4000C2, PC5000, US056-1
STCR50199/16-1M	.050" x .019"	7/16"	9/16"	1000	BOSTITCH® T6-8, T6-80C2, US056-1, PC4000, PC4000C2
STCR50199/16-4M	.050" x .019"	7/16"	9/16"	4000	



Light-Duty PowerCrown™ Staples

SKU #	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
STCR26191/4	.026" x .019"	7/16"	1/4"	5000	BOSTITCH® T5-6, H30-6, P6C-6
STCR26195/16	.026" x .019"	7/16"	5/16"	5000	
STCR26193/8	.026" x .019"	7/16"	3/8"	5000	
STCR26191/2	.026" x .019"	7/16"	1/2"	5000	T5-6, PC3000C2, T6-60C2

Light-Wire Staples

SKU #	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
SP191/4	.019"	3/8"	1/4"	5000	P3-IND, P3-Chrome

Collated Rings

SKU #	FINISH	WIRE GAUGE	CROWN	LENGTH	QUANTITY	FITS
RING616G50	Galvanized	16-Gauge		11/16"	2500	BOSTITCH® P7
RING616SS50	Stainless Steel	16-Gauge		11/16"	2500	

BOSTITCH®

www.BOSTITCH.com

BOSTITCH

701 E. Joppa Rd, Towson, MD 21286

Customer Service 1-800-556-6696

Fax 1-800-842-9360

