


Super Felt

Premium Felt Underlayment 70-190

For use over concrete and wood subfloors



Keep floors warm in winter and cool in summer

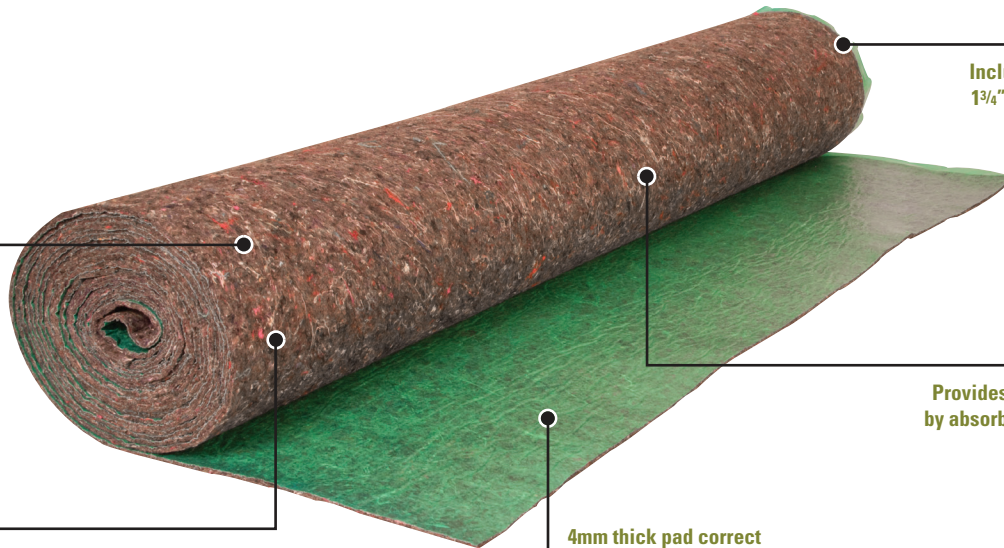


Includes adhesive strip and 1 $\frac{3}{4}$ " overlap film for linking multiple rolls


Provides deep, rich sound by absorbing noise instead of deflecting it

Extremely high temperature manufacturing process compresses and treats fibers

4mm thick pad correct minor sub-floor imperfections




Sound Reduction



Cushions Flooring



Recycled Fibers



Levels Imperfections

Super Felt is a 4mm thick insulating underlayment made to reduce noise and help cushion flooring. By absorbing noise instead of deflecting it, Super Felt provides a deep, rich sound. This felt underlayment is made from recycled fibers and compressed using a high heat manufacturing process. The film overlay protects engineered and laminate flooring from any moisture from the subfloor and includes an adhesive strip and 1-3/4" overlap for linking multiple rolls.

Item Code:	70-190
Unit of Measure:	Ea.
Coverage:	100 sq. ft. per roll
Width of roll:	44"
Length of roll:	27.3 ft.
Thickness:	4mm
Weight per roll:	10.11 lbs.
Diameter of roll:	7.5"
Density:	14.5 lbs./ft. ³

TECHNICAL SPECIFICATIONS

IIC (Impact Sound Transmission Test)	67
STC (Sound Transmission Loss Test)	66

Both tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50.

Roberts Consolidated Industries, Inc. • Boca Raton, FL 33487 • (800) 423 6545 • www.robertsconsolidated.com

Roberts Company Canada Ltd.
TEL: 800 840 9422

O.E.P. Chile Limitada
TEL: 562 622 6588

O.E.P. Australia Pty. Ltd.
TEL: 011 61 3 9797 1888

Zocalis S.R.L.
TEL: 541 14 765 9796

Estillon B.V.
TEL: 0031 24 6485348

O.E.P. Co., N.Z., Limited
TEL: 64 9 415 9700