



CATALOG TABLE OF CONTENTS



American Granby ii-iv
 Terms & Conditions v
 Suppliers vi



Pool & Spa Section P Pages 1-64
 Pump & Well Accessories Section 1 Pages 1-104



Tank Crosses, Fittings Packages Section 1A
 Relief Valves, Air Controls, Well Installation Section 1B
 Switches, Controls, Gauges Section 1C
 Pitless Adapters, Well Caps, Well Seals Section 1D
 Drive Shoes, Drive Points, Pitcher Pump Section 1E
 Well Cylinders, Leathers, Jet-Lube Section 1F
 Foot/Check Valves & Yard Hydrants Section 2 Pages 1-20
 Plumbing Valves Section 3 Pages 1-30
 Water Filtration & Disinfection Section 4 Pages 1-52
 Sump & Sewage Section 5 Pages 1-10
 Plumbing & Heating Accessories & Specialties Section 6 Pages 1-36
 Pex & PE-RT Tubing, Fittings & Accy. Section 6A Pages 1-18
 Tapes, Sealants & Solvent Cements Section 7 Pages 1-26
 Super Lube®, Permatex®/Devcon Section 8 Pages 1-10
 Flo Control®, NDS® Fittings, Valves, Drainage Section 9 Pages 1-38
 Turf Irrigation Section 10 Pages 1-56
 Hand Tools & Accessories Section 11 Pages 1-12
 Ideal Clamps, Fittings & Nipples Section 12 Pages 1-54
 Push Connect Fittings Section 12A
 Ideal Clamps, Insert Fittings Section 12B
 Pressure Fittings PVC/CPVC-CTS Section 12C
 Compression Cplg, Flex Cplg, S&D, Corrugated Section 12D
 Merchant Cplg, Threaded Bronze, Malleables Section 12E
 Pipe Nipples Section 12F
 Index & Reference Data Section X Pages 1-10





Why do business with American Granby

- ☺ The Original Source of Vendor Consolidation™
- ☺ Highest Quality Products
- ☺ Extensive Product Offering
- ☺ Easily Understood Discounts
- ☺ Fast, Accurate Shipments
- ☺ Knowledgeable Customer Service Dept.

American Granby Sales Representative:

Name _____
Address _____
City _____ State _____ Zip _____
Phone _____ Fax _____
Cell _____ Email _____

For shipping information or to place orders contact:

American Granby US Customer Sales Department	In Canada:
Phone: 800-776-2266	Phone: 800-268-7570
315-451-1100	Fax: 905-629-3204
Fax: 800-729-3299	Email: sales@cbsupplies.ca
Email: customerservice@americangranby.com	

Address mail orders or other correspondence to:

American Granby, Inc.	CB Supplies
7652 Morgan Road	5266 Timberlea Blvd.
Liverpool, NY 13090 USA	Mississauga, ON L4W 2S6

Contact us on the web at www.americangranby.com



*This catalog is also
available on CD.
Call for your copy today.*



American Granby



Since 1962, American Granby has served the water systems, pool & spa, turf irrigation and plumbing & heating markets in North America and around the world.

The 2006 construction and 2016 expansion of our new state of the art distribution facility is only a small part of our continued commitment to serve our customers now and well into the future.



www.americangranby.com
In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016





Terms & Conditions of Sale

1. When ordering material please use American Granby Inc. (AGI) part number, size and other definitive information necessary. AGI reserves the right to correct clerical errors or omissions in quotations or other documents.
2. **ORDERS AND CONTRACTS:** Subject to acceptance at the office in Liverpool, New York. Any statement in an order of contract which modifies AGI's Terms and Conditions as set forth here, must first be accepted in writing by AGI. Any order cancelled after acceptance by AGI is subject to a 25% cancellation charge.
3. **PRICES AND QUOTATIONS:** Orders will be invoiced at the prices in effect at the time of shipment. Unless otherwise specified, prices are F.O.B. point of shipment. All prices and quotations are subject to change without notice. Items not listed in this catalog will be quoted on application.
4. **MINIMUM ORDERS:** All orders under \$100.00 will be charged \$25.00 to cover packing, shipping, order processing, billing and other handling expenses.
5. **TAXES:** Any tax that may be imposed by law on the sale of articles made or sold by this company shall be added to the sale price of such articles.
6. **TERMS:** 2% 15 days, Net 30 Days unless otherwise noted. CASH DISCOUNTS TAKEN BEYOND TERMS STATED ON THE INVOICE WILL BE DISALLOWED.
7. **FREIGHT & DELIVERY:** All merchandise shipped FOB point of shipment. Full freight allowed on shipments from the AGI warehouse within the continental US for orders totalling **\$1300** net. Shipments to Puerto Rico are prepaid at **\$4000** net. Other shipments outside the continental US are prepaid and allowed to closest inland point based on above net minimums. The individual manufacturer's freight will supersede AGI's freight policy on drop ship items. Special order items are not subject to prepaid freight allowances.
Additional Freight Charges: Additional fees for residential, remote areas, lift gate service or any special circumstance deliveries from the freight carrier will be the responsibility of the receiver of the shipment and a separate invoice will be issued upon receipt of notification of such charges. This applies to any freight prepaid, freight allowed or prepay and add invoices. The receiver of the shipment is to pay all additional fees.
8. **SPECIAL PRODUCTS/ORDERS:** Requests for cancellation of these orders will not be considered if the manufacture of the product is in process or the special product has already been shipped by the manufacturer when the customer's request for cancellation reaches the home office. Special orders for non-cataloged items, or products made to customer's specifications can not be returned for any refund. Special order items are not subject to prepaid freight allowances.
9. **WARRANTY:** All products, with the exception of chemical feed pumps are warranted to authorized distributors/wholesalers purchasing from AGI as to workmanship and material for a period of one year from date of sales by AGI, when the products are used in recommended service. AGI's liability and its customer's exclusive remedy under this warranty, expressed or implied is limited to repair, replacement or credit at AGI's option, for such parts as proven defective. If such product(s) or part(s) are returned, shipping charges must be prepaid, to AGI at its factory at 7652 Morgan Road Liverpool, NY 13090. AGI will examine such product(s) or part(s) promptly upon arrival. If a defect covered by this warranty is found, AGI will, in its sole discretion, either repair the defect or replace the defective part(s) or allow a credit for the defective part(s). If a part is replaced, it is a condition of this warranty that AGI be allowed to keep the returned part. Costs of shipping all parts or products back to the distributor/wholesaler shall be solely the responsibility of the distributor/wholesaler; repairs and replacements are furnished F.O.B. AGI's factory only.
NOTE: This warranty is extended to distributors/wholesalers who have purchased products covered from AGI. AGI extends no warranty of such products to "consumers", as that term is defined in the Magnuson-Moss Warranty-Federal Trade Commission Improvement Act (14 U.S.C. 2301 et.

seq.), and the regulations promulgated thereunder. There are no warranties other than those contained in this statement, and neither any representation or affirmation made nor any drawing or sample shown, shall be deemed to create any warranty or standard of performance. In the event that any AGI product is modified at any place other than the point of original manufacture, this warranty is null and void. The warranty set forth in this paragraph is made expressly in lieu of all other warranties expressed, implied or statutory, including, but not limited to, warranties with respect to quality, merchantability, or fitness of a particular purpose.

10. LIMITATION OF LIABILITY: The exclusive remedy to which AGI may be subjected by reason of any breach of warranty, or in connection with any goods supplied by AGI, or by reason of any breach of agreement shall be for damages and the amount of damage for which AGI shall be liable shall be limited in accordance with the provisions hereof. AGI's liability for any and all losses and damages to purchaser or any other person resulting from any breach of any warranty by which AGI may be bound, from any damaged or defective goods supplied by AGI (regardless of whether any said defect shall be discoverable or latent), failure to deliver, breach of agreement, or any other cause whatsoever, including AGI's negligence, shall in no event exceed the purchase price of the particular goods with respect to which losses or damages are claimed, or at the election of AGI, the repair or replacement of defective or damaged goods. In no event, including a claim of negligence, shall AGI be liable for incidental or consequential damages as defined in Section 2-715 of the Uniform Commercial Code. Without limitation to the foregoing, in no event shall American Granby be liable for the loss of use of the product, process, plant, equipment or facilities of the purchaser or the end-user whether partially or wholly due to defects in material and/or workmanship and/or design of AGI's product and in no event shall AGI be liable for expenses necessary to remove or reinstall any product supplied by AGI, or for any damages to other property or equipment resulting from any such removal or reinstallation. Damages resulting from improper storage, improper product rotation, improper handling, freezing, improper installation, fire or any act of God will not be considered by AGI as its liability. AGI will not assume any expenses or liability for repairs or modifications made to its products, without its written consent.

11. DELIVERY: AGI's responsibility ceases upon delivery to any common carrier. AGI does not, unless under previous written agreement, insure shipments beyond the point of delivery to such carrier. AGI shall not be responsible for delays resulting from strikes, accidents, negligence of carriers, or any other causes beyond our control. AGI may, during a period of shortage due to causes beyond its control, prorate the supply of its products among all of its customers in such a manner as may be deemed equitable at the sole discretion of AGI.

12. RETURNED GOODS: Materials may not be returned unless authorization has first been obtained from the Liverpool, NY office. AGI reserves the right to refuse acceptance of deliveries of materials returned without this consent. All returns of saleable goods will be subject to a 25% restocking/handling charge. All authorized returned goods must be shipped prepaid by the customer. **Returns accepted within 30 days from date of authorization only.**

13. ERRORS, SHORTAGES, ETC: Claims for errors, shortages, etc. must be made within 30 days of receipt of goods, otherwise no allowance will be made. **WHEN PRODUCTS ARE SHIPPED ON WRAPPED PALLETS, INDIVIDUAL CARTONS MUST BE COUNTED UPON RECEIPT. ANY SHORTAGES OR OTHER DISCREPANCIES MUST BE NOTED ON THE DELIVERY RECEIPT AT THE TIME OF RECEIPT OR CLAIMS WILL BE CONSIDERED WAIVED.**

14. PRODUCT CHANGES: AGI reserves the right to make changes in pattern, design or materials when deemed necessary, without prior notice. Products which have become obsolete by reason of design change or discontinued as a manufactured item may not be returned for any refund.

15. EXPORT: Additional charges quoted upon application for export packaging and crating.



American Granby



CLAYTON MARK®



American Granby was established in 1962 to serve the distribution needs of the wholesale market. With the birth of American Granby came the concept of "Vendor Consolidation."™ We strive to provide you with the products you need and the service you deserve. The following supplier partners have made our mission possible and we thank them.



AK INDUSTRIES



AMTROL INC.




U.S. GAUGE DIVISION

AquaMend

UNDERWATER REPAIR EPOXY



B/W Controls



JOHNSON CONTROLS



LASCO Fittings, Inc.



MDI



NDS



Permatex



PENTAIR

POLYKEN®



Rainmaid Manufacturing



Simmons



SQUARE D



TRUEBRO

United Elchem UNI-WELD





SECTION P POOL & SPA



PRODUCT LINE	PAGE
3 way valves	16
Ball Valves, Single Union	15-16
Molded in place	17-20
Boss™ Adhesives, Lubricants & Sealants	43
Boss™ Expanding Foam Sealant	44
Butterfly Valves	27-29
Butterfly Valve Accessories, Installation Kits	30-31
Check Valves	23-25
Clear Braided PVC Hose	33-34
Concrete Repair	49-50
Equipment Pads	51
Float Valves	26
Flowmeters	14
Installation & Repair	45-48
Pipe & Hose Cutters, Saws	39-42
Pool Floats	1
Pressure Gauges	7-10
Pressure Gauges - Liquid Filled	11-12
Pumps, Utility, Cover	64
Slice Gate Valves	21-22
Specialty Pool & Spa Fittings	6
Repair Fittings	48
Rope	3
Rope & Float Kits	2
Rope Anchors, Hooks & Accessories	4
Service Accessories	52
Test Kits & Specialty Gauges	13-14
Tubing	35-36
Tubing Fittings	37-38
Unions	5
Wingmaster Pool Service Tools	53-60
Winterizing Plugs	61-62
Winterizing Products	63



www.americangranby.com


In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



IF Series

HARVARD Handi-Lock® Float Features:

- Made of polyethylene and treated with chlorine inhibitors and ultraviolet stabilizers for durability and long life.
- Self locking feature fixes on line without additional expense of float keepers or wedges.
- Three sealed compartments for optimum buoyancy in case of puncture.
- Three inside diameters to accommodate 3/8", 1/2" or 3/4" rope (either hollow braid or twisted).
- Patented.



HF Series

HARVARD High Impact Styrene Float Features:

- Blue and white high impact styrene.
- Fits 3/8" hollow braid rope.



RBF Series

HARVARD Rainbow Style Float Features:

- Polyethylene
- Unsinkable
- Durable
- Chlorine inhibitors and ultraviolet stabilizers added.
- 3" x 5" for 1/2" pool rope and 5" x 9" for 3/4" pool rope available.



Part Number	Float Size	Rope Size	Color	Ctn Qty	List Price
IF3538	3" x 5"	3/8"	Blue/White/Blue	50	\$ 8.47
IF3538R	3" x 5"	3/8"	Red/White/Red	50	8.47
IF3538O	3" x 5"	3/8"	Orange/White/Orange	50	8.47
IF3550	3" x 5"	1/2"	Blue/White/Blue	50	8.47
IF3550R	3" x 5"	1/2"	Red/White/Red	50	8.47
IF3550O	3" x 5"	1/2"	Orange/White/ Orange	50	8.47
IF3550RWB	3" x 5"	1/2"	Red/White/Blue	50	8.47
IF3550 ALL BLUE	3" x 5"	1/2"	Blue/Blue/Blue	50	8.47
IF3550 ALL RED	3" x 5"	1/2"	Red/Red/Red	50	8.47
IF3550 ALL WHITE	3" x 5"	1/2"	White/White/White	50	8.47
IF5950	5" x 9"	1/2"	Blue/White/Blue	24	16.32
IF5950R	5" x 9"	1/2"	Red/White/Red	24	16.32
IF5950O	5" x 9"	1/2"	Orange/White/Orange	24	16.32
IF5950W	5" x 9"	1/2"	White/White/White	24	16.32
IF5975	5" x 9"	3/4"	Blue/White/Blue	24	16.32
IF5975R	5" x 9"	3/4"	Red/White/Red	24	16.32
IF5975O	5" x 9"	3/4"	Orange/ White/Orange	24	16.32
IF5975RWB	5" x 9"	3/4"	Red/White/Blue	24	16.32
HF35	3" x 5"	3/8"	Blue/White	10	3.86
RBF35BW	3" x 5"	1/2"	Blue/White	100	2.96
RBF35RW	3" x 5"	1/2"	Red/White	100	2.96
RBF35YW	3" x 5"	1/2"	Yellow/White	100	2.96
RBF35W	3" x 5"	1/2"	Solid White	100	2.96
RBF59BW	5" x 9"	3/4"	Blue/White	24	5.68
RBF59RW	5" x 9"	3/4"	Red/White	24	5.68
RBF59YW	5" x 9"	3/4"	Yellow/White	24	5.68
RBF59WHITE	5" x 9"	3/4"	Solid White	24	5.68
RBF59RED	5" x 9"	3/4"	Solid Red	24	5.68






IFK Series

IFK Series Float Kit Features:

- Blue and White Handi-Lock® Floats packaged for 16', 18', 20', 22' and 25' pools.
- Each partially assembled kit contains rope, Handi-Lock® Floats, 2 chrome plated brass rope hooks, splicing FID, and a full set of illustrated instructions.
- Individually packaged in shelf stackable boxes.
- 4 kits per master carton.



RFK Series

RFK Series Float Kit Features:

- Blue and White styrene float lane markers packaged for 12', 14', 16', 18', 20', 22' and 25' pools.
- Completely assembled and ready to install.
- Each individually bagged kit contains braided polypropylene rope with attractive blue/white floats, prefixed at regular intervals and two chrome plated brass hook eyes.

Part Number	Pool Size	Rope Length	Rope Size	Floats	Ctn Qty	List Price
IFK16	16'	18'	3/8"	5	4	\$ 63.74
IFK18	18'	20'	3/8"	6	4	71.09
IFK20	20'	22'	3/8"	7	4	79.33
IFK22	22'	24'	3/8"	7	4	80.23
IFK25	25'	27'	3/8"	8	4	87.75
RFK12	12'	14'	3/8"	5	6	37.11
RFK14	14'	16'	3/8"	5	6	37.21
RFK16	16'	18'	3/8"	5	6	37.32
RFK18	18'	20'	3/8"	7	6	44.46
RFK20	20'	22'	3/8"	9	4	51.79
RFK22	22'	24'	3/8"	9	4	52.20
RFK25	25'	27'	3/8"	10	4	58.15

Custom Float Kits also available on a special order basis.




Pool Rope - Twisted/Braided



PR Series



BPR Series



FID

Pool Rope Features:

- Polypropylene.
- Floatable.
- Waterproof.
- Rot Resistant.
- Easy to Handle.
- Resists Oil and Gasoline.
- Resists Most Chemicals.
- Resistant to Abrasion.
- Resistant to Color Fading.

Part Number	Color	Diameter	Length	List Price
Twisted Pool Rope				
YR25-500	Solid Yellow	1/4"	500'	\$ 41.67
PR25-6	Blue/White	1/4"	600'	49.81
PR25-6R	Red/White	1/4"	600'	49.81
YR25-1	Solid Yellow	1/4"	1000'	83.00
PR38-3R	Red/White	3/8"	300'	54.57
PR38-3O	Orange/White	3/8"	300'	54.57
PR38-3W	Solid White	3/8"	300'	54.57
PR38-4	Blue/White	3/8"	400'	74.19
PR38-6	Blue/White	3/8"	600'	109.19
PR38-6R	Red/White	3/8"	600'	109.19
PR38-6O	Orange/White	3/8"	600'	109.19
PR38-6W	Solid White	3/8"	600'	109.19
PR50-3	Blue/White	1/2"	300'	97.43
PR50-3R	Red/White	1/2"	300'	97.43
PR50-3O	Orange/White	1/2"	300'	97.43
PR50-3W	Solid White	1/2"	300'	97.43
PR50-6	Blue/White	1/2"	600'	194.86
PR50-6R	Red/White	1/2"	600'	194.86
PR50-6O	Orange/White	1/2"	600'	194.86
PR50-6W	Solid White	1/2"	600'	194.86
PR58-6	Blue/White	5/8"	600'	298.90
PR75-3	Blue/White	3/4"	300'	231.67
PR75-3R	Red/White	3/4"	300'	231.67
PR75-3O	Orange/White	3/4"	300'	231.67
PR75-3W	Solid White	3/4"	300'	231.67
PR75-6	Blue/White	3/4"	600'	440.95
PR75-6R	Red/White	3/4"	600'	440.95
PR75-6O	Orange/White	3/4"	600'	440.95
PR75-6W	Solid White	3/4"	600'	440.95
PR75-6Y	Solid Yellow	3/4"	600'	440.95
Braided Pool Rope				
BPR38-5	Blue/White	3/8"	500'	96.24
Splicing Fid				
FID	Splicing Fid, For 3/8" braided rope			2.42

Pool Rope Anchors & Hooks






Chrome Plated Brass Rope Accessory Features:

- Bright chrome finished brass rope accessories.
- Precision cast from corrosion resistant brass.
- Stainless steel fasteners.
- Black or White EPDM gaskets.
- Fully assembled.



HOE2

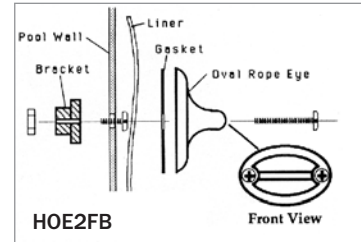

HCA

HEBA



HPRS



HRH



AGHP

Part Number	Description	Ctn Qty	List Price
HOE2	Chrome Plated Brass CURVED COPING MOUNT Oval Rope Anchor (Set of 2 w/ ss self tap screws)	72	\$ 19.88
HOE2F	Chrome Plated Brass FLAT WALL MOUNT Oval Rope Anchor (Set of 2 w/ ss self tap screws, EPDM gasket)	6/72	19.88
HOE2FB	Chrome Plated Brass FLAT WALL MOUNT Oval Rope Anchor w/ brass mounting bracket and hardware (Set of 2 w/ ss screws, EPDM gasket, brass mounting brackets)	6/72	24.43
HCA	Chrome Plated Brass Cup Anchor for concrete pools.	12/120	13.40
HEBA	Chrome Plated Brass wall mount eye with washer gasket and nut for vinyl liners. 1-3/8" long bolt	20/200	12.32
HPRS	Chrome Plated Strap Type Rope Anchor used under coping for vinyl pools. 14" long	12/252	14.26
HRH	Chrome Plated Brass "S" Rope Hook for 1/4"-1/2" rope	500	5.22
AGHP52	CLEAT Style Chrome Plated Brass Hook for 3/8" & 1/2" rope w/ ss screws	125	16.97
AGHP53	CLEAT Style Chrome Plated Brass Hook for 3/4" rope w/ ss screws	125	21.25



Unions - PVC Sch 80



PV79, PV69 Series

ISO 9002



PVC Sch 80 Union Features:

- Ideal for swimming pool, spa and plumbing installations.
- EPDM O-Ring seal.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Meets ASTM standards for Schedule 80 construction.
- Manufactured for AGI in an ISO 9002 facility.
- NSF listed.
- Available white or gray.
- **Third party certified to NSF/ANSI 372.**


MATERIAL SPECIFICATIONS	
Body	PVC
End Connector	PVC
Union Nut	PVC
O-Ring	EPDM

DIMENSIONS (IN.)	SIZE	d3	D1	D2	L
	1/2"	.51	1.21	1.80	2.11
	3/4"	.71	1.45	2.15	2.42
	1"	.92	1.76	2.58	2.69
	1 1/4"	1.17	2.11	3.20	3.32
	1 1/2"	1.52	2.54	3.83	3.40
	2"	1.92	3.05	4.68	3.71
	3"	2.84	3.52	6.10	4.96
	4"	3.94	4.52	8.86	6.30

Part Number	IPS Size	Ctn Qty	List Price		
SCHEDULE 80 - WHITE			PV797	PV798	PV799
SLIP X SLIP	FIPT X FIPT	SLIP X FIPT	SXS	TXT	SXT
PV797-1/2	PV798-1/2	1/2"	36	\$ 2.93	\$ 3.06
PV797-3/4	PV798-3/4	3/4"	24/144	3.85	4.00
PV797-1	PV798-1	1"	12/96	4.95	5.30
PV797-1 1/4	PV798-1 1/4	1 1/4"	12/96	8.82	9.28
PV797-1 1/2	PV798-1 1/2	PV799-1 1/2	8/64	11.14	11.59
PV797-2	PV798-2	PV799-2	2"	4/48	15.50
				16.30	16.20
SCHEDULE 80 - GRAY			PV697	PV698	
slip x slip	FIPT x FIPT		SxS	TXT	
PV697-1/2	PV698-1/2	1/2"	36/288	\$ 2.93	\$ 3.09
PV697-3/4	PV698-3/4	3/4"	24/144	3.86	4.08
PV697-1	PV698-1	1"	12/96	4.95	5.40
PV697-1 1/4	PV698-1 1/4	1 1/4"	12/96	8.82	9.16
PV697-1 1/2	PV698-1 1/2	1 1/2"	8/64	11.14	11.81
PV697-2	PV698-2	2"	4/48	15.80	16.61
PV697-3	PV698-3	3"	2/12	39.95	41.31
PV697-4		4"	1/4	88.67	
Replacement O-Ring for PV797, PV798, PV799, PV697, PV698					
PV796-1/2	1/2"	1		\$ 0.35	
PV796-3/4	3/4"	1		0.35	
PV796-1	1"	1		0.42	
PV796-1 1/4	1 1/4"	1		0.42	
PV796-1 1/2	1 1/2"	1		0.70	
PV796-2	2"	1		0.70	
Union Repair Split Nut					
SNR150	1 1/2" FBT Repair Split Nut w/ Screw	125		5.01	
SNR200	2" FBT Repair Split Nut w/ Screw	100		5.51	



Specialty Pool & Spa Fittings

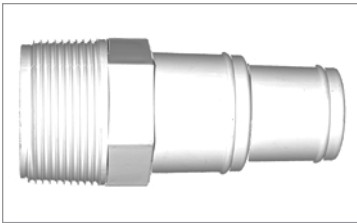


SPA1512

Pool/Spa Hose Adapter Features:

- Larger hex nut than most other styles
- Ribbed insert end to promote a tight seal and tapered thread to prevent “bottoming out” during installation
- White ABS plastic

Part Number	Description	Ctn Qty	List Price
SPA1512	1 1/2" mip x 1 1/2", 1 1/4" combo hose adapter	100	\$ 1.75



473-210



B1241

Part Number	Description	Ctn Qty	List Price
Venturi Tee			
473-825	3/4" x 1" x 3/4" Venturi Tee	50	\$ 11.75
473-210	1 1/2" x 1 1/2" x 3/4" Venturi Tee	25	14.30
Fittings			
B1241-00	1 1/2" 90 elbow, spigot x spigot	25	9.92



SW406 Series

PVC Sweep Elbow Features:

- Exceeds requirements of CA Title 24, Pool Systems & Equipment Installations.
- Sweep Elbows reduce head loss.
- Socket dimensions to Sch 40 ASTM D 2464.
- Listed to NSF/ANSI Standard 50 Swimming Pools, Spas and Hot Tubs - Circulation System Component.

Part Number	Description	Ctn Qty	List Price
SW406-015	1 1/2" PVC Sweep Elbow SL x SL	25	\$ 3.49
SW406-020	2" PVC Sweep Elbow SL x SL	25	4.16
SW406-025	2 1/2" PVC Sweep Elbow SL x SL	25	6.68



Schedule 80 CPVC Nipple Features:

- Sturdy.
- Lightweight.
- Chemical Resistant.
- Gray.
- Threaded on both ends.

SCHEDULE 80 CPVC PIPE NIPPLES			
PART NO.	SIZE	CTN QTY	LIST PRICE
CPVC1XCLOSE	1 X CLOSE	25	\$ 2.92
CPVC11/2xCLOSE	1 1/2 x CLOSE	25	4.26
CPVC11/2X6	1 1/2X 6	25	12.27
CPVC11/2x8	1 1/2 x 8	25	14.92
CPVC11/2X12	1 1/2 X 12	25	23.24
CPVC2XCLOSE	2 X CLOSE	25	7.10
CPVC2X6	2 X 6	25	17.50
CPVC2x8	2 x 8	25	20.73
CPVC2X12	2 X 12	BULK	31.94
CPVC2x24	2 x 24	BULK	64.26



Pressure Gauges - Dry



Pressure Gauge

ISO 9001

Pressure Gauge Features:

- Rugged precision made phosphor-bronze Bourdon tube movements assuring maximum accuracy (+/- 3-2-3%) under adverse field conditions.
- **TO BE USED WITH AIR OR WATER ONLY.**
- Manufactured for AGI in an ISO 9001 facility.



POLYPROPYLENE CASE:


- Bourdon tube movement is totally enclosed in corrosion resistant polypropylene housing, acrylic lens.
- Resists rust, electrolytic action and chemical solvents.
- Brass sockets standard.

STEEL CASE:

- Deep drawn one piece steel housing encases a quality movement.
- Genuine mar-resistant glass lens and brass socket connections are standard.

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, PLASTIC CASE, DRY							
IPPG302-4L	Plastic	0-30#	Pressure	2"	1/4 Lower	100	\$ 6.64
IPPG302-4B	Plastic	0-30#	Pressure	2"	1/4 Back	100	6.64
IPPG602-4L	Plastic	0-60#	Pressure	2"	1/4 Lower	100	6.64
IPPG602-4B	Plastic	0-60#	Pressure	2"	1/4 Back	100	6.64
IPPG1002-4L	Plastic	0-100#	Pressure	2"	1/4 Lower	100	6.64
IPVG302-4L	Plastic	0-30 Hg"	Vacuum	2"	1/4 Lower	100	7.39
2" DIAL SIZE, STEEL CASE, DRY							
IPG152-4L	Steel	0-15#	Pressure	2"	1/4 Lower	100	6.44
IPG302-4L	Steel	0-30#	Pressure	2"	1/4 Lower	100	6.84
IPG302-4B	Steel	0-30#	Pressure	2"	1/4 Back	100	6.84
IPG302-8L	Steel	0-30#	Pressure	2"	1/8 Lower	100	6.84
IPG302-8B	Steel	0-30#	Pressure	2"	1/8 Back	100	6.84
IPG602-4L	Steel	0-60#	Pressure	2"	1/4 Lower	100	6.84
IPG602-4B	Steel	0-60#	Pressure	2"	1/4 Back	100	6.84
IPG602-8L	Steel	0-60#	Pressure	2"	1/8 Lower	100	6.84
IPG1002-4L	Steel	0-100#	Pressure	2"	1/4 Lower	100	6.84
IPG1002-4B	Steel	0-100#	Pressure	2"	1/4 Back	100	6.84
IPG1002-8B	Steel	0-100#	Pressure	2"	1/8 Back	100	6.84

Pressure Gauges - Dry



CAUTION



CAUTION
DO NOT USE WITH
POTABLE WATER

↓ Reduced price - Limited quantities available.

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, STEEL CASE, DRY							
IPVG302-4B	Steel	0-30 Hg"	Vacuum	2"	1/4 Back	100	7.39
IPVG302-8L	Steel	0-30 Hg"	Vacuum	2"	1/8 Lower	100	7.39
IPCG3602-4L	Steel	30Hg"/60#	Vacuum/PPressure	2"	1/4 Lower	200	7.39
2 1/2" DIAL SIZE, DRY							
IPG3025-4L	Steel	0-30#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG6025-4L	Steel	0-60#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG10025-4L	Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	8.71
IPG16025-4L	Steel	0-160#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG40025-4L	Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	8.71
IPVG3025-4L	Plastic	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	8.71
IPCG31025-4L	Steel	30 Hg"/160#	Vacuum/Pressure	2 1/2"	1/4 Lower	50	4.27 ↓
4 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3045-4L	Steel	0-30#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG6045-4L	Steel	0-60#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG10045-4L	Steel	0-100#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG30045-4L	Steel	0-300#	Pressure	4 1/2"	1/4 Lower	50	10.57 ↓
IPVG3045-4L	Steel	30 Hg"	Vacuum	4 1/2"	1/4 Lower	50	18.42
IPCG36045-4L	Steel	30 Hg"/60#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	18.42
IPCG31045-4L	Steel	30 Hg"/160#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	18.42



Pressure Gauges - NO LEAD Dry




IPPG or IPG Series

ISO 9001

Pressure Gauge Features:

- Rugged precision made phosphor-bronze Bourdon tube movements assuring maximum accuracy (+/- 3-2-3%) under adverse field conditions.
- **TO BE USED WITH AIR OR WATER ONLY.**
- Manufactured for AGI in an ISO 9001 facility.
- Bourdon tube movement is totally enclosed in corrosion resistant housing.
- Resists rust, electrolytic action and chemical solvents.
- **Third party certified to NSF/ANSI 372.** No Lead brass sockets.
- Deep drawn one piece steel or molded plastic housings encase a quality movement.
- Genuine mar-resistant glass or acrylic lens.




CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, PLASTIC CASE, DRY							
IPPG302-4LNL	Plastic	0-30#	Pressure	2"	1/4 Lower	100	\$ 8.05
IPPG302-4BNL	Plastic	0-30#	Pressure	2"	1/4 Back	100	8.05
IPPG602-4LNL	Plastic	0-60#	Pressure	2"	1/4 Lower	100	8.05
IPPG602-4BNL	Plastic	0-60#	Pressure	2"	1/4 Back	100	8.05
IPPG1002-4LNL	Plastic	0-100#	Pressure	2"	1/4 Lower	100	8.05
EIPPG1002-4LPNL	Plastic	0-100#	Pressure	2" No dial logo	1/4 Lower	100	7.61
IPPG1002-4BNL	Plastic	0-100#	Pressure	2"	1/4 Back	100	8.05
IPVG302-4LNL	Plastic	0-30 Hg"	Vacuum	2"	1/4 Lower	100	8.63
2" DIAL SIZE, STEEL CASE, DRY							
IPG152-4LNL	Steel	0-15#	Pressure	2"	1/4 Lower	100	7.55
IPG302-4LNL	Steel	0-30#	Pressure	2"	1/4 Lower	100	8.22
IPG302-4BNL	Steel	0-30#	Pressure	2"	1/4 Back	100	8.22
IPG302-8LNL	Steel	0-30#	Pressure	2"	1/8 Lower	100	8.22
IPG302-8BNL	Steel	0-30#	Pressure	2"	1/8 Back	100	8.22
IPG602-4LNL	Steel	0-60#	Pressure	2"	1/4 Lower	100	8.22
IPG602-4BNL	Steel	0-60#	Pressure	2"	1/4 Back	100	8.22
IPG602-8LNL	Steel	0-60#	Pressure	2"	1/8 Lower	100	8.22
IPG1002-4LNL	Steel	0-100#	Pressure	2"	1/4 Lower	100	8.22
EIPG1002-4LPNL	Steel	0-100#	Pressure	2" No dial logo	1/4 Lower	100	7.53
IPG1002-4BNL	Steel	0-100#	Pressure	2"	1/4 Back	100	8.22
IPG1002-8LNL	Steel	0-100#	Pressure	2"	1/8 Lower	100	8.22
IPG1002-8BNL	Steel	0-100#	Pressure	2"	1/8 Back	100	8.22
IPG1602-4LNL	Steel	0-160#	Pressure	2"	1/4 Lower	100	8.22



Pressure Gauges - NO LEAD Dry



CAUTION



Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, STEEL CASE, DRY							
IPG2002-4LNL	Steel	0-200#	Pressure	2"	1/4 Lower	100	\$ 8.22
IPG2002-4BNL	Steel	0-200#	Pressure	2"	1/4 Back	100	8.22
IPG2002-8LNL	Steel	0-200#	Pressure	2"	1/8 Lower	100	8.22
IPG3002-4LNL	Steel	0-300#	Pressure	2"	1/4 Lower	100	8.22
IPVG302-4BNL	Steel	0-30 Hg"	Vacuum	2"	1/4 Back	100	8.63
IPVG302-8LNL	Steel	0-30 Hg"	Vacuum	2"	1/8 Lower	100	8.63
IPCG3102-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	2"	1/4 Lower	100	8.63
IPCG3602-4LNL	Steel	30Hg"/60#	Vacuum/PResure	2"	1/4 Lower	200	8.63
2 1/2" DIAL SIZE, DRY							
IPG1525-4LNL	Plastic	0-15#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG3025-4LNL	Steel	0-30#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG6025-4LNL	Steel	0-60#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG10025-4LNL	Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPG16025-4LNL	Steel	0-160#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG20025-4LNL	Steel	0-200#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG30025-4LNL	Steel	0-300#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPG40025-4LNL	Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPVG3025-4LNL	Plastic	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	10.54
IPCG31025-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	2 1/2"	1/4 Lower	50	10.54
3 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3035-4LNL	Steel	0-30#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG10035-4LNL	Steel	0-100#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG20035-4LNL	Steel	0-200#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG30035-4LNL	Steel	0-300#	Pressure	3 1/2"	1/4 Lower	50	15.38
4 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3045-4LNL	Steel	0-30#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG6045-4LNL	Steel	0-60#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG10045-4LNL	Steel	0-100#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG20045-4LNL	Steel	0-200#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG30045-4LNL	Steel	0-300#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPVG3045-4LNL	Steel	30 Hg"	Vacuum	4 1/2"	1/4 Lower	50	19.98
IPCG36045-4LNL	Steel	30 Hg"/60#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	19.98
IPCG31045-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	19.98



Pressure Gauges - Liquid Filled




EILPG Series



ILPG Series

Liquid Filled Pressure Gauge Features:

- Stainless steel or black steel case
- Glycerine Filled, Phosphor bronze bourdon tube
- Accuracy +/- 3-2-3%
- 2" or 2 1/2" Dial face with clear acrylic lens
- Crimped stainless steel ring
- For use in high vibration, corrosion situations
- **TO BE USED WITH AIR OR WATER ONLY.**



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, LIQUID FILLED							
EILPG302-4L	Steel	0-30#	Pressure	2"	1/4" Lower	100	\$ 8.62
EILPG602-4L	Steel	0-60#	Pressure	2"	1/4" Lower	100	8.62
EILPG602-4B	Steel	0-60#	Pressure	2"	1/4" Back	100	9.45
EILPG1002-4L	Steel	0-100#	Pressure	2"	1/4" Lower	100	8.62
EILPG1002-4B	Steel	0-100#	Pressure	2"	1/4" Back	100	9.45
EILPG1602-4L	Steel	0-160#	Pressure	2"	1/4" Lower	100	8.62
EILVG302-4L	Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	10.36
EILPG302-4LSS	Stainless Steel	0-30#	Pressure	2"	1/4" Lower	100	13.69
EILPG602-4LSS	Stainless Steel	0-60#	Pressure	2"	1/4" Lower	100	13.69
EILPG602-4BSS	Stainless Steel	0-60#	Pressure	2"	1/4" Back	100	14.25
EILPG1002-4LSS	Stainless Steel	0-100#	Pressure	2"	1/4" Lower	100	13.69
EILVG302-4LSS	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	14.82
2 1/2" DIAL SIZE, LIQUID FILLED							
ILPG3025-4L	Stainless Steel	0-30#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG6025-4L	Stainless Steel	0-60#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG10025-4L	Stainless Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG16025-4L	Stainless Steel	0-160#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG20025-4L	Stainless Steel	0-200#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG30025-4L	Stainless Steel	0-300#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG40025-4L	Stainless Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILVG3025-4L	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	16.68
ILCG36025-4L	Stainless Steel	30 Hg"/60#	Vacuum/Press	2 1/2"	1/4 Lower	50	17.29



Pressure Gauges - NO LEAD Liquid Filled




EILPG Series



ILPG Series

Liquid Filled Pressure Gauge Features:

- Stainless steel or black steel case.
- Glycerine filled, phosphor bronze bourdon tube.
- Accuracy +/- 3-2-3%.
- 2" or 2 1/2" Dial face with clear acrylic lens.
- Crimped stainless steel ring.
- For use in high vibration, corrosion situations.
- **Third party certified to NSF/ANSI 372.**
- No lead brass or stainless steel sockets.
- **TO BE USED WITH AIR OR WATER ONLY.**



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, LIQUID FILLED							
EILPG302-4LNL	Steel	0-30#	Pressure	2"	1/4" Lower	100	\$ 10.32
EILPG602-4LNL	Steel	0-60#	Pressure	2"	1/4" Lower	100	10.32
EILPG602-4BNL	Steel	0-60#	Pressure	2"	1/4" Back	100	11.48
EILPG1002-4LNL	Steel	0-100#	Pressure	2"	1/4" Lower	100	10.84
EILPG1002-4BNL	Steel	0-100#	Pressure	2"	1/4" Back	100	11.16
EILPG1002-8BNL	Steel	0-100#	Pressure	2"	1/8" Back	100	11.16
EILPG1602-4LNL	Steel	0-160#	Pressure	2"	1/4" Lower	100	10.32
EILPG2002-4LNL	Steel	0-200#	Pressure	2"	1/4" Lower	100	10.84
EILVG302-4LNL	Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	12.25
EILVG302-4BNL	Steel	0-30 Hg"	Vacuum	2"	1/4" Back	100	13.18
EILPG302-4LSSNL	Stainless Steel	0-30#	Pressure	2"	1/4" Lower	100	15.56
EILPG602-4LSSNL	Stainless Steel	0-60#	Pressure	2"	1/4" Lower	100	15.56
EILPG602-4BSSNL	Stainless Steel	0-60#	Pressure	2"	1/4" Back	100	16.49
EILPG1002-4LSSNL	Stainless Steel	0-100#	Pressure	2"	1/4" Lower	100	15.56
EILPG1002-4LSS316*	Stainless Steel 316	0-100#	Pressure	2"	1/4" Lower	100	37.25
EILPG1002-4BSSNL	Stainless Steel	0-100#	Pressure	2"	1/4" Back	100	16.49
EILPG1002-4BSS316*	Stainless Steel 316	0-100#	Pressure	2"	1/4" Back	100	37.25
EILPG1602-4LSSNL	Stainless Steel	0-160#	Pressure	2"	1/4" Lower	100	15.56
EILPG2002-4LSSNL	Stainless Steel	0-200#	Pressure	2"	1/4" Lower	100	15.56
EILVG302-4LSSNL	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	17.14
EILVG302-4BSSNL	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Back	100	18.07
* 316 Stainless steel internals and mount.							
2 1/2" DIAL SIZE, LIQUID FILLED							
ILPG3025-4LNL	Stainless Steel	0-30#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILPG6025-4LNL	Stainless Steel	0-60#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILPG10025-4LNL	Stainless Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG16025-4LNL	Stainless Steel	0-160#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG20025-4LNL	Stainless Steel	0-200#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG30025-4LNL	Stainless Steel	0-300#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG40025-4LNL	Stainless Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILVG3025-4LNL	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	18.60
ILVG3025-4BNL	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Back	50	19.53
ILCG36025-4LNL	Stainless Steel	30 Hg"/60#	Vacuum/Press	2 1/2"	1/4 Lower	50	19.28



Test Kits & Specialty Gauges



Pool Test Kit Features:

- For pressure testing pool systems
- Unassembled kits individually boxed
- Includes PVC Sch 40 Reducing Tee, PVC Sch 40 Reducing Bushing, Brass Boiler Drain, 3/4", 60# 2" plastic case pressure gauge, 1/4" lower brass mount.

Part Number	Description	Ctn Qty	List Price
TK150	1 1/2" Pool Test Kit	8	\$ 36.17
TK200	2" Pool Test Kit	8	36.28



Pressure Air Test Gauge Features:

- Quick, easy means of pressurizing and monitoring plumbing systems for leakage.
- Attach to hose bibb.
- Includes brass hex manifold, air valve, 2" 200# gauge, garden hose thread fitting.

Part Number	Description	Ctn Qty	List Price
PATG200	Pressure Air Test Gauge	30	\$ 21.61



PGBS

Pressure Gauge Brass Snubber Features:

- Use with any pressure gauge subjected to rapidly fluctuating pressures or sudden shock pressure.
- Brass housing with high strength sintered, porous type snubbing element.

Part Number	Size/Description	Ctn Qty	List Price
PGBS1/4	1/4" mpt x 1/4" fpt Brass Snubber	50/500	\$ 8.47



PTG1002

Pressure Test Gauge Features:

- 0-100 psi, 2" plastic lens.
- Brass test fitting with pressure release button.
- Heavy rubber boot to protect gauge from damage.

Part Number	Size	Pressure Setting/Description	Ctn Qty	List Price
PTG1002	2" case	0-100# Pressure test gauge	50	\$ 14.90



WTG

Water Test Gauge Features:

- Quick, easy method to test a wide range of pressure systems for leakage.
- 2 1/2" dial face, steel case pressure gauge w/ plastic lens.
- With standard 3/4" FGHT swivel garden hose connection with rubber washer.
- Attach to hose bibbs, boiler drains and lawn faucets for pressure testing.
- "MP" series MAX pointer arm measures maximum water surge or pressure drop.
- Individually cartoned.



WTG MP

Part Number	Size	Pressure Setting/Description	PSI dial		
			increments	Ctn Qty	List Price
WTG100	2 1/2"	0-100# water test gauge, fght	1	50	\$ 7.45
WTG200	2 1/2"	0-200# water test gauge, fght	2	50	10.42
WTG300	2 1/2"	0-300# water test gauge, fght	3	100	10.42
WTG100MP	2 1/2"	0-100# gauge with MAX pointer	1	50	11.14
WTG200MP	2 1/2"	0-200# gauge with MAX pointer	2	50	11.14
WTG300MP	2 1/2"	0-300# gauge with MAX pointer	3	50	11.14



Gas Test Gauges, Flowmeters



Gas Test Gauge Features:

- Quick, easy means of pressurizing & monitoring gas systems for leakage.
- Completely assembled - brass hex manifold, air valve with plastic cap and 2" dial face, steel case pressure gauge with plastic lens.
- Manifold also available separately: 3/4" fpt connection with 1/4" fpt gauge tap and 1/8" fpt air valve tap.
- Individually cartoned and available in 15, 30, 60 and 100 psi.

Part Number	Description	Gauge Increments	Ctn Qty	List Price
GTG15	Gas test gauge, 3/4" fpt, 0-15#	1/10 lb.	50	\$ 18.42
GTG30	Gas test gauge, 3/4" fpt, 0-30#	1/2 lb.	50	18.42
GTG60	Gas test gauge, 3/4" fpt, 0-60#	1/10 lb.	50	18.42
GTG100	Gas test gauge, 3/4" fpt, 0-100#	1 lb.	50	18.42
GTM3/4	Brass Gas test manifold only		100	9.60

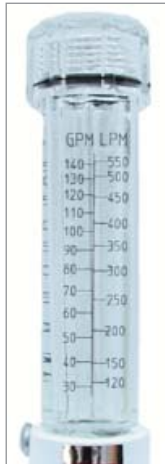

Flow Meter Features:



- Economical, easy to install, easy to maintain.
- Calibrated in GPM/LPM with easy-to-read numbering.
- Available 1" - 4" pipe size.
- Durable acrylic construction.
- Supplied with 2 clamps and rubber gasket seal.
- Maximum temperature limit = 120 °F, Maximum pressure limit = 120 psi.

ISO 9002

Part Number	Nominal Pipe Size	Range GPM/LPM	List Price
U8800424	1"	5-35 / 20-130	\$ 158.80
U8800438	1 1/4"	10-60 / 40-220	158.80
U8800439	1 1/2"	20-80 / 80-300	158.80
U8800440	2"	30-140 / 120-550	158.80
U8800441	2 1/2"	40-200 / 160-750	158.80
U8800442	3"	80-350 / 300-1300	158.80
U8800443	4"	150-600 / 600-2200	158.80



Ball Valves - PVC Single Union for Pool & Spa



PV1450 Series




PV1452, PV1453 Series

ISO 9002



PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- PTFE seats.
- Double EPDM o-ring seal on stem: single EPDM o-ring seal on union end.
- Fully round ball prevents foreign matter from scoring seats.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Manufactured for AGI in an ISO 9002 facility.
- Imported

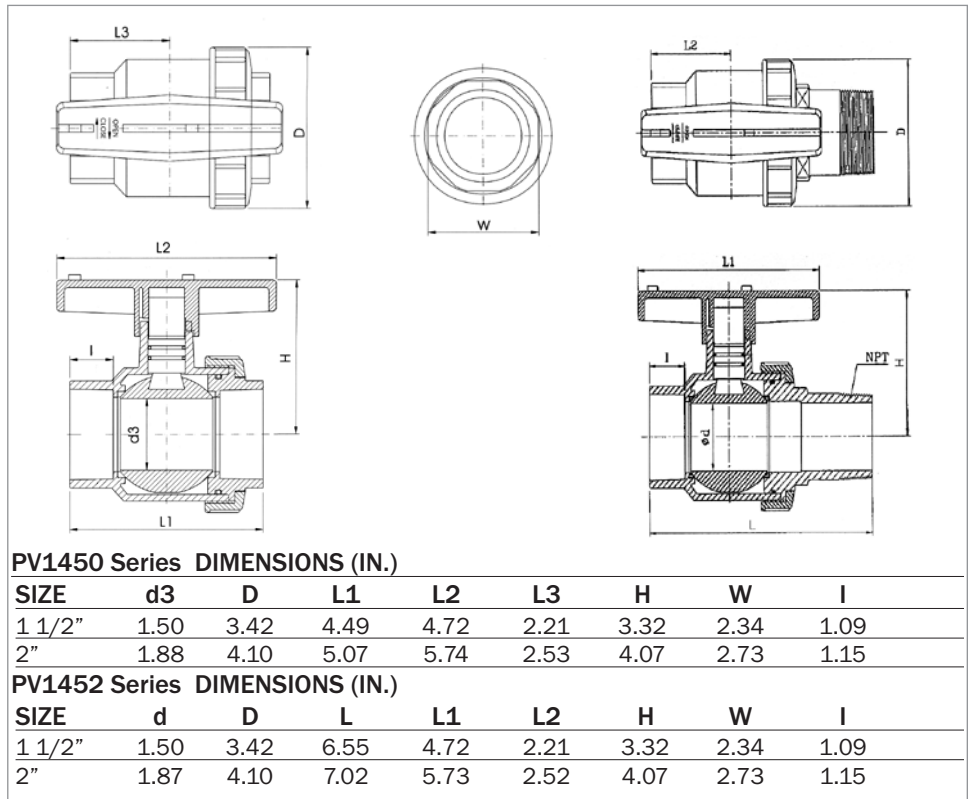

MATERIAL SPECIFICATIONS

Body	PVC
End Adapter	PVC
Union Nut	PVC
Ball	PVC
Stem	PVC
Handle	ABS
Union o-rings	EPDM
Seat Seals	PTFE
Stem o-rings	EPDM

Part Number	Threaded/Slip	Size	Ctn Qty	List Price
PV1450-11/2	Slip	1-1/2"	48	\$ 21.68
PV1450-2	Slip	2"	24	28.70
PV1451-11/2	Threaded	1-1/2"	48	21.68
PV1451-2	Threaded	2"	24	28.70
PV1452-11/2	Slip x Extended MIP	1 1/2"	24	21.48
PV1452-2	Slip x Extended MIP	2"	24	29.52
PV1453-11/2	FPT x Extended MIP	1 1/2"	24	21.48
PV1453-2	FPT x Extended MIP	2"	12	29.52



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016



1350 Series




PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- **Buna "N" O-Ring seal; HDPE seats.**
- 1-1/4 deep sockets on both ends for extra cementing surface area.
- Acme thread on assembly nut prevents cross threading.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Made in USA.



Part Number	Threaded/Socket	Size	Ctn Qty	List Price
1350-15	Socket	1-1/2"	12	\$ 36.85
1350-20	Socket	2"	6	59.47
1351-15	Threaded	1-1/2"	12	41.69



1930 Series

CPVC Three-Way Valve Features:

- For pool & spa applications.
- Made of CPVC plastic
- Diverts water anywhere diversion is required.
- Positive seal diverter prevents reverse flow.
- Diverter seals are made of a special lubricated EPDM material
- Available 1 1/2" - 2" slip with 2" and 2 1/2" spigot.
- Rated at 160° F, 125 PSI



Part Number	Description	Ctn Qty	List Price
1930-15	1 1/2" slip x 2" spigot	12	\$ 92.72
1930-20	2" slip x 2 1/2" spigot	12	92.72



Ball Valves - Economy PVC Molded-in-Place




Economy Series PVC Molded-In-Place Ball Valve Features:

- Heavy duty thermoplastic white PVC (Type 1, Grade 1) construction.
- White body, blue handle.
- Tee handle on 1/2" through 2". Lever handle on 2 1/2", 3" and 4".
- EPDM seats provide excellent chemical resistance.
- EPDM "o" ring stem seal.
- 150 PSI working pressure at 73°F water, non-shock.
- Maintenance free compact design.
- Severe shock loads and misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Individually cartoned.
- Imported.



EMIP TE/SE Series IPS DIMENSIONS (IN.)						
SIZE	d	d1	D	L1	L	H
1/2"	0.591	.0839	1.24	0.80	2.9	1.78
3/4"	0.792	1.051	1.45	0.89	3.4	2.01
1"	0.981	1.315	1.77	1.08	4.0	2.26
1 1/4"	1.262	1.661	2.07	1.06	4.3	2.66
1 1/2"	1.421	1.902	2.49	1.14	4.8	2.91
2"	1.832	2.374	3.01	1.42	5.7	3.32
2 1/2"	2.492	2.874	3.54	1.80	7.2	4.07
3"	3.153	3.5	4.25	2.4	9.3	4.47
4"	3.821	4.5	5.21	2.52	10.1	4.89

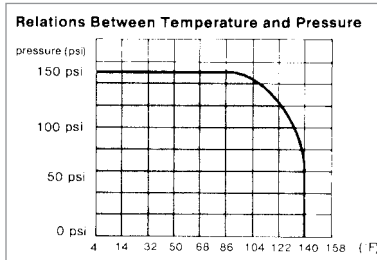

MATERIAL SPECIFICATIONS	
1 Screw	Zinc Plated Steel
2 Cap	ABS
3 Handle	ABS
4 Ball	PVC
5 Stem Seal o-ring	EPDM
6 Body	PVC
7 Seat Seal	EPDM

CV (GPM/(1 lbf/in ²) ^{1/2}) Opening Rate: 90°	
SIZE	CV
1/2"	14.5
3/4"	29.5
1"	48.0
1 1/4"	71.0
1 1/2"	135.0
2"	180.0
2 1/2"	225.0
3"	400.0
4"	865.9

Threaded Part Number	Slip Part Number	Size	Master Case Qty	List Price
EMIP50TE	EMIP50SE	1/2"	210	\$ 1.70
EMIP75TE	EMIP75SE	3/4"	137	2.29
EMIP100TE	EMIP100SE	1"	95	3.64
EMIP125TE	EMIP125SE	1 1/4"	56	4.97
EMIP150TE	EMIP150SE	1 1/2"	36	6.79
EMIP200TE	EMIP200SE	2"	24	10.89
EIMP250TE	EMIP250SE	2 1/2"	9	29.47
EMIP300TE	EMIP300SE	3"	8	45.33
EMIP400TE	EMIP400SE	4"	6	83.75







Ball Valves - PVC Sch 80 Molded-in-Place



ISO 9002

MATERIAL SPECIFICATIONS

Body	PVC
Seat Seal	EPDM, PTFE
Ball	PVC
Stem Seal o-ring	EPDM
Handle	ABS
Bolt	Zinc Plated Steel
Cap	ABS

SCH 80 Series PVC Molded-In-Place Ball Valve Features:


- Heavy duty thermoplastic white PVC (Type 1, Grade 1) construction. Materials meet NSF standards.
- Meets ASTM 2467 Schedule 80.
- White body, red handle.
- Available with PTFE or EPDM seats providing excellent chemical resistance.
- EPDM “o” ring stem seal
- **150 PSI** working pressure at 73°F water, non-shock.
- Maintenance free compact design.
- Severe shock loads and misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Individually cartoned.
- Manufactured for AGI in an ISO 9002 facility.
- **Third party certified to NSF/ANSI 372.**



Certified to
ANSI-NSF 61 &
ANSI-NSF 61 Annex G




NO LEAD
< 0.25% Pb by
weighted avg
Third Party Certified
to NSF / ANSI 372

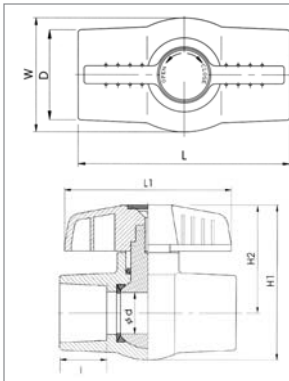

HMIP TE/SE and T/S Series IPS DIMENSIONS (IN.)

SIZE	d	D	L	L1	I	H1	H2	W
1/2"	.55	1.17	3.24	2.73	.87	2.42	1.68	1.48
3/4"	.78	1.48	3.71	3.43	1.00	3.04	2.11	1.67
1"	.98	1.76	4.13	3.90	1.12	3.63	2.54	2.22
1 1/4"	1.17	2.11	4.45	3.90	1.25	3.82	2.61	2.46
1 1/2"	1.40	2.42	5.07	4.25	1.37	4.49	3.04	2.93
2"	1.82	3.00	5.74	5.23	1.50	5.27	3.47	3.59
2 1/2"	2.34	3.59	7.96	6.94	1.75	6.24	4.10	4.29
3"	3.00	4.13	8.93	8.74	1.88	7.41	4.84	5.19
4"	3.94	5.27	11.70	10.76	2.25	9.09	5.77	6.63

Relations Between Temperature and Pressure

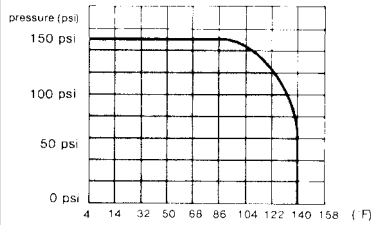

CV (GPM/(1 lbf/in²)^{1/2}) Opening Rate: 90"

SIZE	CV
1/2"	8.84
1"	25.24
1 1/4"	38.53
1 1/2"	51.28
2"	96.67
2 1/2"	162.37
3"	438.81
4"	865.90
CMIP-C Series excluded	

WITH EPDM SEATS

Threaded Part Number	Slip Part Number	Size	Ctn Qty	List Price
HMIP50TE	HMIP50SE	1/2"	100	\$ 4.17
HMIP75TE	HMIP75SE	3/4"	100	5.36
HMIP100TE	HMIP100SE	1"	100	7.38
HMIP125TE	HMIP125SE	1 1/4"	100	10.41
HMIP150TE	HMIP150SE	1 1/2"	48	16.87
HMIP200TE	HMIP200SE	2"	24	22.32
HIMP250TE	HMIP250SE	2 1/2"	12	60.30
HMIP300TE	HMIP300SE	3"	12	104.49
HMIP400TE	HMIP400SE	4"	6	188.22

WITH PTFE SEATS

Threaded Part Number	Slip Part Number	Size	Ctn Qty	List Price
HMIP50T	HMIP50S	1/2"	100	\$ 9.39
HMIP75T	HMIP75S	3/4"	100	12.61
HMIP100T	HMIP100S	1"	100	12.76
HMIP125T	HMIP125S	1 1/4"	100	20.22
HMIP150T	HMIP150S	1 1/2"	48	25.82
HMIP200T	HMIP200S	2"	24	35.21



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Ball Valves - CPVC Sch 80 Molded-in-Place



ISO 9002

MATERIAL SPECIFICATIONS

Body	CPVC
Seat Seal	PTFE
Ball	CPVC
Stem Seal	EPDM
Handle	ABS
Bolt	Zinc Plated Steel
Cap	ABS


SCH 80 Series CPVC Molded-in-Place Ball Valve Features:

- Made with Flo Guard Gold CPVC material.
- Heavy duty thermoplastic CPVC construction for hot water use.
- NSF listed.
- Meets ASTM 2467 Schedule 80.
- CTS slip x slip - cream body, orange handle.
- PTFE seats providing excellent chemical resistance.
- EPDM O-Ring stem seal.
- Working pressure 75 PSI at 180°F.
- Maintenance free compact design.
- Severe shock loads & misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Individually cartoned.
- Manufactured for AGI in an ISO 9002 facility.
- **Third party certified to NSF/ANSI 372.**


FLOWGUARD GOLD
PIPE & FITTINGS



Certified to
ANSI-NSF 61 &
ANSI-NSF 61 Annex G

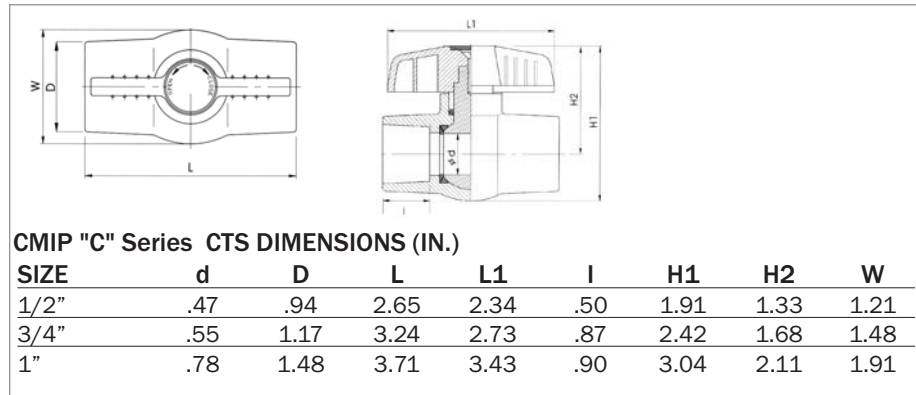

Relations Between Temperature and Pressure

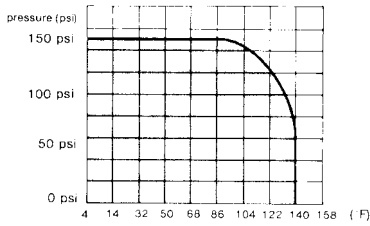

CV (GPM/(1 lbf/in²)^{1/2})


Opening Rate: 90"

SIZE	CV
1/2"	14.5
3/4"	29.5
1"	48.0

Part Number	Description	Ctn Qty	List Price
CPVC Ball Valve, Copper Tube Size, SLIP X SLIP			
CMIP50C	1/2" SLIP X SLIP	100	\$ 8.47
CMIP75C	3/4" slip x slip	100	9.53
CMIP100C	1" slip x slip	100	14.83



Slice Gate Valves - PVC



VSGV Uni-Body



VSGV 3 piece body



VSGV 3 piece body with union

PVC Slice Gate Valve Features:

- Designed for pool & spa, irrigation, plumbing, waste water and agricultural applications.
- Stainless steel shaft prevent rust and corrosion.
- Ozone & chemical resistant Santoprene™ materials.
- Santoprene™ seals are integrated to the paddle to eliminate any chance of torn or punctured gaskets.
- Maximum working pressure 50 psi (through 2”).
- Solvent cement traps to catch excess glue.
- Every valve tested at double recommended working pressure.
- Valterra's patent pending triple o-ring neck seal to ensure against any chance of shaft leakage.

Unibody Design


- One piece uni-body design.
- Combination socket ID x spigot OD for installation flexibility.
- Locking handle provides positive shut-off and easy gate opening.

3 Piece body

- Three piece configuration allows for repair or can be used as a union.
- Three piece configuration easily disassembles for inline service.

Part Number	Description	Max PSI	Ctn Qty	List Price
Uni-Body				
VSGV2101	1 1/2" slip x slip	45	30	\$ 18.70
VSGV2201	2" slip x slip	40	20	26.64
* Unibody 2" slip hubs are 2" slip or 2 1/2" spig				
Three Piece Body				
VSGV150SL	1 1/2" slip x slip	45	30	19.57
VSGV150FIPTXMIPT	1 1/2" fipt x mipt	45	40	25.32
VSGV150FIPTxMIPTABS	1 1/2" fipt x mipt ABS	45	26	26.77
VSGV150SLU	1 1/2" slip x union slip	45	38	31.93
VSGV150MTU	1 1/2" mipt x union slip	45	38	33.09
VSGV150SP	1 1/2" slip x spigot	45	30	23.98
VSGV150SD	1 1/2" step down pool hose x mipt ABS		40	23.36
VSGV200SL	2" slip x slip	40	20	28.29
VSGV200SP	2" slip x spigot	40	34	27.47
VSGV300SL	3" slip x slip	30	15	39.32
VSGV400SL	4" slip x slip w/ metal handle	20	6	167.22
VSGV600SL	6" slip x slip w/ stainless handle	10	1	696.67
VSGV800SL	8" slip x slip w/ stainless handle	10	1	975.45
VSGV1000SL	10" slip x slip w/ stainless handle	10	1	1778.33
VSGV1200SL	12" slip x slip w/ stainless handle	10	1	1868.19


Slice Gate Valves - PVC

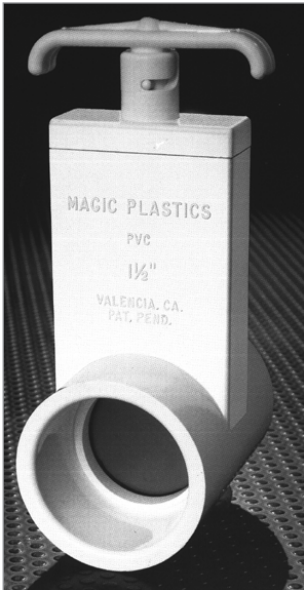

SGV - SL Series

PVC Slice Gate Valve

- One piece “Uni-Body” PVC Construction. Guaranteed NO HUB LEAKS or loose bolts.
- 1/4 turn “Cam-Lock” for 100% shut-off..
- Internal “snap-lock” feature ensures valve will remain totally open, providing 100% flow with no restriction.
- Stainless steel shaft prevents rust and corrosion.
- Glass filled poly-pro tapered gate design for 100% sealing.
- Integrally molded seal on gate. - No pinched or torn gaskets.
- Seals are “Santoprene” that have been impregnated with a permanent lubricant. Never needs lube yet will provide continuous smooth operation. Ozone and chemical resistant for much longer life.
- Santoprene buttons on gate provides smooth operation without sticking.
- Every valve water tested at 100PSI and random quick burst tested at 400 PSI. Virtually no chance of leaky valves in the field at standard operating pressures.
- Maximum recommended operating pressure is 50 PSI.
- Glue wells on all slip-socket configuration catches excess glue during plumbing.
- Constructed and tested for use in pool & spa applications.
- Made in USA

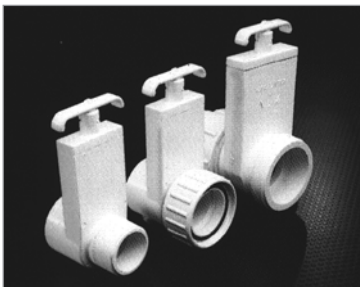

SGV-Sp and SGV-SLU Series

Part Number	Size	Description	Ctn/Case Qty	List Price
SGV150SL	1 1/2"	Slip x Slip	14/56	\$ 20.74
SGV200SL	2"	Slip x Slip	12/48	21.93
SGV250SL	2 1/2"	Slip x Slip	5/20	46.52
SGV150SP	1 1/2"	Slip x Spigot	14/56	19.50
SGV200SP	2"	Slip x Spigot	12/48	21.93
SGV150SLU	1 1/2"	Slip x Slip with Union	10/40	33.57
SGV200SLU	2"	Slip x Slip with Union	10/40	40.53




Check Valves - PVC Swing



MCRV Series


“CR” Full Flow Corrosion Resistant Check Valve Features:

- Protects heat exchangers from potential damage by inline chlorinators.
- Maintains full flow circulation system.
- Proprietary designed Hastelloy spring.
- Glass filled Noryl injection molded shaft.
- 100% silicone gasket never requires lubrication.
- Clear sight glass. Removable, servicable.
- 3 IPS sizes in one valve. 1 1/2” slip with bushing, 2” slip and 2 1/2” spigot. (1 1/2” bushing sold separately.)
- Spring loaded flapper/gate mechanism assures full flow and minimum cavitation.
- Positive water seal when in the closed position.
- “CR” valve can be installed in virtually any position.
- Use in highly corrosive conditions and conditions needing backflow prevention.




MCRV Series

Part Number	Description	Size	Ctn Qty	List Price
MCRV801-20H	PVC CR Swing Check Valve	2” Slip x Slip	12	\$ 88.89
60104028	CR Swing Check Bushing	2” Sp x 1 1/2” Slip	1	3.83



Bushing

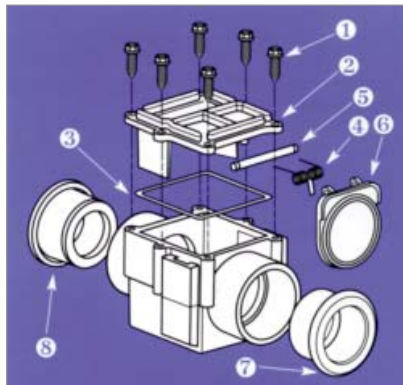

CR VALVE REPLACEMENT PARTS

ID	Part Number	Description	Ctn Qty	List Price
1	M04030066	#14 x 1” Phillips Pan Head SS Screw	6	\$ 14.27
2	M0191401020	Lid	1	17.46
3	0301-154	O-Ring	1	5.78
4	M0405001	Spring	1	6.75
4	0405-001-H	Hastelloy Spring	1	28.17
5	M0401005P	Shaft	1	7.45
6	M0081201020	Gate Assembly	1	26.60
7	M0060504028	Adapter 2” sp x 1 1/2” Slip, Black	1	4.37
8	M0060104028	Adapter, 2” sp x 1 1/2” Slip, White	1	4.20


Check Valves - PVC Swing




MCV Series

“Smart” Swing Check Valve Features:

- Patented innovation in swing check valve technology eliminates in-line flow restriction of conventional check valves.
- Spring loaded swing check flapper/gate allows full flow and reliable back flow prevention.
- Standard “smart” check valve remains closed to 1/2 psi, then open for full flow.
- Magnetic “smart” check valves remain closed to 2 psi, then open for full flow.



MCV821 Series



MCV823 Series



MCV850 Series

Part Number	Size	Description	Spring Tension	Ctn Qty	List Price
MCV821-10	1"	Slip x Slip	1/2 lb.	12	\$ 22.26
MCV821-10C	1"	Slip x Slip CLEAR	1/2 lb.	12	25.37
MCV821-15	1 1/2"	Slip x Slip	1/2 lb.	12	33.56
MCV821-15C	1 1/2"	Slip x Slip CLEAR	1/2 lb.	12	37.00
MCV821-20	2"	Slip x Slip	1/2 lb.	12	39.46
MCV821-20C	2"	Slip x Slip CLEAR	1/2 lb.	12	42.55
MCV821-20M	2"	Slip x Slip w/magnet	2 lb.	12	43.08
MCV821-20MC	2"	Slip x Slip w/magnet CLEAR	2 lb.	12	45.96
MCV823-10	1"	Union x Union	1/2 lb.	12	33.56
MCV823-10C	1"	Union x Union CLEAR	1/2 lb.	12	37.00
MCV823-15	1 1/2"	Union x Union	1/2 lb.	12	38.21
MCV823-15C	1 1/2"	Union x Union CLEAR	1/2 lb.	12	56.56
MCV823-20	2"	Union x Union	1/2 lb.	12	50.89
MCV823-20C	2"	Union x Union CLEAR	1/2 lb.	12	60.25
MCV823-20M	2"	Union x Union w/magnet	2 lb.	12	60.25
MCV823-20MC	2"	Union x Union w/magnet CLEAR	2 lb.	12	63.97
MCV850-15	1 1/2"	Check/Slice Combo Union x Slip		12	58.49
MCV850-20	2"	Check/Slice Combo Union x Slip		12	84.92



Check Valves - PVC Spa, By-Pass




1050 Series



PVC Spa Air Valve Features:



- Drip proof seal at low pressure.
- 1 1/2" IPS deep socket connection with 2" IPS OD spigot
- Excess solvent cement trap at base of socket to help prevent solvents from entering sealing area.
- Minimum restriction of air flow, using 1/4 lb. spring resulting in less burden on blower motor.
- Domed shaped seat for even air flow.
- EPDM seal.
- Stainless steel spring.
- NSF approved.



1095 Series

PVC In-Line By-Pass Check Valve Features:


- In-line shape takes less space.
- Raised valve seat prevents excess cement of solvent from affecting the seal area.
- Poppet is equipped with EPDM seal.
- Body is made of Type 1 PVC.
- All metal parts are stainless steel.
- Valve stem is reinforced w/ full length stainless steel shaft.
- Static pressure tested: 150 psi @ 72° F. Back pressure tested at 150 psi.
- Quick burst test proves in excess of 500 psi
- 2" iron pipe size
- Valve can be used on 1-1 1/2" pipe by use of a PVC Sch 40 bushing.
- Begins to open at 1/2 lb. or 5 lb.
- NSF approved.



1901/1903 Series

CPVC 90° Spring Check Valve Features:

- Use in pool, spa applications.
- CPVC body with corrosion proof poppet.
- Spring made of 302 stainless.
- Available with 1 lb. or 3 lb. spring tension.
- NSF approved.




See "FLO/NDS" tab for a complete line of Flo Control PVC check valves.

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Spa Air Valve - 1-1/2" ips socket / 2" ips o.d. spigot				
1050-20	2"	5-1/8"	12	\$ 31.48
PVC In Line By-Pass Check Valve				
1095-20	2" w/ 5# spring	5"	12	39.64
CPVC 90° Spring Check Valve, w/ stainless steel poppet				
1901-15	1 1/2" check valve, 1 lb. tension		12	98.11
1903-15	1 1/2" check valve, 3 lb. tension		12	98.11
1901-20	2" socket x 2 1/2" spigot valve, 1 lb. tension		12	98.11
1903-20	1" socket x 2 1/2" spigot valve, 3 lb. tension		12	98.11



Float Valves - Bronze, NO LEAD Bronze

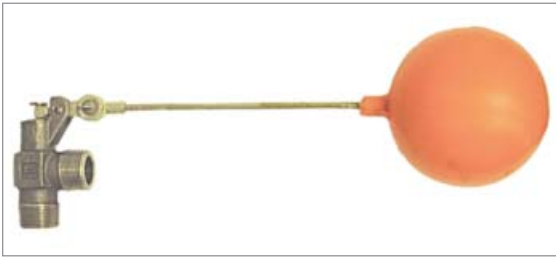

Bronze, NO LEAD Bronze Float Valve Features:

- Cast bronze or NO LEAD bronze body
- Buna-N Disc
- Heavy Duty
- Tapped for 1/4"-20SAE rod
- Threaded outlet
- Rated at 125 psi
- Third party certified to NSF/ANSI 372.



BFV Series

Part Number	Size	Inlet	Outlet	Tapped	Ctn Qty	List Price
BFVNL1/2	1/2"	1/2" mpt	1/2" mpt	1/4"-20SAE	10/100	\$ 42.69
BFVNL3/4	3/4"	3/4" mpt	3/4" mpt	1/4"-20SAE	10/80	44.14
BFVNL1	1"	1" mpt	1" mpt	1/4"-20SAE	10/40	68.65



BFVR Series

Stainless Steel Rods Features:

- Stainless Steel SAE
- Male thread both ends
- Third party certified to NSF/ANSI 372.



Part Number	Length	Thread	Fits Valve Size	Ctn Qty	List Price
BFVR8	8"	1/4"-20SAE	1/2" - 1"	50/400	\$ 6.62
BFVR10	10"	1/4"-20SAE	1/2" - 1"	50/300	7.67
BFVR12	12"	1/4"-20SAE	1/2" - 1"	50/300	8.59



BFVFP Series

Plastic Float Features:

- PVC, Corrosion resistant.
- Lightweight
- Up to 175 ° F
- For open tank service only
- Bronze or NO LEAD bronze threaded connection.
- Third party certified to NSF/ANSI 372.



Part Number	Float Diam.	Buoyancy	Female Connection	Ctn Qty	List Price
BFVFPNL5	5"	2.17 lbs.	1/4"-20SAE	100	\$ 21.23
BFVFPNL6	6"	3.8 lbs.	1/4"-20SAE	100	25.00
BFVFPNL8	8"	9.87 lbs.	1/4"-20SAE	20	31.08



Butterfly Valves - Ductile Iron



HBFV Series

Ductile Iron Butterfly Valve Features:

- Designed for swimming pool, irrigation and water systems.
- Wafer body features 4 alignment holes.
- Lever lock handle (spring loaded) provides excellent manual control for balancing or shut off services.
- Notched throttling plate allows balancing in 10° increments in any position desired within 90° arc rotation of the disc.
- Positive bubble-tight shutoff with minimum torque.
- Seat face eliminates need for flange gaskets.
- Phenolic backed seats prevent collapse, are stretch resistant, blowout proof and field replaceable.
- **EPDM seats** temperature rated at -30° F to 275° F.
- 420 stainless steel shaft
- Bidirectional dead-end capability for 250 psi (2" - 12").
- Compatible with ANSI 125/150 flanges.
- Designed to comply with MSS SP-67 and API 609.
- **Ductile iron, ENP plated disc.**
- Imported



HBFV GEAR Series



Part No.	Size	Weight(lbs)	Ctn Qty	List Price
Ductile Iron ENP Plated Disc*				
HBFV2	2"	7	1	\$ 75.64
HBFV2 1/2	2-1/2"	8	1	89.21
HBFV3	3"	10	1	95.82
HBFV4	4"	12	1	141.43
HBFV5	5"	15.5	1	175.11
HBFV6	6"	17.5	1	210.46
HBFV8	8"	33	1	335.46
HBFV10	10"	50	1	498.86
HBFV12	12"	74	1	585.90
Ductile Iron ENP Plated Disc - GEAR DRIVE *				
HBFV6-GEAR	6"	28.5	1	290.19
HBFV8 GEAR	8"	54	1	471.90
Replacement Handles for HBFV Series				
BFH2	2"		1	17.46
BFH3	3"		1	17.46
BFH4	4"		1	17.46
BFH5	5"		1	20.87
BFH6	6"		1	20.87
BFH8	8"		1	42.94
BFH10	10"		1	42.94
BFH12	12"		1	48.88


Flanges & Bolt kits available,
see page P.28





www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

Butterfly Valves - Cast Iron

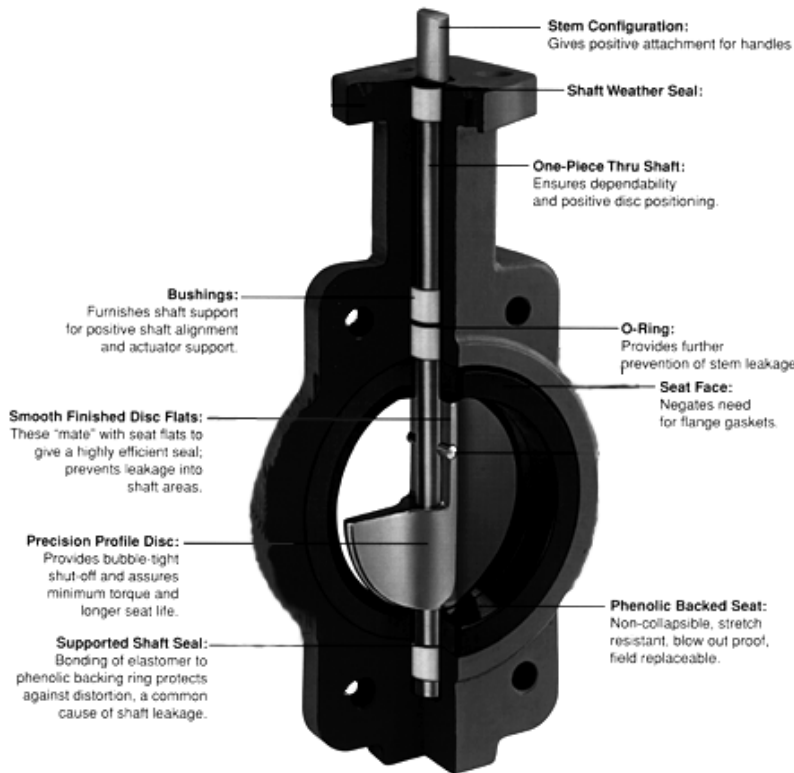

MATERIAL SPECIFICATIONS		
No.	Part	Material
1	Body	DUCTILE Iron
2	Disc	Ductile Iron
3	Seat	EPDM
4	Shaft	420 Stainless Steel
5	Key	Carbon Steel
6	O-ring	EPDM
7-9	Bushing	Nylon

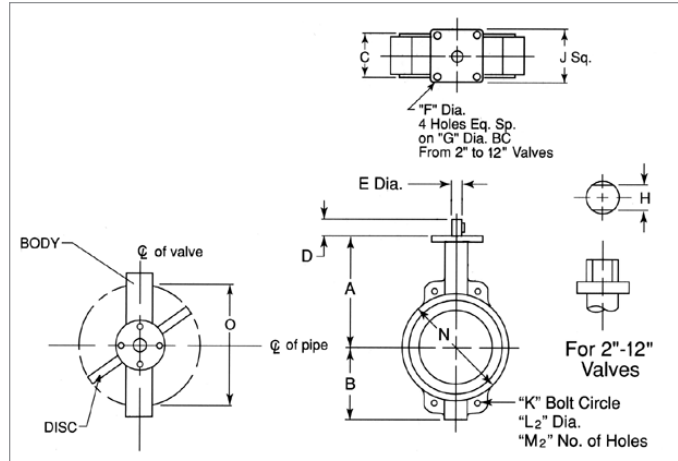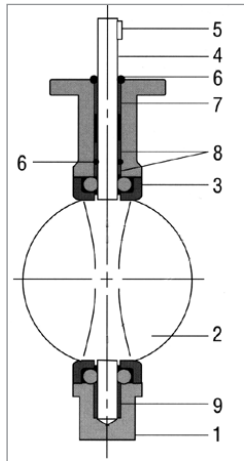

SIZE \ DIMENSION (in) for HBFV Series

SIZE	A	B	C	D	E	F	G	H	J	K	L2	M2	N	O
2"	5.51	2.44	1.64	1.26	.50	.375	2.76	.39	2.75	4.75	.75	4	4.75	2.12
2 1/2"	6.02	2.76	1.75	1.26	.50	.375	2.76	.39	2.75	5.5	.75	4	5.50	2.57
3"	6.26	2.89	1.75	1.26	.50	.375	2.76	.39	2.75	6.0	.75	4	6.00	3.14
4"	7.01	4.49	2.00	1.26	.625	.375	2.76	.47	2.75	7.50	.75	4	7.50	4.13
5"	7.50	4.79	2.13	1.26	.75	.375	2.76	.55	2.75	8.50	.87	4	8.50	5.12
6"	8.01	5.55	2.12	1.26	.75	.375	2.76	.55	2.75	9.50	.87	4	9.50	6.13
8"	9.50	6.85	2.50	1.26	.875	.438	4.02	.67	3.75	11.75	.87	4	11.75	8.15
10"	10.75	8.19	2.50	1.58	1.125	.438	4.02	.87	3.75	14.25	1.00	4	14.29	9.98
12"	12.25	9.53	2.99	1.58	1.125	.438	4.02	.95	3.75	17.00	1.00	4	17.00	11.89



Butterfly Valves - PVC Sch 80




PBFV Series

ISO 9002



PVC Sch 80 Butterfly Valves Features:

- 150 PSI working pressure.
- PVC body, polypropylene disc, and EPDM seat and o-ring.
- Flanged end design.
- Corrosion resistant.
- Excellent flow characteristics.
- Ideally suited for flow control in a minimum piping space.
- Clear indication of disc opening degree.
- Built in seat requires no additional gaskets between flanges.
- Manufactured for AGI in an ISO 9002 facility.
- Imported.

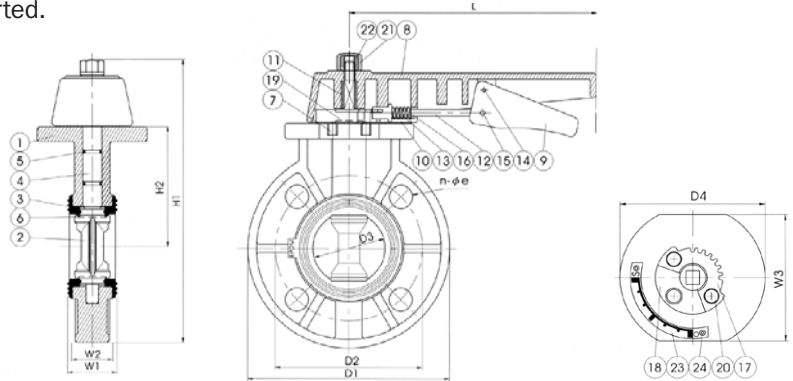

MATERIAL SPECIFICATIONS

No.	Part	Material	Qty
1	Body	PVC	1
2	Disc	PP	1
3	Seat Seal	EPDM	1
4	Stem	SS 410	1
5	O-ring	EPDM	2
6	O-ring	EPDM	2
7	Inserted Nut	SS 41	3
8	Large Handle	ABS	1
9	Small Handle	ABS	1
10	Spring Lock	ABS	1
11	Handle Insert	SS	1
12	Handle Lever	SS 304	1
13	Spring	SS 304	1
14	Spring Pin	SS 304	1
15	Spring Pin	SS 304	1
16	Washer	SS 304	1
17	Locking Plate	SS 304	1
18	Gear Seat	PP + GF	1
19	Washer	SS 304	1
20	Bolt	SS 304	3
21	Nut	PVC	1
22	Insert Nut	C3604	1
23	Level	SS 304	1
24	Rivet	SS	2

CV (GPM/(1 lbf/in²)^{1/2})
Opening Rate: 90°

SIZE	CV
2"	100.87
2 1/2"	137.82
3"	224.08
4"	409.51
5"	523.92
6"	1243.00

DIMENSIONS \ SIZE (in)

	2"	2 1/2"	3"	4"	5"	6"	8"
D1	6.44	7.22	7.80	8.93	9.98	11.12	13.38
D2	4.70	5.44	5.94	7.43	8.42	9.42	11.64
D3	2.20	2.71	3.10	4.01	5.11	6.02	7.91
D4	4.13	4.66	4.84	5.26	6.40	6.64	7.84
L	7.92	7.92	7.92	9.91	11.86	11.86	11.86
H1	9.59	10.37	10.76	12.40	15.21	15.80	18.17
H2	4.02	4.41	4.49	5.27	5.85	6.90	8.19
W1	1.67	1.85	1.85	2.23	2.57	2.88	3.41
W2	1.35	1.45	1.45	1.83	2.22	2.53	3.06
W3	3.67	3.67	3.66	3.89	4.31	3.93	4.76
n-oe	.741	.741	.741	.741	.858	.858	.858

Part Number	Description	Ctn Qty	List Price
PBFV2	2" PVC Butterfly valve	4	\$ 246.11
PBFV21/2	2 1/2" PVC Butterfly valve	4	252.11
PBFV3	3" PVC Butterfly valve	4	248.47
PBFV4	4" PVC Butterfly valve	4	283.14
PBFV5	5" PVC Butterfly valve	4	404.37
PBFV6	6" PVC Butterfly valve	4	464.61
PBFV8	8" PVC Butterfly valve	1	684.31
Replacement handles			
PBFV2 HANDLE	2" PVC valve handle	1	27.87
PBFV21/2 HANDLE	2 1/2" PVC valve handle	1	27.87
PBFV3 HANDLE	3" PVC valve handle	1	27.87
PBFV4 HANDLE	4" PVC valve handle	1	34.47
PBFV5 HANDLE	5" PVC valve handle	1	46.29
PBFV6 HANDLE	6" PVC valve handle	1	46.78
PBFV8 HANDLE	8" PVC valve handle	1	46.78



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Flanges, Bolt Kits, Gaskets



PF Series

ISO 9002




PVC Sch 80 Van Stone Flange Features:

- Two-piece van stone socket style.
- Class 150, Schedule 80
- Improve the security and safety of connections between pipes, valves & fittings.
- Imported - Manufactured for AGI in an ISO 9002 facility.

DIMENSIONS \ SIZE (in)	SIZE (in)						
	2"	3"	4"	6"	8"	10"	12"
D1	5.93	7.49	8.93	11.08	13.38	15.83	18.76
D2	4.72	5.93	7.45	9.40	11.62	14.12	16.85
D3	2.96	4.21	5.19	7.45	9.28	12.09	14.20
d	1.99	3.00	3.98	6.08	7.96	9.98	11.97
d1	2.35	3.46	4.45	6.55	8.53	10.64	12.62
d2	2.37	3.48	4.48	6.59	8.57	10.68	12.67
H	1.68	2.11	2.50	3.32	4.60	5.85	7.45
T	.78	1.01	1.09	1.25	1.40	1.64	1.64
l	1.49	1.86	2.23	2.97	3.98	4.80	6.44
n-oe	.741	.741	.741	.858	.858	.936	.975

Part Number	Description	Ctn Qty	List Price
PF2	2" Flange	60	\$ 13.23
PF21/2	2 1/2" Flange	36	21.73
PF3	3" Flange	30	21.86
PF4	4" Flange	20	29.25
PF6	6" Flange	10	47.16
PF8	8" Flange	4	76.27
PF10	10" Flange	2	101.93
PF12	12" Flange	2	120.92

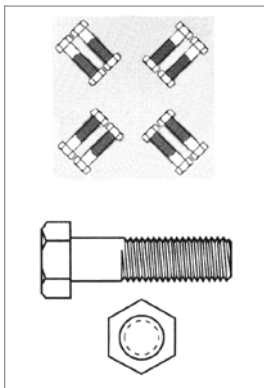

BBK Series

Bolt Kit Features:

- For use with cast iron & PVC butterfly valves. BF8200, HBFV and PBFV Series
- ASTM-A307 grade black steel bolts and A563 finished nuts.
- Washers and Gaskets NOT included- Available upon request.

Part Number	Valve Size	Bolt Size	Bolts/Kit	Ctn Qty	List Price
BBK2	2"	5/8" x 5"	4	16	\$ 22.28
BBK2.5/3	2 1/2" and 3"	5/8" x 5 1/2"	4	16	22.56
BBK4	4"	5/8" x 6"	8	8	41.49
BBK5/6	5" and 6"	3/4" x 6 1/2"	8	8	54.68
BBK8	8"	3/4" x 7"	8	8	60.96
BBK10	10"	7/8" x 7 1/2"	12	3	144.87
BBK12	12"	7/8" x 8 1/2"	12	3	164.87



GSK Series

Red Rubber Gasket Features:

- For use with butterfly valves, Sch 80 flanges
- Red rubber, 150 lbs., 1/8" full face.

Part Number	Valve Size	List Price
GSK11/2R	1 1/2"	\$ 6.45
GSK2R	2"	8.72
GSK21/2R	2 1/2"	11.39
GSK3R	3"	12.80
GSK4R	4"	13.96

Part Number	Valve Size	List Price
GSK5R	5"	\$ 16.19
GSK6R	6"	19.00
GSK8R	8"	26.13
GSK10R	10"	34.79
GSK12R	12"	56.52



Butterfly Valve Installation Kits



PBCVIK Series



Butterfly Valve Installation Kit Features:

- Everything needed for a quick, easy butterfly valve installation.
- Available with PVC Sch 80 or Ductile Iron butterfly valves.
- Custom kits available upon request.

PVC Butterfly Valve Installation Kit Includes:

- One PBFV Series PVC Sch 80 Butterfly valve.
- Two PF Series PVC Sch 80 Van Stone flanges.
- Two red rubber GSK gaskets.
- Bolt kit with steel nuts and bolts.
- Steel washers.

Part Number	Size	Number of Nuts/Bolts	Number of Washers	Ctn Qty	List Price
PBVIK2	2" Kit	4	8	1	\$ 311.99
PBVIK21/2	2 1/2" Kit	4	8	1	339.67
PBVIK3	3" Kit	4	8	1	338.69
PBVIK4	4" Kit	8	16	1	411.27
PBVIK6	6" Kit	8	16	1	653.81
PBVIK8	8" Kit	8	16	1	950.09



PHBFV Series

Ductile Iron Butterfly Valve Installation Kit Includes:

- One HBFV Series Ductile Iron Butterfly valve.
- Two PF Series PVC Sch 80 Van Stone flanges.
- Bolt kit with steel nuts and bolts.
- Steel washers.
- Rubber gaskets NOT included. (Extended EPDM seat on the HBFV valve acts as gasket seal with flange.)

Part Number	Size	Number of Nuts/Bolts	Number of Washers	Ctn Qty	List Price
PHBFV2NG	2" Kit	4	8	1	\$ 126.62
PHBFV21/2NG	2 1/2" Kit	4	8	1	161.80
PHBFV3NG	3" Kit	4	8	1	185.84
PHBFV4NG	4" Kit	4	8	1	224.65
PHBFV6NG	6" Kit	4	8	1	339.14
PHBFV8NG	8" Kit	4	8	1 *	526.08
PHBFV10NG	10" Kit	4	8	1 *	762.76
PHBFV12NG	12" Kit	4	8	1 *	990.63

* Shipped in two cartons





Clear Braided PVC Hose



Clear Braided PVC Hose Standard Wall, Class 125 Features:



- Flexible, see through clear hose with braid pattern reinforcement of two polyester spirals.
- Flexible clear PVC NSF 51 certified to 100°F (38°C), USP CLASS V1 rated.
- All hose compound ingredients used are listed in US FDA CFR, Title 21.
- Temperature range + 25° to 150° F / -5° to +65°C.
- Silicone free.
- Food and beverage grade, standard wall.
- Use for air, water lines.

Part Number	Nominal (inches)		Max Working Pressure		Reel Length	Approx Wt per CFT.	List Price Per Reel
	ID	OD	PSI@68°F	PSI@122°F			
CBH316-1	3/16	0.375	250	105	100'	4.5 lbs	\$ 132.77
CBH25-1	1/4	0.438	250	105	100'	5.7 lbs	117.14
CBH516-1	5/16	0.525	250	105	100'	7.5 lbs	169.17
CBH38-1	3/8	0.594	225	97	100'	9.0 lbs	161.76
CBH50-1	1/2	0.750	200	86	100'	13.8 lbs	220.11
CBH50-3	1/2	0.750	200	86	300'	13.8 lbs	660.32
CBH58-1	5/8	0.875	200	86	100'	16.5 lbs	262.11
CBH75-1	3/4	1.030	150	65	100'	21.9 lbs	333.12
CBH75-3	3/4	1.030	150	65	300'	21.9 lbs	999.40
CBH100-1	1	1.300	125	54	100'	31.5 lbs	433.22
CBH100-2	1	1.300	125	54	200'	31.5 lbs	809.76
CBH125-50	1 1/4	1.625	100	43	50'	45.0 lbs	407.26
CBH125-1	1 1/4	1.625	100	43	100'	45.0 lbs	814.55
CBH150-50	1 1/2	1.937	100	43	50'	64.0 lbs	495.66
CBH150-1	1 1/2	1.937	100	43	100'	64.0 lbs	991.29
CBH200-50	2	2.490	75	33	50'	95.0 lbs	831.39
CBH200-1	2	2.490	75	33	100'	95.0 lbs	1662.80

** Temperatures higher than 68° F reduce available working pressure. See next page for temperature, working pressure calculation chart and cautionary note.


Clear Braided PVC Hose



Effects of Elevated Temperatures on Thermoplastic Hose.


The compounds used in clear braided PVC hose are generally referred to as thermoplastics. These materials achieve their optimum physical properties at room temperature, 68°F (20°C). As these materials are exposed to increased ambient temperatures, they will soften and their physical properties will change. This will have the effect of sharply reducing the available working pressure. Coupling retention will also be reduced. The charts below illustrate this effect. In all cases, the product should be tested in a controlled, secure and safe environment, and all operating conditions should be considered prior to use.

All published working pressures of AGI Series CBH hose are based on a room temperature of 68°F (20°C).

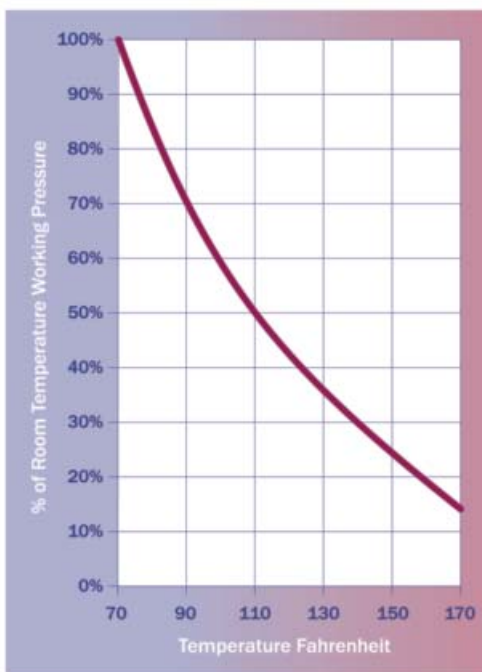

Example from the Fahrenheit Chart

If working pressure at 68°F is 200 psi, then the WP at 110°F is $200 \times 50\%$, or 100 psi

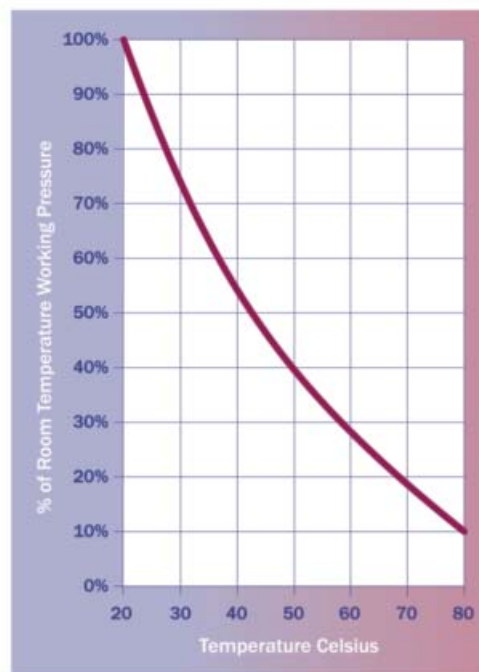

Example from the Celsius Chart


If working pressure at 20° is 14 bar, then the WP at 50°C is $14 \times 50\%$, or 5.6 bar

CAUTIONARY NOTE

The charts are to be used as a guideline only. The information and recommendations contained here are, to the best of our manufacturer's knowledge, accurate and reliable, but no guarantee of their accuracy is made. All products are sold upon the condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses, and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Variability in length of exposure, temperature, pressure, velocity of fluid, and chemical concentration all contribute to reduced working pressure and hose reliability.



Tubing - Polyethylene



Physical Properties of Polyethylene Tubing

Secant Modulus	.3200 PSI
Tensile Strength	1600 PSI
Ultimate Elongation	500%
Water Absorption	0.01%
Density	.912g/cm ³
Vicat Softening Point	201°F
Melt Index	1.0g/10 min
Thermal Coefficient of Expansion	.11x10 ⁻⁵ in/in/°F
Thermal Conductivity	.8x10 ⁻⁴ cal/sq cm/sec/°C/cm
Brittleness Temperature	-76°F
Tear Resistance	.475lb/in. of thickness

Polyethylene Tubing Features:


- Economical.
- Extremely Flexible.
- Translucent.
- Resists Corrosion.
- **NOT FOR USE WITH HOT WATER**

• **SOLD IN COIL LENGTHS ONLY.**


• **ORDER BY THE NUMBER COIL LENGTHS REQUIRED.**

Ex: For 500' of MV4040-5 order Qty 1 MV4040-5

Part Number Bulk Boxed	Part Number Dispenser Box	OD	ID	Wall	Coil Length	List Price Per Coil
MV4040-1BLACK		1/4"	.17"	0.04"	100'	\$ 25.62
MV4040-1		1/4"	.17"	0.04"	100'	28.18
MV4040-5		1/4"	.17"	0.04"	500'	140.95
MV4040M		1/4"	.17"	0.04"	1000'	281.92
MV4062-1		1/4"	1/8"(.125)	1/16"(.062)	100'	32.02
MV4062-5		1/4"	1/8"(.125)	1/16"(.062)	500'	160.14
MV4062M		1/4"	1/8"(.125)	1/16"(.062)	1000'	320.28
MV5062-1		5/16"	3/16"(.1875)	1/16"(.040)	100'	44.62
MV5062-5		5/16"	3/16"(.1875)	1/16"(.062)	500'	223.06
MV5062M		5/16"	3/16"(.1875)	1/16"(.062)	1000'	446.15
MV6062-1		3/8"	1/4"(.250)	1/16"(.062)	100'	53.38
MV6062-5		3/8"	1/4"(.250)	1/16"(.062)	500'	274.03
MV6062-5BLACK		3/8"	1/4"(.250)	1/16"(.062)	500'	274.03
MV6062M		3/8"	1/4"(.250)	1/16"(.062)	1000'	544.63
MV8062-1		1/2"	3/8"(.375)	1/16"(.062)	100'	76.51
MV8062-5		1/2"	3/8"(.375)	1/16"(.062)	500'	382.56
MV10062-1		5/8"	1/2"(.500)	1/16"(.062)	100'	96.58
MV10062-5		5/8"	1/2"(.500)	1/16"(.062)	500'	483.01
MV12075-1		3/4"	.6	.075	100'	133.22
MV12075-5		3/4"	.6	.075	500'	700.58
MV16093-1		1"	.814	.093	100'	200.99
	TP308	1/4"	.17"	0.04"	100'	\$ 40.64
	TP309	5/16"	3/16"(.1875)	1/16"(.040)	100'	37.26
	TP310	3/8"	1/4"(.250)	1/16"(.062)	100'	64.82
	TP311	1/2"	3/8"(.375)	1/16"(.062)	100'	90.60



POLYETHYLENE TUBING SIZING GUIDE

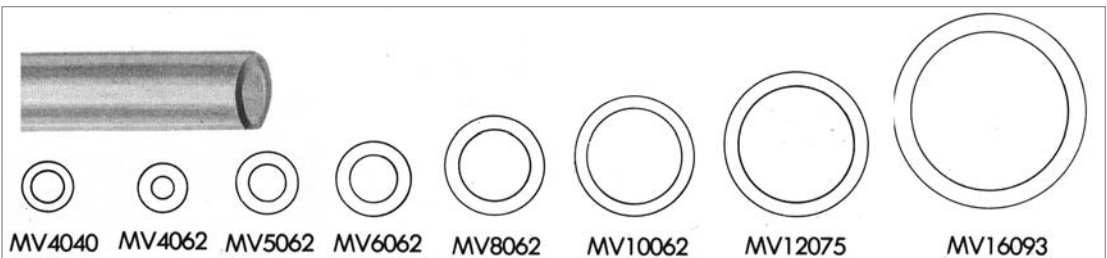


www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Tubing - Clear Vinyl

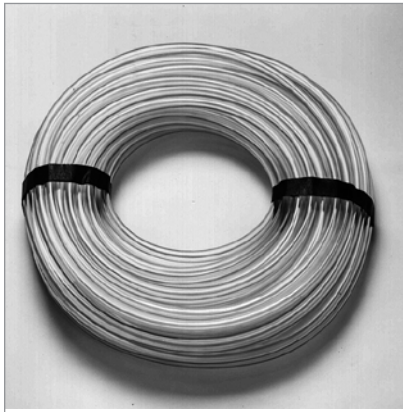

Physical Properties of Vinyl Tubing

100% Modulus of Elasticity	.800 PSI
Durometer "A"	.68
Tensile Strength	.2000 PSI
Specific Gravity	.1.20
Elongation	.400%
Brittle Temperature	-.40°F
Color	.Crystal Clear
Odor	.Slight
Taste	.None
Toxicity	.Non-Toxic
Aging Characteristics	.Excellent


Vinyl Tubing Features:

- Flexible.
- Transparent.
- Tasteless.
- Non-Toxic.
- **NOT FOR USE WITH HOT WATER**


Applications:

- Pool slides
- RV use cold water
- Water softeners
- Ice maker
- Livestock
- Hobby and pet use

• **SOLD IN COIL LENGTHS ONLY.**
 • **ORDER BY THE NUMBER COIL LENGTHS REQUIRED.**
 Ex: For 500' of IV7062-5 order Qty 1 IV7062-5

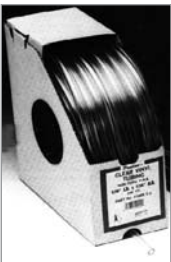Part Number	Bulk Box	Dispenser Box	OD	ID	Coil Wall	Length	List Price Per Coil
IV4062-1			1/4"	1/8"(.125)	1/16"(.062)	100'	\$ 55.43
IV5062-1			5/16"	3/16"(.1875)	1/16"(.062)	100'	70.02
IV6062-1			3/8"	1/4"(.250)	1/16"(.062)	100'	87.47
IV7062-1			7/16"	5/16"(.3125)	1/16"(.062)	100'	88.61
IV7062-5			7/16"	5/16"(.3125)	1/16"(.062)	500'	439.02
IV8062-1			1/2"	3/8"(.375)	1/16"(.062)	100'	112.24
IV8062-5			1/2"	3/8"(.375)	1/16"(.062)	500'	561.26
IV8062M			1/2"	3/8"(.375)	1/16"(.062)	1000'	1122.41
IV10062-1			5/8"	1/2"(.500)	1/16"(.062)	100'	152.00
							
	TV308		1/4"	1/8"(.125)	1/16"(.062)	100'	49.60
	TV309		5/16"	3/16"(.1875)	1/16"(.062)	100'	54.88
	TV310		3/8"	1/4"(.250)	1/16"(.062)	100'	69.95
	TV3105		7/16"	5/16"(.3125)	1/16"(.062)	100'	77.70
	TV311		1/2"	3/8"(.375)	1/16"(.062)	100'	92.14
	TV3125		5/8"	1/2"(.500)	1/16"(.062)	100'	118.86
	TV313-1		7/8"	5/8"	1/8"	100'	282.96
	TV314		1"	3/4"	1/8"	50'	176.21
	TV315		1 1/4"	1"	1/8"	50'	219.15

VINYL TUBING SIZING GUIDE

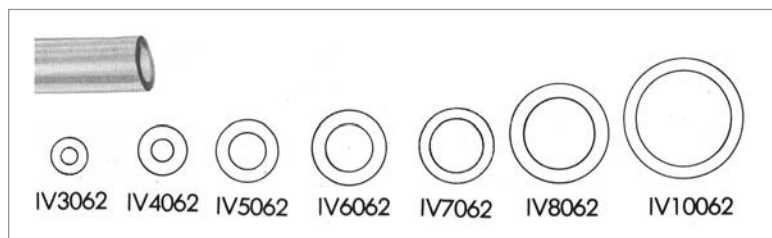



Fittings for Plastic Tubing - NL Brass




Barb Fitting Features:


- Superior NO LEAD brass fittings for soft plastic tubing for oil, water, air, vacuum, gas and liquid low pressure lines.
- Exclusive self-clinching double barbs actually tighten under strain.

Compression Fitting Features:


- NO LEAD Brass compression fittings designed for plastic tubing.
- Built-in tube support prevents tube collapse and allows easy assembly.




VT22




VT224



VT229




VT26




VT28

Part Number	Fits Tube OD	Fits Tube ID	Thread Size	Qty	List Price
Coupling (Ins x Ins)					
VT22-4-4NL	3/8"	1/4"		Bulk	\$ 4.13
VT22-6-6NL	1/2"	3/8"		Bulk	5.15
VT22-8-8NL	5/8"	1/2"		Bulk	7.65
Tee (Ins x Ins x Ins)					
VT224-4NL	3/8"	1/4"		Bulk	13.98
VT224-6NL	1/2"	3/8"		Bulk	13.06
Elbow (Ins x MIP)					
VT229-4-4NL	3/8"	1/4"	1/4" mip	Bulk	11.58
VT229-6-4NL	1/2"	3/8"	1/4" mip	Bulk	10.20
VT229-8-6NL	5/8"	1/2"	3/8" mip	Bulk	18.21
Female Adapter (Ins x FIP)					
VT26-4-2NL	3/8"	1/4"	1/8" fip	Bulk	5.46
VT26-6-4NL	1/2"	3/8"	1/4" fip	Bulk	6.68
Male Adapter (Ins x MIP)					
VT28-4-2NL	3/8"	1/4"	1/8" mip	Bulk	3.88
VT28-4-4NL	3/8"	1/4"	1/4" mip	Bulk	5.51
VT28-6-4NL	1/2"	3/8"	1/4" mip	Bulk	6.28
VT28-8-6NL	5/8"	1/2"	3/8" mip	Bulk	9.44


Fittings for Plastic Tubing - NL Brass




VT62




VT64




VT65



VT69



VT66



VT68



VT60



VT61



VT63

Part Number	Fits Tube OD	Fits Tube ID	Thread Size	Qty	List Price
Union w/ inserts (Comp x Comp)					
VT62-4NL	1/4" x 1/4"	.17"		Bulk	\$ 10.19
Tee w/ inserts (Comp x Comp x Comp)					
VT64-4NL	1/4" x 1/4" x 1/4"	.17"		Bulk	15.29
VT64-6NL	3/8" x 3/8" x 3/8"	1/4"		Bulk	20.33
Elbow w/ inserts (Comp x Comp)					
VT65-6NL	3/8" x 3/8"	1/4"		Bulk	23.24
VT65-8NL	1/2" x 1/2"	3/8"		Bulk	33.43
Male Elbow w/ inserts (Com x MIP)					
VT69-4-4NL	1/4"	.17"	1/4" mip	Bulk	17.43
VT69-6-4NL	3/8"	1/4"	3/8" mip	Bulk	20.33
Female Connector w/ inserts (Com x FIP)					
VT66-4-4NL	1/4"	.17"	1/4" fip	Bulk	10.95
VT66-6-4NL	3/8"	1/4"	1/4" fip	Bulk	14.52
VT66-8-8NL	1/2"	3/8"	1/2" fip	Bulk	13.10
Male Connector w/ inserts (Comp x MIP)					
VT68-4-4NL	1/4"	.17"	1/4" mip	Bulk	9.48
VT68-6-4NL	3/8"	1/4"	1/4" mip	Bulk	10.19
Delrin Sleeve					
VT60-4	1/4"			Bulk	0.49
VT60-6	3/8"			Bulk	0.82
VT60-8NL	1/2"			Bulk	8.05
Nut					
VT61-4NL	1/4"			Bulk	1.43
VT61-5NL	5/16"			Bulk	1.79
VT61-6NL	3/8"			Bulk	1.99
Tube Support					
VT63-4NL	1/4"	.17"		Bulk	0.51
VT63-6NL	3/8"	1/4"		Bulk	0.97
VT63-8NL	1/2"	3/8"		Bulk	2.50



Pipe & Hose Cutters



T Series

HARVARD CONTRACTOR'S Plastic Pipe & Hose Cutter Features:

- Heavy duty, glass reinforced nylon handles.
- Handles designed with matted surface and finger indentation for firm gripping in any weather conditions.
- Handle "bridge" support structure designed to eliminate deflection, bending or breaking while cutting for straighter, truer cut every time.
- "100" and "135" available in black or yellow. "200" available in black.
- Available with either PTFE coated hardened tool steel or polished high-carbon stainless steel blades specially honed to maintain their edge longer than competitive blades.
- Cutter blades individually laser etched with "100", "135" or "200" for easy identification. Replacement blades are blister packed with knock out pin.
- All Harvard Plastic Pipe and Hose cutters are blister packed with an attractive hang-up card.

The unique cutting action of the Harvard Contractor's cutter is produced by slightly rotating or rocking the cutter on the pipe while squeezing lightly on the handles. After just a few cuts, anyone can make fast, clean, straight cuts. The rotating action is not necessary for rubber hose or soft tubing (except when cutting 2" or larger hose with the SS200).



Part Number	Color	Blade Material	Cuts	Ctn Qty	List Price
HARVARD CONTRACTOR Pipe & Hose Cutters					
T100	Black	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	\$ 21.53
YT100	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	21.53
T100SS	Black	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
YT100SS	Yellow	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
T135	Black	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
YT135	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
T135SS	Black	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
YT135SS	Yellow	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
SS200	Black	Stainless Steel	Rubber hose through 2" PE through 1 1/2" & Class PVC through 1 1/4"	50	26.61
HARVARD CONTRACTOR Replacement Blades (includes one knock out pin) DP is DOUBLE PACK					
BT100	PTFE Coated Hardened Steel Blade	T100, YT100	100	8.20	
BT100SS	Stainless Steel Blade	T100SS, YT100SS	100	9.16	
BT135	PTFE Coated Hardened Steel Blade	T135, YT135	100	8.98	
BT135DP	PTFE Coated Hardened Steel Blades (2)	T135, YT135	100	17.42	
BT135SS	Stainless Steel Blade	T135SS, YT135SS	100	9.91	
BT135DPSS	Stainless Steel Blades (2)	T135SS, YT135SS	100	19.29	
SSB200	Stainless Steel Blade	SS200	50	10.20	



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Pipe & Hose Cutters & Cable Saws



APC100SS

HARVARD CONTRACTOR'S Plastic Pipe & Hose Cutter with Spring Action Features:

- Heavy duty, cast metal handles.
- Handles designed with matted surface and finger indentation for firm gripping in any weather conditions.
- Spring action for easy use.
- Latch handle for carrying in closed position.
- **Reversible**, replaceable polished high carbon stainless steel blades honed to maintain thin edge longer than competitive blades.
- Cuts PE, Rubber hose & PVC (Class & Sch 40) through 1" ID (max diameter 1 3/8")
- Blister packed with an attractive hang-up card.



The unique cutting action of the Harvard Contractor's cutter is produced by slightly rotating or rocking the cutter on the pipe while squeezing lightly on the handles. After just a few cuts, anyone can make fast, clean, straight cuts. The rotating action is not necessary for rubber hose or soft tubing.



Part Number	Color	Blade Material	Cuts	Ctn Qty	List Price
HARVARD CONTRACTOR Pipe & Hose Cutters					
APC100SS	Red	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1" ID (max diameter 1 3/8")	50	\$ 17.31
HARVARD CONTRACTOR Replacement, Reversible Blade					
APC100SSB		Stainless Steel reversible blade		1	8.93



CS24L

HARVARD CONTRACTOR'S PVC Cable Saw Features:

- Multi-purpose cable saw cuts PVC pipe.
- Available in two lengths and two handle styles



CS36T

Part Number	Description	Ctn Qty	List Price
Cable Saws			
CS24L	Cable saw, 24" length, Loop handle	50/500	\$ 6.00
CS36L	Cable saw, 36" length, Loop handle	5/200	8.72
CS36T	Cable saw, 36" length, T handle	50	11.43



PVC Pipe Cutters - Ratchet



HRPC42



HRPC50

HARVARD CONTRACTOR'S PVC Ratchet Pipe Cutter


Features:

- For use up to 1 1/4" or 2" diameter pipe.
- All stainless steel cutting blade and ratchet teeth.
- All metal body construction with latching handle for safe storage.
- 1 1/4" cutter has quick release thumb lever for easy blade opening.
- 1 1/4" cutter packaged in blister card for easy display.
- 2" two hand cutter has rubber handle grips.
- 2" two hand cutter packaged with wrap around card for easy display.
- Replacement stainless steel blades and spring sets are available.

Part Number	Description	Ctn Qty	List Price
Cutters - with stainless steel blade			
HRPC42	PVC Pipe Cutter, 1 1/4"	50	\$ 28.39
HRPC50	PVC Pipe Cutter, 2"	10	142.68
Replacement Blades - stainless steel			
HRPC42B	Blade for HRPC42	1	9.47
HRPC50B	Blade for HRPC50	1	71.25
Replacement Spring Sets			
HRPC42SP	Spring Set for HRPC42	1	1.55
HRPC50SP	Spring Set for HRPC50	1	1.55



HS25

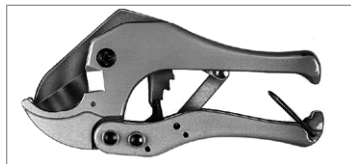

HM42



HL48



HL50

HARVARD® PVC Ratchet Pipe Cutter Features:

- For use on plastic pipes up to 1", 1 1/4", 1 3/8", 1 1/2" or 2" diameter.
- **Blade and ratchet teeth made of molybdenum vanadium stainless steel. Stays sharp longer than plated steel blades.**
- All metal construction insures long life; locking clip provides safe storage.
- Holds pipe as it cuts, creating smooth, even ends.
- One hand operation (except on HL50).

Part Number	Description	Ctn Qty	List Price
Cutters - With molybdenum vanadium stainless steel blades			
HS25	PVC Pipe Cutter, 1"	60	\$ 53.39
HM42	PVC Pipe Cutter, 1-1/4"	60	56.97
HL42A	PVC Pipe Cutter, 1 3/8"	60	69.82
HL48	PVC Pipe Cutter, 1 1/2"	40	114.55
HL50	PVC Pipe Cutter, 2"	20	218.32
Replacement Blades - Molybdenum vanadium stainless steel			
HS25B	Blade for HS25	1	32.70
HM42B	Blade for HM42	1	33.85
HL42AB	Blade for HL42A	1	38.06
HL48B	Blade for HL48	1	59.59
HL50B	Blade for HL50	1	106.63
Replacement Spring Sets			
HS25SP	Spring Set for HS25	1	4.91
HM42SP	Spring Set for HM42	1	6.69
HL42ASP	Spring Set for HL42A	1	6.88
HL48SP	Spring Set for HL48	1	11.08
HL50SP	Spring Set for HL50	1	7.43



PVC & ABS Saws and Hacksaws



TBS300

14" PVC/ABS Tool Box Saw Features:

- 14" saw for use with PVC or ABS.
- One saw for all applications.
- Cuts wood, aluminum and drain pipe.
- Durable ABS handle.
- Tempered steel blade.
- 15 teeth, 16 points.
- Cuts in both directions.



PVCSW

PVC/ABS Saw Features:

- 12" or 18" saw blade lengths.
- Aluminum die cast handle for sure grip.
- Cuts large diameter PVC or ABS pipe.
- Cuts drywall, paneling, plywood or plaster board.
- Precision milled teeth for faster, cleaner cuts.
- Induction hardened teeth for longer life.
- Cuts in both directions.
- Quick change design allows for changing blades without tools.
- Replacement blades available.

Part Number	Description	Ctn Qty	List Price
TBS300	Tool Box Saw, 14" length, 15 teeth, 16 pt.	4/48	\$ 24.82
PVCSW12	PVC Saw, 12" aluminum handle	12	24.36
PVCSW18	PVC Saw, 18" aluminum handle	12	26.68
PVCSW12B	PVC Saw 12" BLADE ONLY	12	13.04
PVCSW18B	PVC Saw 18" BLADE ONLY	12	15.89



T22466

TASK HIGH TENSION HACKSAWS

Task Contractor's High Tension Hacksaw Features:

- Aluminum handle and end piece.
- Square tube frame prevents frame twisting.
- Multiple tension adjustment setting.
- 3 blade positions for 90°, 45° and use as a minisaw.
- Extra blade storage in frame.
- Unconditional warranty.



T22464

Task Professional Plus High Tension Hacksaw Features:

- Patented quick change blade feature.
- Soft touch, non-slip grip.
- Square tube frame design prevents frame twisting.
- Multiple tension adjustment settings.
- 3 blade positions for 90°, 45° and use as a mini hacksaw.
- Extra blade storage in frame.
- Unconditional warranty.

Part Number	Description	Ctn Qty	List Price
T22466	Contractors Hacksaw	6	\$ 31.88
T22464	Professional Plus Hacksaw	6	51.38



BOSS® Pool & Spa Adhesives, Lubricants & Sealants

BOSS® line of adhesives, grouts and lubricants are specifically formulated for use with pools and whirlpool baths.



BOSS® 801 Neutral Cure Silicone Adhesive Features:

- A one part, low odor, non-corrosive, oxime cure adhesive and sealant.
- Provides excellent adhesion to ceramic tile, spa jets, skimmers, lighting fixtures, plumbing and fiber optic lighting.
- Adheres well to fiberglass, ABS, acrylic, PVC, wood and masonry.



BOSS® 802 Acetoxy Cure Silicone General Purpose Adhesive Features:

- A one part, acetoxy cure, adhesive/sealant.
- Performs well in jet sealing applications.
- Designed for many other pool and spa maintenance and repair needs.

BOSS® 804 Neutral Cure Silicone Ceramic Tile Grout Features:

- A one part, low odor, non-corrosive, oxime cure silicone grout.
- Spreads easily and provides ample tooling time.
- Excellent adhesion to all ceramic tiles.



BOSS® 820 Pool & Spa Silicone Lubricant Features:

- Water washout resistant and non-solidifying compound.
- Provides superb lubricant for rubber o-rings.
- Non-corrosive, silicone lubricant compound.

BOSS® 315 RTV 100% Silicone Sealant Features:

- 100% Silicone rubber clear adhesive/sealant.
- Paste-like one component material cures to a tough, rubbery solid when exposed to moisture in the air.
- Can be applied overhead or on walls without sagging.
- Adheres to clean metal, glass, wood, ceramic and painted or plastic surfaces.

Part Number	Description	Ctn Qty	List Price
80100B	Silicone Adhesive Clear, 10.3 oz cart	12	\$ 17.85
80101B	Silicone Adhesive White, 10.3 oz cart	12	17.85
80200B	Silicone Adhesive Gen Purpose, Clear 10.3 oz. cart	12	10.52
80201B	Silicone Adhesive Gen Purpose, White 10.3 oz cart	12	10.52
80131B	Silicone Adhesive Grout, Clear 3 oz. tube	12	8.92
80401B	Silicone Ceramic Tile Grout, White 10.3 oz cart	12	17.85
82001B	Pool & Spa Lubricant Clear, 1 oz tube bulk	288	5.98
82002B	Pool & Spa Lubricant Clear, 1 oz tube 36 pc tub	36	288.64
82030B	Pool & Spa Lubricant Clear, 3 oz tube	12	9.10
82000B	Pool & Spa Lubricant Clear, 5.3 oz tube	12	15.26
31500B	RTV Silicone Seal CLR 10.0 oz tube	12	14.00
31580B	RTV Silicone Seal CLR 8 oz pressurized can	12	30.57



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

BOSS® Expanding Foam Sealant



BOSS®
PRODUCTS



BOSS® 333 Expanding Foam Sealant Features:

- Easy to use, multi-purpose urethane foam.
- Unlike ordinary sealants, it expands **three** times it's original volume.
- Adheres to all building materials except PTFE, silicone and polyethelene.
- Seals by expanding into gaps, cracks and crevices.
- Uses including insulating, sealing and filling gaps around pipes, plumbing fixtures, ductwork and foundations.
- UL classified.

DIRECTIONS FOR USE:

1. Shake can before and during use.
2. Surface must be clean and free of grease and oil.
3. Can must be held UPSIDE DOWN during application.
4. Insert straw into void and depress the trigger. The use of protective gloves is highly recommended.
5. Fill void 50% full to allow for expansion.
6. Uncured foam can be cleaned with acetone or paint thinner.
7. Cured foam can be trimmed, sanded, painted or stained. Foam MUST be painted or covered if application is exposed to UV light.



R19028
CAULKING AND SEALANTS
SURFACE BURNING CHARACTERISTICS
APPLIED TO INORGANIC REINFORCED
CEMENT BOARD*
FLAME SPREAD: 5 SMOKE DEVELOPED: 20
38FN

* Tested as applied in three 3/4" beads 5" on center covering 12.5% of the exposed test sample area.

Part Number	Description	Ctn Qty	List Price
33316B *	Expanding Foam Sealant, 12 oz can w/ application tip	12	\$ 14.99
33324B *	Expanding Foam Sealant, 24 oz can w/ application tip	12	29.32

* SHIPPING NOTE: Ground shipping only. Can NOT be shipped via air.



AquaMend

AquaMend® Underwater Repair Epoxy

- Ideal for pool & spa repairs.
- Resin and hardener in same stick
- Hand kneadable.
- Unaffected by chlorinated or salt water.
- Sets in 25 minutes, cures in 1 hour.
- Dries off-white.
- Can be sanded and drilled.



1. Cut



2. Mix



3. Apply

Part Number	Size	Display Ctn Qty	List Price
82093	7" stick	12	\$ 12.64



3M Spray Adhesives

BLUE 72

- Repositionable BLUE pressure sensitive spray adhesive.
- One side bonds in 8 hours, aggressive tack, low soak in.
- Covers 100 sq ft.
- Ideal for pool liner installation.

ORANGE FOAM FAST 74

- Permanent, light orange, fast tack.
- Two sides bond in 15 minutes.
- Covers 260 sq. ft.

Both manufactured for AGI in an ISO 900 facility.

Pallet pricing available. Call your sales rep.

ISO 9001

Part Number	Size	Ctn/Pallet Qty	List Price
BLUE 72	Blue Spray Adhesive 24 fl oz can, 17.3 oz net wt.	12/768	\$ 41.36
ORANGE 74	Orange spray adhesive 24 fl oz can, 17.3 oz net wt	12/768	50.18



HDT Series

POLYKEN®

Contractor/Industrial Grade Cloth Reinforced Duct Tape

- Multi-purpose duct tape.
- Polyethylene coated cloth backing.
- Natural rubber based adhesive.
- Temperature range: 40°F to 200 °F.
- Superior tensile strength, adhesion & tack.
- Recommended for pool liner installations.
- Conformable and will not curl or twist during application.
- 10 mil thickness
- Silver
- Manufactured for AGI in an ISO 9002 facility.

ISO 9002

Part Number	Width x Length	Ctn Qty	List Price
HDT260	2" x 60 yards	24	\$ 23.73



FAL32



Fix A Leak Features:

Fix A Leak is a blended material, designed to seal leaks in just about anything. It works in any kind of pool, spa or hot tub, regardless of constructed material, concrete, fiberglass, acrylic, wood, etc. It works equally well in all plumbing materials including PVC, ABS, poly plastics, vulcathen, copper, steel, etc.

- Seals leaks up to 1/8" in diameter.
- Forms a permanent seal.
- One quart is designed to seal leaks in up to 20,000 gallons. Do not use in excess of 1 quart per 5,000 gallons of water.
- Cures in 24-48 hours.
- Patented by Marlig Industries, Inc.

Part Number	Description	Ctn Qty	List Price
FAL32	Fix A Leak Sealant, 32 oz.	12	\$ 50.89
FAL8	Fix A Leak Sealant, 8 oz.	20	22.79

See the "Tapes, Sealants, Cements" and "Permatex Industrial" tabs for more installation & repair materials.



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016



PTC163-6ST



PTC163-6RA


HARVARD CONTRACTOR'S

Power Cord Features:

- Three prong straight (115V) or right angle (115V, 220V) molded plugs.
- 16 gauge, 3 conductor, 13 amp, 125 Volt rating.
- 14 gauge, 3 conductor, 15 amp, 250 Volt rating.
- Six foot cord length.
- Free end is split, stripped 3/8".
- UL and CSA listed in US and Canada.



PTC143-6RA220




Part Number	Description	Wire Gauge	Volt Rating	Ctn Qty	List Price
PTC163-6ST	Straight plug cord	16	125 V	50	\$ 10.89
PTC163-6RA	Right angle plug cord	16	125 V	50	10.89
PTC143-6RA220	Right angle plug cord	14	250 V	50	14.11



HARVARD CONTRACTOR'S

Anchor Kit Features:

- Anchor kits complete with 100 plastic anchors, 100 screws and 1/4" masonry drill bit in a plastic case.
- Plastic gray ribbed anchors with lip design for electronic timer, pump start relay installations. Use with concrete block, brick and wallboard.
- Anchors have internal ribs for better centering of screws, locking lugs against pull and twist. Exterior design prevents fall out in overhead holes.
- Kit available with combination slotted/phillips head or tri-combination, slotted/phillips/hex head #10 x 1" screws.
- Kits complete with 1/4" x 4" masonry drill bit.
- Clear, unbreakable plastic case with molded-in hanging tab.



Combo Head

Tri Combo Head



Part Number	Description	Ctn Qty	List Price
AK10CSPR	Ribbed Combo Head	36	\$14.11
AK10TCR	Ribbed Tri Combo Head	36	15.00



2136



LISTED

Swimming Pool,
Fountain and Spa
Equipment
Conductor Splice
Potting Compound
2L02

Scotchcast™ 2136 Wet-Niche Potting Kit Features:

- Provides protection against corrosion and deteriorating effects of pool water by encapsulating the 8 AWG ground connection in a wet niche shell.
- The wet-niche shell is a corrosion-resistant metal housing for underwater fixtures in permanently installed pools.
- Product meets NEC requirements to allow the use of rigid nonmetallic conduit in the installation of wet-niche underwater lighting fixtures.
- Packaged in easy-mix, single use, 1.5 oz. container with cleaning pad, application stick and gloves.
- Will not sag or drip. Gels in minutes and can be submerged within 4 hrs.

Part Number	Description	Ctn Qty	List Price
2136	Wet-Niche Potting Kit	10	\$ 98.69



LR Series



LR SERIES Features:

- For use with Laars-Raypak pool and spa heaters.
- Stainless steel, with plastic quick connect union



Part Number	Size	Ctn Qty	List Price
Stainless Steel Tube with Plastic Quick Connect Union			
LR619-2SSUN	2" X 6" X 19"	6	209.78
Union O-Ring			
PHU150 O-RING	1 1/2" o-ring	1	2.64
PHU200 O-RING	2" o-ring	1	2.64
Heater Union Repair Split Nut			
HSNR150	1 1/2" FBT Heater Split Nut Set w/ screws	125	4.92
HSNR200	2" FBT Heater Split Nut Set w/ screws	100	5.51



10-417-15

Hot Water Swimming Pool Heater

Safety Relief Valve Features:

- Bronze safety relief valve protects ASME Section IV hot water heating boilers and hydronic heating systems.
- High capacity design features corrosion resistant construction.
- Ideal for use in swimming pool heater applications, hot water boilers and hydronic heating systems.
- ASME Section IV.
- Set pressure 75 psi. 20-80 psig certified pressure range.
- Maximum temperature service 250°F
- Stainless steel springs.
- Registered in all Canadian provinces and territories, CRN #0G8547.5C
- Made in USA.

Part Number	Description	Height	Ctn Qty	List Price
10-417-15	3/4" M/F Safety relief valve	3"	100	\$ 44.69

Repair Fittings for Sch 40 Pipe





PEX Series



PIC Series

Pipe Extender and Inside Connector Repair Fitting Features:

- For Sch 40 pipe.
- Saves labor.
- Invisible after installation.
- Permanent repair.
- Insignificant flow restriction.
- PVC Construction.
- PIC Series connects two pieces of Sch 40 pipe with flush joint.



Part Number	Description	IPS Size	Ctn Qty	List Price
Pipe Extender Repair Fitting				
PEX50	Pipe Extender	1/2"	48	\$ 2.21
PEX75	Pipe Extender	3/4"	48	2.82
PEX100	Pipe Extender	1"	48	3.58
PEX125	Pipe Extender	1 1/4"	48	4.20
PEX150	Pipe Extender	1 1/2"	48	5.01
PEX200	Pipe Extender	2"	48	5.59
PEX250	Pipe Extender	2 1/2"	96	7.59
PEX300	Pipe Extender	3"	96	10.97
PEX400	Pipe Extender	4"	48	12.94
Inside Connector Repair Fitting				
PIC100	Inside Connector	1"	48	3.58
PIC150	Inside Connector	1 1/2"	48	5.01
PIC200	Inside Connector	2"	48	5.59



A simple squeeze to repair horizontal cracks and spalls, and to set anchors

DP600

Horizontal Concrete Repair Features:

Hardens in as little as 5 minutes,

Cracks and spalls in concrete floors are an eyesore as well as a potential safety risk. Fixing them has meant either hiring and waiting for an outside contractor or doing it yourself with a repair method that takes the floor out of service for up to 24 hours. Now with 3M Concrete Repair, you save money and time.

- Self-leveling urethane flows smoothly into cleaned cracks and gaps and hardens in as little as 5 minutes. A fork lift can pass over a repair in as few as 15 minutes.
- Hardens to any depth without cracking or shrinking.
- Flexible urethane expands and contracts for durability that outlasts repairs made with concrete.
- Do it yourself with a common caulking gun and eliminate the cost and wait for an outside contractor.
- *Easy to use - Just clean damaged area and fill. With every squeeze of the caulking gun trigger, cartridge nozzle meters and mixes precise proportions for optimum performance.*



Part Number	Description	Ctn Qty	List Price
DP600	Concrete Repair, 8.4 fl oz cartridge supplied with 2 nozzles	6	\$ 147.86



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
CG9	9" Ratchet	Blue	20	6.36



Horizontal Concrete Repair Specifications:

- Gray, self-leveling urethane concrete repair.
- 8.4 fl. oz. cartridge of concrete repair and 2 nozzles.
- Work life of 70 sec.
- Handling time of 5 minutes
- Cure time of 60 minutes

Applications:

- Repairing cracks and spalls on concrete floors or horizontal surfaces.
- Setting anchors in concrete floors or horizontal surfaces.
- Light-duty custom threading and anchoring.
- Use outdoors or in highly ventilated area.

Approximate coverage:

Crack Width	Crack Depth	Linear Feet per 8.4 fl. oz.
1/4"	1/4"	19.3
1/2"	1/4"	9.9
3/4"	1/4"	6.4
1"	1/4"	4.9
1/4"	1/2"	9.9
1/2"	1/2"	4.9
3/4"	1/2"	3.0
1"	1/2"	2.0

Bead Size dimension	Linear Feet per 8.4 fl. oz.
1/16"	815.0
1/8"	205.0
1/4"	51.9
3/8"	22.2
1/2"	12.4

Quick and Easy Spall Repair




Clean
Remove all loose material from area to be filled. Concrete should be dry and grease-free.



Fill
Dispense product into deepest part of repair areas, slightly overfilling. Product self-levels and is tack-free in as little as one minute.




Finish
In as little as 15 minutes, product can be sanded to remove rough edges. It can be painted within one hour.


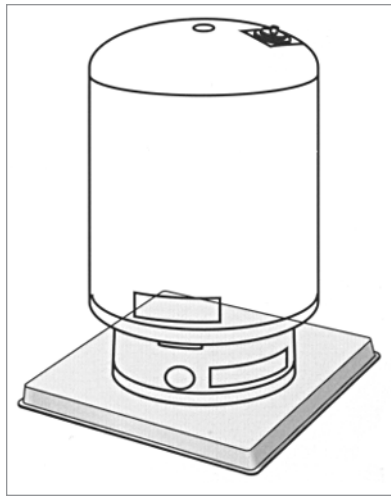


HEF-T-PAD™ Features:


- Injection molded from high impact polyolefin for strength and durability.
- Resistant to impact, UV degradation and weathering.
- Will not crack, flake or warp.
- Virtually impervious to climate changes.
- Drillable, permits installation of refrigerant and electrical lines under and through pad. Also permits equipment to be easily secured to pad.
- Unique, non-creep surface absorbs vibration and noise and keeps equipment in it's original position.
- Gray



Underside of Hef-T-Pad showing support ribs, stabilization pads and stabilization flange.

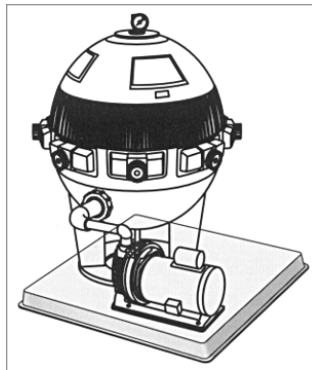

Part Number	Size	Pallet Qty	List Price
2" HEF-T-PADS			
X2424211	24" x 24" x 2" one piece	24	\$ 64.87
X2430211	24" x 30" x 2" one piece	24	87.82
X2436211	24" x 36" x 2" one piece	24	102.48
X3232211	32" x 32" x 2" one piece	24	102.23
X3244211	32" x 44" x 2" one piece	24	133.66
X3636211	36" x 36" x 2" one piece	24	129.01
X3830211	38" x 30" x 2" one piece	24	97.30
X3836211	38" x 36" x 2" one piece	24	117.60
X3842211	38" x 42" x 2" one piece	24	150.19
3" HEF-T-PADS			
X2424311	24" x 24" x 3" one piece	16	83.18
X2436311	24" x 36" x 3" one piece	16	131.36
X3030311	30" x 30" x 3" one piece	16	99.78
X3232311	32" x 32" x 3" one piece	16	109.57
X3636311	36" x 36" x 3" one piece	16	160.42
X3848311	38" x 48" x 3" one piece	16	216.34
X5055301	50" x 55" x 3" one piece	16	348.91

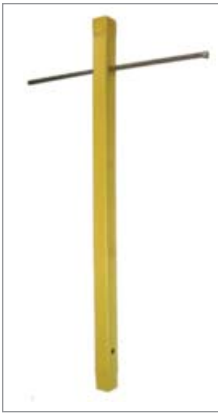


SPPW405

2 in 1 Swimming Pool Plug Wrench Features:

- Fits 1 1/2" or 2" cleanout plugs.
- 31" long.
- Removable 18" plated steel handle.
- Heavy duty, powder coated steel to resist rust and corrosion.
- No welds to corrode.

Part Number	Description	Ctn Qty	List Price
SPPW405	1 1/2" / 2" pool plug wrench with handle	24	\$ 46.25
SPPW405H	Replacement handle only for SPPW405	250	6.97



MBC75

Master Blaster Cleaner Features:

- 3/4" FGHT connection.
- Handy on/off lever.
- For general pool/spa cleanup of filters, under copings.

Part Number	Description	Size	Ctn Qty	List Price
MBC75	Master Blaster Cleaner	3/4"	12	\$ 20.81




AGLFB19

Ladder Bumper Features:

- White, molded EPDM.

Part Number	Description	Fits Tubes	Ctn Qty	List Price
AGLFB19	Male Ladder bumper	1.9" OD	200	\$ 4.09

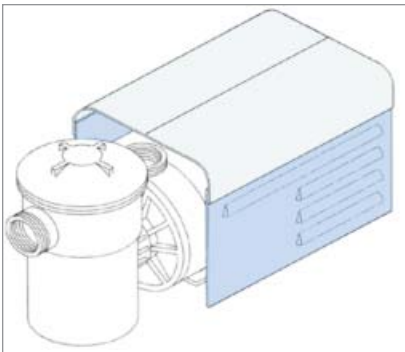

B8200C

Universal Motor Cover Features:

- Fits all motors from 1/3 hp to 2 hp.
- Shields and protects outdoor motors from sun, rain and dust.
- Made of heavy duty plastic for long life and durability.
- Heat resistant white top and attractive blue sides.
- Sturdy, will not fade from sun or ultraviolet rays.
- Assembles in minutes. No tools needed.

Part Number	Description	Ctn Qty	List Price
B8200C	Universal Motor Cover	12	\$ 44.89



Pool Service Tools - Multipurpose Tools



MW, CWMP, RPNH

Wingmaster® Plus Tool Features:

- The all in one **patented** tool for pool technicians.
- **Original** Wingmaster® Plus includes 7" cylinder, hex bar and hand knob.
- 5" Mini tool fits in tight spots such as main drains and skimmers.
- Nylon holster available separately.
- **US Patent #6,374,708**

Typical Applications



Tighten/loosen winterizing and pressure testing plugs



Remove plugs from pipe using threaded end tool or adapter



Install/remove slotted plugs



Install/remove flush plugs



Raise/lower safety cover anchors (1/4" and 3/16" hex)



Hold plugs in place for vacuuming

Part Number	Description	Ctn Qty	List Price
CWMP	Wingmaster Plus Tool 7"	1	\$ 145.25
MW	Mini Wingmaster Plus Tool 5"	1	132.14
RPNH	Nylon Holster for CWMP/MW	1	45.71



PTM

Wingmaster® Plus PT Master Tool Features:


- Tighten, loosen Anderson pressure testing plugs.
- Has 1/8-27, 5/16-18, 1/2-13 and 5/8-11 fitting ends.
- Supplied with open end wrench.



Remove test plugs using the threaded end tool adapter.



Releases air from tire valve plug.



Tighten/loosen air hoses.

Part Number	Description	Ctn Qty	List Price
PTM	PT Wingmaster Plus Tool 5" w/ wrench	1	\$ 194.11

Wingmaster® is an American Granby Inc. registered trademark.



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Pool Service Tools - Anchor, Shell Extractor Kits



Wingmaster® Anchor Extractor Features:

- Removes old cover anchors including anchors with escutcheons with the special design feature of the anchor extractor.
- Anchor Extractor available only in NANSK or NANSK2 kit.



To remove safety cover anchors:



1. Thread anchor with tap



2. Turn stud in anchor



3. Place extractor over stud



4. Thread castle nut onto extractor.



5. Attach tool. Turn clockwise to remove anchor.



6. Place square tip of stud into tool to remove old anchor from extractor.



Part Number	Description	Ctn Qty	List Price
JS	Hardened Stud (For 10-15 pulls)	1	\$ 30.59
CN	Castle Nut	1	33.99



KEMB

KEMB - Wingmaster® Castle Nut Driver Features:

- Tightens and loosens Castle Nut (CN) with the use of a cordless screw gun.
- Used in the removal of safety cover anchors with the NANSK Kit.
- Works with 5/16 Tap for the tapping (threading) of cover anchors.

Part Number	Description	Ctn Qty	List Price
KEMB	Castle Nut Driver	1	\$ 117.88



NANSE

Wingmaster® Shell Extractor Kit Features:

- Removes brass anchor shells - pop-up or threaded style.
- Includes SEW wrench, 11/16 tap and shell adapter.
- Wrench and tap available separately.
- Shell Adapter available only with NANSE kit.



1. Insert tap in pop-up shell to create threads (For threaded shell proceed to 2)



2. Thread adapter into shell



3. Thread stud in adapter 1/4"




4. Place tool on castle nut and turn clockwise to remove anchor

Part Number	Description	Ctn Qty	List Price
NANSE	Shell Extractor Kit	1	\$ 169.94
SEW	Shell Extractor Wrench	1	17.25
TAP1116	Tap 11/16	1	53.39

Wingmaster® is an American Granby Inc. registered trademark.



Pool Service Tools - Multipurpose Keys

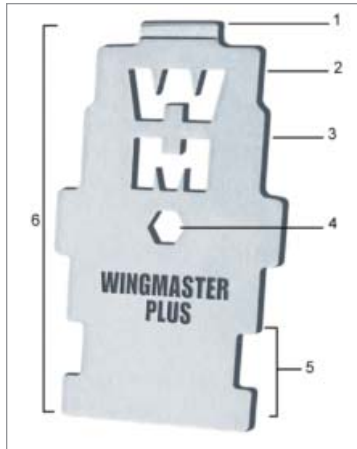

WK

Wingmaster® Key Features:

- Multipurpose, stainless steel service tool.
1. Screwdriver.
 2. Install/remove 3-way Hayward valve unions.
 3. Install/remove directional fittings.
 4. Use hex bar through center hole for more turning and torque.
 5. Install/remove universal wall fittings.
 6. Install/remove Waterway Poly Jet series face ring.



1. Screwdriver to raise/lower slotted anchors.



2. Install/remove 3-way Hayward valve unions



3. Install/remove directional wall fittings




4-5. Install/remove universal wall fittings. Place hex bar in hole for more turning and torque.



6. install/remove Waterway Poly Jet series face ring.

Part Number	Description	Ctn Qty	List Price
WK	Wing Key	1	\$ 46.35

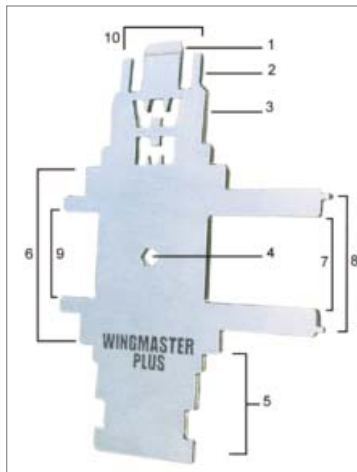

WKJ

Wingmaster® Jet Key Features:

- Multipurpose, stainless steel service tool.
1. Screwdriver.
 2. Install/remove 3-way Hayward valve unions.
 3. Install/remove directional fittings.
 4. Use hex bar through center hole for more turning and torque.
 5. Install/remove Polaris/Letro universal wall fittings.
 6. Install/remove Waterway Poly Jet face rings.
 - 7-8. Install/remove Hayward jet nozzle retaining rings or broken ring tips.
 9. Install/remove Hydro-Air spa jet face ring.
 10. Install/remove Hydro-Air (Slim-line) face ring.



7. Install/remove Hayward jet nozzle retaining ring.



8. Install/remove broken Hayward retaining ring tips.



9. Install/remove Hydro-Air spa jet face ring



10. Install/remove Hydro-Air Slimline face ring.

Part Number	Description	Ctn Qty	List Price
WKJ	Jet Key	1	\$ 74.15

Wingmaster® is an American Granby Inc. registered trademark.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Pool Service Tools - Service Kits



NANSK



Wingmaster® Plus Service Kit Features:

7" Multipurpose Wingmaster Plus tool, Anchor Extractor, Wing Key and carrying case.

Includes:

- Hand knob, cylinder, hex bar
- Anchor extractor, castle nut, hardened stud
- Anchor extractor for anchors with escutcheons (NANSK2 only).
- Wing key
- 12/24 tap
- 5/16 tap
- Molded Carrying case
- Wingmaster® Plus Tool. **US Patent # 6,374,708**



Part Number	Description	Ctn Qty	List Price
NANSK	Wingmaster Plus Service Kit	1	\$ 377.10
NANSK2*	Wingmaster Plus Service Kit	1	423.41
MHK	Hand Knob	1	27.57
MHB	Hex Bar	1	26.94
JS	Hardened Stud (For 10-15 pulls)	1	30.59
CN	Castle Nut	1	33.99
TAP1224	Tap 12-24	1	21.64
TAP516	Tap 5-16	1	23.18
BMC	Blow Molded Case	1	64.26

* Includes anchor extractor for removal of anchors with escutcheons.



KAAK



CTW

RSW

XPLUG

MW

SQW

SPW

SM

Wingmaster® Plus Multipurpose Accessory Kit

Features:

- Wrenches for multiple applications, packed in molded and padded case.

Includes:

- Caretaker Wrench
- Recessed Square Plug Wrench
- "X" Plug Wrench (JoSam)
- Jet Nozzle Wrench
- Square Plug Wrench
- Stretch Master
- Slotted Wrench for 1022 raised bar plug
- Mini Wingmaster® Plus Tool. **US Patent # 6,374,708**

Part Number	Description	Ctn Qty	List Price
KAAK	Multipurpose Accessory Kit	1	\$ 900.23
CTW	Caretaker Wrench	1	124.23
RSW	Recessed Square Plug Wrench	1	96.18
XPLUG	X Plug (JoSam)	1	97.39
SQW	Square Plug Wrench	1	100.05
SM	Stretch Master	1	39.99
SPW	Slotted Plug Wrench	1	114.36
MW	Mini Wingmaster Tool 5"	1	132.14

Wingmaster® is an American Granby Inc. registered trademark.



Pool Service Tools - Accessories



WB

Wingmaster® Bar Features:

- Raise or lower cover anchors from a standing position.
- Fits 1/4" and 3/16" anchors.
- Overall bar length is 32".



Part Number	Description	Ctn Qty	List Price
WB	Bar	1	\$ 47.06



OTWAB

Wingmaster® Wing Bit Features:

- Countersinks wood anchor flush to deck.
- Simple, fast and flush every time.
- Comes with 1 1/2" blade.
- 2" blade (Meyco) available.
- US Patent # 7,264,427



Part Number	Description	Ctn Qty	List Price
OTWAB	Wing Bit w/ 1 1/2" blade	1	\$ 347.68
OTRB1.5	Replacement Blade 1 1/2"	1	80.65
OTRB2	Replacement Blade 2"	1	87.17



HRVS

Wingmaster® Hydrostatic Tool Features:

- Install or remove hydrostatic relief valves in main drain or Sylvan "X" plug (JoSam) and floor return cap.



Remove/install Hayward hydrostatic relief valve in main drain

Install/remove Sylvan floor return cap and "X" plug (JoSam)

Part Number	Description	Ctn Qty	List Price
HRVS	Hydrostatic Tool	1	\$ 227.85

Wingmaster® is an American Granby Inc. registered trademark.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



SCRT

Wingmaster® Easy Lift™ Spring Cover Removal Tool Features:

- Quick and easy installation and removal of cover springs with T-handle and quick spring grip.
- Stainless Steel T handle allows for greater leverage. Includes 1/4" and 3/16" stainless steel Allen wrenches to raise/lower anchors.
- 33" long steel bar.

Part Number	Description	Ctn Qty	List Price
SCRT	Spring Cover Removal Tool	1	\$ 78.93



AEMBW

Wingmaster® Skimmer Guard Blowout Wrench Features:

- Tightens and loosens skimmer guards.
- Works on Harvard, Gizzmo and Eddie Blowout.

Part Number	Description	Ctn Qty	List Price
AEMBW	Skimmer Guard Blowout Wrench	1	\$ 197.13



LAW

Wingmaster® Anchor Socket Washer Features:

- Contoured washer to fit handrail and ladder anchor sockets.
- Fits up to 3/8" bolt.
- Insures a tight fit for safety.
- Allows bolt to have flush fit and wider coverage around anchor socket.
- Completes pool bonding.

Part Number	Description	Ctn Qty	List Price
LAW25	Anchor Socket Washers, 25 pack	1	\$ 176.70

Wingmaster® is an American Granby Inc. registered trademark.



Pool Service Tools - Accessories



WMSK

Wingmaster® Stencil Kit Includes:

- High quality stencils made of stainless steel.
- Numbers: 0,1,2,3,4,5,6,7,8,9, 1/2
- Letters for FEET, INCH, DEEP.
- NO DIVING symbol and words
- 2" high letters for FEET DEEP, INCHES DEEP.
- 3 top over spray panels.
- Molded storage case included.

Part Number	Description	Ctn Qty	List Price
WMSK4	Wing Stencil Kit, 4" high	1	\$ 510.06
WMSK5	Wing Stencil Kit, 5" high	1	1014.64



SLH

Wingmaster® Snap-In Level Holder Features:

- Use with a torpedo level.
- Spring loaded to fit and ensure level installation of 1 1/2" and 2" fittings.
- Clamps to torpedo level.
- Snaps into fitting.



Part Number	Description	Ctn Qty	List Price
SLH	Snap In Level Holder	1	\$ 94.82



PDT

Wingmaster® Pipe Deburr Features:

- Removes PVC burrs from inside and outside of all size pipe.
- Cleans out pump impellers.
- Replacement blades available.



Part Number	Description	Ctn Qty	List Price
PDT	Pipe Deburr Tool	1	\$ 45.92
PDRB	Pipe Deburr Replacement Blade	1	11.91

Wingmaster® is an American Granby Inc. registered trademark.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

P.59



MH

Wingmaster® Multi-Handle Features:

- Attaches to many pool maintenance tools to shorten poles for easier use in spas and tight spaces.
- Two holes to accept delcron spring clips.
- Plastic handle cover for sure grip.
- Use with skimmer nets, wall brushes and pumice stones.
- Use with 4" and 8" algae brushes for cleaning heat exchangers.

Part Number	Description	Ctn Qty	List Price
MH	Multi Handle	1	\$ 97.39



BC

Wingmaster® Burner Cleaner Features:

- Blow-through tube for hookup to compressed air.
- Textured (knurled) and curved end to grab spider webs.
- Easy access to accumulated debris in heater orifices.
- Works on Pentair, Zodiac and Hayward heaters.

Part Number	Description	Ctn Qty	List Price
BC	Burner Cleaner	1	\$ 53.36



DSSB

Wingmaster® Drain Screw Security Bit Features:

- Tighten and loosen uni-screw for drain safe lids.

Part Number	Description	Ctn Qty	List Price
DSSB	Drain Screw Security Bit	1	\$ 45.26

Wingmaster® is an American Granby Inc. registered trademark.



Winterizing Plugs



HWP Flush Plug



HWP Raised Plug



HWP Rubber Plug



Winterizing Plug Applications:



- Safely seals swimming pool inlets and outlets against freezing.
- Temporary pluggings of any water system application for either pipe or fitting sizes.

Plastic 1-1/2" Threaded Plug Features:

- Heavy duty, white ABS construction.
- EPDM o-ring is resistant to extreme weather & chemical corrosion.
- Gives a positive seal-no leaking.
- Available in raised or flush style.

Rubber Expansion Plug Features:

- Stainless steel screw and washers.
- Nylon wing nut provides easier turning in cold temperatures, providing greater tightness than conventional plugs.
- Tapered.



Part Number	D (in)	Plug Size	Used For	Case/Ctn Qty	List Price
Plastic					
HWP1022B(Flush)	1-1/2"	White	1 1/2" fip	1000/50	\$ 1.79
HWP1022C(Raised)	1-1/2"	White	1 1/2" fip	1000/50	1.79
Rubber					
HWP2000	0.46	000	3/8" pipe	500/50	\$ 2.11
HWP200	0.63	0	1/2" pipe	500/50	2.21
HWP201	0.70	1	1/2" pipe	500/50	2.50
HWP202	0.75	2	3/4" tube	500/50	2.54
HWP203	0.89	3	3/4" pipe	500/50	2.61
HWP204	0.96	4	3/4" & 1" pipe	500/50	2.68
HWP205	1.02	5	1" tube	500/50	2.75
HWP2055	1.06	5 1/2	1" pipe	500/50	2.79
HWP206	1.20	6	1" fitting	500/50	3.00
HWP2065	1.27	6 1/2	1 1/4" pipe	200/20	3.11
HWP207	1.39	7	1 1/4" pipe	200/20	3.36
HWP2075	1.46	7 1/2	1 1/2" pipe	200/20	3.46
HWP208	1.54	8	1 1/2" pipe	200/20	3.57
HWP2085	1.62	8 1/2	1 1/2" pipe	200/20	3.64
HWP209	1.69	9	1 1/2" pipe & 1 1/4" fgt	200/20	3.96
HWP2095	1.73	9 1/2	1 1/2" fitting	200/20	4.50
HWP20975	1.81	9 3/4	1 1/2" fitting (for SP1023G)	200/20	4.50
HWP210	1.89	10	1 1/2" fitting	60/10	4.18
HWP211	2.13	11	2" pipe	60/10	5.50
HWP212	2.42	12	2" fitting	60/10	5.93
HWP213	2.58	13	2 1/2" pipe	30/5	9.36
HWP2135	2.82	13 1/2	3" pipe	40/5	11.71
HWP214	3.40	14	3" pipe	30/5	17.40
HWP215	3.86	15	4" pipe	30/5	23.38
HWP216	4.64	16	4" pipe	20/4	25.95
HWP1-5	1.02	01-05	Universal tapered 01-05	250/50	2.61
HWP5-7	1.36	05-07	Universal tapered 05-07	100/20	4.18
HWP7-10	1.78	07-10	Universal tapered 07-10	100/20	5.93

Winterizing Plugs



Extended Plug Features:

- Non-corrosive construction of heavy duty nylon wingnuts, stainless steel washers, spacers and high quality rubber.

Double Plug Features:

- Non-corrosive construction of heavy duty nylon wingnuts, stainless steel washers, spacers and high quality rubber with brass stem.

Blow Through Plug Features:

- Non-corrosive construction of heavy duty nylon wingnuts and caps, stainless steel washers, high quality rubber, extended brass air valve w/ spring loaded core.



HWP Extended Shaft



HWP Double Plug



HWP Blow Through



HWP Blow Through
Universal Tapered


Part Number	Plug Size	Case/Ctn Qty	List Price
Rubber Extended Shaft Plugs			
HWP202X	2	250/50	\$ 5.61
HWP203X	3	250/50	5.82
HWP204X	4	250/50	6.04
HWP205X	5	250/50	6.25
HWP206X	6	250/50	6.32
HWP207X	7	200/20	6.43
HWP208X	8	200/20	6.57
HWP209X	9	200/20	6.93
HWP210X	10	60/10	7.11
Double Plugs			
	top x bottom x spacing length x top spacer		
HWP858DP10	Anthony "H" 085 x 08 x 1.05" x 3.05"	40/10	\$ 15.57
HWP858DP39	Anthony "U" 085 x 08 x 3.93" x 1.68"	40/10	15.57
HWP98DP35	Anthony "U3" 09 x 08 x 3.5" x 2.3"	40/10	15.57
HWP98DP47A	Anthony "J3" 09 x 08 x 4.7" x 2.3"	40/10	15.57
HWP99DP35	Sylvan 09 x 09 x 3.5" x 2.3"	40/10	15.57
HWP88DP39	Sylvan "88" 08 x 08 x 3.93" x .6"	80/20	15.57
HWP98DP39	Sylvan "98" 09 x 08 x 3.93" x .6"	80/20	15.57
HWP98DP47S	Sylvan "98L" 09 x 08 x 4.7" x .6"	40/10	15.57
HWP107DP47	Sylvan "107L" 10 x 07 x 4.7" x .6"	40/10	15.57
HWP98DP65	Sylvan 09 x 08 x 6.5" x .6"	80/20	15.57
Blow-through Plugs			
HWP202BT	2	500/50	\$ 8.89
HWP203BT	3	500/50	10.39
HWP204BT	4	500/50	11.93
HWP205BT	5	500/50	13.46
HWP206BT	6	200/50	15.07
HWP207BT	7	200/20	16.07
HWP208BT	8	200/20	16.25
HWP209BT	9	200/20	16.61
HWP2095BT	9 1/2	60/10	17.71
HWP210BT	10	60/10	18.71
HWP211BT	11	60/10	19.07
HWP212BT	12	60/10	19.43
HWP1-5BT	Universal Tapered 01 - 05	250/50	14.21
HWP5-7BT	Universal Tapered 05 - 07	100/20	15.07
HWP7-10BT	Universal Tapered 07 - 10	100/20	15.96



Winterizing Accessories



SKG Series



Winterizing accessories for pool closings

SKG Skimmer Guard Features:

- Installs in skimmer to prevent freezing and breakage.
- Ends are threaded for 1 1/2" and 2" applications.
- SKG-H with blowout hole, o-ring seals to allow skimmer lines to be blown out without dropping water level.
- SKG9H fits SP1090 series skimmers.
- SKG16H fits SP1070 and SP1080 series skimmers.

Water Tube and Air Pillow Features:

- Single and double tubes available.
- Double chambers extend life of water tubes.
- 12 and 20 mil thickness on tubes. 12 mil on pillows.
- Used for weighing down winter covers on inground pools.



DCWT Series



AP44

Part Number	Description	Color	Ctn Qty	List Price
Skimmer Guards				
SKG9	9" Skimmer guard	Teal-Green	36	\$ 6.36
SKG9H	9" Skimmer guard w/ blowout hole	Teal-Green	36	10.32
SKG16	16" Skimmer guard	Teal-Green	24	8.21
SKG16H	16" Skimmer guard w/ blowout hole	Teal-Green	24	12.93
Water Tubes				
SCWT8	8' Single chamber, 12 mil	Blue	36	8.47
SCWT8-20	8' Single chamber, 20 mil	Blue	24	12.11
SCWT10	10' Single chamber, 12 mil	Blue	30	10.39
DCWT8	8' Double chamber, 12 mil	Blue	36	9.07
DCWT10	10' Double chamber, 12 mil	Blue	30	10.89
DCWT8-20	8' Double chamber, 20 mil	Blue	24	12.61
DCWT10-20	10' Double chamber, 20 mil	Blue	24	14.82
Air Pillows				
AP44	4' x 4' Air pillow, 12 mil	Blue	24	13.47
AP48	4' x 8' Air pillow, 12 mil	Blue	12	22.89



CCP300

Pool Cover Pump Features:

- Magnetic drive motor - Only one moving part.
- Completely submersible.
- Easily hooks up to any standard 3/4" garden hose.
- Extra-long 25' power cord with grounded plug.
- Sturdy ceramic shaft impeller.
- Includes easy clean clog resistant foam filter.
- 1 year warranty.
- Listed to UL and cUL standards.



CCP350 / CCP500

Part Number	Description	Max Output	Max Pump		
			Height	Ctn Qty	List Price
CCP300	Pool Cover Pump	300 gph	6'	18	\$ 99.36
CCP350	Pool Cover Pump	350 gph	7'	6	157.46
CCP500	Pool Cover Pump	500 gph	10.5'	6	183.54



91025 & 91330

Submersible Utility Pump Features:

- 1/5 & 1/3 HP motors, 120 v, 60 Hz
- Corrosion resistant construction.
- 10' waterproof power cord.
- Clog resistant open type impeller.
- Fits in 6" opening.
- Capacities of 26 & 40 gpm.
- 1 year limited warranty.



Specifications:

Discharge: 1 1/4" MNPT or 3/4" GHT
 Housing & Base: Thermoplastic
 Impeller: Non-clogging open type
 Bearing: Permanently lubricating
 Motors: Permanent split capacitor, continuous duty, thermally protected



92250 & 92330

Submersible Sump Pump Features:

- 1/4 & 1/3 HP motors, 120 v, 60 Hz
- Corrosion resistant construction.
- 10' waterproof power cord.
- Clog resistant open type impeller.
- Switch turns on at 9", off at 4".
- Handles 1/8" solids.
- 1 year limited warranty.



Specifications:

Discharge: 1 1/4" MNPT
 Housing & Base: Thermoplastic
 Impeller: Non-clogging open type
 Bearing: Permanently lubricating
 Motors: Permanent split capacitor, continuous duty, thermally protected

Model No.	HP	Gallons per minute at discharge height in feet _						Min. Lift	Min. Amps	List Price
		0'	5'	10'	15'	20'	25'			
SP91025	1/5	26	21	14	10	7	1	25'	3.6	\$ 186.69
SP91330	1/3	40	34	28	22	12	2	25'	4.1	234.58
SP92250	1/4	30	22	20	16	9	2	25'	3.8	247.49
SP92330	1/3	40	34	28	22	12	2	25'	4.1	266.54

Note: Use of smaller diameter pipe, or long runs of pipe, will result in lower flow rates than those shown.



SECTION 1 PUMP & WELL



PRODUCT LINE	PAGE
Air Volume Controls & Releases	33-34
Clear Braided PVC Hose	31-32
Constant Pressure Manifold Systems	4-8
Couplings - Drop, Turned, Tool	43-44
Cylinders, Parts	87-90
Operating Data	90
Cup Leathers	91-98
Drive Shoes	83-84
Electrical Installation Accessories	47-50
Equipment Pads	3
Flow Control Valves	45-46
Geothermal Installation Accessories	42
Jet-Lube™	99-104
Liquid Level Controls	57-58
Pitcher Pump	85
Pitless Adapters	67-68
Snap-on with well caps	69
Pressure Gauges - Dry & Liquid	59-64
Specialty	65-66
Pressure Switches	51
Pressure Switches - Square D	53-54
Pump Start Relays / Magnetic Contactors	55-56
Pump Tanks, Sourceline	1-2
Relief Valves	29
Rod Couplings	86
Submersible Installation Accessories	35-36
Submersible Installation Adapters & Fittings	37-41
Tank Installation Accessories	30
Tank Crosses & Installation Packages	9-27
Well Caps	71-72
Well Points, Screens & Drive Supplies	79-82
Well Seals & Accessories	73-78
ABS	73
Cast Iron	74-77




www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Pump Tanks - Sourceline™



INLINE MODELS

- Appliance Gray finish
- Maximum working temperature: 200 °F.
- Maximum working pressure: 100 PSIG
- Third party certified to NSF/ANSI 372.




ANSI/NSF 61



Part Number	Dimensions (ins)		Total Volume (gal)	Max Accept Factor	Drawdown (gal)			Shipping Wt (Vol) lbs (cu ft)	Pallet Qty	System Conn. NPTM	Precharge Pressure (psig)	List Price
	Dia	Height			20/40	30/50	40/60					
SL2I	8	12 5/8	2.0	0.45	0.8	0.7	0.6	5 (0.6)	75	3/4"	18	\$ 184.82
SL4I	11	15	4.4	0.55	1.8	1.5	1.3	9 (1.2)	48	3/4"	18	260.45
SL8I	11	22 1/4	7.4	0.43	3.1	2.6	2.2	15 (2.0)	32	3/4"	28	362.63
SL10I	15 3/8	17 3/4	10.3	1.00	4.1	3.5	3.0	20 (3.0)	18	1"*	38	470.13
SL14I	15 3/8	22	14.0	0.81	5.6	4.8	4.1	22 (4.1)	18	1"*	38	484.42

* NPTF connection.



VERTICAL STAND MODELS


- Appliance Gray finish
- Malleable elbow system connection.
- Maximum working temperature: 200 °F.
- Maximum working pressure: 100 psig
- Third party certified to NSF/ANSI 372.



ANSI/NSF 61



Part Number	Dimensions (ins)		Total Volume (gal)	Max Accept Factor	Drawdown (gal)			Shipping Wt (Vol) lbs (cu ft)	Pallet Qty	System Conn. NPTF	Precharge Pressure (PSIG)	List Price
	Dia	Height			20/40	30/50	40/60					
SL14V	15 3/8	25 1/8	14.0	0.81	5.6	4.8	4.1	25 (3.8)	18	1"	38	\$ 416.56
SL20V	15 3/8	32 1/8	20.0	0.57	8.0	6.8	5.9	33 (4.9)	18	1"	38	517.59
SL32V	15 3/8	46 1/2	32.0	0.35	-	10.9	9.4	43 (7.0)	9	1"	38	773.57
SL34V	22	29 5/8	34.0	1.00	13.7	11.6	10.0	61 (9.5)	4	1 1/4"	38	686.04
SL44V	22	36	44.0	0.77	17.7	15.0	12.9	69 (11.0)	4	1 1/4"	38	1182.01
SL62V	22	46 3/4	62.0	0.55	24.9	21.1	18.2	92 (13.9)	4	1 1/4"	38	1409.91
SL86VT	22	62 1/4	86.0	0.39	-	29.2	25.3	114 (18.1)	4	1 1/4"	38	1496.96
SL86VS	26	47 1/4	86.0	0.54	34.6	29.2	25.3	123 (18.9)	4	1 1/4"	38	1404.73
SL119V	26	61 7/8	119.0	0.39	-	40.5	35.0	166 (24.5)	4	1 1/4"	38	1769.06




HORIZONTAL PUMP STAND MODELS

- Appliance Gray finish
- Maximum working temperature: 200 °F.
- Maximum working pressure: 100 PSIG
- Third party certified to NSF/ANSI 372.



ANSI/NSF 61



Part Number	Dimensions (ins)			Total Volume (gal)	Max Accept Factor	Drawdown (gal)			Shipping Wt (Vol) lbs (cu ft)	Pallet Qty	System Conn. NPTM	Precharge Pressure (psig)	List Price
	H	W	L			20/40	30/50	40/60					
SL5H	11	10 9/16	18 1/4	5.3	0.80	2.1	1.8	1.6	13 (1.5)	72	3/4"	20	\$ 469.06
SL14H	16	15 3/8	20 7/8	14.0	0.81	5.6	4.8	4.1	29 (4.0)	18	1"	38	626.88



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Pump Tanks - Sourceline™



SOURCELINE™ Characteristics

- Projection welded airtight valve
- Durable steel tank with appliance-like finish
- Pre-pressurized, sealed-in air chamber
- Butyl/EPDM diaphragm isolates water from air
- Separate polypropylene liner
- 100% non-metallic reservoir
- Water-tight, welded system connection
- 100 PSIG maximum working pressure
- NSF Standard 61 listed


SOURCELINE™ Facts

- Seamless liner
- Diaphragm never creases like bladder tank designs
- No bubbles or corners to trap sediment
- Does not promote bacteria growth
- 5 year limited warranty

Pre-Pressurized Water System Tanks Cross Reference


() represents total volume (gals.)

AGI Sourcline	Flexcon Challenger	Flexcon Well-Rite	AO Smith Goulds	Sta-Rite Pro-Source	State PermaAir	Elbi Top Pro	Wessels	Str. Fibers Well Mate	Amtrol Well-X-Trol	Amtrol Wel-Flo	Amtrol Champion	Amtrol ProLine
SL2I(2)	JR6(2.1)	JR6(2.1)	V6P(2)		PIL-2(2)	D-8(2.1)	FX8(2.1)		WX101(2)			
SL4I(4.4)	JR15(4.5)	JR15(4.5)	V15P(4.5)		PIL-5(4.6)	D-18(5)	FX19(5)	WM-2(3.6)	WX102(4.4)			
SL5H(5.3)	JR44HS(5.2)	JR44HS(5.2)		PS15H-S05(6)			FX20H(5.3)		WX105PS(5.3)			
	JR20(6.0)	JR20(6.0)		PS15-S02(6)		D-25(6.5)						
SL8I(7.4)	JR25(8.5)	JR25(8.5)	V25P(8.2)		PIL-7(7.3)				WX103(7.4)			
SL10I(10.3)						D-35(9)			WX104(10.3)			
SL14I(14)					PIL-14(14)				WX200(14)			
SL14V(14)	PC44(14)	WR45(14)	V45P(13.9)	PS30-T01(14)	PAD-14(14)	DV-50(13.5)	FX60V(16)	WM-4(14.5)	WX201(14)	WF45(14)	CH3001(14)	CA3001(14)
SL20V(20)	PC66(20)	WR60(20)	V60(19.9)	PS42T-T02(19)	PAD-20(20)	DV-80(21)	FX80V(21)	WM-6(19.8)	WX202(20)	WF60(20)	CH4202(20)	CA4202(20)
	PC88(26)	WR80(26)				DV-100(27)	FX100V(26)					
SL32V(32)	PC111(32)	WR100(32)	V100(31.8)	PS75T-T03(32)				WM-9(29.5)	WX203(32)	WF100(32)	CH8003(32)	CA8003(32)
SL34V(34)	PC122(33.4)	WR120(33.4)		PS82T-T05(35)	PAD-36S(36)				WX205(34)	WF110(34)	CH8205(34)	CA8205(34)
SL44V(44)	PC144(44)	WR140(44)	V140(45.2)			DV-150(40)		WM-12(40.3)	WX250(44)	WF140(44)	CH10050(44)	CA10050(44)
				PS120-T50(50)	PAD-52(52)		FX200V(52)					
SL62V(62)	PC211(62)	WR200(62)	V200(65.1)	PS200-T51(62)		DV-200(53)		WM-20WB(60)	WX251(62)	WF200(62)	CH12051(62)	CA12051(62)
SL86VT(86)	PC244(81)	WR240(81)	V260(84.9)		PAD-86(86)				WX252(86)	WF252(86)	CH252(86)	CA17252(86)
SL86VS(86)	PC266(85)	WR260(85)	V250(83.5)	PS220-T52(85)		DV-300(80)	FX300V(80)	WM-25WB(86.7)	WX302(86)	WF260(86)	CH17002(86)	CA17002(86)
					PAD-96(96)							
SL119V(119)	PC366(119)	WR360(119)	V350(115.9)		PAD-119(119.5)	DV-450(119)		WM-35WB(119.7)	WX350(119)	WF360(119)	CH22050(119)	CA22050(119)
						DV-500(132)	FX500V(132)					


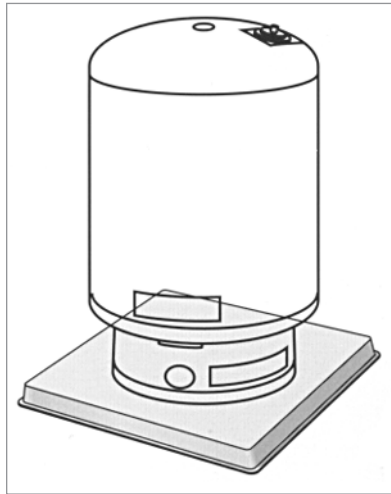


HEF-T-PAD™ Features:

- Injection molded from high impact polyolefin for strength and durability.
- Resistant to impact, UV degradation and weathering.
- Will not crack, flake or warp.
- Virtually impervious to climate changes.
- Drillable, permits installation of refrigerant and electrical lines under and through pad. Also permits equipment to be easily secured to pad.
- Unique, non-creep surface absorbs vibration and noise and keeps equipment in it's original position.
- Gray



Underside of Hef-T-Pad showing support ribs, stabilization pads and stabilization flange.

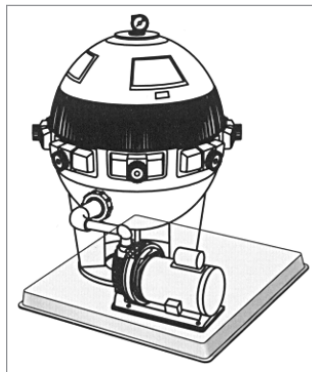

Part Number	Size	Pallet Qty	List Price
2" HEF-T-PADS			
X2424211	24" x 24" x 2" one piece	24	\$ 64.87
X2430211	24" x 30" x 2" one piece	24	87.82
X2436211	24" x 36" x 2" one piece	24	102.48
X3232211	32" x 32" x 2" one piece	24	102.23
X3244211	32" x 44" x 2" one piece	24	133.66
X3636211	36" x 36" x 2" one piece	24	129.01
X3830211	38" x 30" x 2" one piece	24	97.30
X3836211	38" x 36" x 2" one piece	24	117.60
X3842211	38" x 42" x 2" one piece	24	150.19
3" HEF-T-PADS			
X2424311	24" x 24" x 3" one piece	16	83.18
X2436311	24" x 36" x 3" one piece	16	131.36
X3030311	30" x 30" x 3" one piece	16	99.78
X3232311	32" x 32" x 3" one piece	16	109.57
X3636311	36" x 36" x 3" one piece	16	160.42
X3848311	38" x 48" x 3" one piece	16	216.34
X5055301	50" x 55" x 3" one piece	16	348.91

Constant Pressure System Manifolds - No Lead Brass, Brackets



CPSM-NL Series



Constant Pressure System Manifold Features:

- No lead brass or 304 stainless steel manifold eliminates the need for extra tees, fittings & nipples required to install constant pressure pump systems.
- “NL” and “SS” Series are **third party certified to NSF/ANSI 372**.
- Easy to install, **13 1/2”** length provides plenty of room for tank and accessories. (Tank diameters up to 11” on 2” manifold.)
- Five ports allow installation for all needed plumbing accessories.
- 1” top port manifold allows for direct installation of FLEXCON, FLOW-THRU FT18 tank.
- Manifolds available with or without NL Bronze, PVC or SS bushings.



NO LEAD BRASS Part Number	Overall Length	Line Conn.	Tank Conn.	Transducer Port	Drain Ports	Gauge Port	Bushing	Ctn Qty	List Price
* CPSM125BNL	13 1/2”	1 1/4” mpt x 1” fpt	3/4” fpt	3/4” (1)	3/4” (2)	1/4” (1)	None	16	\$ 70.89
CPSM125PBNL	13 1/2”	1 1/4” mpt x 1” fpt	3/4” fpt	3/4” (1)	3/4” (2)	1/4” (1)	3/4”x1/4” Plastic	16	73.60
CPSM125BBNL	13 1/2”	1 1/4” mpt x 1” fpt	3/4” fpt	3/4” (1)	3/4” (2)	1/4” (1)	3/4”x1/4” NL Bronze	16	77.59
CPSM125PB3/4x1/2NL	13 1/2”	1 1/4” mpt x 1” fpt	3/4” fpt	3/4” (1)	3/4” (2)	1/4” (1)	3/4”x1/2” Plastic	16	73.60
CPSM125BB3/4x1/2NL	13 1/2”	1 1/4” mpt x 1” fpt	3/4” fpt	3/4” (1)	3/4” (2)	1/4” (1)	3/4”x1/2” NL Bronze	16	77.59
* CPSM125-100BNL	13 1/2”	1 1/4” mpt x 1” fpt	1” fpt	1” (1)	3/4” (2)	1/4” (1)	None	16	72.93
CPSM125-100PBNL	13 1/2”	1 1/4” mpt x 1” fpt	1” fpt	1” (1)	3/4” (2)	1/4” (1)	1” x 1/4” Plastic	20	79.36
CPSM125-100BBNL	13 1/2”	1 1/4” mpt x 1” fpt	1” fpt	1” (1)	3/4” (2)	1/4” (1)	1” x 1/4” NL Bronze	20	82.58
CPSM125-100PB1x1/2NL	13 1/2”	1 1/4” mpt x 1” fpt	1” fpt	1” (1)	3/4” (2)	1/4” (1)	1” x 1/2” Plastic	20	79.36
CPSM125-100BB1x1/2NL	13 1/2”	1 1/4” mpt x 1” fpt	1” fpt	1” (1)	3/4” (2)	1/4” (1)	1” x 1/2” NL Bronze	20	82.58

Please see Stainless Steel manifolds on next page.



Constant Pressure System Manifold Mounting Brackets:

- Dual mounting brackets allow secure manifold placement with tank.
- Zinc-plated, heavy gauge steel tubing, all stainless steel mounting screws, locknuts, U-bolts, plastic end plugs.
- Brackets can be mounted two ways to allow for mounting flexibility.
- Brackets measure 8” x 12 1/2”.
- 1 set includes 2 brackets & hardware.



Part Number	Size	Manifold Size	Ctn Qty	List Price
CPSMMB	8” x 12 1/2”	1 1/4”	8	\$ 43.75
CPSMMB200	8” x 12 1/2”	2”	8	54.52



Constant Pressure System Manifolds - 304SS



CPSM-SS Series



304 STAINLESS Part Number	Overall Length	Line Conn.	Tank Conn.	Transducer Port	Drain Ports	Gauge Port	Bushing	Ctn Qty	List Price
CPSM125SS	13 1/2"	1 1/4" mpt x 1" fpt	3/4" fpt	3/4" (1)	3/4" (2)	1/4" (1)	None	16	\$ 80.89
CPSM125SSPB	13 1/2"	1 1/4" mpt x 1" fpt	3/4" fpt	3/4" (1)	3/4" (2)	1/4" (1)	3/4"x1/4" PVC	16	92.36
CPSM125SSPB3/4x1/2	13 1/2"	1 1/4" mpt x 1" fpt	3/4" fpt	3/4" (1)	3/4" (2)	1/4" (1)	3/4"x1/2" PVC	16	92.36
CPSM125SSB	13 1/2"	1 1/4" mpt x 1" fpt	3/4" fpt	3/4" (1)	3/4" (2)	1/4" (1)	3/4"x1/4" 304 SS	16	97.15
CPSM125SSB3/4x1/2	13 1/2"	1 1/4" mpt x 1" fpt	3/4" fpt	3/4" (1)	3/4" (2)	1/4" (1)	3/4"x1/2" 304 SS	16	97.15
CPSM125-100SS	13 1/2"	1 1/4" mpt x 1" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	None		\$ 80.89
CPSM125-100SSPB	13 1/2"	1 1/4" mpt x 1" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" x 1/4" PVC		92.36
CPSM125-100SSPB1x1/2	13 1/2"	1 1/4" mpt x 1" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" x 1/2" PVC		92.36
CPSM125-100SSB	13 1/2"	1 1/4" mpt x 1" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" X 1/4" 304 SS		97.15
CPSM125-100SSB1X1/2	13 1/2"	1 1/4" mpt x 1" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" X 1/2" 304 SS		97.15
CPSM200-100SS	13 1/2"	2" mpt x 1 1/2" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	None		149.11
CPSM200-100SSPB	13 1/2"	2" mpt x 1 1/2" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" x 1/4" PVC		152.53
CPSM200-100SSPB1x1/2	13 1/2"	2" mpt x 1 1/2" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" x 1/2" PVC		152.53
CPSM200-100SSB	13 1/2"	2" mpt x 1 1/2" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" X 1/4" 304 SS		157.72
CPSM200-100SSB1X1/2	13 1/2"	2" mpt x 1 1/2" fpt	1" fpt	1" (1)	3/4" (2)	1/4" (1)	1" X 1/2" 304 SS		157.72

Installation Packages - Constant Pressure, NO LEAD



HARVARD NO LEAD Brass Constant Pressure System Manifold Installation Packages



- All kits contain:
 - EIPG1002-4BNL 0-100# NL pressure gauge
 - IRV75-100NL 3/4" x 100# NL brass relief valve
 - IHBB75NL NL brass 1/4 turn hose bibb
 - 13 1/2" long manifold as listed below for each kit
 - PVC or NL bronze bushing as listed below for each kit
 - optional CPSMMB mounting bracket
- All components are certified to NSF/ANSI 371 except the CPSMMB.

Part Number	Additional Components	List Price w/ PVC Bush	List Price w/ NLBB	List Price w/ Bracket
IPCPSM125PBNL	• CPSM125BNL 11/4" No Lead brass Manifold • 439-098 3/4"x1/4" PVC Sch 40 bushing	\$ 121.74		
IPCPSM125PBNLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			165.53
IPCPSM125BBNL	• CPSM125BNL 11/4" No Lead brass Manifold • NLBB3/4x1/4 3/4"x1/4" No Lead bronze bushing		126.11	
IPCPSM125BBNLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			170.00
IPCPSM125PB3/4X1/2NL	• CPSM125BNL 11/4" No Lead brass Manifold • 439-101 3/4"x1/2" PVC Sch 40 bushing	121.74		
IPCPSM125PB3/4X1/2NLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			165.53
IPCPSM125BB3/4X1/2NL	• CPSM125BNL 11/4" No Lead brass Manifold • NLBB3/4x1/2 3/4"x1/2" No Lead bronze bushing		125.32	
IPCPSM125BB3/4X1/2NLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			169.20
IPCPSM125-100PBNL	• CPSM125-100BNL 11/4" No Lead brass Manifold • 839-128 1"x1/4" PVC Sch 80 bushing	117.12		
IPCPSM125-100PBNLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			159.98
123.78IPCPSM125-100BBNL	• CPSM125-100BNL 11/4" No Lead brass Manifold • NLBB1x1/4 1"x1/4" No Lead bronze bushing		123.78	
IPCPSM125-100BBNLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			168.33
IPCPSM125-100PB1X1/2NL	• CPSM125-100BNL 11/4" No Lead brass Manifold • 439-130 1"x1/2" PVC Sch 40 bushing	117.12		
IPCPSM125-100PB1x1/2NLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			158.21
IPCPSM125-100BB1X1/2NL	• CPSM125-100BNL 11/4" No Lead brass Manifold • NLBB1x1/2 1"x1/2" No Lead bronze bushing		123.78	
IPCPSM125-100BB1x1/2NLMB	Components above plus • CPSMMB 1 1/4" Mounting bracket			168.33



Installation Packages - Constant Pressure, Stainless Steel



HARVARD STAINLESS STEEL Constant Pressure System Manifold Installation Packages

- Available with or without a mounting bracket.



Part Number	Components	Length	List Price	List Price w/ Bracket
IPCPSM125SSPB		13 1/2"	173.25	
	<ul style="list-style-type: none"> • CPSM125SS 1 1/4" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • 439-101 3/4"x 1/2" PVC bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM125SSPBMB	Components above plus			217.00
	<ul style="list-style-type: none"> • CPSMMB200 2" Mounting bracket 			
IPCPSM125SSB		13 1/2"	178.00	
	<ul style="list-style-type: none"> • CPSM125SS 1 1/4" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • SSHB3/4x1/2 3/4"x 1/2" SS bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM125SSBMB	Components above plus			221.75
	<ul style="list-style-type: none"> • CPSMMB200 2" Mounting bracket 			
IPCPSM125-100SSPB		13 1/2"	\$ 158.58	
	<ul style="list-style-type: none"> • CPSM125-100SS 1 1/4" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • 439-130 1"x 1/2" PVC bushing • 439-131 1" x 3/4" PVC bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM125-100SSPBMB	Components above plus			208.57
	<ul style="list-style-type: none"> • CPSMMB 1 1/4" Mounting bracket 			
IPCPSM125-100SSB		13 1/2"	175.80	
	<ul style="list-style-type: none"> • CPSM125-100SS 1 1/4" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • SSHB1x1/2 1"x 1/2" SS bushing • SSHB1x3/4 1" x 3/4" SS bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM125-100SSBMB	Components above plus			224.10
	<ul style="list-style-type: none"> • CPSMMB 1 1/4" Mounting bracket 			

Installation Packages - Constant Pressure, Stainless Steel



HARVARD STAINLESS STEEL Constant Pressure System Manifold Installation Packages


- Available with or without a mounting bracket.



Part Number	Components	Length	List Price	List Price w/ Bracket
IPCPSM200-100SSPB		13 1/2"	236.15	
	<ul style="list-style-type: none"> • CPSM200-100SS 2" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • 439-130 1"x 1/2" PVC bushing • 439-131 1" x 3/4" PVC bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM200-100SSPBMB	Components above plus • CPSMMB200 2" Mounting bracket			284.25
IPCPSM200-100SSB		13 1/2"	250.00	
	<ul style="list-style-type: none"> • CPSM200-100SS 2" SS Constant Pressure System Manifold • EILPG1002-4BSS316 100lb All SS liquid filled pressure gauge, 1/4" SS back mount • IHBB75SS 3/4" SS 1/4 turn hose bibb • IRV75-100SS 3/4" SS relief valve (100 psi preset) • SSHB1x1/2 1"x 1/2" SS bushing • SSHB1x3/4 1" x 3/4" SS bushing • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 			
IPCPSM200-100SSBMB	Components above plus • CPSMMB200 2" Mounting bracket			295.50



Tank Crosses - Short Cast NO LEAD Brass



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** brass tank crosses are **third party certified to NSF/ANSI 372**.



CHT100FBSNL



CHT125BSNL

NO LEAD BRASS Short Cast Crosses w/ 1 drain & 2 or 3 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CHT100FBSNL	2 1/2"	1" fpt	1" X 3/4"	3/4" (1)	1/4" (2)	NL Brass	Import	5/40	\$ 35.05
CCAT100BSNL	4 1/4"	1" x 3/4"	1" x 3/4"	1/2" (1)	1/4" (2), 1/2" (1)	NL Brass	Import	4/40	52.54
CHC125BNL	4 1/4"	1 1/4" x 1"	1" x 3/4"	1/2" (1)	1/4" (3)	NL Bronze	USA	12	72.56
CHC12550BSNL	4 1/2"	1 1/4" x 1"	1" x 3/4"	3/4" (1)	1/4" (2)	NL Brass	Import	5/40	37.32
CHT125BSNL	3 3/4"	1 1/4" x 1"	1 1/4" x 1"	3/4" (1)	1/4" (2)	NL Brass	Import	5/30	60.02
CIC125BSNL	4 1/4"	1 1/4" x 1"	1" x 3/4"	3/4" (1)	1/4" (2), 1/2" (1)	NL Brass	Import	4/40	54.22



NO LEAD BRASS Short Cast Crosses with 2 drain & 2 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100BNL	4 3/4"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Bronze	USA	12	\$ 73.37
CICS100BSENL	4 1/2"	1" x 3/4"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	4/24	28.75
CIC3125BNL	5"	1 1/4" x 1"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Bronze	USA	12	87.57
CIC3125BSENL	4 1/2"	1 1/4" x 1"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	4/24	41.79
CIC71250BSNL	4 1/2"	1 1/4" x 1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	5/40	39.08
CIC712BNL	4"	1 1/4" x 1"	1" x 3/4"	3/4" (2)	1/4" (2)	NL Bronze	USA	12	87.46




NO LEAD BRASS Short Cast Crosses with Union Disconnect

- Metal to metal ball joint leak proof seal.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100BSUENL	5 1/2"	1"	1"x3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	4/24	\$ 36.43
CICS125BSUENL	5 1/2"	1 1/4"x 1"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	4/24	71.07

Tank Crosses - Short Cast NO LEAD Brass



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** brass tank crosses are **Third party certified to NSF/ANSI 372.**



NO LEAD BRASS Short cast crosses
Use with Flexcon Flex-Lite Series, WellMate Tanks



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CWM100BSNL	4 1/2"	1" (FIP)	1"x3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	5/40	\$ 33.93
CWM125BSNL	4 3/4"	1 1/4" (FIP)	1 1/4"x1"	3/4" (2)	1/4" (2)	NL Brass	Import	4/32	43.21
CICS736BSNL	2 1/2"	1 1/4" MIP x 1" FIP	1"x3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	5/40	38.33



NO LEAD BRASS Short cast female union tank crosses
Use with Flexcon "Flex-Lite" Series, WellMate Tanks.
FPT brass union w/ American Standard Buna-N o-ring.

- 1" uses AS 568-212 o-ring
- 1 1/4" uses AS 568-320 o-ring.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100BSFTUNL	4"	1" fpt union	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	4/32	\$ 40.36
CICS1251BSFTUNL	4"	1 1/4" fpt union	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	4/32	49.11
CICS125BSFTUNL	4"	1 1/4" fpt union	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	4/24	57.32



NO LEAD Short Cast Quick Connect (w/ Buna-N o-ring)
Crosses With alignment tabs for use with Well Mate "Quick Connect" Series Tanks.


- 1" and 1 1/4" uses AS568-220 o-ring.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CWM100BSQCNL	5"	Quick Connect	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	2/24	\$ 35.11
CWM125BSQCNL	5"	Quick Connect	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	2/24	49.29



Tank Crosses - Short Cast NO LEAD Brass



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** brass tank crosses are **Third party certified to NSF/ANSI 372.**



NO LEAD BRASS Short cast crosses
for use with Flexcon Well-Rite, Online Series



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CFC100BSNL	4 1/2"	1" Union Th.	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	5/40	\$ 38.87
CFC125BSNL	4 1/2"	1 1/4" Union Th.	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	5/30	50.76




NO LEAD BRASS Compact cast crosses
with 1 drain & 2 top ports



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
TM100BSNL	2 1/2"	1" (FIP)	1" (FIP)	1/2" (1)	1/4" (2)	NL Brass	Import	5/50	\$ 20.89
TM125BSNL	3"	1 1/4" (FIP)	1 1/4" (FIP)	3/4" (1)	1/4" (2)	NL Brass	Import	5/50	27.68

Tank Crosses - Short Cast Stainless Steel



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- 304 Cast Stainless Steel.
- Stainless Steel tank crosses are **third party certified to NSF/ANSI 372**.



304 Stainless Steel Short Cast Crosses with 2 drain & 2 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100SS	4 1/2"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	5/40	\$ 55.89
CICS125SS	4 1/2"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	304 Stainless	Import	4/24	76.96



304 Stainless Steel Short Cast Crosses with Union Disconnect

- PTFE captive gasket seal ring on 304 SS crosses.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100SSU	5 1/2"	1"	1"x3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	4/24	84.04
CICS125SSU	5 3/4"	1 1/4" x 1"	1 1/4" x 1"	3/4" (2)	1/4" (2)	304 Stainless	Import	4/24	85.54



304 Stainless Steel Short cast crosses Use with Flexcon Flex-Lite Series, WellMate Tanks



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CWM100SS	4 3/4"	1" (FIP)	1"x3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	5/40	\$ 65.54
CWM125SS	4 3/4"	1 1/4" (FIP)	1 1/4"x1"	3/4" (2)	1/4" (2)	304 Stainless	Import	4/32	93.75



304 Stainless Steel Short cast female union tank crosses Use with Flexcon "Flex-Lite" Series, WellMate Tanks. FPT 304 Stainless Steel union w/ American Standard Buna-N o-ring.


- 1" uses AS 568-212 o-ring
- 1 1/4" uses AS 568-320 o-ring.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CICS100SSFTU	4"	1" fpt union	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	4/32	\$ 74.00
CICS1251SSFTU	4"	1 1/4" fpt union	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	4/32	79.63
CICS125SSFTU	4"	1 1/4" fpt union	1 1/4" x 1"	3/4" (2)	1/4" (2)	304 Stainless	Import	4/24	102.32



Tank Crosses - Short, PVC, Galvanized



General Tank Cross Features:

- Internal and external threads reduce fittings needed and installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- Injected molded PVC, galvanized ductile iron.
- Crosses are **third party certified to NSF/ANSI 372**.



Short Cast Crosses with 1 drain and 3 top ports.

*** DO NOT USE PTFE THREAD SEAL TAPE WITH PVC TANK CROSS APPLICATIONS. USE THREAD SEAL PASTE WITH OUT PTFE FOR PLASTIC THREADS ONLY.**



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CIC125	4 1/4"	1 1/4" x 1"	1" x 3/4"	3/4" (1)	1/4" (2), 1/2" (1)	PVC*	USA	100	\$ 15.20



Short cast galvanized crosses with one drain, two top ports



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
HC100G	3 3/4"	1" (FIP)	1" (FIP)	1/2" (1)	1/4" (2)	Ductile Iron	Import	30	\$ 20.21
HC10075G	4"	1" (FIP)	1" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	40	18.58
HC125G	3 3/4"	1 1/4" (FIP)	1 1/4" (FIP)	1/2" (1)	1/4" (2)	Ductile Iron	Import	24	25.29
HC12575G	4"	1 1/4" (FIP)	1 1/4" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	25	28.39



Short cast galvanized crosses with one drain, two top ports



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
IC100G	3"	1" (FIP)	1" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	28	\$ 21.11
IC125G	3 1/2"	1 1/4" (FIP)	1 1/4" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	24	24.35



Short cast galvanized crosses with two drain, two top ports



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
IC200G	3"	1" (FIP)	1" (FIP)	1/2" (2)	1/4" (2)	Ductile Iron	Import	48	\$ 25.18



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204





Tank Installation Packages - 1" Side Discharge

- ALL tank installation package components contain no lead and are third party certified to NSF/ANSI 372.



TP100BRNL	CCAT100BSNL	NO LEAD Brass	4 1/4"	\$ 122.79
<ul style="list-style-type: none"> • CCAT100BSNL 1" Short NO LEAD Brass Safety Tank Cross. • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



IPS100BSENL	CICS100BSENL	NO LEAD Brass	4 1/2"	\$ 99.91
<ul style="list-style-type: none"> • see above 1" Short NO LEAD Brass Tank Cross. • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



IPS100SSNL	CICS100SS	Stainless Steel	4 1/2"	\$ 146.18
<ul style="list-style-type: none"> • see above 1" Short Stainless Steel Cast Tank Cross. • 9013FSG2 30/50 Pressure Switch. • SS80-1/4 x 3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50SS 1/2" Stainless Steel Relief Valve • IHBB50SS 1/2" Stainless Steel Hose Bibb • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



IPWM100BSNL	CWM100BSNL	NO LEAD brass	4 1/2"	\$ 116.78
<ul style="list-style-type: none"> • CWM100BSNL 1" NO LEAD Brass Tank Cross for FLEXCON "Flex-Lite" WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



IPWM100SSNL	CWM100SS	Stainless Steel	4 1/2"	\$ 156.32
<ul style="list-style-type: none"> • CWM100SS 1" Short Cast SS Tank Cross for FLEXCON "Flex-Lite" WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • SS80-1/4 x 3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50SS 1/2" Stainless Steel Relief Valve • IHBB50SS 1/2" Stainless Steel Hose Bibb • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



Tank Installation Packages - 1" Side Discharge



- ALL tank installation package components contain no lead and are third party certified to NSF/ANSI 372.



IPS100BSFTUNL	CICS100BSFTUNL	NO LEAD brass	4 1/2"	\$ 133.82
<ul style="list-style-type: none"> • CICS100BSFTUNL 1" NO LEAD Brass Tank Cross for FLEXCON "Flex-Lite", WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



IPS100SSFTUNL	CICS100SSFTU	Stainless Steel	4"	\$ 162.04
<ul style="list-style-type: none"> • CICS100SSFTU 1" Short Cast SS Tank Cross for FLEXCON "Flex-Lite", WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • SS80-1/4 x 3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50SS 1/2" Stainless Steel Relief Valve • IHBB50SS 1/2" Stainless Steel Hose Bibb • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



IPS100BSUENL	CICS100BSUENL	NO LEAD Brass	5 1/2"	\$ 119.37
<ul style="list-style-type: none"> • CICS100BSUENL 1" Short LEAD Brass Union Tank Cross • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



IPS100SSUNL	CICS100SSU	Stainless Steel	5 1/2"	\$ 183.85
<ul style="list-style-type: none"> • see above 1" Short Cast Stainless Steel Tank Cross. • 9013FSG2 30/50 Pressure Switch. • SS80-1/4x3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb No Lead Pressure Gauge. • IRV50SS 1/2" Stainless Steel Relief Valve. • IHBB50SS 1/2" Stainless Steel Hose Bibb. • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



Tank Installation Packages - 1 1/4" Side Discharge

- ALL tank installation package components contain no lead and are third party certified to NSF/ANSI 372.



IP125BSNL	CIC125BSNL	NO LEAD Brass	4 1/4"	\$ 127.77
<ul style="list-style-type: none"> • CIC125BSNL • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • IRV50NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" Short Cast NO LEAD Brass Cross. Pressure Switch. Brass Nipple. 100lb NO LEAD Pressure Gauge 1/2" NO LEAD Brass Relief Valve 3/4" NO LEAD Brass No Kink Boiler Drain 			



IP3125BSENL	CIC3125BSENL	NO LEAD Brass	4 1/2"	\$ 112.92
<ul style="list-style-type: none"> • CIC3125BSENL • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • IRV75NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" Short Cast NO LEAD Brass Tank Cross Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" NO LEAD Brass Relief Valve. 3/4" NO LEAD Brass No Kink Boiler Drain 			



IPS125SSNL	CICS125SS	Stainless Steel	4 1/2"	\$ 170.57
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • SS80-1/4 x 3 • EIPG1002-4LNL • IRV75SS • IHBB75SS • HTST60-1/2SS 	<ul style="list-style-type: none"> 1" Short Cast Stainless Steel Tank Cross. Pressure Switch. Stainless Steel Nipple. 100lb NO LEAD Pressure Gauge 3/4" Stainless Steel Relief Valve 3/4" Stainless Steel Hose Bibb 1/2" x 60" Stainless Steel PTFE Tape 			



IPWM125BSNL	CWM125BSNL	No Lead brass	4 3/4"	\$ 123.30
<ul style="list-style-type: none"> • CWM125BSNL • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • IRV75NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" NO LEAD Brass Cross for FLEXCON "Flex-Lite", WELLMATE tanks Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" NO LEAD Brass Relief Valve. 3/4" NO LEAD Brass No Kink Boiler Drain 			



IPWM125SSNL	CWM125SS	Stainless Steel	4 3/4"	\$ 185.79
<ul style="list-style-type: none"> • CWM125SS • 9013FSG2 30/50 • SS80-1/4 x 3 • EIPG1002-4LNL • IRV75SS • IHBB75SS • HTST60-1/2SS 	<ul style="list-style-type: none"> 1 1/4" Stainless Steel Cross for FLEXCON "Flex-Lite", WELLMATE tanks Pressure Switch. Stainless Steel Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" Stainless Steel Relief Valve. 3/4" Stainless Steel Hose bibb 1/2" x 60" Stainless Steel PTFE Tape 			



Tank Installation Packages - 1 1/4" Side Discharge




- ALL tank installation package components contain no lead and are third party certified to NSF/ANSI 372.
- Do not use PTFE thread seal tape with PVC tank cross applications.
- Use thread paste without PTFE approved for plastic threads only.



IPS125BSFTUNL	CICS125BSFTUNL	NO LEAD brass	4"	\$ 144.57
<ul style="list-style-type: none"> • CICS125BSFTUNL 1 1/4" NO LEAD Brass Cross for FLEXCON "Flex-Lite", WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb. NO LEAD Brass Pressure Gauge. • IRV75NL 3/4" NO LEAD Brass Relief Valve. • HNKD75NL 3/4" NO LEAD Brass No Kink Boiler Drain 				



IPS125SSFTUNL	CICS125SSFTU	Stainless Steel	4"	\$ 191.96
<ul style="list-style-type: none"> • CICS125SSFTU 1 1/4" Stainless Steel Cross for FLEXCON "Flex-Lite", WELLMATE tanks • 9013FSG2 30/50 Pressure Switch. • SS80-1/4 x 3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb. NO LEAD Brass Pressure Gauge. • IRV75SS 3/4" Stainless Steel Relief Valve. • IHBB75SS 3/4" Stainless Steel Hose bibb • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



IPS125BSUENL	CICS125BSUENL	NO LEAD Brass	5 1/2"	\$ 149.74
<ul style="list-style-type: none"> • CICS125BSUENL 1 1/4" Short Cast NO LEAD Brass Cross w/ union • 9013FSG2 30/50 Pressure Switch. • B80-1/4 x 3 Brass Nipple. • EIPG1002-4LNL 100lb. NO LEAD Brass Pressure Gauge. • IRV75NL 3/4" NO LEAD Brass Relief Valve. • HNKD75NL 3/4" NO LEAD Brass No Kink Boiler Drain 				



IPS125SSUNL	CICS125SSU	Stainless Steel	5 1/2"	\$ 189.72
<ul style="list-style-type: none"> • CICS125SSU 1 1/4" Short Cast Stainless Steel Tank Cross w/ union • 9013FSG2 30/50 Pressure Switch. • SS80-1/4x3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb No Lead Pressure Gauge. • IRV75SS 3/4" Stainless Steel Relief Valve. • IHBB75SS 3/4" Stainless Steel Hose Bibb. • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				




IP125PRNL	CIC125	PVC	4 1/4"	\$ 104.45
<ul style="list-style-type: none"> • CIC125 1-1/4" Short PVC Safety Cross. • 9013FSG2 30/50 Pressure Switch. • 1/4 x 3 Schedule 80 PVC Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge. • IRV50NL 1/2" NO LEAD Brass Relief Valve. • HNKD75NL 3/4" NO LEAD Brass No Kink Boiler Drain 				





Tank Crosses - Long Cast NO LEAD Brass, Stainless Steel



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** brass, bronze and stainless steel tank crosses are **third party certified to NSF/ANSI 372.**



NO LEAD BRASS and BRONZE Long Cast Tank Crosses with 1 drain & 2 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CHC100BSENL	11"	1"	1" x 3/4"	1/2" (1)	1/4" (2)	NL Brass	Import	2/24	\$ 39.11
CHC100BNL	11"	1"	1" x 3/4"	1/2" (1)	1/4" (2)	NL Bronze	USA	12	95.41



NO LEAD BRASS and BRONZE Long Cast Tank Crosses with 2 drain & 2 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CIC100BSENL	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	2/24	\$ 39.11
CIC100BNL	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Bronze	USA	12	95.29
CIC100BS14ENL	14"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	2/12	61.07
CIC125BS14ENL	14"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	2/12	74.82




304 STAINLESS STEEL Long Cast Tank Crosses with 2 drain & 2 top ports.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CIC100SS	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	2/24	\$ 74.82
CIC125SS14	14"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	304 Stainless	Import	2/16	103.39

Tank Crosses - Long Cast NO LEAD Brass, Stainless Steel



General Tank Cross Features:

- Internal and external threads reduce fittings needed & installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** brass and stainless steel tank crosses are **third party certified to NSF/ANSI 372.**



NO LEAD BRASS Long Cast Tank Crosses with union disconnect, with 1 drain & 2 top ports.

- Metal to metal ball joint leak proof seal.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CHC100BSUENL	11"	1"	1" x 3/4"	1/2" (1)	1/4" (2)	NL Brass	Import	2/20	\$ 49.89
CHC125BSU14ENL	14"	1 1/4"	1 1/4" x 1"	3/4" (1)	1/4" (2)	NL Brass	Import	2/12	84.46



NO LEAD BRASS Long Cast Tank Crosses with union disconnect, with 2 drain & 2 top ports.

- Metal to metal ball joint leak proof seal.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
NO LEAD Brass									
CIC100BSUENL	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	2/20	\$ 49.89
CIC100BSU14ENL	14"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Brass	Import	2/12	64.11
CIC125BSU14ENL	14"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Brass	Import	2/12	84.46



304 STAINLESS STEEL Long Cast Tank Crosses with union disconnect, with 2 drain & 2 top ports.


- PTFE captive gasket seal ring on 304 SS crosses.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
304 Stainless Steel									
CIC100SSU	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	2/20	85.54
CIC100SSU14	14"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	304 Stainless	Import	2/20	94.63
CIC125SSU14	14"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	304 Stainless	Import	2/12	126.96



Tank Crosses - Long Fabricated, NO LEAD Bronze



General Tank Cross Features:

- Internal and external threads reduce fittings needed and installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- **NO LEAD** bronze, fabricated tank crosses are **third party certified to NSF/ANSI 372.**



No Lead Long Fabricated Tank Crosses with 1 drain and 2 top taps.




Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CHC100BFNL	11"	1"	1" x 3/4"	1/2" (1)	1/4" (2)	NL Bronze/Copper	USA	12	\$ 76.21
CHC100BF13NL	13"	1"	1" x 3/4"	1/2" (1)	1/4" (2)	NL Bronze/Copper	USA	12	98.73
CHC125BFNL	14"	1 1/4"	1 1/4" x 1"	3/4" (1)	1/4" (2)	NL Bronze/Copper	USA	12	108.42
CHC125BF16NL	16"	1 1/4"	1 1/4" x 1"	3/4" (1)	1/4" (2)	NL Bronze/Copper	USA	6	111.15





NO LEAD Long Fabricated Tank Crosses with 2 drain and 2 top taps.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CIC100BFNL	11"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Bronze/Copper	USA	12	\$ 79.18
CIC100BF13NL	13"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Bronze/Copper	USA	12	82.29
CIC125BFNL	14"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Bronze/Copper	USA	12	100.29
CIC125BF16NL	16"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Bronze/Copper	USA	6	104.29




NO LEAD Long Fabricated Elevated Tank Crosses with union disconnect.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
CIC740BFNL	18"	1"	1" x 3/4"	1/2" (2)	1/4" (2)	NL Bronze/Copper	USA	9	\$ 178.42
CIC741BFNL	18"	1 1/4"	1 1/4" x 1"	3/4" (2)	1/4" (2)	NL Bronze/Copper	USA	6	279.85

Tank Crosses - Long Fabricated, PVC, Galvanized



General Tank Cross Features:

- Internal and external threads reduce fittings needed and installation time.
- Reduces turbulence and waterlogging in tanks without separate air chambers.
- Galvanized ductile iron crosses contain no lead.
- Third party certified to NSF/ANSI 372.




Long Fabricated PVC Tank Cross

- Shipped unassembled with 1 x 10 Sch 80 PVC nipple.
- Third party certified to NSF/ANSI 372.
- * Do not use PTFE thread seal tape with PVC tank cross applications. Use thread seal paste without PTFE for plastic threads only.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
IC100F	14"	1"	1" x 3/4"	3/4" (1)	1/4" (2), 1/2" (1)	PVC*	USA	12	\$ 20.47



Long Fabricated Galvanized Ductile Iron Tank Cross

- Shipped unassembled.
- HC100GF supplied with 1x8 and 1/4x3 galvanized nipples.
- HC125GF & 125/100GF supplied with 1 1/4"x11" & 1/4"x3" galvanized nipples.




Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
HC100GF	11 1/2"	1" (MIP)	1" (FIP)	1/2" (1)	1/4" (2)	Ductile Iron	Import	12	\$ 30.23
HC125GF	14 1/2"	1 1/4" (MIP)	1 1/4" (FIP)	1/2" (1)	1/4" (2)	Ductile Iron	Import	4	38.33



Long Fabricated Galvanized Ductile Iron Tank Cross

- Shipped unassembled.
- IC100GF supplied with 1x8 and 1/4x3 galvanized nipples.
- IC125GF supplied with 1 1/4"x11" & 1/4"x3" galvanized nipples.



Part Number	Overall Length	Tank Conn.	Leg Conn.	Drain Ports Size (Qty)	Top Ports Size (Qty)	Material	USA or Import	Ctn Qty	List Price
IC100GF	10 3/4"	1" (MIP)	1" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	12	\$ 31.39
IC125GF	14 1/4"	1 1/4" (MIP)	1 1/4" (FIP)	3/4" (1)	1/4" (2)	Ductile Iron	Import	12	38.02



Tank Installation Packages - 1" Bottom Discharge

- ALL NO LEAD brass tank installation package components are third party certified to NSF/ANSI 372.
- ALL tank installation package components contain NO LEAD.



TP100BSNL	CHC100BSENL	NO LEAD Brass	11"	\$ 115.59
TP100BNL	CHC100BNL	NO LEAD Bronze	11"	176.96
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • B80-1/4x3 • EIPG1002-4LNL 		1"x11" Long NO LEAD Brass or Bronze Tank cross Pressure Switch. Brass Nipple. 100lb NO LEAD Pressure Gauge.		



IP100BSENL	CIC100BSENL	NO LEAD Brass	11"	124.72
IP100BS14ENL	CIC100BS14ENL	NO LEAD Brass	14"	134.30
IP100BRNL	CIC100BNL	NO LEAD Bronze	11"	225.06
IP100BFRNL	CIC100BFNL	NO LEAD Bronze	11"	210.50
IP100BF13RNL	CIC100BF13NL	NO LEAD Bronze	13"	213.90
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • B80-1/4x3 • EIPG1002-4LNL • IRV50NL • HNKD50NL 		1" Long NO LEAD Brass or Bronze Tank Cross. Pressure Switch. Brass Nipple. 100lb NO LEAD Pressure Gauge 1/2" NO LEAD Brass Relief Valve 1/2" NO LEAD Brass No Kink Boiler Drain		



IP100BSUENL	CIC100BSUENL	NO LEAD Brass	11"	\$ 134.87
IP100BSU14ENL	CIC100BSU14ENL	NO LEAD Brass	14"	144.34
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • B80-1/4x3 • EIPG1002-4LNL • IRV50NL • HNKD50NL 		1" Long NO LEAD Union Tank Cross Pressure Switch. Brass Nipple. 100lb NO LEAD Pressure Gauge 1/2" NO LEAD Brass Relief Valve 1/2" NO LEAD Brass No Kink Boiler Drain		



IP100SSNL	CIC100SS	Stainless Steel	11"	\$ 166.14
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • SS80-1/4x3 • EIPG1002-4LNL • IRV50SS • IHBB50SS • HTST60-1/2SS 		1" Long Stainless Steel Cast Tank Cross. Pressure Switch. Stainless Steel Nipple. 100lb NO LEAD Pressure Gauge 1/2" Stainless Steel Relief Valve 1/2" Stainless Steel Hose Bibb 1/2" x 60" Stainless Steel PTFE Tape		

Tank Installation Packages - 1" Bottom Discharge




- Do not use PTFE thread seal tape with PVC tank cross applications.
- Use thread paste without PTFE approved for plastic threads only.
- ALL tank installation package components contain NO LEAD.



IP100SSUNL	CIC100SSU	Stainless Steel	11"	\$ 201.49
IP100SSU14NL	CIC100SSU14	Stainless Steel	14"	223.52
<ul style="list-style-type: none"> • see above 1" Long Stainless Steel Union Tank Cross. • 9013FSG2 30/50 Pressure Switch. • SS80-1/4x3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb No Lead Pressure Gauge. • IRV50SS 1/2" Stainless Steel Relief Valve. • IHBB50SS 1/2" Stainless Steel Hose Bibb. • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



TP100GFNL	HC100GF	Fab Galvanized	11 1/2"	\$ 87.29
<ul style="list-style-type: none"> • HC100G 1" Galvanized Tank Cross. • GS80-1/4x3 Galvanized Steel Nipple. • GS80-1x8 Galvanized Steel Nipple. • 9013FSG2 30/50 Pressure Switch. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • HNKD50NL 1/2" NO LEAD Brass No Kink Boiler Drain 				



TP100PFNL	IC100F	Fab. PVC	14"	\$ 70.26
<ul style="list-style-type: none"> • IC100F 1" x 14" Long PVC Fabricated Safety Tank Cross. • 9013FSG2 30/50 Pressure Switch. • 1/4x3 PVC Schedule 80 Nipple. • 450-005 PVC Schedule 40 Threaded Plug. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge 				



IP100PFRNL	IC100F	Fab. PVC	14"	\$ 94.68
<ul style="list-style-type: none"> • IC100F 1"x14" Long PVC Fabricated Safety Tank Cross. • 9013FSG2 30/50 Pressure Switch. • 1/4 x 3 PVC Schedule 80 Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge • IRV50NL 1/2" NO LEAD Brass Relief Valve • HNKD75NL 3/4" NO LEAD Brass No Kink Boiler Drain 				





Tank Installation Packages - 1 1/4" Bottom Discharge

- ALL tank installation package components are contain NO LEAD.



TP125BFNL	CHC125BFNL	NO LEAD Bronze 14"	\$ 195.40
<ul style="list-style-type: none"> • CHC125BFNL • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL 	<ul style="list-style-type: none"> 1 1/4" Long NO LEAD Fabricated Bronze Tank Cross Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 		



IP125BFR7NL	CIC125BFNL	NO LEAD Bronze 14"	\$ 252.07
IP125BF16R7NL	CIC125BF16NL	NO LEAD Bronze 16"	257.74
<ul style="list-style-type: none"> • see above • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • RV75NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" Long NO LEAD Fabricated Bronze Tank Cross Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" NO LEAD Brass Relief Valve. 3/4" NO LEAD Brass No Kink Boiler Drain. 		



IP125BS14ENL	CIC125BS14ENL	NO LEAD Brass 14"	\$ 160.52
<ul style="list-style-type: none"> • CIC125BS14ENL • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • IRV75NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" Long NO LEAD Cast Brass Tank Cross Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" NO LEAD Brass Relief Valve. 3/4" NO LEAD Brass No Kink Boiler Drain. 		



IP125BSU14ENL	CIC125BSU14ENL	NO LEAD Brass 14"	\$ 176.83
<ul style="list-style-type: none"> • See above • 9013FSG2 30/50 • B80-1/4 x 3 • EIPG1002-4LNL • IRV75NL • HNKD75NL 	<ul style="list-style-type: none"> 1 1/4" Long NO LEAD Union Brass Tank Cross Pressure Switch. Brass Nipple. 100lb. NO LEAD Brass Pressure Gauge. 3/4" NO LEAD Brass Relief Valve. 3/4" NO LEAD Brass No Kink Boiler Drain. 		



Tank Installation Packages - 1 1/4" Bottom Discharge



- ALL tank installation package components contain NO LEAD.



IP125SS14NL	CIC125SS14	Stainless Steel	14"	\$ 199.42
<ul style="list-style-type: none"> • see above 1 1/4" Long Stainless Steel Cast Tank Cross. • 9013FSG2 30/50 Pressure Switch. • SS80-1/4x3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge. • IRV75SS 3/4" Stainless Steel Relief Valve. • IHBB75SS 3/4" Stainless Steel Hose Bibb. • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				



IP125SSU14NL	CIC125SSU14	Stainless Steel	14"	\$ 267.88
<ul style="list-style-type: none"> • see above 1 1/4" Long Stainless Steel Union Tank Cross. • 9013FSG2 30/50 Pressure Switch. • SS80-1/4x3 Stainless Steel Nipple. • EIPG1002-4LNL 100lb NO LEAD Pressure Gauge. • IRV75SS 3/4" Stainless Steel Relief Valve. • IHBB75SS 3/4" Stainless Steel Hose Bibb. • HTST60-1/2SS 1/2" x 60" Stainless Steel PTFE Tape 				





Tank Installation Packages - Underground



Underground Tank Installation Package Features:

- Includes components needed to complete the installation of underground (buried) well tanks.

NO LEAD Parts include:

- 9013FSG2 40/60 Square D pressure switch
- PT800TNL 1" NO LEAD bronze pitless adapter
- EIPG1002-4LNL NO LEAD 0-100 psi, steel case, pressure gauge
- 1/4x3 PVC Sch 80 nipple
- 6204 (2) Ideal SS hose clamps
- NLBT1/4 1/4" NO LEAD brass tee
- VT129HB-4-2N Nylon EII 1/4" hose barb x 1/8" mip
- SW019 4 feet 1/4" x 1/2" OD red rubber hose
- 146-1899N 1/4" Nylon male insert adapter (mpt x hose barb)



Part Number	List Price
IP100UGNL 40/60	\$ 222.47





Pressure Relief Valves

RV and IRV Series Relief Valve Features:

- Heavy duty no lead bronze, **no lead** brass or 304 stainless steel.
- For shallow, deep well and submersible pumps.
- **Third party certified to NSF/ANSI 372.**
- Spring loaded and pre-set under pressure, **NOT ADJUSTABLE.**
- 1/2" or 3/4" (IRV7575) discharge.



Hamilton Adjustable Safety Relief Valve Features:

- Preset at 75 P.S.I. with concealed adjusting screw to prevent tampering.
- No-lead brass heavy duty, full-flow design with Buna-N seats.
- **Third party certified to NSF/ANSI 372.**



RV-NL Series

ISO 9001



IRV-NL



IRV SS Series



HRV Series

NOTE: Relief valves on this page are not for use with hot water heaters. Recommended for cold water system installations only.

Preset relief valves are **NOT** intended to be adjusted. Any adjustment to preset relief valves voids warranty.

Part Number	Size	Pressure Setting	Ctn/Case	List Price
NO LEAD Bronze Relief Valves - Made in USA				
RV50NL	1/2" x 1/2"	Set at 75 psi	50/150	\$ 29.00
RV75NL	3/4" x 1/2"	Set at 75 psi	50/150	29.43
RV50-100NL	1/2" x 1/2"	Set at 100 psi	50/150	29.00
RV75-100NL	3/4" x 1/2"	Set at 100 psi	50/150	29.43
NO LEAD Brass Relief Valves - Imported				
IRV50NL	1/2" x 1/2"	Set at 75 psi	10/100	10.54
IRV75NL	3/4" x 1/2"	Set at 75 psi	10/100	11.46
IRV50-100NL	1/2" x 1/2"	Set at 100 psi	10/100	10.54
IRV75-100NL	3/4" x 1/2"	Set at 100 psi	10/100	11.46
IRV7575NL	3/4" x 3/4"	Set at 75 psi	10/100	13.75
IRV7575-100NL	3/4" x 3/4"	Set at 100 psi	10/100	13.75
304 Stainless Steel Relief Valves - Imported				
IRV50SS	1/2" x 1/2"	Set at 75 psi	10/100	19.66
IRV75SS	3/4" x 1/2"	Set at 75 psi	10/100	20.76
IRV7575SS	3/4" x 3/4"	Set at 75 psi	10/100	21.50
IRV50-100SS	1/2" x 1/2"	Set at 100 psi	10/100	19.66
IRV75-100SS	3/4" x 1/2"	Set at 100 psi	10/100	20.76
IRV7575-100SS	3/4" x 3/4"	Set at 100 psi	10/100	21.50
Hamilton NO LEAD Brass Adjustable Safety Relief Valves				
		Set at Adjustable to	Sold at Preset Only	
HRV50NL	1/2" mipt x 1/2" fipt	75 psi 150 psi	25	58.17
HRV75NL	3/4" mipt x 3/4" fipt	75 psi 100 psi	25	79.08
HRV125NL	1 1/4" mipt x 1 1/4" fipt	75 psi 200 psi	10	238.02
HRV175NL	1" mipt x 3/4" fipt	75 psi 200 psi	25	137.76

FLOW RATES							
PSI	85	90	95	100	105	110	115
RV Series gpm	.30	7.3	7.7	9.8	17.9	18.9	20.6
IRV Series gpm	2.0	2.7	3.8	4.7	7.0	12.0	12.7
PSI	10	20	30	40	60	80	100
HRV50	.6	1.5	2.5	3.6	6.1	8.8	11.8
HRV75			2.8	5.5	11.0	13.8	17.9
HRV175	6.0	12.6	19.0	24.6	35.6	44.8	52.3
HRV125	12.0	35.0	48.4	69.2	106.5	132.5	150.0



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

1.29

Installation Accessories - Tank



TL3



PMB1



SN18NL, SN18LNL, SN25NL, SN25LNL



PTG1002

Tank Legs Features:

- Elevates tank above floor and out of condensation pools.
- Leveled on uneven floors without the use of tools.
- Custom molded from high strength ABS.

Pump Mounting Bracket Features:

- Elevates pump out of corrosive atmosphere.
- Heavy duty 12 gauge cold rolled steel with gray enamel coating. Heaviest steel gauge bracket available in the market.
- Plastic protectors on the pump stand legs prevent scratching of the tank.
- Supplied with 1", 1 1/4" zinc plated steel screws and steel adapter for larger tanks.
- Fits all pumps and comes individually cartoned.

Air Valve Features:

- Used for reciprocating and submersible pumps to admit air to system.
- Used for charging applications and many other uses.
- Available in long and short patterns.
- Made in USA



Pressure Test Gauge Features:

- 0-100 psi, 2" plastic lens.
- Brass test fitting with pressure release button.
- Heavy rubber boot to protect gauge from damage.

Part Number	Size	Pressure Setting/Description	Ctn Qty	List Price
Tank Legs				
TL3		(3/Package), ABS	48	\$ 3.45
Pump Mounting Brackets				
PMB1		12 gauge steel plate, Gray	20	26.43
Air Valves - Made in USA				
LVC18		Replacement Core for light spring models		0.94
SN18NL	1/8"	Short Pattern Light Spring (Snifter) NO LEAD	25/250	3.15
SN18LNL	1/8"	Long, Light Spring (Snifter) NO LEAD	25/250	3.89
SN18LNLNCS	1/8"	Long, No Core Spring NO LEAD	25/250	4.07
SN25NL	1/4"	Short Pattern Heavy Spring NO LEAD	25/250	4.27
SN25LNL	1/4"	Long, Light Spring (Snifter) NO LEAD	25/250	4.67
Pressure Test Gauge				
PTG1002		Pressure test gauge	50	14.90



Clear Braided PVC Hose



Clear Braided PVC Hose Standard Wall, Class 125 Features:



- Flexible, see through clear hose with braid pattern reinforcement of two polyester spirals.
- Flexible clear PVC NSF 51 certified to 100°F (38°C), USP CLASS V1 rated.
- All hose compound ingredients used are listed in US FDA CFR, Title 21.
- Temperature range + 25° to 150° F / -5° to +65°C.
- Silicone free.
- Food and beverage grade, standard wall.
- Use for air, water lines.

Part Number	Nominal (inches)		Max Working Pressure		Reel Length	Approx Wt per CFT.	List Price Per Reel
	ID	OD	PSI@68°F	PSI@122°F			
CBH25-1	1/4	0.438	250	105	100'	5.7 lbs	\$ 117.14
CBH38-1	3/8	0.594	225	97	100'	9.0 lbs	161.76
CBH50-1	1/2	0.750	200	86	100'	13.8 lbs	220.11
CBH58-1	5/8	0.875	200	86	100'	16.5 lbs	262.11
CBH75-1	3/4	1.030	150	65	100'	21.9 lbs	333.12
CBH100-1	1	1.300	125	54	100'	31.5 lbs	433.22
CBH100-2	1	1.300	125	54	200'	31.5 lbs	809.76
CBH125-50	1 1/4	1.625	100	43	50'	45.0 lbs	407.26
CBH125-1	1 1/4	1.625	100	43	100'	45.0 lbs	814.55
CBH150-50	1 1/2	1.937	100	43	50'	64.0 lbs	495.66
CBH150-1	1 1/2	1.937	100	43	100'	64.0 lbs	991.29
CBH200-1	2	2.490	75	33	100'	95.0 lbs	1662.80

** Temperatures higher than 68° F reduce available working pressure. See next page for temperature, working pressure calculation chart and cautionary note.


Clear Braided PVC Hose



Effects of Elevated Temperatures on Thermoplastic Hose.


The compounds used in clear braided PVC hose are generally referred to as thermoplastics. These materials achieve their optimum physical properties at room temperature, 68°F (20°C). As these materials are exposed to increased ambient temperatures, they will soften and their physical properties will change. This will have the effect of sharply reducing the available working pressure. Coupling retention will also be reduced. The charts below illustrate this effect. In all cases, the product should be tested in a controlled, secure and safe environment, and all operating conditions should be considered prior to use.

All published working pressures of AGI Series CBH hose are based on a room temperature of 68°F (20°C).

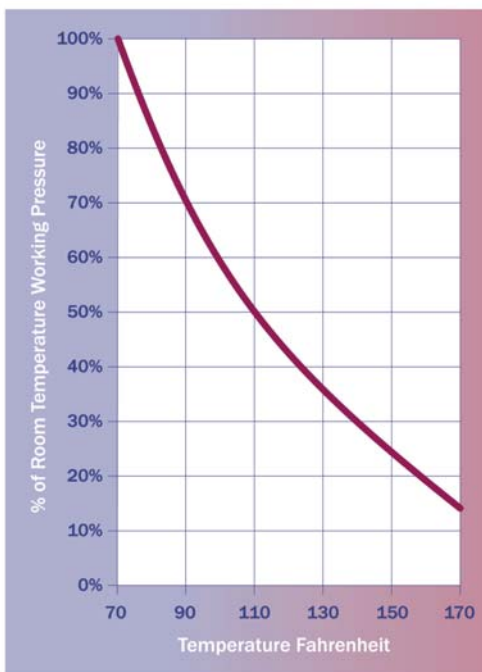

Example from the Fahrenheit Chart

If working pressure at 68°F is 200 psi, then the WP at 110°F is $200 \times 50\%$, or 100 psi

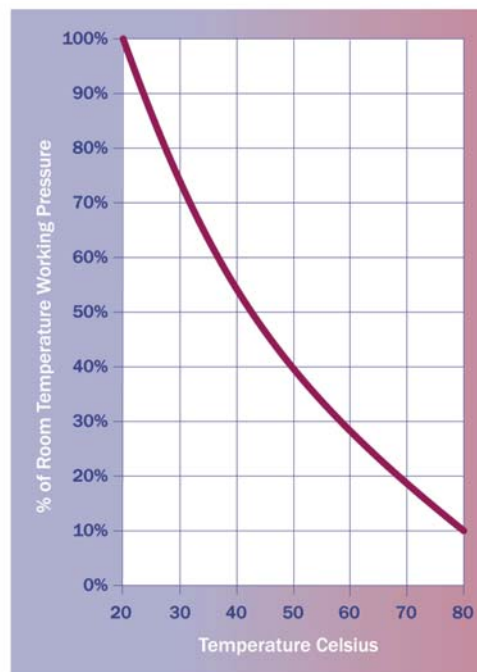

Example from the Celsius Chart

If working pressure at 20° is 14 bar, then the WP at 50°C is $14 \times 50\%$, or 5.6 bar

CAUTIONARY NOTE

The charts are to be used as a guideline only. The information and recommendations contained here are, to the best of our manufacturer's knowledge, accurate and reliable, but no guarantee of their accuracy is made. All products are sold upon the condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses, and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Variability in length of exposure, temperature, pressure, velocity of fluid, and chemical concentration all contribute to reduced working pressure and hose reliability.



Air Volume Controls



AV
Non-Repairable



AV Repairable



AC100



AVCTF1/4x3/8NL

Brady Air Volume Control Features:

- Maintains water flow-stretches pump life.
- Repairable and non-repairable offering.
- Diaphragm-type air volume control maintains correct proportions of air & water in jet systems.
- Die Cast, 96% Zinc. Individually cartoned.
- Available with or without Tapped Gauge Port.
- "E" Series compares to Boshart "AVC" and Merrill "AV" series non-repairable controls.



Air Charger Features:

- For jet systems.
- Positive action control. No flexing diaphragm or metal springs to malfunction.
- Will not corrode in a moist environment.
- Fits all tanks up to and including 82 gallon.
- Available with tube & fittings as an optional extra, specify AC100TF. Includes 60" tubing & assortment of special NL brass fittings & adapters, eliminates duplication of inventories with a single kit for all applications.

Universal Air Charger Installation Kit Features:

- Fits all air volume controls.
- Includes 60" polyethylene tubing and assortment of special NL brass fittings and adapters, eliminating duplication of inventories with a single kit for all applications.



Air Volume Control Tank Fitting Features:

- No Lead Brass. Certified Lead Free



Part Number (Tapped)	Tank Capacity	Tank Port	Suction Port	Ctn Qty	Tapped List Price	Standard List Price
Non-repairable *						
AV45E	80	1/4" pipe	7/16"-24 pipe	50		\$17.68
AV45	80	1/4" pipe	7/16"-24 pipe	50		48.09
AV45F	80	1/4" pipe	1/8" pipe tap	50		48.39
AV100E	120	3/8" pipe	7/16"-24 pipe	50		18.75
AV100	120	3/8" pipe	7/16"-24 pipe	50		51.57
AV100F	120	3/8" pipe	1/8" pipe tap	50		54.93
Repairable *						
AV30	42	1/4" pipe	7/16"-24 pipe	100		51.63
AV42 AV42T	80	1/4" pipe tap	1/4" pipe tap	50	79.01	75.53
AV80 AV80T	120	1/4" pipe tap	1/4" pipe tap	50	82.61	77.50
AV120 AV120T	220	3/8" pipe tap	1/4" pipe tap	25	108.38	103.89
Repair Kits • Fits all makes of repairable diaphragm type controls						
AV30-3A	For Brady AV30 controls			42		31.90
AV42-3A	For Brady AV42 controls			42		37.48
AV80-3A	For Brady AV80 controls			42		43.82
AV120-3A	For Brady AV120 controls			42		57.39
Plastic Air Charger *						
AC100				30		21.13
CAC100				Bulk Packed		17.88
Air Charger with Tubing and Fittings **						
AC100TFNL	No lead kit			20		35.20
AC100TFBTL	No lead kit with Black Tubing			20		35.20
Air Charger Installation Kit with Tubing and Fittings **						
UTF1NL	No lead kit			24		22.04
UTF1BTL	No lead kit with Black Tubing			24		22.04
Air Volume Control Tank Fitting - No Lead Brass						
AVCTF1/4x3/8NL	Air Volume Control Tank Fitting 1/4" MPT x 3/8" FPT			500		6.96

** See page 6.7 for additional lengths of MV4040 1/2" OD x 0.17" ID translucent and black tubing.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.33



HAE1

HARVARD

All Plastic Deep Well Air Release Features:

- Formerly Robert Shaw* AE10
(*used with permission of Invensys Controls)
- Maintains proper ratio of air to water in submersible water systems.
- All polyethylene construction eliminates corrosion.
- Includes gauge port and 0-40 psi limited bleed adjustment.
- **NO LEAD - Third party certified to NSF/ANSI 372.**
- **Made in USA.**




Formerly Robert Shaw/Invensys



BAR125N

Brady Plastic Deep Well Air Release Features:


- Maintains the proper ratio of air to water.
- Constructed of ABS resin grade plastic.
- Non-corrosive, non-conductive and completely serviceable.
- Release mechanism consists of a Buna-N procession ball & 316 stainless steel spring.
- Factory set at 20 P.S.I., adjustable from 0 to 40 P.S.I.



WJ1

Deep Well Air Release Features:

- Maintains proper ratio of air to water in submersible water systems.
- Deluxe deep well air release features ABS float and molded or cast body which prevents galvanic action at pump tank tapping.
- **WJ1NL NO LEAD**
- WJ1NL Imported.



HF93B1



SWCL

Shallow Well Control Features:

- Preserves correct proportion of water and air in shallow well reciprocating pump systems.
- **SWCLNL NO LEAD**
- Imported.



Part Number	Tapping	Manufacturer	Ctn Qty	List Price
All Plastic Deep Well Air Release				
HAE1	1 1/4"	Harvard (formerly Robert Shaw)	49	\$ 45.71
BAR125N	1 1/4"	Brady	50	44.39
Deep Well Air Release				
WJ1NL	1 1/4"	Ametek	20	67.68
HF93B-1	1 1/4"	Johnson	50	42.17
Shallow Well Control				
SWCLNL	1 1/4"	NO LEAD Ametek	20	75.71




Installation Accessories - Submersible




TA48



SG Series



MG6



TA6100



WG Series

All torque arrestors, pump guides, cable guards are third party certified to NSF/ANSI 372.



Deluxe Torque Arrestor Features:

- Two piece design, molded from PVC or natural rubber.
- PVC torque arrestor is **40% heavier** than competitors to resist long-term casing abrasion.
- Field adjustable to hold pump centered in well.
- Fits all well casings from 4" to 8" I.D.
- Torque Arrestor is securely fastened to 1" or 1 1/4" drop pipe w/ **2 Ideal all stainless steel** clamps included.
- Available bagged or bulk without clamps.

Spider Style Torque Arrestor Features:

- Spider style molded from natural rubber.
- Installs just above discharge of submersible pump.
- Tabs are easily cut for field alteration.
- 4"-6" casing, 1" center hole.

Natural Rubber Pump Guide Features:

- Installed at the top of the submersible pump discharge.
- Permits the pump to be lowered without damage from abrading against the well casing & ledge while centering the pump in the well.

Cable Guard Features:

- Snap-in and self clamping styles.
- Keeps power cable from abrading against well casing.
- A minimum of three to five should be used; one at the pump, one no further than 15' above the pump, and one between 25' and 30' above the pump.
- Adjustable - use in 4", 5" and 6" wells. Available for 1" or 1 1/4" drop pipe.
- Made of polyethylene and will float.

Part Number	Description	Color	Ctn Qty	List Price
Deluxe PVC Torque Arrestor				
TA48	Bagged, with 2 Ideal all stainless steel clamps	Black	16	\$ 13.89
TA48G	Bagged, with 2 Ideal all stainless steel clamps	Green	16	15.54
CTA48	Bulk, no clamps	Black	Bulk	11.35
CTA48G	Bulk, no clamps	Green	Bulk	12.50
Deluxe Rubber Torque Arrestor				
TA48R	Bagged with 2 Ideal all stainless steel clamps	Black	16	15.68
CTA48R	Bulk, No clamps	Black	Bulk	13.93
Spider Style Rubber Torque Arrestor				
TA6100	6x1	Black	50	27.47
Natural Rubber Pump Guides Fits Casing ID Guide OD Drop Pipe				
SG400-3X1	4"	3"	1"	Bulk 4.89
SG400-3X1 1/4	4"	3"	1 1/4"	Bulk 4.89
SG500-4X1	5"	4"	1"	Bulk 5.30
SG558-5X1	5-5/8"	5"	1"	Bulk 8.99
SG600-55/8X1	6"	5 5/8"	1"	Bulk 10.31
SG600-55/8X1 1/4	6"	5 5/8"	1 1/4"	Bulk 10.31
SG625-6X1	6 1/4"	6"	1"	Bulk 11.41
SG625-6X2	6 1/4"	6"	2"	Bulk 11.41
Cable Guard				
MG6	With two cable holes, fits 4"-6" casing		100	0.96
WG100	1" Self-clamping style, fits 4"-6" casing		48	2.93
WG125	1 1/4" Self-clamping style, fits 4"-6" casing		48	4.86



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (866) 503-5523 Fax (888) 562-2095

www.americangranby.com

FALL 2016

1.35

Installation Accessories - Submersible



MR Series

HARVARD® Submersible Safety Rope Features:

- Custom extruded from tough polypropylene fiber.
- Highly resistant to chafing, abrasion & corrosion.
- Recommended wherever minimum stretch and maximum strength are required.
- Twisted SR25 Series tested in excess of 1,200 lbs.. Braided MR25 Series tested in excess of 1,000 lbs.
- Plastic or wood reels.



PO100

Bleeder Orifices Features:

- Provides a fast bleed through its large opening.
- Complete closure prevents loss of pumping volume.
- Full 1" size molded of virgin rubber increases bleed capacity & reduces cost of pipe fitting.
- 3/4" available in brass, NO LEAD brass.
- Bleeder orifice tee available. Includes yellow brass insert tee w/ 1" rubber bleeder orifice.
- **All bleeder orifices are third party certified to NSF/ANSI 372.**



ES

Ejector Screen Features:

- Protects heat pumps against plugged nozzles and clogged venturis.
- Non-corrosive brass or stainless steel screen.
- Installs easily in discharge side of ejector.



CT Series

Cable Tie Features:

- UL approved, self-clinching nylon fastener.
- Ideal for holding cable to drop pipe, positioning cable guards, etc.
- Withstands -65° to 225°F.
- Packaged in bags of 100.
- Manufactured for AGI in an ISO 9002 facility.



ISO 9002



Part Number	Description	Ctn Qty	List Price
HARVARD® Braided Safety Rope			
MR25-500	Blue/White, 1/4" x 500' Plastic Reel, 1000#	1	\$ 31.96
MR25-1	Blue/White, 1/4" x 1000' Plastic Reel, 1000#	1	62.57
MR25-3	Blue/White, 1/4" x 3000' Plastic Reel, 1000#	1	197.32
HARVARD® Twisted Safety Rope			
SR25-500	Black, 1/4" x 500' Plastic Reel, 1200#	1	48.86
SR25-1	Black, 1/4" x 1000' Plastic Reel, 1200#	1	92.75
SR25-3	Black, 1/4" x 3000' Plastic Reel, 1200#	1	305.54
Bleeder Orifices			
PO75BNL	3/4" Brass, NO LEAD	25/250	12.97
PO100	1", Rubber	25/100	2.04
BOT100NL	No Lead Brass Insert Tee 1" w/ rubber bleeder orifice	6	37.42
Ejector Screen			
ES1	Brass Screen	1	7.05
ES1S	Stainless Steel Screen	1	10.19
Cable Ties			
CT150	Bag of 100 Nylon, 1" to 1 1/4" diameter pipe, 8" long	1	7.03 /100
CT300	Bag of 100 Nylon, 1 1/2" to 4" diameter pipe, 15" long	1	16.22 /100



Pump Installation Fittings - Economy NO LEAD Bronze

Features:

- Light pattern, NO LEAD cast bronze insert fittings for use with flexible plastic pipe.
- "E" Series light pattern, NO LEAD fittings compete with Merrill.
- Third party certified to NSF/ANSI 372.



ERBMANL



EXLRBMANL



ERBCNL



ERBTNL



ERBENL

Part Number	Size	Style	# Barbs	Ctn/CaseQty	List Price
NO LEAD Cast Bronze Male Insert Adapters (INS x MIP) (Merrill CRBMANL Series)					
ERBMA1/2NL	1/2" x 1/2"	Hex	6	10/200	\$ 6.25
ERBMA3/4NL	3/4" x 3/4"	Hex	6	10/100	6.75
ERBMA1NL	1" x 1"	Hex	7	10/100	12.50
ERBMA1X3/4NL	1" x 3/4"	Hex	5	10/100	9.64
ERBMA11/4NL	1 1/4" x 1 1/4"	Hex	6	10/100	15.46
ERBMA11/4X1NL	1 1/4" x 1"	Hex	7	10/100	16.75
ERBMA1X11/4NL	1" x 1 1/4"	Hex	6	10/100	15.82
ERBMA11/2NL	1 1/2" x 1 1/2"	Hex	6	5/50	21.61
ERBMA2NL	2" x 2"	Hex	7	5/50	31.61
NO LEAD Cast Bronze Extra Long Male Adapters (INS x MIP) (Merrill RBMANLXL Series)					
EXLRBMA1NL	1" x 1"	Hex	13	10/100	22.50
EXLRBMA11/4NL	1 1/4" x 1 1/4"	Hex	13	10/100	30.17
NO LEAD Cast Bronze Couplings (INS x INS) (Merrill RBCPNL Series)					
ERBC1/2NL	1/2" x 1/2"	Hex	4	10/200	7.32
ERBC3/4NL	3/4" x 3/4"	Hex	4	10/200	9.04
ERBC1NL	1" x 1"	Hex	5	12/120	14.11
ERBC11/4NL	1 1/4" x 1 1/4"	Hex	6	12/72	21.46
ERBC11/2NL	1 1/2" x 1 1/2"	Hex	4	5/50	24.82
ERBC2NL	2" x 2"	Hex	4	5050	33.39
NO LEAD Cast Bronze Tees (INS x INS) (Merrill RBHTNL Series)					
ERBT3/4NL	3/4" x 3/4"		5	10/100	15.88
ERBT1NL	1" x 1"		5	10/100	23.04
ERBT11/4NL	1 1/4" x 1 1/4"		6	5/50	47.45
NO LEAD Cast Bronze Elbows (INS x INS) (Merrill RBHENL Series)					
ERBE3/4NL	3/4" x 3/4"		5	10/100	12.24
ERBE1NL	1" x 1"		5	10/100	17.79
ERBE11/4NL	1 1/4" x 1 1/4"		6	10/50	39.48

Pump Installation Adapters - NO LEAD Bronze




Features:

- Heavy pattern, contractor grade, NO LEAD cast bronze material.
- 20% to 30% heavier fittings than some competitors.
- No Lead bronze are third party certified to NSF/ANSI 372.



SEE PAGE 12.4c and 12.4d for a complete line of imported NO LEAD cast bronze insert fittings.



NLRBMA



NLLRBMA



NLXLRBMA



NLRBMUA



NLRBRA



NLRBFA

Part Number	Size	Style	Number of Barbs	Ctn/Case Qty	List Price
No Lead Cast Bronze Male Insert Adapters (INS x MIP)					
NLRBMA1/2	1/2" x 1/2"	Hex	5	10/200	\$ 6.77
NLRBMA3/4	3/4" x 3/4"	Hex	5	10/200	8.82
NLRBMA3/4X1	3/4" x 1"	Hex	6	10/100	12.32
NLRBMA1	1" x 1"	Hex	7	10/100	14.46
NLRBMA1X3/4	1" x 3/4"	Hex	5	10/100	10.36
NLRBMA1X11/4	1" x 11/4"	Hex	6	10/100	16.07
NLRBMA11/4	1 1/4" x 1 1/4"	Hex	6	10/100	17.89
NLRBMA11/4X1	1 1/4" x 1"	Hex	7	10/100	18.29
NLRBMA11/2	1 1/2" x 1 1/2"	Hex	6	5/50	21.68
NLRBMA11/2X11/4	1 1/2" x 1 1/4"	Hex	6	10/100	25.20
NLRBMA2	2" x 2"	Hex	7	5/50	39.14
No Lead Cast Bronze Long Male Adapters (INS x MIP)					
NLLRBMA1	1" x 1"	Hex	9	10/100	21.43
NLLRBMA1x11/4	1" x 1 1/4"	Hex	9	10/100	23.64
No Lead Cast Bronze Extra Long Male Adapters (INS x MIP)					
NLXLRBMA1	1" x 1"	Hex	12	10/100	19.46
NLXLRBMA1x11/4	1" x 1 1/4"	Hex	12	10/100	21.96
NLXLRBMA11/4	1 1/4" x 1 1/4"	Hex	12	10/100	28.21
NLXLRBMA2	2" x 2"	Hex	12	5/50	51.25
No Lead Cast Bronze Male Union Adapters (INS x MIP)					
NLRBMUA1	1" x 1"	Hex	6	10/80	29.75
NLRBMUA11/4	1 1/4" x 1 1/4"	Hex	6	10/40	54.46
No Lead Cast Bronze Rope Adapter (INS x MIP)					
NLRBRA1	1" x 1"	Round w/ rope eye	7	10/100	20.00
NLRBRA1X11/4	1" x 1 1/4"	Round w/ rope eye	6	10/100	22.36
NLRBRA11/4	1 1/4" x 1 1/4"	Round w/ rope eye	6	10/100	25.07
No Lead Cast Bronze Female Adapters (INS x FIP)					
NLRBFA1/2	1/2" x 1/2"	Round	5	10/200	10.75
NLRBFA3/4	3/4" x 3/4"	Round	5	10/100	11.54
NLRBFA1	1" x 1"	Round	5	10/100	16.75
NLRBFA11/4	1 1/4" x 1 1/4"	Round	7	10/100	22.61
NLRBFA11/2	1 1/2" x 1 1/2"	Round	6	5/50	24.46
NLRBFA2	2" x 2"	Round	7	5/50	39.79



Pump Installation Fittings - Cast Stainless Steel



SSMA

XLSSMA



SSC Series



SST



SSE Series



SSHE Series



SSHT Series



SSHB

Part Number	Size	Style	# Barbs	Ctn/CaseQty	List Price
Cast 304 Stainless Steel Male Insert Adapters (MIP xINS)					
SSMA1/2	1/2"	Hex	7	10/100	\$ 8.18
SSMA3/4	3/4"	Hex	7	10/200	12.21
SSMA3/4X1	3/4" X 1"	Hex	6	10/200	13.50
SSMA1	1"	Hex	7	10/100	16.79
SSMA11/4	1 1/4"	Hex	7	10/100	21.25
SSMA11/4X1	1 1/4" x 1"	Hex	7	10/100	18.39
SSMA11/2	1 1/2"	Hex	7	5/80	29.32
SSMA2	2"	Hex	7	5/40	43.93
Cast 304 Stainless Steel Heavy Pattern Extra Long Male Adapters (MIPxINS)					
XLSSMA1	1" x 1"	Hex	13	10/100	24.46
XLSSMA11/4X1	1 1/4" x 1"	Hex	13	5/50	25.89
XLSSMA11/4	1 1/4" x 11/4"	Hex	13	5/50	25.54
Cast 304 Stainless Steel Coupling (INS x INS)					
SSC1/2	1/2" x 1/2"	Hex	6	10/200	9.27
SSC3/4	3/4" x 3/4"	Hex	6	10/200	10.60
SSC1	1" x 1"	Hex	5	10/100	14.57
SSC11/4	11/4" x 11/4"	Hex	5	10/100	22.04
SSC11/2	11/2" x 11/2"	Hex	8	10/50	29.13
SSC2	2" x 2"	Hex	8	5/50	39.24
Cast 304 Stainless Steel Tee (INS x INS x INS)					
SST3/4	3/4" x 3/4"		5	5/50	17.14
SST1	1" x 1"		5	10/100	26.50
SST11/4	1 1/4" x 1 1/4"		5	10/100	37.50
Cast 304 Stainless Steel Elbow (INSxINS)					
SSE1	1" x 1"		5	10/100	24.82
SSE11/4	1 1/4" x 1 1/4"		7	5/50	33.75
Cast 304 Stainless Steel Hydrant Elbow (INSxMIP)					
SSHE3/4	3/4"x 3/4"		5	10/100	16.75
SSHE1X3/4	1" x 3/4"		5	10/100	19.11
SSHE1	1" x 1"		5	10/100	23.39
SSHE11/4	1 1/4" x 1 1/4"		6	10/50	32.86
Cast 304 Stainless Steel Hydrant Tee (INS x MIP)					
SSHT3/4	3/4" x 3/4"		4	10/100	20.00
SSHT1x3/4	1" x 3/4"		6	10/100	24.34
SSHT1	1" x 1"		4	10/100	28.50
Cast 304 Stainless Steel Hex Bushing (MIPxFIP)					
SSHB1X1/4	1" x 1/4"	Hex	-	10/200	8.62
SSHB1X1/2	1" x 1/2"	Hex	-	10/200	8.62
SSHB1X3/4	1" x 3/4"	Hex	-	10/200	8.62
SSHB11/4x1	1 1/4" x 1"	Hex	-	10/160	15.38



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.39

Pump Installation Fittings - Swaged Stainless Steel




☺ Limited Quantities Available



IMASS Series



SS12 Series



SS38 Series



ICSS Series



SS10 Series

Part Number	Size	Style	# Barbs	Ctn/Case Qty	List Price
Swaged 304 Stainless Steel Male Adapter (MIP x INS)					
IMASS50	1/2"	Round	6	25/200	\$ 6.75
IMASS75	3/4"	Round	6	25/150	6.96
IMASS100	1"	Round	7	20/120	11.25
IMASS125	1 1/4"	Round	7	20/80	13.07
IMASS125100	1 1/4 X 1"	Round	7	20/80	14.54
IMASS150	1 1/2"	Round	9	10/60	19.11
IMASS200	2"	Round	9	10/40	27.14
Swaged 316 Stainless Steel Male Insert Adapters (MIPxINS) Made in USA					
SS12-1/2	1/2"	Hex	6	25/300	\$ 8.40
SS12-3/4	3/4"	Hex	7	25/200	9.94
SS12-1	1"	Hex	7	20/160	11.92
SS12-11/4	1-1/4"	Hex	6	20/120	25.34
SS12-11/2	1-1/2"	Hex	6	10/60	30.88
SS12-2	2"	Hex	7	10/40	56.35 ☺
Swaged 316 Stainless Steel Male Reducing Adapter (MIP x INS) Made in USA					
SS38-11/4x1	1-1/4 x 1"	Round	7	25/100	23.83
Swaged 316 Stainless Steel Extra Long Male Adapter (MIP x INS) Made in USA					
XSS12-1	1"	Round	14	25	24.12
XSS12-11/4	1 1/4"	Round	14	25	31.98

Part Number	Size	Style	# Barbs	Ctn/Case Qty	List Price
Swaged 304 Stainless Steel Coupling (INS x INS)					
ICSS50	1/2"	Round	6	25/200	\$ 5.46
ICSS75	3/4"	Round	6	25/150	5.82
ICSS100	1"	Round	7	20/120	11.68
ICSS125	1 1/4"	Round	7	20/80	13.50
ICSS150	1 1/2"	Round	9	10/60	20.89
ICSS200	2"	Round	9	10/40	31.07
Swaged 316 Stainless Steel Coupling (INS x INS) Made in USA					
SS10-1	1"	Round	7	20	17.33
SS10-11/4	1 1/4"	Round	7	20	23.32
Swaged 316 Stainless Steel Extra Long Coupling (INS x INS) Made in USA					
XSS10-1	1"	Round	14	25	52.42




Pump Installation Well Seal Ells, Venturis

- Well Seal Ells and Venturis are third party certified to NSF/ANSI 372.



☺ Limited Quantities Available



ISWSE, B99



S86, ISVMA, B86

Part Number	Size	Ctn/CaseQty	List Price
Zinc Plated Steel Well Seal Elbows (INS x INS)			
ISWSE100	1"	25	\$ 14.82
ISWSE125	1 1/4"	15	21.54
Red Brass Well Seal Elbow (INS x INS) Made in USA			
B99-1	1"	5	84.08 ☺
B99-11/4	1-1/4"	5	158.39 ☺
Zinc Plated Steel Venturi Adapter (MIP x INS)			
ISVMA1X6	1" x 6"	60	5.68
ISVMA1X8	1" x 8"	50	6.43
ISVMA1X10	1" x 10"	40	9.74
ISVMA11/4X6	1-1/4" x 6"	50	7.21
ISVMA11/4X8	1-1/4" x 8"	40	8.36
ISVMA11/4X10	1-1/4" x 10"	30	12.52
Zinc Plated Steel Venturi Adapter (MIP x INS) Made in USA			
S86-3/4X6	3/4" x 6"	25	15.80 ☺
S86-3/4X10	3/4" x 10"	25	18.84 ☺
S86-3/4X12	3/4" x 12"	25	25.02
S86-1X6	1" x 6"	25	15.36
S86-1X8	1" x 8"	25	19.04
S86-1x10	1" x 10"	25	16.26 ☺
S86-1X12	1" x 12"	25	18.58 ☺
S86-11/4X6	1-1/4" x 6"	25	15.36 ☺
S86-11/4X8	1-1/4" x 8"	25	18.38 ☺
S86-11/4X10	1-1/4" x 10"	20	22.17 ☺
Red Brass Venturi Adapter (MIP x INS) Made in USA			
B86-1X6	1" x 6"	25/100	41.70
B86-1X8	1" x 8"	25/100	51.28 ☺
B86-11/4X8	1-1/4" x 8"	25/100	75.91 ☺

Geothermal Installation Accessories



GLLS8

GEOLOOP Leak Seal:

- Preventative maintenance for residential and commercial geothermal systems.
- A blended concentrated material designed to coat all surfaces it comes into contact with and reduce the formation of rust and corrosion.
- Field tested and proven effective in sealing system leaks (holes up to 1/8" in diameter.)
- Do not use if strainer is installed in system.
- Can plug or seal off strainers and gauges. Use with care.

Part Number	Description	Ctn Qty	List Price
GLLS8	GEOLOOP Leak Seal 8 oz. bottle	20	\$ 22.79

GEOLOOP Leak Seal Directions:

- Shake well before using.
- Use one 8 oz. bottle per 5 ton (up to 1200 gallons) system for minor leaks. A second bottle can be added for larger leaks.
- Premix with no less than 8-16 oz. of water.
- With circulating pump(s) running in continuous mode or using flushcart, pour or insert mixture into loop and circulate for several hours at low pressure. After introduced to the system, build pressure to 60 psi or higher (not to exceed 160 psi). Circulate for 24 hours. Return system to normal operating pressure thereafter. Check system in one week for pressure drop. Treatment can be repeated if needed.



RBGSE Series

Cast Bronze Ground Source Elbow Features:

- Elbow with 1/4" tapping used to check pressures and temperatures at the geothermal unit.

Part Number	Size	Ctn/Case Qty	List Price
Cast Bronze Ground Source Elbows (INS x MIP w/ 1/4" tap)			
RBGSE3/4	3/4" x 3/4"	10/100	\$ 12.45
RBGSE1X3/4	1" x 3/4"	10/100	13.57
RBGSE1	1" x 1"	10/80	15.18
RBGSE11/4	1 1/4" x 1 1/4"	5/50	26.17



HFBV6-I Series

ISO 9001

Forged Brass FULL Port Ball Valve with Hose Barbs Features:

- Heavy pattern, full port, forged brass construction.
- PTFE seats, chrome plated brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow-out proof stem design.
- **600 psi W.O.G.** non-shock; **150 psi S.W.P.**
- Insert hose barb ends for use with polyethylene pipe connections.
- Imported. Manufactured for American Granby in an ISO 9001 facility.



MATERIAL SPECIFICATIONS	
Handle nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Gland Follower	Forged Brass
Stem Packing	PTFE
Ball	Chrome Plated Brass
Seats	PTFE
Body	Forged Brass
End Adapter	Forged Brass

Part Number	Size	Ctn/Case Qty	List Price
HFBV6-50I	1/2"	50/100	\$ 11.13
HFBV6-75I	3/4"	30/60	17.33
HFBV6-100I	1"	20/40	32.39
HFBV6-125I	1-1/4"	12/24	54.47



Drop Pipe Couplings

Couplings for connecting pipe in submersible pump applications.
Ideal for all other threaded applications.



DPC Series



SSDPC Series

DPC Series Features:

- Available in Schedule 80 or 120
- Machined from custom extruded PVC stock which eliminates weak points that occur in molded couplings.
- Reamed and drifted for easy starting of threads.
- Tapered pipe threads for positive watertight connections.
- Made in U.S.A.



SSDPC Series Features:

- Heavy duty, extra heavy wall cast 304 STAINLESS STEEL construction.
- Up to 60% heavier wall than other SS drop pipe couplings available.
- Reamed and drifted for easy starting of threads.
- Tapered pipe threads for positive watertight connections.
- Wrench flats for easy installation.
- Third party certified to NSF/ANSI 372.



Part Number	Pipe Size	Overall Length	Ctn Qty	List Price
PVC Schedule 80 - Standard Wall				
80DPC100	1"	2 3/4"	25	\$ 2.05
80DPC125	1 1/4"	2 3/4"	25	2.05
PVC Schedule 120 - Extra Heavy Wall				
DPC100	1"	2-3/4"	100	2.29
DPC125	1-1/4"	2-3/4"	100	2.97
DPC150	1-1/2"	3-3/8"	100	3.83
DPC200	2"	3-3/8"	100	4.78
Cast Stainless Steel 304 - Heavy Duty - Extra Heavy Wall				
SSDPC100	1"	2 1/2"	10 / 60	15.00
SSDPC125	1 1/4"	2 1/2"	8 / 48	18.21
SSDPC150	1 1/2"	2 1/2"	10 / 60	19.46
SSDPC200	2"	2 1/2"	6 / 36	26.96

Couplings - Turned, Tool



Turned Coupling Features:

- Used for suspending flush well points or strainers from drive shoes or tubular cylinders.
- Galvanized with standard pipe thread.
- Furnished with right hand pipe threads.
- Thin wall 434J.
- Third party certified to NSF/ANSI 372.



Part Number	Rt. Hand Thread Pipe Size	Well Size	Strainer Size	Coupling O.D.	Coupling Length	Ctn Qty	List Price
434J11/4X11/4	1 1/4 x 1 1/4"	2	1"	1 13/16"	2 1/4"	48	\$ 6.48
434-11/4X11/4	1 1/4 X 1 1/4"	2	1 1/4	1 15/16"	2 1/4	48	7.12



Tool Coupling Features:

- Heavy, extra-long black steel coupling recessed for use with well tools and drill rods.
- Third party certified to NSF/ANSI 372.



Part Number	Pipe Size	Thread	OD	Length	Ctn Qty	List Price
8049C	1"	1" Tapered	1 5/8"	3 1/2"	24	\$ 27.21
8049D	1 1/4"	1 1/4" Straight	2 1/8"	3 3/4"	40	38.45




Flow Control Valves - Dole




Dole Flow Control Valve Features:

- Prevents over-pumping of low yield wells.
- Installs in the discharge line between check valve and pressure tank.
- Do not use to suspend pipe.
- Self cleaning, designed to deliver constant volume of water over wide pressure drop range.
- Flow rated maintained within +/- 15% up to a pressure drop of 125 psi.
- Maximum system pressure 200 psi.
- Lead Free.







GA, GB, GC, GX Series *
3/8" - 1" fipt
Brass Housing/
Nickle Plated



GY Series
3/4 mipt" x 3/4" fipt
Brass Housing/
Nickle Plated

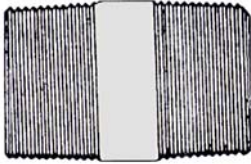

GP GT, GF, GH, GK Series
1 1/4" - 3" mipt
Steel Housing/
Zinc Plated

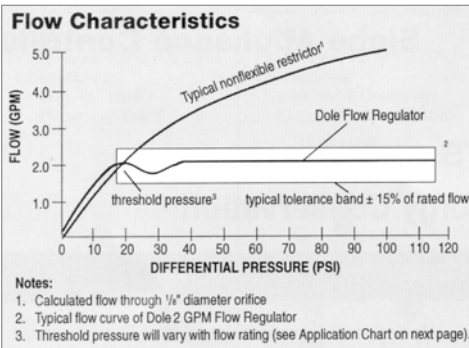

NEW Part Number	OLD	Flow (GPM)	Inlet/Outlet	List Price
Brass Housing/Nickel Plated				
* GA.06		0.06	3/8" fIPT	\$ 30.28
GA.13	DV.13	0.13	3/8" fipt	30.28
GA.19	DV.19	0.19	3/8" fipt	30.28
GA.25	DV2.5	0.25	3/8" fipt	30.28
GA.35		0.35	3/8" fipt	30.28
GA.50	DV5	0.50	3/8" fipt	30.28
GA.75	DV75	0.75	3/8" fipt	30.28
GA1.0	DV10	1.0	3/8" fipt	30.28
Steel Housing/Zinc Plated				
* GB1.0	DV10-1/2	1.0	1/2" fipt	35.21
GB1.5	DV15	1.5	1/2" fipt	35.21
GB2.0	DV20	2.0	1/2" fipt	35.21
GB2.5	DV25	2.5	1/2" fipt	35.21
GB3.0	DV30	3.0	1/2" fipt	35.21
GB3.5	DV35	3.5	1/2" fipt	35.21
GB4.0	DV40	4.0	1/2" fipt	35.21
GB5.0	DV50-1/2	5.0	1/2" fipt	35.21
GB6.0	DV60-1/2	6.0	1/2" fipt	35.21
Steel Housing/Brass Housing				
* GC1	DV1.0	1.0	3/4" fipt	46.59
GC1.5		1.5	3/4" fipt	46.59
GC2.0	DV2.0	2.0	3/4" fipt	46.59
GC2.5	DV2.5-3/4	2.5	3/4" fipt	46.59
GC3.0	DV30-3/4	3.0	3/4" fipt	46.59
GC3.5	DV3.5-3/4	3.5	3/4" fipt	46.59
GC4.0	DV40-3/4	4.0	3/4" fipt	46.59
GC5.0	DV50	5.0	3/4" fipt	46.59
GC6.0	DV60	6.0	3/4" fipt	46.59
GC7.0	DV70	7.0	3/4" fipt	46.59
GC8.0	DV80	8.0	3/4" fipt	46.59
GC9.0	DV90	9.0	3/4" fipt	46.59
GC10	DV100	10.0	3/4" fipt	46.59
GC11.5	DV115	11.5	3/4" fipt	46.59
Steel Housing/Brass Housing with MXF				
* GY1.0	DV1-3/4MXF	1.0	3/4" mipt x fipt	63.63
GY1.5	DV1.5-3/4MXF	1.5	3/4" mipt x fipt	63.63
GY2.0	DV2-3/4MXF	2.0	3/4" mipt x fipt	63.63
GY2.5	DV2.5-3/4MXF	2.5	3/4" mipt x fipt	63.63
GY3.0	DV3-3/4MXF	3.0	3/4" mipt x fipt	63.63
GY3.5	DV3.5-3/4MXF	3.5	3/4" mipt x fipt	63.63
GY4.0	DV4-3/4MXF	4.0	3/4" mipt x fipt	63.63
GY5.0	DV5-3/4MXF	5.0	3/4" mipt x fipt	63.63
GY6.0	DV6-3/4MXF	6.0	3/4" mipt x fipt	63.63
GY7.0	DV7-3/4MXF	7.0	3/4" mipt x fipt	63.63



Flow Control Valves - Dole



NEW Part Number	OLD	Flow (GPM)	Inlet/Outlet	List Price
GY8.0	DV8-3/4MXF	8.0	3/4" mipt x fipt	\$ 63.63
GY9.0	DV9-3/4MXF	9.0	3/4" mipt x fipt	63.63
GY10	DV10-3/4MXF	10.0	3/4" mipt x fipt	63.63
GY11.5		11.5	3/4" mipt x fipt	63.63
* GX1.0	DV10-1	1.0	1" fipt	74.85
GX1.5	DV15-1	1.5	1" fipt	74.85
GX2.0	DV20-1	2.0	1" fipt	74.85
GX2.5	DV25-1	2.5	1" fipt	74.85
GX3.0	DV30-1	3.0	1" fipt	74.85
GX3.5	DV35-1	3.5	1" fipt	74.85
GX4.0	DV40-1	4.0	1" fipt	74.85
GX5.0	DV50-1	5.0	1" fipt	74.85
GX6.0	DV60-1	6.0	1" fipt	74.85
GX7.0	DV70-1	7.0	1" fipt	74.85
GX8.0	DV80-1	8.0	1" fipt	74.85
GX9.0	DV90-1	9.0	1" fipt	74.85
GX10	DV100-1	10.0	1" fipt	74.85
GX12	DV120	12.0	1" fipt	74.85
GX13.5	DV135-1	13.5	1" fipt	74.85
GX15	DV150	15.0	1" fipt	74.85
GX20	DV200	20.0	1" fipt	74.85
GX25	DV250	25.0	1" fipt	74.85
GX30	DV300	30.0	1" fipt	74.85
Steel Housing/Zinc Plated				
GP1.0	DV1.0-11/4	1.0	1 1/4" mipt	135.47
GP1.5		1.5	1 1/4" mipt	135.47
GP2.0		2.0	1 1/4" mipt	135.47
GP2.5		2.5	1 1/4" mipt	135.47
GP3.0		3.0	1 1/4" mipt	135.47
GP3.5		3.5	1 1/4" mipt	135.47
GP4.0		4.0	1 1/4" mipt	135.47
GP5.0		5.0	1 1/4" mipt	135.47
GP6.0		6.0	1 1/4" mipt	135.47
GP7.0	DV75-11/4	7.0	1 1/4" mipt	135.47
GP8.0		8.0	1 1/4" mipt	135.47
GP9.0		9.0	1 1/4" mipt	135.47
GP10	DV10-11/4	10.0	1 1/4" mipt	135.47
GP12	DV12-11/4	12.0	1 1/4" mipt	135.47
GP15	DV15-11/4	15.0	1 1/4" mipt	135.47
GP20	DV20-11/4	20.0	1 1/4" mipt	135.47
GP25	DV25-11/4	25.0	1 1/4" mipt	135.47
GP30	DV30-11/4	30.0	1 1/4" mipt	135.47
GT1.0		1.0	1 1/2" mipt	150.05
GT1.5		1.5	1 1/2" mipt	150.05
GT2.0	DV2-11/2	2.0	1 1/2" mipt	150.05
GT2.5		2.5	1 1/2" mipt	150.05
GT3.0		3.0	1 1/2" mipt	150.05
GT3.5		3.5	1 1/2" mipt	150.05
GT4.0		4.0	1 1/2" mipt	150.05
GT5.0	DV5-11/2	5.0	1 1/2" mipt	150.05

NEW Part Number	OLD	Flow (GPM)	Inlet/Outlet	List Price
Steel Housing/Zinc Plated				
GT6.0		6.0	1 1/2" mipt	\$ 150.05
GT7.0	DV7-11/2	7.0	1 1/2" mipt	150.05
GT8.0		8.0	1 1/2" mipt	150.05
GT9.0	DV9-11/2	9.0	1 1/2" mipt	150.05
GT10	DV10-11/2	10.0	1 1/2" mipt	150.05
GT12		12.0	1 1/2" mipt	150.05
GT13.5		13.5	1 1/2" mipt	150.05
GT15	DV15-11/2	15.0	1 1/2" mipt	150.05
GT20	DV20-11/2	20.0	1 1/2" mipt	150.05
GT25	DV25-11/2	25.0	1 1/2" mipt	150.05
GT30	DV30-11/2	30.0	1 1/2" mipt	150.05
GF10	DV10-2	10.0	2" mipt	255.85
GF11.5		11.5	2" mipt	255.85
GF12	DV12-2	12.0	2" mipt	255.85
GF13.5	DV135-2	13.5	2" mipt	255.85
GF15		15.0	2" mipt	255.85
GF20	DV20-2	20.0	2" mipt	255.85
GF25		25.0	2" mipt	255.85
GF30	DV30-2	30.0	2" mipt	255.85
GH30		30.0	2-1/2" mipt	566.99
GH35	DV350	35.0	2-1/2" mipt	566.99
GH40	DV400	40.0	2-1/2" mipt	566.99
GH45	DV450	45.0	2-1/2" mipt	566.99
GH50	DV500	50.0	2-1/2" mipt	566.99
GH55	DV550	55.0	2 1/2" mipt	566.99
GH60	DV600	60.0	2-1/2" mipt	566.99
GH65	DV650	65.0	2-1/2" mipt	566.99
GH70	DV700	70.0	2-1/2" mipt	566.99
GH75	DV750	75.0	2-1/2" mipt	566.99
GH80	DV800	80.0	2-1/2" mipt	566.99
GH85		85.0	2-1/2" mipt	566.99
GH90	DV900	90.0	2 1/2" mipt	566.99
GK30		30.0	3" mipt	589.49
GK35	DV3500	35.0	3" mipt	589.49
GK40	DV4000	40.0	3" mipt	589.49
GK45	DV4500	45.0	3" mipt	589.49
GK50		50.0	3" mipt	589.49
GK55	DV5500	55.0	3" mipt	589.49
GK60		60.0	3" mipt	589.49
GK65	DV6500	65.0	3" mipt	589.49
GK70		70.0	3" mipt	589.49
GK75		75.0	3" mipt	589.49
GK80		80.0	3" mipt	589.49
GK85	DV8500	85.0	3" mipt	589.49
GK90		90.0	3" mipt	589.49
GK95		95.0	3" mipt	589.49
GK100	DV1000	100.0	3" mipt	589.49
GK105		105.0	3" mipt	589.49
GK110		110.0	3" mipt	589.49
GK115		115.0	3" mipt	589.49
GK120	DV1200	120.0	3" mipt	589.49



Installation Accessories - Electrical



HS Series



EC Series

Heat Shrink Splicing Kit Features:

- Excellent dielectric strength and can be shrunk over a large diameter connector and still effectively seals watertight down to a small diameter cable.
- Available in two, three and four wire kits. Designed to fit the new, smaller O.D. pump leads.
- No grease tape or epoxy is needed.
- Highly resistant to moisture, fungus and weathering.
- Supplied w/ EC1410 wire connectors for #14-#10 gauge wire. (EC6/8 for LHS Series.)
- Private labeling available for minimum orders of 200 kits.
- Bulk tubing available.
- **Third party certified to NSF/ANSI 372.**



Wire Connector Features:

- Provides quick, safe and sure electrical connection.
- Seamless.
- 13/16" in length.



Part Number	Tubes Fits Wire Size	# Tubes	# Butt Connectors (included in kit)	Ctn Qty	List Price
Black Heavy Wall Heat Shrink Kits					
HS2	#14, #12, #10	2	2	50	\$ 2.86
HS2-3	#14, #12, #10	2	3	50	3.00
HS3	#14, #12, #10	3	3	50	4.07
HS3-4	#14, #12, #10	3	4	50	4.21
HS4	#14, #12, #10	4	4	50	5.29
LHS3	#8, #6, #4, #2	3	3 (#8) 3 (#6)	20	11.70
LHS4	#8, #6, #4, #2	4	4 (#8) 4 (#6)	20	15.42
CHST	#14, #12, #10	BULK	0	500	0.99
Black Standard Wall Heat Shrink Kits					
HSSW2	#14, #12, #10	2	2	50	2.17
HSSW2-3	#14, #12, #10	2	3	50	2.31
HSSW3	#14, #12, #10	3	3	50	3.09
HSSW3-4	#14, #12, #10	3	4	50	3.24
HSSW4	#14, #12, #10	4	4	50	3.98
CHSSWT	#14, #12, #10	BULK	0	500	0.73
Clear Heavy Wall Heat Shrink Kits					
HSHWC2	#14, #12, #10	2	2	50	2.79
HSHWC2-3	#14, #12, #10	2	3	50	3.38
HSHWC3	#14, #12, #10	3	3	50	3.96
HSHWC3-4	#14, #12, #10	3	4	50	4.04
HSHWC4	#14, #12, #10	4	4	50	5.04
LHSHWC3	#8, #6, #4, #2	3	3 (#8) 3 (#6)	20	11.70
LHSHWC4	#8, #6, #4, #2	4	4 (#8) 4 (#6)	20	16.56
CHSHWCT	#14, #12, #10	BULK	0	500	0.89
Clear Standard Wall Heat Shrink Kits					
HSCL2	#14, #12, #10	2	2	50	2.43
HSCL2-3	#14, #12, #10	2	3	50	2.61
HSCL3	#14, #12, #10	3	3	50	3.54
HSCL3-4	#14, #12, #10	3	4	50	3.75
HSCL4	#14, #12, #10	4	4	50	4.71
CHSCLT	#14, #12, #10	BULK	0	500	0.77
Wire Connectors					
EC1410	For #14-10 gauge wire			100	27.11/100
EC8	For #8 gauge wire			250	0.64 each
EC6	For #6 gauge wire			250	1.00 each
EC4	For #4 gauge wire			100	1.64 each
EC2	For #2 gauge wire			100	2.21 each



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.47

Installation Accessories - Electrical



SK Series

Compression Splicing Kit Features:

- Molded from high impact resistant polycarbonate.
- No water absorption characteristics.
- Excellent dielectric properties.
- Available in two, three and four wire kits.
- Supplied with EC1410 wire connectors for #14-#10 gauge wire.
- **Third party certified to NSF/ANSI 372.**



LA1

LA1 Surge Arrestor Features:


- Protects motors and controls from voltage surge caused by lightning interference, switching loads and powerline interferences.
- 500 volt surge protection.
- Easy installation in pressure switch, motor control box or breaker box.
- Instructions included.



LA302R

LA302R Lightning Arrestor Features:

- Rated Voltage 125-250V, single phase.
- 3 wire residential service.
- 60,000 amps maximum current. 2000 joules per pole. Unlimited number of surges.
- Weatherproof enclosure.
- 2 1/4" high x 2 1/4" diameter.
- Bracket included.
- UL Listed



HPL

Pump Light Features:

- Can be used with two or three wire motors in either 115 volt or 230 volt applications.
- It is easy to install at the pressure switch, where it is used to indicate that the pump is running or at the control box, where it is used to indicate that current is available to the submersible pump.

Part Number	Description	# Tubes	# Connectors	Ctn Qty	List Price
Compression Splice Kits					
SK2	#14, #12, #10	2	2	50	\$ 4.90
SK3	#14, #12, #10	3	3	50	7.23
SK4	#14, #12, #10	4	4	50	9.41
Lightning Arrestors					
LA1	120/240v. AC			112	23.92
LA302R	3 wire UL listed 125/250v			18	103.30
Pump Light					
HPL75	Pump Light			12	19.80



Installation Accessories - Electrical



PTC163-6ST



PTC163-6RA


HARVARD CONTRACTOR'S

Power Cord Features:

- Three prong straight (115V) or right angle (115V, 220V) molded plugs.
- 16 gauge, 3 conductor, 13 amp, 125 Volt rating.
- 14 gauge, 3 conductor, 15 amp, 250 Volt rating.
- Six foot cord length.
- Free end is split, stripped 3/8".
- UL and CSA listed in US and Canada.



PTC143-6RA220



Part Number	Description	Wire Gauge	Volt Rating	Ctn Qty	List Price
PTC163-6ST	Straight plug cord	16	125 V	50	\$ 6.61
PTC163-6RA	Right angle plug cord	16	125 V	50	12.91
PTC143-6RA220	Right angle plug cord	14	250 V	50	14.11



HARVARD CONTRACTOR'S

Anchor Kit Features:

- Anchor kits complete with 100 plastic anchors, 100 screws and 1/4" masonry drill bit in a plastic case.
- Plastic gray ribbed anchors with lip design for electronic timer, pump start relay installations. Use with concrete block, brick and wallboard.
- Anchors have internal ribs for better centering of screws, locking lugs against pull and twist. Exterior design prevents fall out in overhead holes.
- Kit available with combination slotted/phillips head or tri-combination, slotted/phillips/hex head #10 x 1" screws.
- Kits complete with 1/4" x 4" masonry drill bit.
- Clear, unbreakable plastic case with molded-in hanging tab.



Combo Head

Tri Combo Head



Part Number	Description	Ctn Qty	List Price
AK10CSPR	Ribbed Combo Head	36	\$14.11
AK10TCR	Ribbed Tri Combo Head	36	15.00



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.49



WCS1022

HARVARD CONTRACTOR'S Wire Cutter/Strippers Features:

- Combination wire cutter and stripper.
- Strips wire sizes 22-10 AWG.
- Heavy duty scissor opening spring.
- Cushioned plastic grips.
- Easy locking thumb lock.



Part Number	Description	Ctn Qty	List Price
WCS1022	Wire Cutter/Stripper	100	\$ 19.53



Pressure Switches - Imported



Imported Pressure Switch Features:

- Designed for the control of electrically driven water pumps.
- Suitable for all types of pumps: jet, submersible, reciprocating, etc.
- Diaphragm actuated.
- 1/4" FPT connection.
- Standard and low pressure cut-off available.
- Terminal and ground screws are combination slotted, phillips heads.
- Captive cover thumb screw.
- Black plastic NEMA 1 general purpose enclosure.
- UL, CSA listed US and Canada, CE certified.
- Individually boxed. Bulk packaging available on standard switch only.
- Third party certified to NSF/ANSI 372.



Part Number	Description	Cut-In/Cut-off	Package	Case Qty	List Price
PS2040	Standard Switch	20/40	Individual Ctn	50	\$ 17.50
PS3050	Standard Switch	30/50	Individual Ctn	50	17.50
PS4060	Standard Switch	40/60	Individual Ctn	50	17.50
CPS2040	Standard Switch	20/40	Bulk Packed	50	17.14
CPS3050	Standard Switch	30/50	Bulk Packed	50	17.14
CPS4060	Standard Switch	40/60	Bulk Packed	50	17.14
PS2040M4	Low Pressure Cut-off	20/40	Individual Ctn	50	18.93
PS3050M4	Low Pressure Cut-off	30/50	Individual Ctn	50	18.93
PS4060M4	Low Pressure Cut-off	40/60	Individual Ctn	50	18.93





Pressure Switches - Square D



ISO 9001

Square D Pressure Switch Features:

- Designed for the control of electrically driven water pumps.
- Diaphragm actuated.
- Differential increases with range.
- Contacts open on increased pressure.
- General purpose enclosure NEMA Type 1
- **Individually boxed.** Bulk packaging available upon request.
- Manufactured for AGI in an ISO 9001 facility.
- **Third party certified to NSF/ANSI 372.**



SQUARE D



Certified to NSF/ANSI 61



Part Number	Description/Special Features	Ctn Qty	List Price	Drop Ship Price (200 pc)
9013FSG2 20/40	Standard Pump Switch	50	\$ 37.90	
9013FSG2 30/50	Standard Pump Switch	50	37.90	
9013FSG2 40/60	Standard Pump Switch	50	37.90	
9013FSG2M4 20/40	Low Pressure Cutoff	40	50.24	
9013FSG2M4 30/50	Low Pressure Cutoff	40	50.24	
9013FSG2M4 40/60	Low Pressure Cutoff	40	50.24	
9013FSG2M1 20/40	Manual Cutoff Lever	1	45.05	
9013FSG2M1 30/50	Manual Cutoff Lever	1	45.05	
9013FSG2M1 40/60	Manual Cutoff Lever	1	45.05	
9013FSG2P 20/40	with Pulsation Plug	1	39.06	Contact
9013FSG2P 30/50	with Pulsation Plug	1	39.06	your
9013FSG2P 40/60	with Pulsation Plug	1	39.06	Salesperson
9013FSG9 20/40	1/4 mpt Connection	1	37.90	or
9013FSG9 30/50	1/4 mpt Connection	1	37.90	Cust. Service
9013FSG9 40/60	1/4 mpt Connection	1	37.90	For
				Pricing
9013FYG2 30/50	Medium Duty Pump Switch	1	55.88	
9013FYG2 40/60	Medium Duty Pump Switch	1	55.88	
9013FYG2 60/80	Medium Duty Pump Switch	1	55.88	
9013GHG2 60/80	Heavy Duty Pump Switch	1	132.81	
9013GHG2 80/100	Heavy Duty Pump Switch	1	132.81	
9013GHG2 120/150	Heavy Duty Pump Switch	1	132.81	
9013GHG2 145/175	Heavy Duty Pump Switch	1	132.81	
9013GSG2 20/40	Heavy Duty Pump Switch	1	132.81	
9013GSG2 30/50	Heavy Duty Pump Switch	1	132.81	
9013GSG2 40/60	Heavy Duty Pump Switch	1	132.81	
9013GSG2 60/80	Heavy Duty Pump Switch	1	132.81	
9013FGADJTOOL	Pressure Switch Wrench	1	2.41 each	
Pulsation Plug	Pulsation Plug (Packaged in bags of 50)	1	2.24 each	

SEE CATALOG PAGE 5.8 for FLOAT SWITCHES.

- Other 9013 class Square D switches available on a special order basis. Allow 3 weeks for delivery.
- Drop ship pricing available, contact your salesperson or Customer Service.
- Net 30 day terms apply on all drop ship orders.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Pressure Switches - Square D



SPECIFICATIONS




General Purpose Enclosure NEMA Type 1		Application		Pipe Connection
Product No.	Special Feature			
9013FSG9	1/4" MPT Connection	Domestic Water Pumps	Domestic Water Pumps	1/4" - 18 NPT
9013FYG2	High H.P. 80 psi range			
9013FSG2	Standard Pump Switch			
9013FSG2P	Pulsation Plug			
9013FSG2M1	Manual Cutout Lever			
9013FSG2M4	Low Pressure Cutoff			
9013GSG2	Heavy Duty Pump Switch	Air Compressors Lg. Water Pumps	Water or Air	1/4" - 18 NPT Internal Thread
9013GHG2	Heavy Duty Pump Switch			

Horsepower Chart General Purpose Enclosure												
Product No.	Poles	Cut-out PSI	Diff PSIG	Single Phase		Polyphase AC			Direct Current			
				110V	220V	220V	440V	550V	32V	115V	230V	
9013FSG9	2	20-65	15-30	1	1 1/2	2				1/4		
9013FYG2	2	25-80	20-30	1 1/2	2	3				1/4	1/2	1/2
9013FSG2	2	20-65	15-30	1 1/2	2	2				1/4		
9013FSG2P	2	20-65	15-30	1 1/2	2	2				1/4		
9013FSG2M1	2	20-65	15-30	1 1/2	2	2				1/4		
9013FSG2M4	2	20-65	15-30	1 1/2	2	2				1/4		
9013GSG2	2	20-80	12-36	2	3	5	5	5		1/2	1	1
9013GHG2	2	65-200	25-60	2	3	5	5	5		1/2	1	1

Pressure Code Table	
Code	Setting PSI (Close-Open)
J15	5-21
J16	8-20
J18	20-50
J20	20-40
J21	30-50
J23	40-20
J24	40-60
J25	60-80
J26	70-90
J28	70-100
J29	75-100
J31	90-120
J33	50-70
J34	55-85
J51	100-80
J57	120-150
J63	145-175



Pump Start Relays / Magnetic Contactors

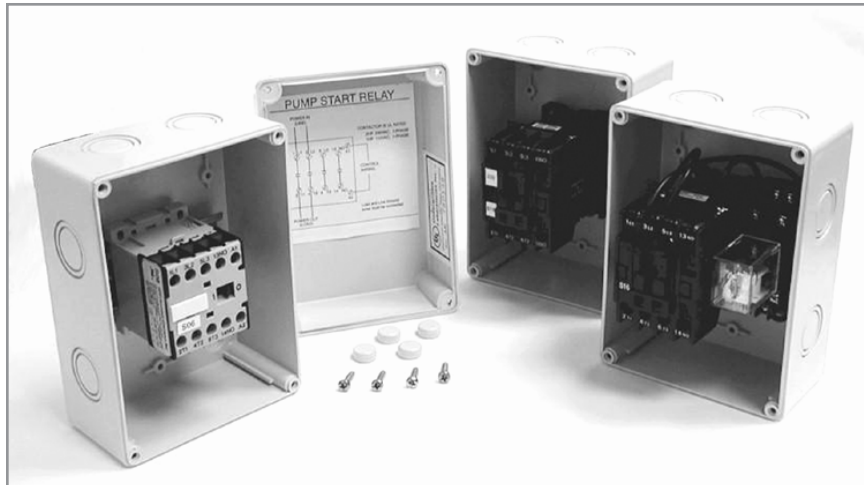

Pump Start Relay / Magnetic Contactor Features:

- Contactors are UL and UL Canada rated.
- Wide coil operating range, +10% to -30% of rated 60 hz coil voltage.
Contactors will start on low voltage as follows:
Single phase: 24 VAC coil will pull in at 17 volts.
120 VAC coil will pull in at 84 volts.
230 VAC coil will pull in at 161 volts.
- Finger safe design.
- One normally open auxilliary contact for powering a pilot light or alarm.
- Pressure screw terminals accept 18 through 10 AWG wire.
- Interposing relay units accept 24 through 10 AWG wire.
- Mechanical life up to 10 million operations.
- Long electrical life.
- PSR567 Series with interposing relay designed for low voltage and low controller output.




Industrial Non-metallic Enclosure Features:

- Gray enclosures are UL, CSA listed.
- Rated NEMA 4X for indoor or outdoor use.
- To maintain 4X enclosure rating use required 4X connectors.
- Watertight, dust tight, oil tight and rain tight.
- High impact, durable insulated Noryl thermoplastic.
- Neoprene gasketed cover.
- Resistant to shock, corrosion, chemicals and atmospheric agents.
- 8 conduit knockouts (1/2", 3/4" NPT combination.)
- Service temperature -40° to 260° F.
- Stainless steel cover screws (max tightening torque: 7 in-lbs.)
- Sealing plugs provided to waterproof mounting screws.
- 5.9" H x 4.3" W x 3.9" D



Pump Start Relays / Magnetic Contactors

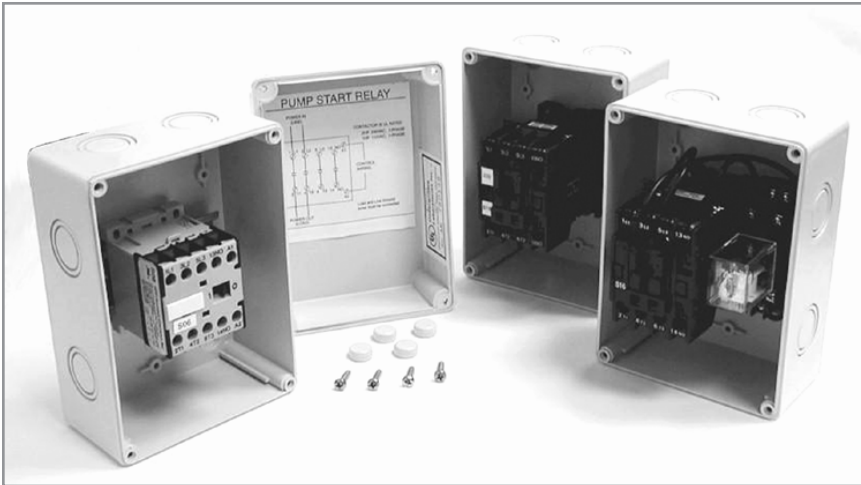

Part Number	INPUT- PUMP START RELAY			CONTACTOR Coil Voltage	PUMP MOTOR HP (MAX)				LIST PRICE
	Volts VAC	Req'd Coil Close	Power Hold		Single Phase*		Three Phase **		
					120 v	230 v	200/230v	460 v	
Direct Control Style Contactor									
PSR123-24	24	26 VA	4.2 VA	24	1 HP	2 HP	3 HP	5 HP	\$ 132.03
PSR123-120	120	26 VA	4.2 VA	120	1 HP	2 HP	3 HP	5 HP	132.03
PSR123-230	230	26 VA	4.2 VA	230	1 HP	2 HP	3 HP	5 HP	132.03
Direct Control Style Contactor									
PSR575-24	24	70 VA	12 VA	24	2 HP	5 HP	7.5 HP	15 HP	183.26
PSR575-120	120	70 VA	12 VA	120	2 HP	5 HP	7.5 HP	15 HP	183.26
PSR575-230	230	70 VA	12 VA	230	2 HP	5 HP	7.5 HP	15 HP	183.26
Interposing Relay Style Contactor for low voltage/controller output applications.									
PSR576-230-24	24	1.2 VA	1.2 VA	260	-	5 HP	7.5 HP	-	334.26

Notes:

1. Direct Control Style: The **input volts** must match the controller output voltage.
The **contactor coil voltage** must match the controller voltage.
 2. Interposing Relay Style: The **input volts** must match the controller output voltage.
The **contactor coil voltage** must match the controller voltage.
 3. VA=Volt Amps. To determine the operating amperage needed by the coil, divide the VA by the controller output voltage.
- * Single Phase systems require **motor overload protection** within the motor.
 ** Three phase systems: May require **motor overload protection** within the motor. For proper **overload protection** consult the NEC (National Electrical Code) and local building codes before installation.



Liquid Level Controls

B/W Controls



Liquid Level Control

Liquid Level Control Features:

- Provides automatic low level cutoff protection for submersible pumps & deep well turbines.
- Liquid level submersible pump control system consists of a standard enclosed type induction relay which operates from two insulated electrodes suspended at desired levels.
- Permits efficient operation at full capacity and eliminates danger of pumping air or sand.
- Wiring diagrams and complete installation instruction are included with each control.

1500G SERIES INDUCTION RELAY:

- Two way control system for pump up or pump down.
- Rated at 1 hp single phase, 115 or 230 volts A.C.
- For use in controlling hydropneumatic tanks and motorized valve installations.

1500C and 1500D SERIES INDUCTION RELAY:

- Rated at 1 h.p. single phase, 110 or 220 volts and furnished in a NEMA 1 metal enclosure.
- For control of a larger motor, it can also be supplied in a common enclosure with an auxiliary relay without overload protection or with a magnetic starter that has overload protection.
- 1500C Series for sewage & sump pump, low level cutoff for submersible pump application.
- 1500D Series for supply pumps on elevated tanks & towers, high level cutoff for pumps & valves.

6013 SERIES ELECTRODES:

- Made of brass or 303 stainless steel.
- 2" long.
- Assembled in molded plastic insulating shield 9/16" in diameter.
- Use in submersible pump installations by suspending to desired length w/ suspension wire.



Electrode

NEW Part Number	OLD Part Number	Description	Volts	Ctn Qty	List Price
1500G-L1-S7-N1X	DH110-220	Pump-up/Pump-down	110/220 volts	1	\$ 676.44
1500G-L1-S8-N1X	DH110-360	Pump-up/Pump-down	110/360 volts	1	676.44
1500G-L2-S7-N1X	DH220-220	Pump-up/Pump-down	220/220 volts	1	676.44
1500G-L2-S8-N1X	DH220-360	Pump-up/Pump-down	220/360 volts	1	676.44
1500G-L3-S8-N1X	DH440-360	Pump-up/Pump-down	440/360 volts	1	676.44
1500G-L4-S11-N1	DH550-600	Pump-up/Pump-down	550/600 volts	1	676.44
1500C Series					
1500C-L1-S4-N1X	LH110-110	Pump-down	110/120 volts	1	600.41
1500C-L1-S7-N1X	LH110-220	Pump-down	110/220 volts	1	600.41
1500C-L1-S8-N1X	LH110-360	Pump-down	110/360 volts	1	600.41
1500C-L2-S7-N1X	LH220-220	Pump-down	220/220 volts	1	600.41
1500C-L2-S8-N1X	LH230-360	Pump-down	230/360 volts	1	600.41
1500C-L2-S9-N1X	LH220-480	Pump-down	220/480 volts	1	600.41
1500C-L3-S8-N1X	LH440-360	Pump-down	440/360 volts	1	600.41
1500D Series					
1500D-L1-S7-N1X	RH110-220	Pump-up	110/220 volts	1	600.41
1500D-L1-S8-N1X	RH110-360	Pump-up	110/360 volts	1	600.41
1500D-L2-S7-N1X	RH220-220	Pump-up	220/220 volts	1	600.41
1500D-L2-S9-N1X	RH220-480	Pump-up	220/480 volts	1	600.41
1500D-L2-S8-N1X	RH230-360	Pump-up	230/360 volts	1	600.41
1500D-L3-S8-N1X	RH440-360	Pump-up	440/360 volts	1	600.41
Electrodes					
6013-W6	E1S	Stainless Steel *		1	89.78
6013-W5	E1SB	Brass		1	78.87



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

1.57

Liquid Level Controls



Induction Relay Coil Selection Data

Primary Coil:

The primary coil voltage should be chosen to match the line voltage of the control system. The 1500 Series Induction Relay can be supplied with any of the following line voltages.

Line Voltage	Frequency (Hertz)	Max Amps (Secondary Shorted)
110-120	50-60	.075
208-240	50-60	.038
440-480	50-60	.019

Secondary Coil:

Since B/W level control systems use liquid as an electrical conductor to complete the relay's secondary circuit - and since the resistance of liquid varies, it is necessary that each induction relay be equipped with a secondary coil that will operate over the resistance of the liquid it controls. The table below lists the operating characteristics of various coils available. All values are based on line voltage of 115, 230, 460 volts at 60 hertz.


Typical Liquids:

The following recommendations are satisfactory for general use, but because the conductivity of liquids varies greatly with concentration, purity, temperature and other factors, some applications may require a different selection. A number of the products listed are produced as solids such as crystals or powders, and the relay selection is based on the normally used commercial solutions of these materials.

Liquid Description	Secondary Coil	Liquid Description	Secondary Coil	Liquid Description	Secondary Coil
Acetic Acid - up to 75%	90 volt	Carbolic Acid - up to 90%	220 volt	Nitric acid	40 or 90 volt
- 75 - 90%	220 volt	Catsup	90 volt	Orange juice	90 volt
Acids - General	40 or 90 volt	Caustic Soda (Sodium Hydroxide)	40 volt	Paper stock	220 volt
Alkalies - General	40 or 90 volt	Cement slurry	220 volt	Penicillin	220 volt
Alum Solutions	220 volt	Chromic acid	40 volt	Phosphoric acid	40 volt
Aluminum Sulphate	90 volt	Citric acid	40 or 90 volt	Plating solutions	40 or 90 volt
Aluminum Hydroxide	90 volt	Coffee	90 volt	Salts - chemical	40 or 90 volt
Amino Acids	90 volt	Condensate - ordinary water	480 volt	Sodium Carbonate (soda ash)	90 volt
Ammonium Chloride	40 volt	Corn syrup	480 volt	Sodium Chloride (table salt)	40 volt
Ammonium Hydroxide (Ammonia)	220 volt	Corn - cream style	90 volt	Sodium Hydroxide (caustic soda)	40 volt
Ammonium Sulphate	220 volt	Ferrous Sulphate	220 volt	Sodium Hypochlorate	40 volt
Baby foods	90 volt	Formic acid - up to 75%	90 volt	Sodium Silicate (water glass)	90 volt
Barium Chloride	40 volt	- 75 to 90%	220 volt	Soups	40 volt
Barium Nitrate	40 volt	Hydrofluoric acid - up to 20%	220 volt	Starch solutions	220 volt
Beer	90 volt	- above 20%	40 volt	Sugar - low concentrations	220 volt
Black liquor	40 volt	Hydrofluorsilicic acid	90 volt	- high concentrations	360 volt
Blood	220 volt	Jams & jellies	360 volt	Vinegar	90 volt
Borax - up to 10%	220 volt	Juices - fruit & vegetable	40 or 90 volt	Water - Sea	40 volt
- Greater than 10%	90 volt	Lithium Chloride	40 volt	- Ordinary potable	220 volt
Bread dough	90 volt	Magnesium Hydroxide	90 volt	- ordinary soft	360 volt
Buttermilk	24 or 40 volt	Mayonnaise	220 volt	- Ordinary condensate	480 volt
Cadmium Chloride	40 volt	Milk	40 volt	Zinc Chloride	40 volt
Cake batter	220 volt	Molasses	220 volt		
Calcium Chloride	40 volt	Muriatic acid	40 volt		
Calcium Hydroxide	220 volt	Mustard	40 volt		

NOTE: Maximum distance limitations for typical induction relay secondary circuits are: 220 secondary - 900 feet, 360 secondary - 350 ft, 480 secondary - 250 ft.

BIW Controls

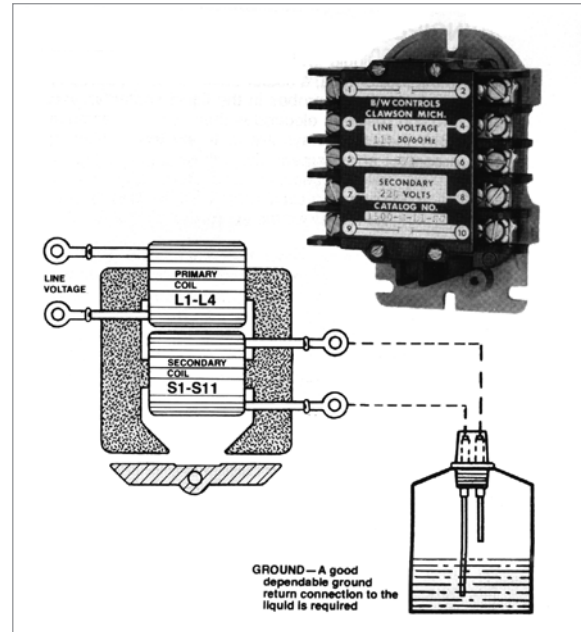



Pressure Gauges - Dry



Pressure Gauge

ISO 9001

Pressure Gauge Features:

- Rugged precision made phosphor-bronze Bourdon tube movements assuring maximum accuracy (+/- 3-2-3%) under adverse field conditions.
- **TO BE USED WITH AIR OR WATER ONLY.**
- Manufactured for AGI in an ISO 9001 facility.

POLYPROPYLENE CASE:

- Bourdon tube movement is totally enclosed in corrosion resistant polypropylene housing, acrylic lens.
- Resists rust, electrolytic action and chemical solvents.
- Brass sockets standard.

STEEL CASE:


- Deep drawn one piece steel housing encases a quality movement.
- Genuine mar-resistant glass lens and brass socket connections are standard.



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, PLASTIC CASE, DRY							
IPPG302-4L	Plastic	0-30#	Pressure	2"	1/4 Lower	100	\$ 6.64
IPPG302-4B	Plastic	0-30#	Pressure	2"	1/4 Back	100	6.64
IPPG602-4L	Plastic	0-60#	Pressure	2"	1/4 Lower	100	6.64
IPPG602-4B	Plastic	0-60#	Pressure	2"	1/4 Back	100	6.64
IPPG1002-4L	Plastic	0-100#	Pressure	2"	1/4 Lower	100	6.64
IPVG302-4L	Plastic	0-30 Hg"	Vacuum	2"	1/4 Lower	100	7.39
2" DIAL SIZE, STEEL CASE, DRY							
IPG152-4L	Steel	0-15#	Pressure	2"	1/4 Lower	100	6.44
IPG302-4L	Steel	0-30#	Pressure	2"	1/4 Lower	100	6.84
IPG302-4B	Steel	0-30#	Pressure	2"	1/4 Back	100	6.84
IPG302-8L	Steel	0-30#	Pressure	2"	1/8 Lower	100	6.84
IPG302-8B	Steel	0-30#	Pressure	2"	1/8 Back	100	6.84
IPG602-4L	Steel	0-60#	Pressure	2"	1/4 Lower	100	6.84
IPG602-4B	Steel	0-60#	Pressure	2"	1/4 Back	100	6.84
IPG602-8L	Steel	0-60#	Pressure	2"	1/8 Lower	100	6.84
IPG1002-4L	Steel	0-100#	Pressure	2"	1/4 Lower	100	6.84
IPG1002-4B	Steel	0-100#	Pressure	2"	1/4 Back	100	6.84
IPG1002-8B	Steel	0-100#	Pressure	2"	1/8 Back	100	6.84

Pressure Gauges - Dry



CAUTION



CAUTION
DO NOT USE WITH
POTABLE WATER

↓ Reduced price - Limited quantities available.

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, STEEL CASE, DRY							
IPVG302-4B	Steel	0-30 Hg"	Vacuum	2"	1/4 Back	100	7.39
IPVG302-8L	Steel	0-30 Hg"	Vacuum	2"	1/8 Lower	100	7.39
IPCG3602-4L	Steel	30Hg"/60#	Vacuum/Pressure	2"	1/4 Lower	200	7.39
2 1/2" DIAL SIZE, DRY							
IPG3025-4L	Steel	0-30#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG6025-4L	Steel	0-60#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG10025-4L	Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	8.71
IPG16025-4L	Steel	0-160#	Pressure	2 1/2"	1/4 Lower	100	8.71
IPG40025-4L	Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	8.71
IPVG3025-4L	Plastic	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	8.71
IPCG31025-4L	Steel	30 Hg"/160#	Vacuum/Pressure	2 1/2"	1/4 Lower	50	4.27 ↓
4 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3045-4L	Steel	0-30#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG6045-4L	Steel	0-60#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG10045-4L	Steel	0-100#	Pressure	4 1/2"	1/4 Lower	50	18.42
IPG30045-4L	Steel	0-300#	Pressure	4 1/2"	1/4 Lower	50	10.57 ↓
IPVG3045-4L	Steel	30 Hg"	Vacuum	4 1/2"	1/4 Lower	50	18.42
IPCG36045-4L	Steel	30 Hg"/60#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	18.42
IPCG31045-4L	Steel	30 Hg"/160#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	18.42



Pressure Gauges - NO LEAD Dry




IPPG or IPG Series

ISO 9001

Pressure Gauge Features:

- Rugged precision made phosphor-bronze Bourdon tube movements assuring maximum accuracy (+/- 3-2-3%) under adverse field conditions.
- **TO BE USED WITH AIR OR WATER ONLY.**
- Manufactured for AGI in an ISO 9001 facility.
- Bourdon tube movement is totally enclosed in corrosion resistant housing.
- Resists rust, electrolytic action and chemical solvents.
- **Third party certified to NSF/ANSI 372.** No Lead brass sockets.
- Deep drawn one piece steel or molded plastic housings encase a quality movement.
- Genuine mar-resistant glass or acrylic lens.



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, PLASTIC CASE, DRY							
IPPG302-4LNL	Plastic	0-30#	Pressure	2"	1/4 Lower	100	\$ 8.05
IPPG302-4BNL	Plastic	0-30#	Pressure	2"	1/4 Back	100	8.05
IPPG602-4LNL	Plastic	0-60#	Pressure	2"	1/4 Lower	100	8.05
IPPG602-4BNL	Plastic	0-60#	Pressure	2"	1/4 Back	100	8.05
IPPG1002-4LNL	Plastic	0-100#	Pressure	2"	1/4 Lower	100	8.05
EIPPG1002-4LPNL	Plastic	0-100#	Pressure	2" No dial logo	1/4 Lower	100	7.61
IPPG1002-4BNL	Plastic	0-100#	Pressure	2"	1/4 Back	100	8.05
IPVG302-4LNL	Plastic	0-30 Hg"	Vacuum	2"	1/4 Lower	100	8.63
2" DIAL SIZE, STEEL CASE, DRY							
IPG152-4LNL	Steel	0-15#	Pressure	2"	1/4 Lower	100	7.55
IPG302-4LNL	Steel	0-30#	Pressure	2"	1/4 Lower	100	8.22
IPG302-4BNL	Steel	0-30#	Pressure	2"	1/4 Back	100	8.22
IPG302-8LNL	Steel	0-30#	Pressure	2"	1/8 Lower	100	8.22
IPG302-8BNL	Steel	0-30#	Pressure	2"	1/8 Back	100	8.22
IPG602-4LNL	Steel	0-60#	Pressure	2"	1/4 Lower	100	8.22
IPG602-4BNL	Steel	0-60#	Pressure	2"	1/4 Back	100	8.22
IPG602-8LNL	Steel	0-60#	Pressure	2"	1/8 Lower	100	8.22
IPG1002-4LNL	Steel	0-100#	Pressure	2"	1/4 Lower	100	8.22
EIPG1002-4LPNL	Steel	0-100#	Pressure	2" No dial logo	1/4 Lower	100	7.53
IPG1002-4BNL	Steel	0-100#	Pressure	2"	1/4 Back	100	8.22
IPG1002-8LNL	Steel	0-100#	Pressure	2"	1/8 Lower	100	8.22
IPG1002-8BNL	Steel	0-100#	Pressure	2"	1/8 Back	100	8.22
IPG1602-4LNL	Steel	0-160#	Pressure	2"	1/4 Lower	100	8.22




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.61

Pressure Gauges - NO LEAD Dry



CAUTION



Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, STEEL CASE, DRY							
IPG2002-4LNL	Steel	0-200#	Pressure	2"	1/4 Lower	100	\$ 8.22
IPG2002-4BNL	Steel	0-200#	Pressure	2"	1/4 Back	100	8.22
IPG2002-8LNL	Steel	0-200#	Pressure	2"	1/8 Lower	100	8.22
IPG3002-4LNL	Steel	0-300#	Pressure	2"	1/4 Lower	100	8.22
IPVG302-4BNL	Steel	0-30 Hg"	Vacuum	2"	1/4 Back	100	8.63
IPVG302-8LNL	Steel	0-30 Hg"	Vacuum	2"	1/8 Lower	100	8.63
IPCG3102-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	2"	1/4 Lower	100	8.63
IPCG3602-4LNL	Steel	30Hg"/60#	Vacuum/PResure	2"	1/4 Lower	200	8.63
2 1/2" DIAL SIZE, DRY							
IPG1525-4LNL	Plastic	0-15#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG3025-4LNL	Steel	0-30#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG6025-4LNL	Steel	0-60#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG10025-4LNL	Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPG16025-4LNL	Steel	0-160#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG20025-4LNL	Steel	0-200#	Pressure	2 1/2"	1/4 Lower	100	10.54
IPG30025-4LNL	Steel	0-300#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPG40025-4LNL	Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	10.54
IPVG3025-4LNL	Plastic	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	10.54
IPCG31025-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	2 1/2"	1/4 Lower	50	10.54
3 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3035-4LNL	Steel	0-30#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG10035-4LNL	Steel	0-100#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG20035-4LNL	Steel	0-200#	Pressure	3 1/2"	1/4 Lower	50	15.38
IPG30035-4LNL	Steel	0-300#	Pressure	3 1/2"	1/4 Lower	50	15.38
4 1/2" DIAL SIZE, STEEL CASE, DRY							
IPG3045-4LNL	Steel	0-30#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG6045-4LNL	Steel	0-60#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG10045-4LNL	Steel	0-100#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG20045-4LNL	Steel	0-200#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPG30045-4LNL	Steel	0-300#	Pressure	4 1/2"	1/4 Lower	50	19.98
IPVG3045-4LNL	Steel	30 Hg"	Vacuum	4 1/2"	1/4 Lower	50	19.98
IPCG36045-4LNL	Steel	30 Hg"/60#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	19.98
IPCG31045-4LNL	Steel	30 Hg"/160#	Vacuum/Pressure	4 1/2"	1/4 Lower	50	19.98



Pressure Gauges - Liquid Filled




EILPG Series



ILPG Series

Liquid Filled Pressure Gauge Features:

- Stainless steel or black steel case
- Glycerine Filled, Phosphor bronze bourdon tube
- Accuracy +/- 3-2-3%
- 2" or 2 1/2" Dial face with clear acrylic lens
- Crimped stainless steel ring
- For use in high vibration, corrosion situations
- **TO BE USED WITH AIR OR WATER ONLY.**



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, LIQUID FILLED							
EILPG302-4L	Steel	0-30#	Pressure	2"	1/4" Lower	100	\$ 8.62
EILPG602-4L	Steel	0-60#	Pressure	2"	1/4" Lower	100	8.62
EILPG602-4B	Steel	0-60#	Pressure	2"	1/4" Back	100	9.45
EILPG1002-4L	Steel	0-100#	Pressure	2"	1/4" Lower	100	8.62
EILPG1002-4B	Steel	0-100#	Pressure	2"	1/4" Back	100	9.45
EILPG1602-4L	Steel	0-160#	Pressure	2"	1/4" Lower	100	8.62
EILVG302-4L	Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	10.36
EILPG302-4LSS	Stainless Steel	0-30#	Pressure	2"	1/4" Lower	100	13.69
EILPG602-4LSS	Stainless Steel	0-60#	Pressure	2"	1/4" Lower	100	13.69
EILPG602-4BSS	Stainless Steel	0-60#	Pressure	2"	1/4" Back	100	14.25
EILPG1002-4LSS	Stainless Steel	0-100#	Pressure	2"	1/4" Lower	100	13.69
EILVG302-4LSS	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	14.82
2 1/2" DIAL SIZE, LIQUID FILLED							
ILPG3025-4L	Stainless Steel	0-30#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG6025-4L	Stainless Steel	0-60#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG10025-4L	Stainless Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG16025-4L	Stainless Steel	0-160#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILPG20025-4L	Stainless Steel	0-200#	Pressure	2 1/2"	1/4 Lower	50	14.63
ILVG3025-4L	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	16.68
ILCG36025-4L	Stainless Steel	30 Hg"/60#	Vacuum/Press	2 1/2"	1/4 Lower	50	17.29

Pressure Gauges - NO LEAD Liquid Filled




EILPG Series



ILPG Series

Liquid Filled Pressure Gauge Features:

- Stainless steel or black steel case.
- Glycerine filled, phosphor bronze bourdon tube.
- Accuracy +/- 3-2-3%.
- 2" or 2 1/2" Dial face with clear acrylic lens.
- Crimped stainless steel ring.
- For use in high vibration, corrosion situations.
- **Third party certified to NSF/ANSI 372.**
- No lead brass or stainless steel sockets.
- **TO BE USED WITH AIR OR WATER ONLY.**



CAUTION

Part Number	Case	Range	Type	Dial Size	MIP Conn.	Ctn Qty	List Price
2" DIAL SIZE, LIQUID FILLED							
EILPG302-4LNL	Steel	0-30#	Pressure	2"	1/4" Lower	100	\$ 10.32
EILPG602-4LNL	Steel	0-60#	Pressure	2"	1/4" Lower	100	10.32
EILPG602-4BNL	Steel	0-60#	Pressure	2"	1/4" Back	100	11.48
EILPG1002-4LNL	Steel	0-100#	Pressure	2"	1/4" Lower	100	10.84
EILPG1002-4BNL	Steel	0-100#	Pressure	2"	1/4" Back	100	11.16
EILPG1002-8BNL	Steel	0-100#	Pressure	2"	1/8" Back	100	11.16
EILPG1602-4LNL	Steel	0-160#	Pressure	2"	1/4" Lower	100	10.32
EILPG2002-4LNL	Steel	0-200#	Pressure	2"	1/4" Lower	100	10.84
EILVG302-4LNL	Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	12.25
EILVG302-4BNL	Steel	0-30 Hg"	Vacuum	2"	1/4" Back	100	13.18
EILPG302-4LSSNL	Stainless Steel	0-30#	Pressure	2"	1/4" Lower	100	15.56
EILPG602-4LSSNL	Stainless Steel	0-60#	Pressure	2"	1/4" Lower	100	15.56
EILPG602-4BSSNL	Stainless Steel	0-60#	Pressure	2"	1/4" Back	100	16.49
EILPG1002-4LSSNL	Stainless Steel	0-100#	Pressure	2"	1/4" Lower	100	15.56
EILPG1002-4LSS316*	Stainless Steel 316	0-100#	Pressure	2"	1/4" Lower	100	37.25
EILPG1002-4BSSNL	Stainless Steel	0-100#	Pressure	2"	1/4" Back	100	16.49
EILPG1002-4BSS316*	Stainless Steel 316	0-100#	Pressure	2"	1/4" Back	100	37.25
EILPG1602-4LSSNL	Stainless Steel	0-160#	Pressure	2"	1/4" Lower	100	15.56
EILPG2002-4LSSNL	Stainless Steel	0-200#	Pressure	2"	1/4" Lower	100	15.56
EILVG302-4LSSNL	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Lower	100	17.14
EILVG302-4BSSNL	Stainless Steel	0-30 Hg"	Vacuum	2"	1/4" Back	100	18.07
* 316 Stainless steel internals and mount.							
2 1/2" DIAL SIZE, LIQUID FILLED							
ILPG3025-4LNL	Stainless Steel	0-30#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILPG6025-4LNL	Stainless Steel	0-60#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILPG10025-4LNL	Stainless Steel	0-100#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG16025-4LNL	Stainless Steel	0-160#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG20025-4LNL	Stainless Steel	0-200#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG30025-4LNL	Stainless Steel	0-300#	Pressure	2 1/2"	1/4 Lower	50	15.75
ILPG40025-4LNL	Stainless Steel	0-400#	Pressure	2 1/2"	1/4 Lower	50	16.43
ILVG3025-4LNL	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Lower	50	18.60
ILVG3025-4BNL	Stainless Steel	0-30 Hg"	Vacuum	2 1/2"	1/4 Back	50	19.53
ILCG36025-4LNL	Stainless Steel	30 Hg"/60#	Vacuum/Press	2 1/2"	1/4 Lower	50	19.28



Specialty Pressure Gauges



PGBS



Pressure Gauge Brass Snubber Features:

- Use with any pressure gauge subjected to rapidly fluctuating pressures or sudden shock pressure.
- Brass housing with high strength sintered, porous type snubbing element.

Part Number	Size/Description	Ctn Qty	List Price
PGBS1/4	1/4" mpt x 1/4" fpt Brass Snubber	50/500	\$ 8.47



IPG45-WLSS



IPG45-WL Water Level Gauge Features:

- 4 1/2" face #304 stainless steel case and clear acrylic lens.
- #304 stainless steel bezel with side screws.
- Brass pointer with black finish.
- NL brass movement.
- Range 0-390' H2O.
- Bourdon tube-phosphor bronze, soft soldered.
- Connection: 1/4" NPT, lower mount, NL brass.
- Accuracy: +/- 3-2-3%

Part Number	Size	Description	MIP Conn.	Ctn Qty	List Price
NO LEAD BRASS					
IPG45-WLSSNL	4 1/2"	0 - 390' Water Level	1/4" lower	20	\$ 35.33



PTG1002

Pressure Test Gauge Features:

- 0-100 psi, 2" plastic lens.
- Brass test fitting with pressure release button.
- Heavy rubber boot to protect gauge from damage.

Part Number	Size	Pressure Setting/Description	Ctn Qty	List Price
PTG1002	2" case	0-100# Pressure test gauge	50	\$ 14.90



WTG

Water Test Gauge Features:

- Quick, easy method to test a wide range of pressure systems for leakage.
- 2 1/2" dial face, steel case pressure gauge w/ plastic lens.
- With standard 3/4" FGHT swivel garden hose connection with rubber washer.
- Attach to hose bibbs, boiler drains and lawn faucets for pressure testing.
- "MP" series MAX pointer arm measures maximum water surge or pressure drop.
- Individually cartoned.



WTG MP



Part Number	Size	Pressure Setting/Description	PSI dial		
			increments	Ctn Qty	List Price
WTG100	2 1/2"	0-100# water test gauge, fght	1	50	\$ 7.45
WTG200	2 1/2"	0-200# water test gauge, fght	2	50	10.42
WTG300	2 1/2"	0-300# water test gauge, fght	3	100	10.42
WTG100MP	2 1/2"	0-100# gauge with MAX pointer	1	50	11.14
WTG200MP	2 1/2"	0-200# gauge with MAX pointer	2	50	11.14
WTG300MP	2 1/2"	0-300# gauge with MAX pointer	3	50	11.14



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.65

Air/Gas Test Gauges



GTG

Gas Test Gauge Features:

- Quick, easy means of pressurizing & monitoring gas systems for leakage.
- Completely assembled - brass hex manifold, air valve with plastic cap and 2" dial face, steel case pressure gauge with plastic lens.
- Manifold also available separately: 3/4" fpt connection with 1/4" fpt gauge tap and 1/8" fpt air valve tap.
- Individually cartoned and available in 15, 30, 60 and 100 psi.

Part Number	Description	Gauge Increments	Ctn Qty	List Price
GTG15	Gas test gauge, 3/4" fpt, 0-15#	1/10 lb.	50	\$ 18.42
GTG30	Gas test gauge, 3/4" fpt, 0-30#	1/2 lb.	50	18.42
GTG60	Gas test gauge, 3/4" fpt, 0-60#	1/10 lb.	50	18.42
GTG100	Gas test gauge, 3/4" fpt, 0-100#	1 lb.	50	18.42
GTM3/4	Brass Gas test manifold only		100	9.60



GTM3/4

Pressure Air Test Gauge Features:

- Quick, easy means of pressurizing and monitoring plumbing systems for leakage
- Attach to hose bibb.
- Includes brass hex manifold, air valve, 2" 200# gauge, garden hose thread fitting.



PATG200

Part Number	Description	Ctn Qty	List Price
PATG200	Pressure Air Test Gauge	30	\$ 28.04



Pitless Adapters - NO LEAD Bronze



PT300NL



PT800NL



PT800TNL



PT825NL



PT100NL



PT125NL



PT3000NL



PT900NL



PT700NL & PT725NL

Pitless Adapter Features:

- Cast from **81% COPPER** content alloy **NO LEAD** bronze to insure long life and durability in the most aggressive well conditions.
- **Extended casing nipple** makes installation easy.
- Rubber inner and outer casing gaskets for certified & approved water tight seal from ground water contamination.
- Built-in lowering eyelet for easier installation.
- All PT Series pitless adapters are individually boxed.
- All PT Series pitless adapters are 100% pressure tested.
- **All PT Series pitless adapters are certified and approved watertight to PAS-97(2012) standards.**
- **NO LEAD** cast bronze pitless adapters are **third party certified to NSF/ANSI 372.**



Part Number	Drop Pipe Size	Nominal Well Casing	Casing Hole Opening	Max Load Capacity (lbs.)	Ctn Qty	List Price
NO LEAD Cast Bronze						
PT300NL	1"	5" through 12"	1 3/4"	800	10	\$ 85.54
PT800NL	1"	5" through 12"	1 3/4"	900	10	88.75
PT100NL	1"	5" through 12"	1 3/4"	2,000	10	90.54
PT700NL	1"	5" through 12"	1 3/4"	5,000	10	153.15
PT825NL	1-1/4"	5" through 12"	2 1/4"	2,000	10	158.21
PT125NL	1 1/4"	5" through 12"	2 1/4"	2,000	10	161.43
PT725NL	1-1/4"	5" through 12"	2 1/8"	5,000	10	308.15
PT3000NL	2"	5 5/8" through 12"	3 1/8"	5,000	4	560.71
PT900NL	1" & 1 1/4" (2 Hole)	4" through 12"	1 3/4" & 2 1/4"	2,000	6	510.72
TAPPED NO LEAD Cast Bronze for Underground tanks						
PT800TNL	1"	5" through 12"	1 3/4"	900	10	94.11



Pitless Adapters - Stainless Steel



PT300SS



PT800SS




PT825SS



PT3000SS

HARVARD Pitless Adapter Features:

- Cast from 304 cast stainless steel to insure long life and durability in the most aggressive well conditions.
- **Extended casing nipple** makes installation easy.
- Rubber inner and outer casing gaskets for certified & approved water tight seal from ground water contamination.
- Built-in lowering eyelet for easier installation.
- All PT Series pitless adapters are individually boxed.
- All PT Series pitless adapters are 100% pressure tested.
- **All PT Series pitless adapters are certified and approved watertight to PAS-97(2012) standards.**
- 304 Stainless Steel pitless adapters are Lead Free.
- **Third party certified to NSF/ANSI 372.**



Part Number	Drop Pipe Size	Nominal Well Casing	Casing Hole Opening	Max Load Capacity (lbs.)	Ctn Qty	List Price
Cast 304 STAINLESS STEEL						
PT300SS	1"	5" through 12"	1 3/4"	6,000	10	\$ 85.54
PT800SS	1"	5" through 12"	1 3/4"	6,000	10	105.18
PT825SS	1-1/4"	5" through 12"	2 1/4"	6,000	10	154.46
PT3000SS	2"	5" through 12"	3 1/8"	6,000	4	531.97



Pitless Adapters - Clear hole, Snap-on




BA and BA-NL Series

Features:

- CLEAR CASING DESIGN - no internal obstructions.
- Self -supporting (750 lbs / 300' of 1" iron pipe).
- 300 series stainless steel spring, pivot pin, pull cable, U-bolt, washers, nuts and extra wide backing strap.
- Built-in safety features should spring or cable fall.
- Available in combination with conduit or watertight caps.
- Quality American made bronze or No Lead Brass (NL).
- Easy to install.
- **All BA Series pitless adapters and BA-SC combination units are certified and approved watertight to PAS-97 Standards. ☺**



Part Number	Description	Nominal Well Size"	Casing O.D."	Drop Pipe"	Ctn Qty	List Price
BA4-100NL ☺	Pitless Adapter Only - NO LEAD	4	4 1/2	1	1	\$ 340.34
BA4-100PSCNL	With PSC4 Plastic Cap - NO LEAD	4	4 1/2	1	1	374.29
BA4-125NL ☺	Pitless Adapter Only - NO LEAD	4	4 1/2	1 1/4	1	353.33
BA4-125CNL	With C4 Alum Conduit Cap - NO LEAD	4	4 1/2	1 1/4	1	401.73
BA4-125PSCNL	With PSC4 Plastic Cap - NO LEAD	4	4 1/2	1 1/4	1	387.33
BA4-125SCNL ☺	With SC4 ABS/Alum Cap - NO LEAD	4	4 1/2	1 1/4	1	407.51
BA45-100NL ☺	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1	1	353.84
BA45-125NL ☺	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1 1/4	1	364.33
BA5-100NL ☺	Pitless Adapter Only - NO LEAD	5	5 9/16	1	1	355.20
BA5-125NL ☺	Pitless Adapter Only - NO LEAD	5	5 9/16	1 1/4	1	370.25

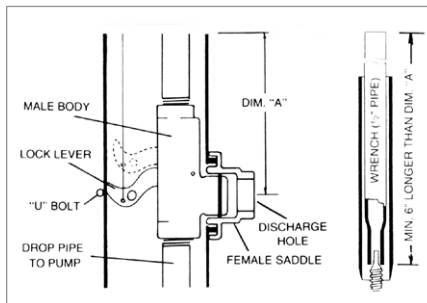

Installation Instructions

Note: Apply lubricant to o-ring on male member of body & female portion of saddle.

1. Cut 2 1/4" diameter discharge hole in casing with a 2 1/4" hole saw. Attach saddle and U-bolt.
2. File notch in top of casing above discharge hole for alignment and for easy reinstallation if pump must be pulled later.
3. Assemble pump and drop pipe to body and lower into casing with 1" support pipe longer than dim A. Note: Make sure male member snaps completely into female portion of saddle.
4. Remove 1" support pipe and attach cap.



Drain & Wire Fitting - Bronze



BWS75-100

Bronze Drain and Wire Fitting Features:

- Cast from bronze to insure long life and durability in the most aggressive well conditions.
- Fastens to well casing to provide tapping for well drain, electrical conduit, bulkhead fittings & other related uses.
- Rubber gasket seals out ground water contamination.

Part Number	Drop Pipe Size	Nominal Well Casing	Casing Hole Opening	Max Load Capacity (lbs.)	Ctn Qty	List Price
BWS75-100	3/4" FPT x 1" MPT	5" through 8"	1 3/8"	—	10/60	27.50



Well Caps - Cast Iron, Plastic



WC Series

HARVARD WC SERIES Cast Iron Watertight Well Cap

Features:

- WC6 fits 6" and 6-1/4" I.D. 6 5/8" OD well casing.
- WC625 fits SDR27.6 6 1/4" ID PVC well casing, with 6.9" OD.
- 1" or 1 1/4" IPS conduit tap and factory installed screen vents.
- Heavy cast iron body. 20% heavier than any other comparable watertight well caps available.
- Wide rubber gasket provides positive watertight seal.
- Blue powder coat paint finish.
- Individually packaged. Includes all hardware.
- **All WC Series well caps are certified and approved watertight to PAS-97 (04) standards.**



LISTED PAS-97 (2012)
PITLESS ADAPTER STANDARD



WTC6

WTC6 Plastic Watertight Well Cap Features:

- Fits 6" ID, 6 1/4" ID, 6 5/8" OD well casing
- 1 1/4" IPS conduit tap.
- Hi-impact blue ABS plastic with UV inhibitors.
- Especially formulated for outdoor weatherability.
- Stainless steel bolts, washers and nuts are included.
- Factory installed screen vents.
- Made in USA. Patented



LISTED PAS-97 (2012)
PITLESS ADAPTER STANDARD



PWTC6

PSC Series

HARVARD Plastic Watertight Well Cap Features:

- PWTC6 Fits 6" and 6 1/4" ID, 6 5/8" OD well casing.
- PSC614 fits SDR27.6 6 1/4" ID PVC well casing with 6.9" OD.
- Gray, glass-filled thermoplastic with UV stabilizers.
- White ABS bottom casing seal for PSC Series.
- Especially formulated for outdoor weatherability.
- Stainless steel bolts, nuts included.
- Factory installed stainless steel vents. 1" conduit tap.
- Made in USA.



LISTED PAS-97 (2012)
PITLESS ADAPTER STANDARD



C56V

HARVARD C56V Cast Iron Multi-Size Well Cap Features :

- Heavy cast iron construction. 30% heavier than any other comparable cap available.
- Quick installation.
- Fits 5-5/8" and 6" well casing, Maximum 6 5/8" OD.
- 1" conduit opening.
- Blue finish for easy site location.
- Individually packaged. Includes bolts.



Part Number	Material	Nominal Well Casing	Maximum Casing OD	Conduit Tap	Master Ctn Qty	List Price
WC6	Cast Iron	6" and 6 1/4"	6 5/8"	1"	6	\$ 70.89
WC6-11/4	Cast Iron	6" and 6 1/4"	6 5/8"	1 1/4"	6	86.79
WC625	Cast Iron	6 1/4" SDR27.6 PVC	6.9"	1"	6	70.89
WC625-11/4	Cast Iron	6 1/4" SDR27.6 PVC	6.9"	1 1/4"	6	86.79
WTC6	ABS Plastic	6" and 6 1/4"	6 5/8"	1 1/4"	1	67.57
PWTC6	Thermoplastic	6" and 6 1/4"	6 5/8"	1"	8	46.21
PSC4	Thermoplastic	4"	4 1/2"	1"	12	29.76
PSC5	Thermoplastic	5"	5 9/16"	1"	12	39.99
PSC614	Thermoplastic	6 1/4" SDR27.6 PVC	6.9"	1"	12	38.03
C56V	Cast Iron	5-5/8" , 6" , 6 1/4"	6 5/8"	1"	6	30.00

Custom personalization of the caps above is available. Self adhering, engraved brushed aluminum. Minimum of 24 of one size. One time set-up charge of \$10.00. Allow 2-3 weeks for delivery.




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.71

Well Caps - Cast Aluminum



AWTC Series



AWTC-T Series



SC Series



C Series

AWTC-Series Watertight Vermin- Proof Cap Features:

- Cast aluminum for strength and weather resistance.
- All stainless bolts and ground screws.
- Molded 3/16" gasket.

SC-Series Watertight Cap Features:

- For use on plastic casing only.
- Injection molded ABS & grade 319 aluminum, can be solvent welded directly to PVC well casing.
- Stainless steel nuts, bolts & screened vents.
- All SC Series well caps are certified and approved watertight to PAS-97 Standards.

C-Series Standard Conduit Cap Features:

- For use on steel or plastic casing.
- Stainless steel set screws.

Custom personalization available - minimum of 48 of one size. Add "P" suffix to part number. One time set-up charge of \$20.00. Allow 2-3 weeks for delivery.



Part Number	Nominal Well Casing Size	Casing O.D.	Conduit Conn.	Vent Size	Weight	Ctn Qty	List Price
Aluminum Watertight Vermin-Proof Well Cap							
AWTC4	4"	4 1/2"	1"	1"	2.2	25	\$ 92.04
AWTC45 ☺	4 1/2"	5"	1"	1"	2.7	20	125.03
AWTC5	5"	5 9/16"	1"	1"	2.4	20	111.14
AWTC55 ☺	5 1/2"	6"	1"	1"	3.1	15	137.44
AWTC6	6"	6 5/8"	1 1/4"	1"	2.8	15	116.54
AWTC7 ☺	6 1/2"	7"	1 1/4"	1"	3.1	13	162.01
AWTC8	8"	8 5/8"	1 1/4"	1"	4.3	1	241.90
AWTC10	10"	10 3/4"	2"	1" (2)	9.0	1	748.85
AWTC12	12"	12 3/4"	2"	1" (2)	11.0	1	1405.10
☺ Fits Whitewater pitless units							
Aluminum Watertight Vermin-Proof Well Cap w/ 1-1/4" Top Tap for use w/ pellet chlorinators							
AWTC45T ☺	4 1/2"	5"	1"	1"	2.7	20	145.70
AWTC55T ☺	5 1/2"	6"	1"	1"	3.1	15	158.00
AWTC6T	6"	6 5/8"	1 1/4"	1"	2.8	15	137.29
AWTC8T	8"	8 5/8"	1 1/4"	1"	4.3	1	263.97
☺ Fits Whitewater pitless units							
Aluminum/ABS Combination Watertight Well Cap							
SC4	4"	4 1/2"	1"		1.5	12	50.34
SC45	4 1/2"	4.95"	1"		1.7	15	58.90
SC5	5"	5 9/16"	1"		2.3	10	66.44
SC6	6"	6 5/8"	1"		2.5	8	71.26
SC614	6 1/4"(SDR27.6)	6.9"	1"		2.5	12	68.67
Standard Ventilated Cap with Conduit Opening							
C4	4"	4 1/2"	3/4"		1.6	25	46.02
C5	5"	5 9/16"	3/4"		2.0	15	65.99
C6	6"	6 5/8"	3/4"		2.3	15	70.74
C7	7"	7 5/8"	1"		2.9	15	104.18
C8	8"	8 5/8"	1"		3.4	1	110.80





ABS Well Seals



PSWS


PSWS and PJWS Series Features:

- Well seals are molded from high impact ABS for extra strength.
- Exclusive design of **extra thick (1-1/4") PVC gland** enables the sanitary sealing of a wide range of casing sizes.
- Zinc plated steel bolts.




Part Number	Fits Well Casing ID	Well Casing ID Size Range	Drop Pipe Size	Conduit Tap IPS	Vent Tap IPS	Weight	Ctn Qty	List Price
Single Hole								
PSWS2x1	2"	2"	1"	--	--	.25 lbs	50	\$ 19.68
PSWS4xBLANK	4"	4 - 4 1/4"	blank	3/4"	3/8"	1.5 lbs.	10	29.72
PSWS4x1	4"	4 - 4 1/4"	1"	3/4"	1/2"	1.5 lbs.	10	29.72
PSWS4x11/4	4"	4 - 4 1/4"	1 1/4"	3/4"	1/2"	1.5 lbs.	10	29.72
PSWS4x11/2	4"	4 - 4 1/4"	1 1/2"	3/4"	1/2"	1.5 lbs.	10	29.72
PSWS4x2	4"	4 - 4 1/4"	2"	3/8"	1/4"	1.5 lbs.	10	29.72
PSWS41/2x1	4 1/2"	4 3/8 - 4 7/8"	1"	3/4"	1/2"	1.75 lbs.	10	33.02
PSWS41/2x11/4	4 1/2"	4 3/8 - 4 7/8"	1 1/4"	3/4"	1/2"	1.75 lbs.	10	33.02
PSWS5xBLANK	5"	4 7/8 - 5 1/4"	blank	3/4"	1/2"	2.0 lbs.	10	44.97
PSWS5x1	5"	4 7/8 - 5 1/4"	1"	3/4"	1/2"	2.0 lbs.	10	44.97
PSWS5x11/4	5"	4 7/8 - 5 1/4"	1 1/4"	3/4"	1/2"	2.0 lbs.	10	44.97
PSWS5x11/2	5"	4 7/8 - 5 1/4"	1 1/2"	3/4"	1/2"	2.0 lbs.	10	44.97
PSWS5x2	5"	4 7/8 - 5 1/4"	2	3/4"	1/2"	2.0 lbs.	10	44.97
PSWS51/2xBLANK	5 1/2"	5 3/8 - 5 7/8"	blank	3/4"	1/2"	2.25 lbs.	10	47.06
PSWS51/2x1	5 1/2"	5 3/8 - 5 7/8"	1"	3/4"	1/2"	2.25 lbs.	10	47.06
PSWS51/2x11/4	5 1/2"	5 3/8 - 5 7/8"	1 1/4"	3/4"	1/2"	2.25 lbs.	10	47.06
PSWS51/2x11/2	5 1/2"	5 3/8 - 5 7/8"	1 1/2"	3/4"	1/2"	2.25 lbs.	10	47.06
PSWS6xBLANK	6"	5 7/8 - 6 1/4"	blank	3/4"	1/2"	3.0 lbs.	10	43.79
PSWS6x1	6"	5 7/8 - 6 1/4"	1"	3/4"	1/2"	3.0 lbs.	10	43.79
PSWS6x11/4	6"	5 7/8 - 6 1/4"	1 1/4"	3/4"	1/2"	3.0 lbs.	10	43.79
PSWS6x11/2	6"	5 7/8 - 6 1/4"	1 1/2"	3/4"	1/2"	3.0 lbs.	10	43.79
PSWS6x2	6"	5 7/8 - 6 1/4"	2"	3/4"	1/2"	3.0 lbs.	10	43.79
PSWS61/4xBLANK	6 1/4"	6 1/4 - 6 1/2"	blank	3/4"	1/2"	3.25 lbs.	10	44.97
PSWS61/4x1	6 1/4"	6 1/4 - 6 1/2"	1"	3/4"	1/2"	3.25 lbs.	10	44.97
PSWS61/4x11/4	6 1/4"	6 1/4 - 6 1/2"	1 1/4"	3/4"	1/2"	3.25 lbs.	10	44.97
PSWS61/4x11/2	6 1/4"	6 1/4 - 6 1/2"	1 1/2"	3/4"	1/2"	3.25 lbs.	10	44.97
PSWS61/4x2	6 1/4"	6 1/4 - 6 1/2"	2"	3/4"	1/2"	3.25 lbs.	10	44.97
PSWS8x1	8"	8 - 8 1/4"	1"	1"	1/2"	5.0 lbs.	6	57.53
PSWS8x11/4	8"	8 - 8 1/4"	1 1/4"	1"	1/2"	5.0 lbs.	6	57.53
PSWS8x2	8"	8 - 8 1/4"	2"	1"	1/2"	5.0 lbs.	6	57.53
Double Hole								
PJWS4x1x11/4	4"	4 - 4 1/4"	1x1 1/4"	n/a	1/2"	1.5 lbs.	10	29.72
PJWS5x1x11/4	5"	4 7/8 - 5 1/4"	1x1 1/4"	n/a	1/2"	2.0 lbs.	10	43.59
PJWS51/2x1x11/4	5 5/8"	5 3/8 - 5 7/8"	1x1 1/4"	n/a	1/2"	2.5 lbs	10	44.70
PJWS6x1x11/4	6"	5 7/8 - 6 1/4"	1x1 1/4"	n/a	1/2"	3.0 lbs.	10	46.16
PJWS61/4x1x11/4	6 1/4"	6 1/4 - 6 3/8"	1x1 1/4"	n/a	1/2"	3.25 lbs.	10	44.97

Cast Iron Well Seals - Import, Submersible & Jet



SWS Series



JWS Series

Cast Iron Well Seal for Submersible & Jet Pumps Features:


- Highest quality smooth grey-iron castings accurately machined to narrowest tolerances.
- Finest heavy duty 3/4" molded rubber packing gland assures seal regardless of minor imperfections in well casing.
- Corrosion resistant, zinc plated steel bolts, rugged construction provides for maximum torque.
- Long lasting painted finish.
- Complete with electrical conduit kit and plug for SWS and plastic plugs for JWS series.
- Individually cartoned.
- Imported.



Part Number	Well Casing ID	Drop Pipe	Cable Hole Tapping	Vent Tapping	Ctn Qty	List Price
Single Drop Pipe, SPLIT TOP, for submersible pumps (* Fits outside of well casing)						
SWS2X1	2"	1"	-	1/8"	50	\$ 21.03
SWS2X11/4 *	2"	1 1/4"	-	1/8"	12	28.32
SWS3X1	3"	1"	3/8"	1/8"	16	22.30
SWS3X11/4	3"	1 1/4"	(2) 5/16" drilled	1/8"	16	22.30
SWS4X1	4"	1"	3/4"	1/2"	12	27.94
SWS4X11/4	4"	1 1/4"	3/4"	1/2"	12	27.94
SWS4X11/4S	4"	1 1/4" center	3/4"	1/4"	12	27.94
SWS4X11/2	4"	1 1/2"	3/4"	1/4"	12	27.94
SWS4X2	4"	2"	1/2"	1/4"	12	27.94
SWS4X2 SOLID	4"	2"	3/4"	1/2"	12	27.94
SWS41/4X1	4 1/4"	1"	3/4"	1/2"	12	27.94
SWS41/4X11/4	4 1/4"	1 1/4"	3/4"	1/2"	12	27.94
SWS5X1	5"	1"	1"	1/2"	6	41.85
SWS5X11/4	5"	1 1/4"	1"	1/2"	6	41.85
SWS5X2	5"	2"	3/4"	1/2"	6	41.85
SWS55/8X1	5 5/8"	1"	3/4"	1/2"	6	52.07
SWS6X1	6"	1"	1"	1/2"	6	53.07
SWS6X11/4	6"	1 1/4"	1"	1/2"	6	53.07
SWS6X11/2	6"	1 1/2"	1"	1/2"	6	53.07
SWS6X2	6"	2"	1"	1/2"	6	53.07
SWS6X3 SOLID	6"	3"	1"	1/2"	6	53.07
SWS6BLANK	6"	-	-	-	6	60.05
SWS61/4X1	6 1/4"	1"	1"	1/2"	6	55.90
SWS61/4X11/4	6 1/4"	1 1/4"	1"	1/2"	6	55.90
Two Hole Drop Pipe, SPLIT TOP, for jet pumps						
JWS3X1X3/4	3"	1" X 3/4"		1/8"	16	18.62
JWS4x11/4x1	4"	1 1/4" x 1"		1/2"	12	27.94
JWS5x11/4X1	5"	1 1/4" X 1"		1/2"	6	41.85
JWS55/8X11/4X1	5 5/8"	1 1/4" X 1"		1/2"	6	52.07
JWS6x11/4x1	6"	1 1/4" x 1"		1/2"	6	53.07
JWS61/4x11/4x1	6 1/4"	1 1/4" x 1"		1/2"	6	55.90



Cast Iron Well Seals - Submersible



Cast Iron Well Seal for Submersible Pump Features:

- Highest quality smooth grey-iron castings accurately machined to narrowest tolerances.
- Finest heavy duty 3/4" molded rubber packing gland assures seal regardless of minor imperfections in well casing.
- Corrosion resistant, zinc plated steel bolts, rugged construction provides for maximum torque.
- Long lasting painted finish.
- Individually cartoned.



Part Number	Simmons Part No.	Well Casing ID	Drop Pipe	Cable Hole Tapping	Vent Tapping	Ctn Qty	List Price
Single Drop Pipe, Split Top, for submersible pump (* Fits outside of well casing)							
2x3/4SCH	106	2"	3/4"	--	--	1	\$ 37.41
2x1SCH	107	2"	1"	1/8"	1/8"	1	37.41
2x11/4SCH *	045	2"	1 1/4"	1/8"	1/8"	1	44.55
3x1SCH	108	3"	1"	3/8"	1/8"	6	44.51
3x11/4SCH	109	3"	1 1/4"	5/16" (2) drilled	1/8"	6	44.51
4BLANK (SOLID)		4"	--	--	--	6	46.32
4x1SCH	111	4"	1"	3/4"	1/2"	6	41.48
4x11/4SCH	112	4"	1 1/4"	3/4"	1/2"	6	41.48
4x11/2SCH	113	4"	1 1/2"	3/4"	1/2"	6	42.53
4x2SCH	114	4"	2"	1/2"	1/2"	6	42.53
41/4x1SCH	116	4 1/4"	1"	3/4"	1/2"	6	41.48
41/4x11/4SCH	117	4 1/4"	1 1/4"	3/4"	1/2"	6	41.48
41/2x1SCH	165	4 1/2"	1"	3/4"	1/2"	6	60.56
41/2x11/4SCH	166	4 1/2"	1 1/4"	3/4"	1/2"	6	60.56
5x1SCH	121	5"	1"	1"	1/2"	6	63.54
5x11/4SCH	122	5"	1 1/4"	1"	1/2"	6	63.54
5x11/2SCH	123	5"	1 1/2"	1"	1/2"	6	63.54
5x2SCH	124	5"	2"	3/4"	1/2"	6	63.54
55/8x1SCH	131	5 5/8"	1"	3/4"	1/2"	6	70.29
55/8x11/4SCH	132	5 5/8"	1 1/4"	3/4"	1/2"	6	70.29
55/8x11/2SCH	133	5 5/8"	1 1/2"	3/4"	1/2"	6	70.29
55/8x2SCH	134	5 5/8"	2"	3/4"	1/2"	6	70.29
6BLANK (SOLID)	313B	6"	--	--	--	6	67.76
6x1SCH	136	6"	1"	1"	1/2"	6	70.34
6x11/4SCH	137	6"	1 1/4"	1"	1/2"	6	70.34
6x11/2SCH	138	6"	1 1/2"	1"	1/2"	6	71.04
6x2SCH	139	6"	2"	1"	1/2"	6	71.04

Cast Iron Well Seals - Submersible



Part Number	Simmons Part No.	Well Casing ID	Drop Pipe	Cable Hole Tapping	Vent Tapping	Ctn Qty	List Price
Single Drop Pipe, Split Top, for submersible pumps, continued							
61/4x1SCH	141	6 1/4"	1"	1"	1/2"	6	\$ 70.34
61/4x11/4SCH	142	6 1/4"	1 1/4"	1"	1/2"	6	70.34
61/4x11/2SCH	143	6 1/4"	1 1/2"	1"	1/2"	6	71.04
61/4x2SCH	144	6 1/4"	2"	1"	1/2"	6	71.04
8x1SCH	196	8"	1"	1"	1/2"	1	210.53
8x11/4SCH	197	8"	1 1/4"	1"	1/2"	1	210.53
8x11/2SCH	198	8"	1 1/2"	1"	1/2"	1	210.53
8x2SCH	199	8"	2"	1"	1/2"	1	210.53
8x3SCH	041	8"	3"	1"	1/2"	1	210.53
8x4SCH	042	8"	4"	1"	1/2"	1	210.53
6 5/8", 10" and 12" well seals are available in steel only by special order.							
Single drop pipe, SOLID TOP PLATE, for submersible pump							
440B	301	4"	1"	3/4"	1/2"	6	45.54
440C	049	4"	1-1/4"	3/4"	1/2"	6	46.37
450B	323	5"	1"	3/4"	1/2"	6	64.26
460B	313	6"	1"	1"	1/2"	6	73.03
460C	314	6"	1-1/4"	1"	1/2"	6	73.03
460D	315	6"	1-1/2"	1"	1/2"	6	73.85
460E	316	6"	2"	1"	1/2"	6	73.85
6x3SCH	021	6"	3" offset	1"	1/2"	6	73.85
460X	313A	6"	Blank	1"	1/2"	6	73.03
462B	318	6-1/4"	1"	1"	1/2"	6	73.03
462C	319	6-1/4"	1-1/4"	1"	1/2"	6	73.03
462D	320	6-1/4"	1-1/2"	1"	1/2"	6	73.85
462E	321	6-1/4"	2"	1"	1/2"	6	73.85

• Additional drop pipe sizes and well casing ID's of well seals are available by special order. Allow 3 weeks for delivery.



Cast Iron Well Seals - Jet



Cast Iron Well Seal for Jet Pump Features:

- Highest quality smooth grey-iron castings accurately machined to narrowest tolerances.
- Finest heavy duty 3/4" molded rubber packing gland assures seal regardless of minor imperfections in well casing.
- Corrosion resistant, zinc plated steel bolts, rugged construction provides for maximum torque.
- Long lasting painted finish.
- Individually cartoned.



Part Number	Simmons Part No.	Well Casing ID	Drop Pipe	Vent Tapping	Ctn Qty	List Price
Two Hole Drop Pipe, SPLIT TOP, for jet pumps						
3x1x3/4DH	149	3"	1x 3/4"	1/8"	6	\$ 43.68
4x11/4x1DH	152	4"	1 1/4 x 1"	1/2"	6	40.87
4x11/4x11/4DH	153	4"	1 1/4 x 1 1/4"	1/2"	6	41.13
41/4x11/4x1DH	156	4 1/4"	1 1/4 x 1"	1/2"	6	40.87
5X11/4x1DH	161	5"	1 1/4 x 1"	1/2"	6	63.21
55/8x11/4x1DH	171	5 5/8"	1 1/4 x 1"	1/2"	6	66.48
55/8x11/4x11/4DH	172	5 5/8"	1 1/4 x 1 1/4"	1/2"	6	66.48
6x11/4x1DH	177	6"	1 1/4 x 1"	1/2"	6	67.87
6x11/4x11/4DH	178	6"	1 1/4 x 1 1/4"	1/2"	6	67.87
61/4x11/4x1DH	183	6 1/4"	1 1/4 x 1"	1/2"	6	67.87
61/4x11/4x11/4DH	184	6 1/4"	1 1/4 x 1 1/4"	1/2"	6	67.87

- Additional drop pipe sizes for jet well seals are available by special order. Allow 3 weeks for delivery.




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.77



8662B

Clayton Mark No. 359 Well Seal Features:

- Designed to seal well when insufficient room exists between casing and drop pipe.

Simple 3 Step Installation:

1. Place eye bolt clamp on outside of casing.
2. Slip rubber packer cover plate over drop pipe.
3. Tighten eye bolts to compress rubber seal in casing.



Part Number	Inside Diameter	Drop Pipe	Vent Size	Ctn Qty	List Price
No. 359 Well Seals					
8662B	2"	1-1/4"	1/8 N.P.S.	16	\$ 39.25



Vent Pipe



Vent Seal

Vent Pipe Features:

- Fabricated from 1/2" heavy duty zinc plated steel pipe.
- Includes stainless steel bug screen.
- Use for ventilating wells directly to atmosphere.

Vent Seal Features:


- Fabricated from rugged ABS for sanitary protection.
- 1/2" OD x 4-1/2" long, and is easily installed.



Part Number	Description	Ctn Qty	List Price
Vent Pipe			
VP50	1/2" Zinc Plated Steel	30	\$ 15.85
Vent Seal			
VS50	1/2" Plastic	50	4.25



Drive Well Points




Drive Well Point

Drive Well Point Features:

- Heavy duty ductile iron point to drive into all types of soil.
- Stainless steel jacket and gauze.
- Crimped seam eliminates peeling.
- Epoxy bonding at critical points.
- Locked at both ends.
- Lead free seam.
- Pipe coupling provided.
- Threaded, octagonal shoulder prevents turning while driving.
- Forms large enough hole to allow clearance for pipe couplings.
- Third party certified to NSF/ANSI 372.



Part Number	Gauze	Pipe Length	Pipe Size	Ctn Qty	List Price
Drive Points					
SBD2460	60	24	1-1/4"	3	\$ 67.68
SBD3060	60	30	1-1/4"	3	73.39
SBD3660	60	36	1-1/4"	3	87.32
SBD4260	60	42	1-1/4"	3	107.75
SBD4860	60	48	1-1/4"	3	113.93
SBD6060	60	60	1-1/4"	3	135.54
SBD2480	80	24	1-1/4"	3	67.68
SBD3080	80	30	1-1/4"	3	73.39
SBD3680	80	36	1-1/4"	3	87.32
SBD4280	80	42	1-1/4"	3	107.75
SBD4880	80	48	1-1/4"	3	113.93
SBD6080	80	60	1-1/4"	3	135.54
SBD30100	100	30	1-1/4"	3	73.39
SBD36100	100	36	1-1/4"	3	87.32
SBD48100	100	48	1-1/4"	3	113.93
SCD&F3060	60	30	1-1/2"	3	90.17
SCD&F3660	60	36	1-1/2"	3	111.15
SCD&F4860	60	48	1-1/2"	3	155.69
SCD&F6060	60	60	1-1/2"	3	194.79
SCD&F3680	80	36	1-1/2"	3	111.15
SCD&F4280	80	42	1-1/2"	3	113.35
SCD&F4880	80	48	1-1/2"	3	155.69
SDD&F3060	60	30	2"	3	110.89
SDD&F3660	60	36	2"	3	134.18
SDD&F4860	60	48	2"	3	165.36
SDD&F6060	60	60	2"	3	204.80
SDD&F3080	80	30	2"	3	110.89
SDD&F3680	80	36	2"	3	134.18
SDD&F4880	80	48	2"	3	165.36
SDD&F6080	80	60	2"	3	204.80



Drive Well Points



CLAYTON MARK®




Flush Well Point Features:


- Same as drive well points plus:
- Designed to pass through well casing & drive shoe into water bearing sand & gravel.
- Pipe coupling is designed to catch in a closed-pattern drive shoe.
- Beveled edges on point forms a positive grip on jacket, similar to single piece construction.
- Stainless steel jacket & gauze

Combination Well Point Features:

- Can be used as a regular well point or as an open end screen.
- Stainless steel jacket & gauze



Flush Well Point



Combination Well Point

Part Number	Gauze	Pipe Length	Pipe Size	Ctn Qty	List Price
Flush Well Points					
SBF3660	60	36	1-1/4"	3	\$ 108.53
SBF4260	60	42	1-1/4"	3	117.10
SBF4860	60	48	1-1/4"	3	141.11
SBF3680	80	36	1-1/4"	3	108.53
SBF4280	80	42	1-1/4"	3	117.10
SBF4880	80	48	1-1/4"	3	141.11
SBF48100	100	48	1 1/4"	3	141.11
Combination Well Points					
SBC2460	60	24	1-1/4"	3	141.11




Drive & Flush Well Point Head

Part Number	Type	Pipe Size	List Price
Well Point Heads			
A1120041	Drive	1-1/4"	\$ 17.88
A1120005	Drive	1-1/2"	25.61
A1120006	Drive	2"	28.50
A1120007	Flush	1-1/4"	18.23



Drive Well Points





I-Series

Imperial Series Features:

- Designed to be driven into all types of soil.
- Imperial series are wrapped outside with a stainless steel screen
- Stainless steel jacket over gauze construction is permanently fixed to perforated steel pipe.
- Design allows the passage of all the sand free water the pipe can carry.
- Cast iron drive point head can be removed for easy field extension by coupling together with the second well point for added capacity.



Part No.	Simmons	Pipe Size	Length	Gauze	Ctn Qty	List Price
Imperial with Outer Stainless Steel Gauze						
I90-60	1720-1	1 1/4	24"	60	1	\$ 128.60
I94-60	1721-1	1 1/4	30"	60	1	139.25
I98-60	1722-1	1 1/4	36"	60	1	150.04
I100-60	1723-1	1 1/4	42"	60	1	161.99
I102-60	1724-1	1 1/4	48"	60	1	183.44
I136-60	1740-1	1 1/2	24"	60	1	152.00
I138-60	1741-1	1 1/2	30"	60	1	171.40
I144-60	1742-1	1 1/2	36"	60	1	189.32
I168-60	1752-1	2	36"	60	1	228.51
I172-60	1753-1	2	48"	60	1	295.27
I176-60	1754-1	2	60"	60	1	361.94
Imperial with Inner Stainless Steel Gauze						
I90-80	1726-1	1 1/4	24"	80	1	128.00
I94-80	1727-1	1 1/4	30"	80	1	139.25
I98-80	1728-1	1 1/4	36"	80	1	150.04
I102-80	1730-1	1 1/4	48"	80	1	183.44
I138-80	1746-1	1 1/2	30"	80	1	171.40
I144-80	1747-1	1 1/2	36"	80	1	189.32



S-Series

Standard Series Features:

- For use in rocky or sandy soil.
- Standard series are wrapped inside with a stainless steel screen.
- Unique corrosion resistant construction features protect stainless steel gauze held in place between galvanized pipe and a stainless steel liner.
- Self flushing chamfered holes in galvanized pipe eliminate clay or sand build-up, giving maximum water yield with minimum development time.



Part No.	Simmons	Pipe Size	Length	Gauze	Ctn Qty	List Price
Standard Series with Inner Stainless Steel Gauze						
S94-60	1721	1 1/4	30"	60	1	\$ 139.37
S98-60	1722	1 1/4	36"	60	1	150.16
S102-60	1724	1 1/4	48"	60	1	183.44
S168-60	1752	2	36"	60	1	228.58
S172-60	1753	2	48"	60	1	295.27
S176-60	1754	2	60"	60	1	361.94
Standard Series with Outer Stainless Steel Gauze						
S94-80	1727	1 1/4	30"	80	1	139.37
S98-80	1728	1 1/4	36"	80	1	150.16



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Drive Well Point Supplies



80002C
Sand Shark
Valve

"Sand Shark", Backwash Valves Features:

- Used in soft soil to jet open-end screen to desired depth.
- Thickwalled, cast iron construction with saw teeth to rip through roots and debris.
- Solid ABS ball check keeps sand from entering well when jetting operations are complete.
- Not spring loaded.

Part Number	Valve Size	Pressure Pipe Tap	Ctn Qty	List Price
80002C	2" NPT Male	1" NPS Left Hand Female	Bulk	\$ 75.29



8660B
Backwash
Valve

Part Number	Pipe Size	Description	Ctn Qty	List Price
8660B	2"	No. 19B S/Steel Ball	12	\$ 72.04



434 Series

Turned Coupling Features:

- Used for suspending flush well points or strainers from drive shoes or tubular cylinders.
- Galvanized with standard pipe thread.
- Furnished with right hand pipe threads.
- Thin wall 434J.
- Third party certified to NSF/ANSI 372.



Part Number	Rt. Hand Thread Pipe Size	Well Size	Strainer Size	Coupling O.D.	Coupling Length	Ctn Qty	List Price
Turned Couplings							
434J11/4X11/4	1-1/4 x 1-1/4"	2	1"	1 13/16"	2-1/4"	48	\$ 6.48
434-11/4X11/4	1 1/4 X 1 1/4"	2	1 1/4	1 15/16"	2 1/4	48	7.12



DC

Galvanized Drive Coupling Features:

- Heavy pattern with deep recess for shouldering on imperfect threads of well points.
- Assures proper driving of well points and standard pipe.
- Taper tapped, reamed and drifted.
- Third party certified to NSF/ANSI 372.



C125

Drive Cap Features:

- Heavy duty forged steel.
- Standard pipe threads.
- Vented on top.

Part Number	Description	Pipe Size	Length (in.)	Ctn Qty	List Price
Galvanized Drive Couplings					
DC125C	1-1/4"	1-1/4"	2.75	40	\$ 8.50
DC150	1-1/2"	1-1/2"	2.75	40	11.49
DC200	2"	2"	2.90	30	14.06
DC200L	2" Long Pattern	2"	3.40	30	17.68
Drive Caps					
C125	Heavy Duty Forged Steel	1-1/4"		32	15.18
C200	Heavy Duty Forged Steel	2"		16	23.57




Drive Shoes




Drive Shoes

Drive Shoe Features:


- Alloy grade seamless stock.
- Special process to strengthen the material before heat treating.
- All drive shoes are heat treated.
- All drive tips are flame hardened for superior driving strength.
- All drive shoes are tested for dimensional accuracy and tip hardness.
- Baked on phosphate coating to protect from corrosion.
- Cable and Rotary style.
- Weld-on and threaded.
- Third party certified NO LEAD to NSF/ANSI 372.




7000 Series



7055 Series




7005 Series




7007 Series


Part Number	Nominal Pipe Size	Description	Ctn Qty	List Price
Threaded Cable Tool Style				
7000A	2"	Open Pattern	50	\$ 27.86
7000D	2"	Closed Pattern, extended threads (P&R)	28	27.86
7000E	3"	Open Pattern	12	84.00
7000GL	4"	Open Pattern	9	42.76
7000J	5"	Open Pattern	5	76.71
7000K	6"	Open Pattern (6.125" ID)	4	107.14
7000N	6"	Short Pattern (6.125" ID)	4	88.71
7000KLD	6"	Open Pattern (6.25" ID)	4	107.14
7059X	8"	Open Pattern	1	248.57
Weld-On Cable Tool Style				
7055E	3"	Open Pattern	12	84.00
7055GL	4"	Open Pattern	9	42.76
7055J	5"	Open Pattern	5	76.71
7055K	6"	Open Pattern (6.125" ID)	4	107.14
7055R	6"	Short Pattern (6.125" ID)	4	88.71
7055M	8"	Open Pattern	1	248.57
7055KLD	6"	Open Pattern (6.25" ID)	4	107.14
7055N	10"	Open Pattern	1	762.86
Threaded Rotary Style				
7005A	4"	Open Pattern	9	42.76
7005B	5"	Open Pattern	4	76.71
7005C	6"	Open Pattern (6.125" ID)	4	107.14
7005H	6"	Short Pattern (6.125" ID)	4	88.71
7005CLD	6"	Open Pattern (6.25" ID)	4	107.14
Weld-on Rotary Style				
7007A	4"	Open Pattern	9	42.76
7007C	6"	Open Pattern (6.125" ID)	4	107.14
7007CLD	6"	Open Pattern (6.25" ID)	4	107.14

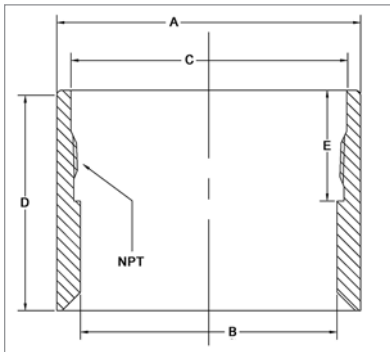


Threaded Cable Tool Style							
PART NO.	Nominal Pipe Size	Thread	A	B	C	D	E
7000A	2"	11 1/2V	2.88	2.06	2.45	2.88	1.86
7000D	2"	11 1/2V	2.88	1.84	2.45	2.88	1.86
7000E	3"	8V	4.00	3.10	3.50	3.50	1.75
7000GL	4"	8V	5.00	4.125	4.575	4.00	2.43
7000J	5"	8V	6.00	5.125	5.59	4.50	2.62
7000K	6"	8V	7.39	6.125	6.50	5.40	2.70
7000N	6"	8V	7.39	6.125	6.69	4.00	2.70
7000KLD	6"	8V	7.39	6.25	6.69	5.40	2.70
7059X	8"	8V	9.55	8.13	8.73	7.50	3.60

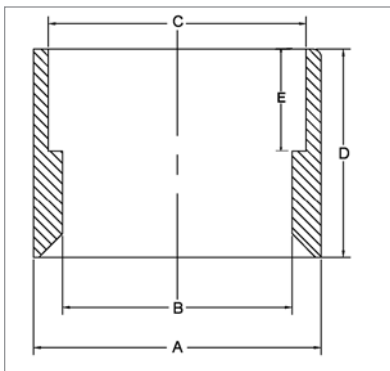

Weld On Cable Tool Style							
PART NO.	Nominal Pipe Size		A	B	C	D	E
7055E	3"		4	3.1	3.54	3.5	1.75
7055GL	4"		5	4.125	4.575	4.00	2.00
7055J	5"		6	5.125	5.59	4.50	2.03
7055K	6"		7.39	6.125	5.38	5.40	2.70
7055R	6"		7.39	6.125	6.69	4.00	2.12
7055KLD	6"		7.39	6.25	6.69	5.40	2.70
7055N	10"		11.75	10.25	10.875	8.00	3.60

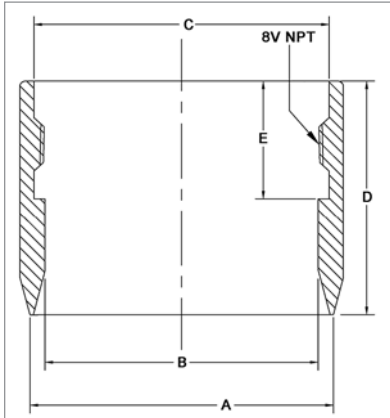

Threaded Rotary Style							
PART NO.	Nominal Pipe Size	Thread	A	B	C	D	E
7005A	4"	8V	5	4.125	4.56	4.00	2.43
7005B	5"	8V	6	5.125	5.59	4.50	2.62
7005C	6"	8V	7.39	6.125	6.69	4.00	2.70
7005H	6"	8V	6.68	6.125	6.69	4.12	2.70
7005CLD	6"	8V	7.39	6.25	6.69	4.50	2.70

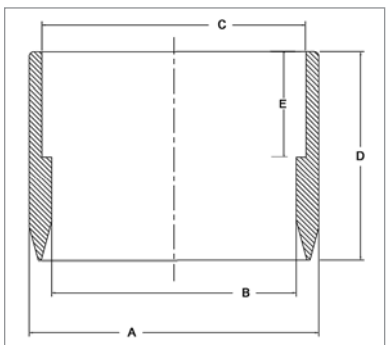

Weld-On Rotary Style							
PART NO.	Nominal Pipe Size		A	B	C	D	E
7007A	4"		5	4.125	4.575	4.00	2.13
7007C	6"		7.39	6.125	6.69	5.40	2.70
7007CLD	6"		7.39	6.25	6.69	5.40	2.70



Pitcher Pump



HPP10


HARVARD® Pitcher Pump Features:

- Recommended for shallow pump applications – depth rating up to 20'.
- Easily installed.
- Made of heavy cast iron.
- Dark green hard enamel rugged powder coated paint finish.
- Open spout.
- 15-3/4" high.
- Tapped for 1-1/4" drop pipe.
- 15 lbs.
- Pumps are individually packaged 4 per master carton.
- Parts are carton qty 1.
- Third party certified NO LEAD to NSF/ANSI 372.



Part Number	Description	Master Ctn Qty	List Price
HPP10	Pitcher Pump, Cast Iron, Size #2	4	\$ 118.75

PITCHER PUMP REPLACEMENT PARTS

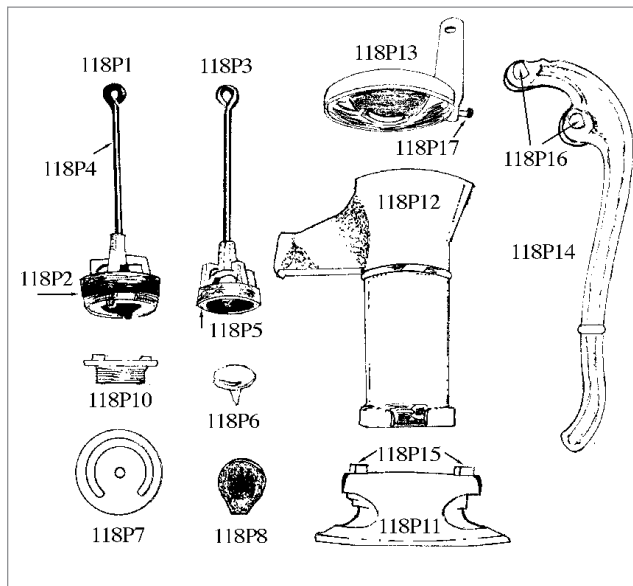

Part Number	Description	List Price
118P1	Complete Plunger Assembly (includes *)	36.98
118P2 *	Cup Leather for Plunger only	15.92
118P3	Plunger Rod and Cage (no cup leather)	14.26
118P4 *	Plunger Rod	7.34
118P5 *	Plunger Cage	11.50
118P6 *	Plunger Weight	5.03
118P7	Flat Leather for Base Valve	11.49
118P8	Weight and Screw for Flat Valve	6.90
118P9	Flat Valve Leather and Weight	15.99
118P10 *	Threaded Nut for Plunger Cage	10.60
118P11	Pump Base with Bolts (118P15)	34.10
118P12	Pump Cylinder	38.79
118P13	Pump Top with Set Screw (118P17)	17.48
118P14	Pump Handle with Two Bolts (118P16)	29.34
118P15	3/8 x1-1/4 Bolts for Pump Base (set of 2)	3.83
118P16	3/8 x 2 bolts for Pump Handle	4.46
118P17	Set Screw for Pump Top	3.81

Rod Couplings



720

720 Series Rod Coupling Features:

- Hexagon shaped, galvanized couplings.
- Made from solid bars of cold-rolled steel.
- Use to connect steel pump rods.



720 Rod Couplings

Part Number	Size	Size of Hexagon	Overall Length	Ctn Qty	List Price
8075B1	3/8"x3/8"	5/8"	1-3/4"	25	\$ 1.81
8075C1	7/16"x3/8"	5/8"	1-3/4"	25	1.81
8075D1	7/16"x7/16"	5/8"	1-3/4"	25	1.83
8075E1	1/2"x3/8"	11/16"	1-3/4"	25	3.23
8075F1	1/2"x7/16"	11/16"	1-3/4"	25	3.40
8075G1	1/2"x1/2"	11/16"	1-3/4"	25	2.28
8075J1	5/8"x7/16"	13/16"	2-1/8"	BULK	9.26
8075K1	5/8" x 1/2"	13/16"	2 1/8"	BULK	8.83
8075L1	5/8"x5/8"	13/16"	2-1/8"	BULK	4.65



Cylinders - All NO LEAD Brass



449 B



Replacement Parts

449B ALL BRASS Features:

- Corrosion resistant, all brass construction.
- Brass tubing offers a smooth working surface and extends the life of the leathers.
- Open top cylinder, threaded valves screw together for one-step removal.
- No need to pull cylinder to replace inner components.
- Reliable **BALL** plunger.
- Contains 707/45 series graphite leathers.
- Third party certified NO LEAD to NSF/ANSI 372.



Part Number	Inside Diameter X Stroke (inches)	Barrel Length (inches)	Caps Tapped Pipe Size Top/Bottom (inches)	Size Rod in Plunger (inches)	Smallest Well Cylinder will enter (inches)	Capacity Per Stroke US Gallons	Cup Leather Sizing		List Price
							O.D. (inches)	Hole (inches)	
7037HNL	1-7/8 x 14	24	2 x 1-1/4	5/8	3	.1680	1-7/8	1-5/16	\$ 708.98
7037RNL	1 7/8 X 20	30	2 X 1 1/4	5/8	3	.2400	1 7/8	1 5/16	786.88
7037LANL	2 1/4 X 25	36	2 1/2 X 1 1/2	7/8	3 1/2	.4303	2 1/4	1 1/2	1340.31
7037EBNL	2 3/4 X 24	36	3 X 2	7/8	4 1/2	.6171	2 3/4	1 7/8	1804.82

449B Replacement Parts	1-7/8"	2-1/4"	2-3/4"
	Part Number	Part Number	Part Number
Plunger assembly w/ leathers	8599ANL	8599C	8599E
Check assembly w/ leathers	8533C	8533D1	8533E1
Leather for Plunger (707/45) Qty 3	707-221 17/8"x1 5/16"	707-334 21/4x11/2	707-384 23/4x17/8
Leather for Check (702/41) Qty 1	702-216 17/8"x1 5/16"	702-334 21/4x11/2	702-384 23/4x17/8

NOTE: PLEASE SEE PAGE 90 FOR REPLACEMENT PART PRICING.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

1.87

Cylinders - All NO LEAD Brass



442

442 ALL BRASS Features:



CLAYTON MARK®

- All brass plunger, plain poppet and two leathers.
- Closed flush cap, recommended for all types of working heads and small diameter, shallow wells.
- Perma-Kleen®, Buna N rubber check poppet facing for smooth, quiet operation and tight seal.
- Clearance of two inches is provided between plunger and check.
- Contains 711/44 Series waterproof leathers.
- "NL" designates NO LEAD.
- Third party certified NO LEAD to NSF/ANSI 372.



442 All Brass Part Number	Inside Diameter x Stroke (inches)	Barrel Length (inches)	Caps Tapped Pipe Size Top/Bottom (inches)	Size Rod in Plunger (inches)	Well Cylinder will enter (inches)	Smallest Capacity Per Stroke US Gallons	Cup Leather Sizing O.D. (inches)	Hole (inches)	List Price
7027ANL	1-11/16 x 8	16	1 x 1	7/16	2	.0768	1-11/16	1-3/16	\$ 469.06
7027BNL	1-11/16 x 10	16	1 x 1	7/16	2	.0960	1-11/16	1-3/16	496.04
7027MNL	1 11/16 X 12	20	1 X 1	7/16	2	.1152	1 11/16	1 3/16	461.12
7027CNL	1-13/16 x 8	16	1 x 1	7/16	2	.0896	1-13/16	1-3/16	360.94
7027DNL	1-13/16 x 10	18	1 x 1	7/16	2	.1120	1-13/16	1-3/16	480.94
7027D3NL	1-13/16 x 12	20	1 x 1	7/16	2	.1344	1-13/16	1-3/16	476.15
7027ENL	2 x 8	16	1 1/4 x 1 1/4	7/16	2-1/2	.1088	2	1-5/16	566.31
7027FNL	2 x 10	18	1 1/4 x 1 1/4	7/16	2-1/2	.1360	2	1-5/16	550.93
7027F1NL	2 X 12	20	1 1/4 X 1 1/4	7/16	2 1/2	.1632	2	1 5/16	561.48
7027HNL	2-1/4 x 8	16	1 1/4 x 1 1/4	7/16	3	.1377	2-1/4	1-3/8	700.25
7027JNL	2-1/4 x 10	18	1 1/4 x 1 1/4	7/16	3	.1721	2-1/4	1-3/8	748.82
7027DANL	2-1/4 x 10	18	1 1/2 x 1 1/4	7/16	3	.1721	2-1/4	1-3/8	645.49
7027P2NL	2-1/4 x 12	20	1 1/4 x 1 1/4	7/16	3	.2071	2-1/4	1-3/8	714.64
7027S3NL	2 1/2 X 8	18	1 1/4 X 1 1/4	7/16	3	.1700	2 1/2	1 5/8	760.80
7027LNL	2-1/2 x 10	20	1 1/4 x 1 1/4	7/16	3	.2125	2-1/2	1-5/8	907.69
7027FA3NL	3 x 10	20	1 1/4 x 1 1/4	7/16	3-1/2	.3060	3	2-1/8	944.11
7027UNL	3 x 10	20	2 x 1 1/4	7/16	3-1/2	.3060	3	2-1/8	992.32

442 Replacement Parts Description	1-11/16" Part Number	1-13/16" Part Number	2" Part Number	2-1/4" Part Number	2-1/2" Part Number	3" Part Number
Plunger Assembly w/ leather	8522A	8522B	8522CNL	8522D	8522F/8522FNL	8522J
Leather for Plunger (711/44)	711-151	711-198	711-264	711-333	711-358	711-638
2 each required	1-11/16x1-3/16	1-13/16x1-3/16	2x1-5/16	2-1/4x1-3/8	2-1/2x1-5/8	3x2-1/8

NOTE: PLEASE SEE PAGE 90 FOR REPLACEMENT PART PRICING.



Cylinders - All NO LEAD Brass Eureka




450 ALL BRASS EUREKA Features:



450

- Open top cylinder made for tubular wells and applications where the originally installed cylinder can't be removed.
- All brass valves with Perma-Kleen rubber poppet facings for smooth quiet operation and better seating.
- Threaded valves screw together for easy one-step removal.
- Spring dog holds unit in place until rubber packer is expanded by rotating drill rods.
- Packer creates a seal and anchors cylinder in place.
- Clearance of 2" is provided for operation between plunger and checks.
- "NL" designates NO LEAD.
- Third party certified NO LEAD to NSF/ANSI 372.



450 All Brass Eureka Cylinders							
Part Number	Size of Well (inches)	Inside Diameter of Cylinder (inches)	Stroke (inches)	Plunger tapped for pipe (inches)	Cup Leather Hole Size for Check & Plunger (inches)	Capacity per Stroke, US Gallons	List Price
7039ENL	2	1-13/16	10	3/8	1-3/16	.1120	\$ 541.56
7039XNL	2	1-13/16	14	3/8	1-3/16	.1570	596.32



Replacement Parts

450 Replacement Parts	
Description	Part Number
Check assembly	8515AP/8515APNL
Plunger assembly	8514B

NOTE: PLEASE SEE PAGE 90 FOR REPLACEMENT PART PRICING.



Seating Tool

451 SEATING TOOL Features:

- Attaches to drill rod string to run and seat the 450 cylinder securely in place.

Part Number	Description	Ctn Qty	List Price
8041A	2" seating tool	1	\$ 10.09



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.89

Cylinder Replacement Parts, Operating Data



CLAYTON MARK®

Product Number	Description	List Price	Page
8034D	Cylinder Packer Rubber 450/7039	\$ 4.97	75
8041A	Seating Tool for 450 Cylinders	4.70	75
8099DNL	Plunger Poppet 442 2-1/4" NO LEAD	34.43	74
8514BNL	Plunger Assembly 450/7039 1 13/16	117.71	75
8515APNL	Check Assembly 450/7039 2" NO LEAD	66.69	75
8522ANL	Plunger Assembly w/ leathers 442 1 11/16" NO LEAD	64.58	74
8522CNL	Plunger Assembly w/ leathers 442 2" NO LEAD	87.22	74
8522FNL	Plunger Assembly w/ leathers 442 2 1/2" NO LEAD	146.18	74
8522JNL	PLUNGER ASSY W/LEATHERS 442 3	221.80	73
8533CNL	CHECK ASMBLY W/LTHRS 449B 17/8	107.71	73
8599ANL	Plunger Assembly w/ leathers 449B 1 7/8" NO LEAD	136.13	73

**Table showing amount of water discharged per stroke by single acting cylinder.
The diameter of cylinder and length of stroke being known.**

Dia. of pump cylinder in inches	Length of stroke in inches with capacity per stroke in gallons												Area of circle cylinder sq in
	1	2	3	4	5	6	7	8	10	12	18	24	
1 3/8	.0064	.0128	.0192	.0256	.0320	.0384	.0448	.0512	.0640	.0768	.1152	.1536	1.4849
1 1/2	.0076	.0153	.0229	.0306	.0382	.0459	.0535	.0612	.0765	.0918	.1375	.1832	1.7671
1 5/8	.0090	.0180	.0270	.0360	.0450	.0540	.0630	.0720	.0900	.1080	.1620	.2140	2.0739
1 3/4	.0104	.0208	.0312	.0416	.0512	.0625	.0729	.0833	.1041	.1249	.1872	.2497	2.4053
1 13/16	.0112	.0224	.0336	.0448	.0560	.0672	.0784	.0896	.1120	.1344	.2016	.2688	2.5802
1 7/8	.0120	.0240	.0360	.0480	.0600	.0720	.0840	.0960	.1200	.1440	.2160	.2280	2.7612
1 31/32	.0132	.0263	.0395	.0527	.0659	.0790	.0922	.1054	.1317	.1580	.2371	.3161	3.0440
2	.0136	.0272	.0408	.0544	.0680	.0816	.0952	.1088	.1360	.1632	.2448	.3264	3.1416
2 3/16	.0163	.0325	.0488	.0650	.0812	.0976	.1137	.1300	.1625	.1952	.2928	.3904	3.7584
2 1/4	.0172	.0344	.0516	.0688	.0860	.1033	.1205	.1377	.1721	.2071	.3104	.4137	3.9760
2 1/2	.0212	.0425	.0637	.0850	.1062	.1275	.1487	.1700	.2125	.2550	.3825	.5100	4.9070
2 3/4	.0257	.0514	.0771	.1028	.1285	.1543	.1800	.2057	.2571	.3085	.4628	.6171	5.9395
3	.0306	.0612	.0918	.1224	.1530	.1836	.2142	.2448	.3060	.3672	.5508	.7344	7.0686

To obtain the capacity of a pump with a diameter of cylinder given in the table, but with a longer stroke than 24 inches (the longest stroke given in the table), add or multiply the capacity to represent the required length of stroke.

For instance: The capacity of a cylinder with a 30 inch stroke would be the same as that (having the same diameter) of an 18 inch stroke cylinder, added to the capacity of a 12 inch stroke cylinder. The same result may be obtained by multiplying the capacity of a cylinder with a 10 inch stroke by 3.

To obtain the amount of water discharged per minute, multiply the capacity per stroke by the number of strokes per minute. To obtain the amount of water discharged per hour, multiply this figure by 60.


Capacities are given in American Gallons. To find English gallons, deduct 1/6; to find liters, multiply by 3.75.



Cup Leathers



702/41



CLAYTON MARK®



702/41 Universal Features:

- Untreated economy leathers.
- Flesh side out.
- Used for open type hand pumps (pitcher pumps), jet packers and on any application calling for a stationary seal.
- Made in USA.

ORDER IN TUBE QUANTITY ONLY

NEW Part Number	OLD Part Number	Finish	A Cylinder I.D. Leather O.D.	B Hole Size Leather I.D.	C Height	Tube Qty	List Price
702/41 Universal							
702-022	L101000006	702/41	1"	3/8"	7/16"	12	\$ 6.43
702-048	L101020006	702/41	1-1/8"	3/8"	1/2"	12	7.11
702-061	L101040006	702/41	1-1/4"	3/8"	1/2"	12	7.11
702-063	L101040008	702/41	1-1/4"	1/2"	1/2"	12	7.11
702-095	L101060010	702/41	1 3/8"	5/8"		12	7.99
702-109	L101080006	702/41	1-1/2"	3/8"	5/8"	12	7.99
702-169	L101120010	702/41	1-3/4"	5/8"	11/16"	12	8.65
702-198	L101130103	702/41	1-13/16"	1-3/16"	3/4"	12	8.65
702-216	L101140105 *	702/41	1-7/8"	1-5/16"	3/4"	12	8.65
702-220	L101140104 **	702/41	1-7/8"	1-1/4"	3/4"	12	8.65
702-263	L102000104	702/41	2"	1-1/4"	3/4"	12	10.26
702-264	L102000105	702/41	2"	1-5/16"	3/4"	12	10.26
702-333	L102040106	702/41	2-1/4"	1-3/8"	3/4"	12	11.25
702-334	L102040108 *	702/41	2 1/4"	1 1/2"	3/4"	12	11.25
702-358	L102080110	702/41	2-1/2"	1-5/8"	13/16"	12	12.53
702-384	L102120114 *	702/41	2-3/4"	1-7/8"	13/16"	12	13.66
702-410	L103000200	702/41	3"	2"	13/16"	12	15.26
702-464	L103080208	702/41	3-1/2"	2-1/2"	1"	12	19.22
702-521	L104000300	702/41	4"	3"	1-1/16"	6	28.23
702-636	L106000408	702/41	6"	4 1/2"		6	93.26

* Standard Clayton Mark hole size
** Standard Midland hole size



www.americangranby.com


FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Cup Leathers



704/46
Oil Fill



CLAYTON MARK®



704/46 Oil Fill Features:

- Oak tanned leather and oil treated.
- Oil treatment waterproofs and retards swelling of leather inside cylinders.
- Reduces rod breakage or overloading motors.
- Oil treatment preserves leather insuring longer life.
- Flesh side out.
- Used in cylinders and piston pumps.
- Made in USA.

ORDER IN TUBE QUANTITY ONLY

NEW Part Number	OLD Part Number	Finish	A Cylinder I.D. Leather O.D.	B Hole Size Leather I.D.	C Height	Tube Qty	List Price
704/46 Oil Fill							
704-010	L600140002	704/46	7/8"	1/8"		12	\$ 6.43
704-044	L601100000	704/46	1-1/8"	-	1/2"	12	7.11
704-048	L601020006	704/46	1-1/8"	3/8"	1/2"	12	7.11
704-092	L601060006	704/46	1-3/8"	3/8"	5/8"	12	7.99
704-105	L601080000	704/46	1 1/2"	SOLID	5/8"	12	7.99
704-109	L601080006	704/46	1-1/2"	3/8"	5/8"	12	7.99
704-198	L601130103	704/46	1-13/16"	1-3/16"	3/4"	12	8.65
704-220	L601140104 **	704/46	1-7/8"	1-1/4"	3/4"	12	8.65
704-255	L602000010	704/46	2"	5/8"	3/4"	12	10.26
704-264	L602000105	704/46	2"	1-5/16"	3/4"	12	10.26
704-333	L602040106	704/46	2-1/4"	1-3/8"	3/4"	12	11.25
704-334	L602040108 *	704/46	2-1/4"	1-1/2"		12	11.25
704-354	L602080104	704/46	2-1/2"	1-1/4"		12	12.53
704-358	L602080110	704/46	2-1/2"	1-5/8"	13/16"	12	12.53
704-384	L602120114 *	704/46	2-3/4"	1-7/8"	13/16"	12	13.66
704-409	L603000105	704/46	3"	1-7/8"		12	15.19
704-410	L603000200	704/46	3"	2"	13/16"	12	15.19
704-464	L603080208	704/46	3-1/2"	2-1/2"	1"	12	19.22
704-521	L604000300	704/46	4"	3"	1-11/16"	6	28.23
* Standard Clayton Mark hole size							
** Standard Midland hole size							



Cup Leathers



706/42 Black Perfection Features:

- Hard, high-polished black finish leather
- Hair side out.
- Used for deep well cylinders as well as developing & testing new wells.
- Made in USA.



ORDER IN TUBE QUANTITY ONLY

NEW Part Number	OLD Part Number	Finish	Cylinder I.D. Leather O.D.	Hole Size Leather I.D.	C Height	Tube Qty	List Price
706/42 Black Perfection							
706-022	L201000006	706/42	1	3/8"	7/16"	12	\$ 6.43
706-063	L201040008	706/42	1-1/4"	1/2"	1/2"	12	7.11
706-064	L201040010	706/42	1 1/4"	5/8"	1/2"	12	7.11
706-073	L201050002	706/42	1 5/16"	1/8"		12	7.99
706-095	L201060010	706/42	1-3/8"	5/8"	5/8"	12	7.99
706-105	L201080000	706/42	1-1/2"	-	5/8"	12	7.99
706-112	L201080010	706/42	1-1/2"	5/8"	5/8"	12	7.75
706-127	L201100006	706/42	1-5/8"	3/8"	5/8"	12	7.99
706-155	L201110102	706/42	1-11/16"	1-1/8"	5/8"	12	8.65
706-166	L201120006	706/42	1 3/4"	3/8"		12	8.65
706-175	L201120102	706/42	1-3/4"	1-1/8"	11/16"	12	8.65
706-198	L201130103	706/42	1-13/16"	1-3/16"	3/4"	12	8.65
706-219	L201140103	706/42	1-7/8"	1-3/16"	3/4"	12	8.65
706-220	L201140104 **	706/42	1-7/8"	1-1/4"	3/4"	12	8.65
706-221	L201140105 *	706/42	1-7/8"	1-5/16"	3/4"	12	8.65
706-255	L202000010	706/42	2"	5/8"	3/4"	12	10.26
706-262	L202000103	706/42	2"	1-3/16"	3/4"	12	10.26
706-263	L202000104	706/42	2"	1-1/4"	3/4"	12	10.26
706-264	L202000105	706/42	2"	1-5/16"	3/4"	12	10.26
706-285	L202010104	706/42	2-1/16"	1-1/4"	3/4"	12	11.25
706-286	L202010105	706/42	2-1/16"	1-5/16"	3/4"	12	11.25
706-308	L202020104	706/42	2-1/8"	1-1/4"	3/4"	12	11.25
706-310	L202020106	706/42	2-1/8"	1-3/8"	3/4"	12	11.25
706-333	L202040106	706/42	2-1/4"	1-3/8"	3/4"	12	11.25
706-334	L202040108 *	706/42	2-1/4"	1-1/2"	3/4"	12	11.25
706-335	L202040110	706/42	2-1/4"	1-5/8"	3/4"	12	11.25
706-345	L202080008	706/42	2-1/2"	1/2"		12	12.53
706-358	L202080110	706/42	2-1/2"	1-5/8"	13/16"	12	12.53
706-359	L202080111	706/42	2-1/2"	1-11/16"	13/16"	12	12.53
706-360	L202080114	706/42	2-1/2"	1-7/8"	13/16"	12	12.53
706-384	L202120114 *	706/42	2-3/4"	1-7/8"	13/16"	12	13.66
706-409	L203000114	706/42	3"	1-7/8"	13/16"	12	15.26
706-410	L203000200	706/42	3"	2"	13/16"	12	15.26
706-435	L203010114	706/42	3 1/16"	1 7/8"		12	17.77
706-436	L203010200	706/42	3-1/16"	2"		12	17.77
706-464	L203080208	706/42	3-1/2"	2-1/2"	1"	12	19.22
706-492	L203120210	706/42	3-3/4"	2-5/8"	1"	12	24.21
706-520	L204000212	706/42	4"	2-3/4"	1-1/16"	6	28.23
706-521	L204000300	706/42	4"	3"	1-1/16"	6	28.23

* Standard Clayton Mark hole size
** Standard Midland hole size



www.americangranby.com

FALL 2016


In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.93

Cup Leathers



707/45
Graphite



707/45 Graphite Features:

- Selected from the center of hides.
- Flesh side out.
- Graphite coating prevents fast absorption of water and acts as a lubricant to reduce binding of the plunger in the cylinder.
- Made in USA.



CLAYTON MARK®



ORDER IN TUBE QUANTITY ONLY

NEW Part Number	OLD Part Number	Finish	A Cylinder I.D. Leather O.D.	B Hole Size Leather I.D.	C Height	Tube Qty	List Price
707/45 Graphite							
707-061	L501040006	707/45	1-1/4"	3/8"	1/2"	12	\$ 7.11
707-063	L501040008	707/45	1-1/4"	1/2"	1/2"	12	7.11
707-064	L501040010	707/45	1-1/4"	5/8"	1/2"	12	7.11
707-092	L501060006	707/45	1-3/8"	3/8"	5/8"	12	7.99
707-095	L501060010	707/45	1-3/8"	5/8"	5/8"	12	7.99
707-109	L501080006	707/45	1-1/2"	3/8"	5/8"	12	7.99
707-112	L501080010	707/45	1-1/2"	5/8"	5/8"	12	7.99
707-130	L501100010	707/45	1-5/8"	5/8"		12	7.99
707-149	L501110010	707/45	1-11/16"	5/8"		12	8.65
707-175	L501120102	707/45	1-3/4"	1-1/8"		12	8.65
707-198	L501130103	707/45	1-13/16"	1-3/16"	3/4"	12	8.65
707-215	L501140114	707/45	1-7/8"	7/8"	3/4"	12	8.65
707-220	L501140104 **	707/45	1-7/8"	1-1/4"	3/4"	12	8.65
707-221	L501140105 *	707/45	1-7/8"	1-5/16"	3/4"	12	8.65
707-255	L502000010	707/45	2"	5/8"	3/4"	12	10.26
707-264	L502000105	707/45	2"	1-5/16"	3/4"	12	10.26
707-286	L502010105	707/45	2-1/16"	1-5/16"	3/4"	12	11.25
707-300	L502020010	707/45	2-1/8"	5/8"	3/4"	12	11.25
707-333	L502040106	707/45	2-1/4"	1-3/8"	3/4"	12	11.25
707-334	L502040108 *	707/45	2-1/4"	1-1/2"	3/4"	12	11.25
707-639	L502060108	707/45	2 3/8"	1 1/2"	3/4"	12	12.53
707-357	L502080108	707/45	2-1/2"	1-1/2"	3/4"	12	12.53
707-358	L502080110	707/45	2-1/2"	1-5/8"	13/16"	12	12.53
707-359	L502080111	707/45	2-1/2"	1-11/16"	13/16"	12	12.53
707-384	L502120114 *	707/45	2-3/4"	1-7/8"	13/16"	12	13.66
707-410	L503000200	707/45	3"	2"	13/16"	12	15.19
707-436	L503010200	707/45	3 1/16"	2"		12	17.77
707-464	L503080208	707/45	3-1/2"	2-1/2"	1"	12	19.22
707-492	L503120210	707/45	3-3/4"	2-5/8"	1"	12	24.21
707-520	L504000212	707/45	4"	2-3/4"		6	28.23
707-521	L504000300	707/45	4"	3"	1-1/16"	6	28.23
707-615	L506000010	707/45	6"	5/8"		6	93.26


* Standard Clayton Mark hole size
** Standard Midland hole size



Cup Leathers



711/44
Waterproof



711/44 Waterproof Features:

- Soft, pliable waterproof.
- Hair side out.
- For use on piston pumps, shallow setting brass-cylinder barrels, air pumps and other applications where minimum water absorption and swelling is desired.
- Made in USA.



CLAYTON MARK®



ORDER IN TUBE QUANTITY ONLY

NEW Part Number	OLD Part Number	Finish	Cylinder I.D. Leather O.D.	Hole Size Leather I.D.	Height	Tube Qty	List Price
711/44 Waterproof							
711-021	L401000004	711/44	1"	1/4"	7/16"	12	\$ 6.43
711-022	L401000006	711/44	1"	3/8"	7/16"	12	6.43
711-024	L401000008	711/44	1"	1/2"	7/16"	12	6.43
711-037	L401010010	711/44	1-1/16"	5/8"		12	7.11
711-048	L401020006	711/44	1-1/8"	3/8"	1/2"	12	7.11
711-050	L401020008	711/44	1-1/8"	1/2"	1/2"	12	7.11
711-057	L401040000	711/44	1 1/4"	-	1/2"	12	7.11
711-061	L401040006	711/44	1-1/4"	3/8"	1/2"	12	7.11
711-062	L401040007	711/44	1-1/4"	7/16"	1/2"	12	7.11
711-063	L401040008	711/44	1-1/4"	1/2"	1/2"	12	7.11
711-064	L401040010	711/44	1-1/4"	5/8"		12	7.11
711-076	L401050006	711/44	1-5/16"	3/8"		12	7.99
711-078	L401050008	711/44	1-5/16"	1/2"		12	7.99
711-092	L401060006	711/44	1-3/8"	3/8"	5/8"	12	7.99
711-094	L401060008	711/44	1-3/8"	1/2"	5/8"	12	7.99
711-095	L401060010	711/44	1-3/8"	5/8"	5/8"	12	7.99
711-098	L401060014	711/44	1-3/8"	7/8"	5/8"	12	7.99
711-109	L401080006	711/44	1-1/2"	3/8"	5/8"	12	7.99
711-111	L401080008	711/44	1-1/2"	1/2"	5/8"	12	7.99
711-112	L401080010	711/44	1-1/2"	5/8"	5/8"	12	7.99
711-129	L401100008	711/44	1-5/8"	1/2"	5/8"	12	7.99
711-130	L401100010	711/44	1-5/8"	5/8"	5/8"	12	7.99
711-135	L401100100	711/44	1-5/8"	1"	5/8"	12	7.99
711-149	L401110010	711/44	1-11/16"	5/8"	5/8"	12	8.65
711-151	L401110103	711/44	1 11/16"	1 3/16"		12	8.65
711-154	L401110100	711/44	1-11/16"	1"	5/8"	12	8.65
711-155	L401110102	711/44	1-11/16"	1-1/8"	5/8"	12	8.65
711-169	L401120010	711/44	1-3/4"	5/8"	11/16"	12	8.65
711-174	L401120100	711/44	1 3/4"	1"	11/16"	12	8.65
711-175	L401120102	711/44	1-3/4"	1-1/8"	11/16"	12	8.65
711-192	L401130012	711/44	1-13/16"	3/4"		12	8.65
711-198	L401130103	711/44	1-13/16"	1-3/16"	3/4"	12	8.65
711-211	L401140008	711/44	1-7/8"	1/2"	3/4"	12	8.65
711-212	L401140010	711/44	1-7/8"	5/8"	3/4"	12	8.65
711-217	L401140100	711/44	1-7/8"	1"	3/4"	12	8.65
711-219	L401140103	711/44	1-7/8"	1-3/16"	3/4"	12	8.65
711-220	L401140104 **	711/44	1-7/8"	1-1/4"	3/4"	12	8.65
711-221	L401140105 *	711/44	1-7/8"	1-5/16"	3/4"	12	8.65

* Standard Clayton Mark hole size
** Standard Midland hole size



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

1.95

Cup Leathers



711/44 Waterproof - continued.
ORDER IN TUBE QUANTITY ONLY




CLAYTON MARK®

NEW Part Number	OLD Part Number	Finish	Cylinder I.D. Leather O.D.	Hole Size Leather I.D.	Height	Tube Qty	List Price
711/44 Waterproof - Continued							
711-233	L401150010	711/44	1-15/16"	5/8"	3/4"	12	\$ 10.26
711-240	L401150103	711/44	1-15/16"	1-3/16"	3/4"	12	10.26
711-242	L401150105	711/44	1-15/16"	1-5/16"	3/4"	12	10.26
711-248	L402000000	711/44	2"	SOLID	3/4"	12	10.26
711-254	L402000008	711/44	2"	1/2"	3/4"	12	10.26
711-255	L402000010	711/44	2"	5/8"	3/4"	12	10.26
711-259	L402000015	711/44	2"	15/16"	3/4"	12	10.26
711-262	L402000103	711/44	2"	1-3/16"	3/4"	12	10.26
711-263	L402000104	711/44	2"	1-1/4"	3/4"	12	10.26
711-264	L402000105	711/44	2"	1-5/16"	3/4"	12	10.26
711-267	L402000110	711/44	2"	1-5/8"	3/4"	12	10.26
711-277	L402010010	711/44	2-1/16"	5/8"	3/4"	12	11.25
711-284	L402010103	711/44	2-1/16"	1-3/16"	3/4"	12	11.25
711-285	L402010104	711/44	2-1/16"	1-1/4"	3/4"	12	11.25
711-286	L402010105	711/44	2-1/16"	1-5/16"	3/4"	12	11.25
711-300	L402020010	711/44	2-1/8"	5/8"	3/4"	12	11.25
711-308	L402020104	711/44	2-1/8"	1-1/4"	3/4"	12	11.25
711-316	L402040000	711/44	2 1/4"	SOLID	3/4"	12	11.25
711-323	L402040010	711/44	2-1/4"	5/8"	3/4"	12	11.25
711-331	L402040104	711/44	2-1/4"	1-1/4"	3/4"	12	11.25
711-332	L402040105	711/44	2-1/4"	1-5/16"	3/4"	12	11.25
711-333	L402040106	711/44	2-1/4"	1-3/8"	3/4"	12	11.25
711-334	L402040108 *	711/44	2-1/4"	1-1/2"	3/4"	12	11.25
711-335	L402040110	711/44	2-1/4"	1-5/8"	3/4"	12	11.25
711-339	L402080000	711/44	2-1/2"	SOLID	13/16"	12	12.53
711-346	L402080010	711/44	2-1/2"	5/8"	13/16"	12	12.53
711-354	L402080104	711/44	2-1/2"	1-1/4"	13/16"	12	12.53
711-355	L402080105	711/44	2-1/2"	1-5/16"	13/16"	12	12.53
711-356	L402080106	711/44	2-1/2"	1-3/8"	13/16"	12	12.53
711-357	L402080108	711/44	2-1/2"	1-1/2"	13/16"	12	12.53
711-358	L402080110	711/44	2-1/2"	1-5/8"	13/16"	12	12.53
711-359	L402080111	711/44	2-1/2"	1-11/16"	13/16"	12	12.53
711-384	L402120114 *	711/44	2-3/4"	1-7/8"	13/16"	12	13.66
711-637	L402140114	711/44	2-7/8"	1-7/8"	13/16"	12	13.66
711-406	L403000108	711/44	3"	1-1/2"	13/16"	12	15.26
711-409	L403000114	711/44	3"	1-7/8"	13/16"	12	15.26
711-410	L403000200	711/44	3"	2"	13/16"	12	15.26
711-638	L403000202	711/44	3"	2 1/8"	13/16"	12	15.19
711-435	L403010114	711/44	3-1/16"	1-7/8"	13/16"	12	17.77
711-436	L403010200	711/44	3-1/16"	2"	13/16"	12	17.77
711-464	L403080208	711/44	3-1/2"	2-1/2"	1"	12	19.22
711-492	L403120210	711/44	3-3/4"	2-5/8"	1"	12	24.21
711-495	L404000000	711/44	4"	SOLID	1-1/16"	6	28.23
711-518	L404000208	711/44	4"	2-1/2"	1-1/16"	6	28.23
711-520	L404000212	711/44	4"	2-3/4"	1-1/16"	6	28.23
711-521	L404000300	711/44	4"	3"	1-1/16"	6	28.23


* Standard Clayton Mark hole size
** Standard Midland hole size



Cup Leathers



NEO/86 NEOFAB Cup

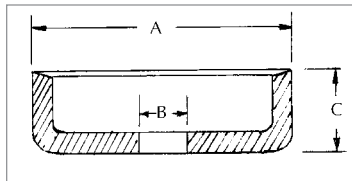

CLAYTON MARK®



NEO/86 NEOFAB CUP Features:

- Enhanced endurance with lower replacement rates.
- Neoprene material with fabric insert in base.
- Outlasts all other leathers.
- Made in USA.

ORDER IN TUBE QUANTITY ONLY


NEW Part Number	OLD Part Number	Finish	A Cylinder I.D. Leather O.D.	B Hole Size Leather I.D.	C Height	Tube Qty	List Price
NEO/86 NEOFAB CUP							
NEO-220	L901140104 **	NEO/86	1-7/8"	1-1/4"	3/4"	3	\$ 28.22
NEO-221	L901140105 *	NEO/86	1-7/8"	1-5/16"	3/4"	3	28.22
NEO-255	L902000010	NEO/86	2"	5/8"	3/4"	3	29.99
NEO-264	L902000105	NEO/86	2"	1-5/16"	3/4"	3	29.99
NEO-334	L902040108 *	NEO/86	2-1/4"	1-1/2"	3/4"	3	31.24
NEO-358	L902080110	NEO/86	2-1/2"	1-5/8"	13/16"	3	36.64
NEO-384	L902120114 *	NEO/86	2-3/4"	1-7/8"	13/16"	3	37.35
NEO-410	L903000200	NEO/86	3"	2"	13/16"	3	43.46
NEO-464	L903080208	NEO/86	3-1/2"	2-1/2"	1"	3	52.77

* Standard Clayton Mark hole size
** Standard Midland hole size

Leathers - Universal



CLAYTON MARK®



V5 Series

Valve Leathers for use with pitcher pumps and cylinders

700/55 Universal Features:

- Lower valve leather.
- Uniform, heavy stock with russet finish.
- Made in USA.



Part Number	Cylinder I.D.	Leather O.D.	Standard I.D.	Ctn Qty	List Price
700/55 Universal					
V502080200	2"	2 1/2"	2"	6	\$ 6.80
V502120204	2 1/4"	2 3/4"	2 1/4"	6	7.88
V503000206	2 1/2"	3"	2 3/8"	6	8.65
V503080214	3"	3 1/2"	2 7/8"	6	10.63
V503120302	3 1/4"	3 3/4"	3 1/8"	6	10.63
V504000304	3 1/2"	4"	3 1/4"	6	12.36
V504080312	4"	4 1/2"	3 3/4"	6	13.03
V505000404	4 1/4"	5"	4 1/4"	6	13.03
V505040408	4 1/2"	5 1/4"	4 1/2"	6	13.84
V506120512	6"	6 3/4"	5 3/4"	6	34.64

Pitcher Pump Leather Selection Chart

Pump Size	Part Number	Cylinder I.D.	Leather O.D.
No. 1	V503000206	2-1/2"	3
No. 2	V503080214	3"	3-1/2"
No. 3	V504000304	3-1/2"	4"
No. 4	V504080312	4"	4-1/2"



708/57 Universal Packing Ring

708/57 Universal Packing Ring Features:

- General purpose leather washer or flat ring gasket.
- Universal finish for all applications.
- Soft, pliable leather for long life.
- Made in USA.



Part Number	Finish	Outside Diameter	Hole Size	Thickness	List Price
708/57 Universal Packing Ring					
R702000106	708/57	2"	1-3/8"	1/8"	\$ 2.36
R702080114	708/57	2-1/2"	1-7/8"	1/8"	3.54
R702120202	708/57	2-3/4"	2-1/8"	1/8"	4.17
R703000206	708/57	3"	2-3/8"	1/8"	4.83
R703080214	708/57	3-1/2"	2-7/8"	5/32"	6.43



Add extra years to the life of any drill rig with the products used for years.



ISO 9001


Use Jet-Lube specialty lubricants, thread compounds and sealants on drill rods, pipe, collars, stabs, subs, wire and cable for lower down-time and longer rig life.

Water well drillers use Jet-Lube products on pumps, compressors and potable water connections. You name it, there's a Jet-Lube product for it. There's even environmental safe cleaners and degreasers.

Jet-Lube products are tested tough every day. Every product is the result of more than 50 years of testing and research. Jet-Lube is the only thread compound manufactured with its own downhole simulation, testing and certification equipment. Products are tested on rigs all over the world. Whether drilling in soft rock or harder formations, Jet-Lube delivers ultimate protection.

Where to apply Jet-Lube products:

- ① On tool joints, drill rods and pipe, on threaded connections, flanges and exposed threads. For water wells and monitor wells.
- ② For swivels, crown bearings, travel blocks and open gears; for anti-friction bearings; for all lube points on rigs.
- ③ On cables, ropes, sheave grooves; on cable spool guides and running gears; roller chain.
- ④ For potable water line connections; lines for fuel and gases.
- ⑤ For truck machinery; floors, tanks and trucks.
- ⑥ Jobsite protection.

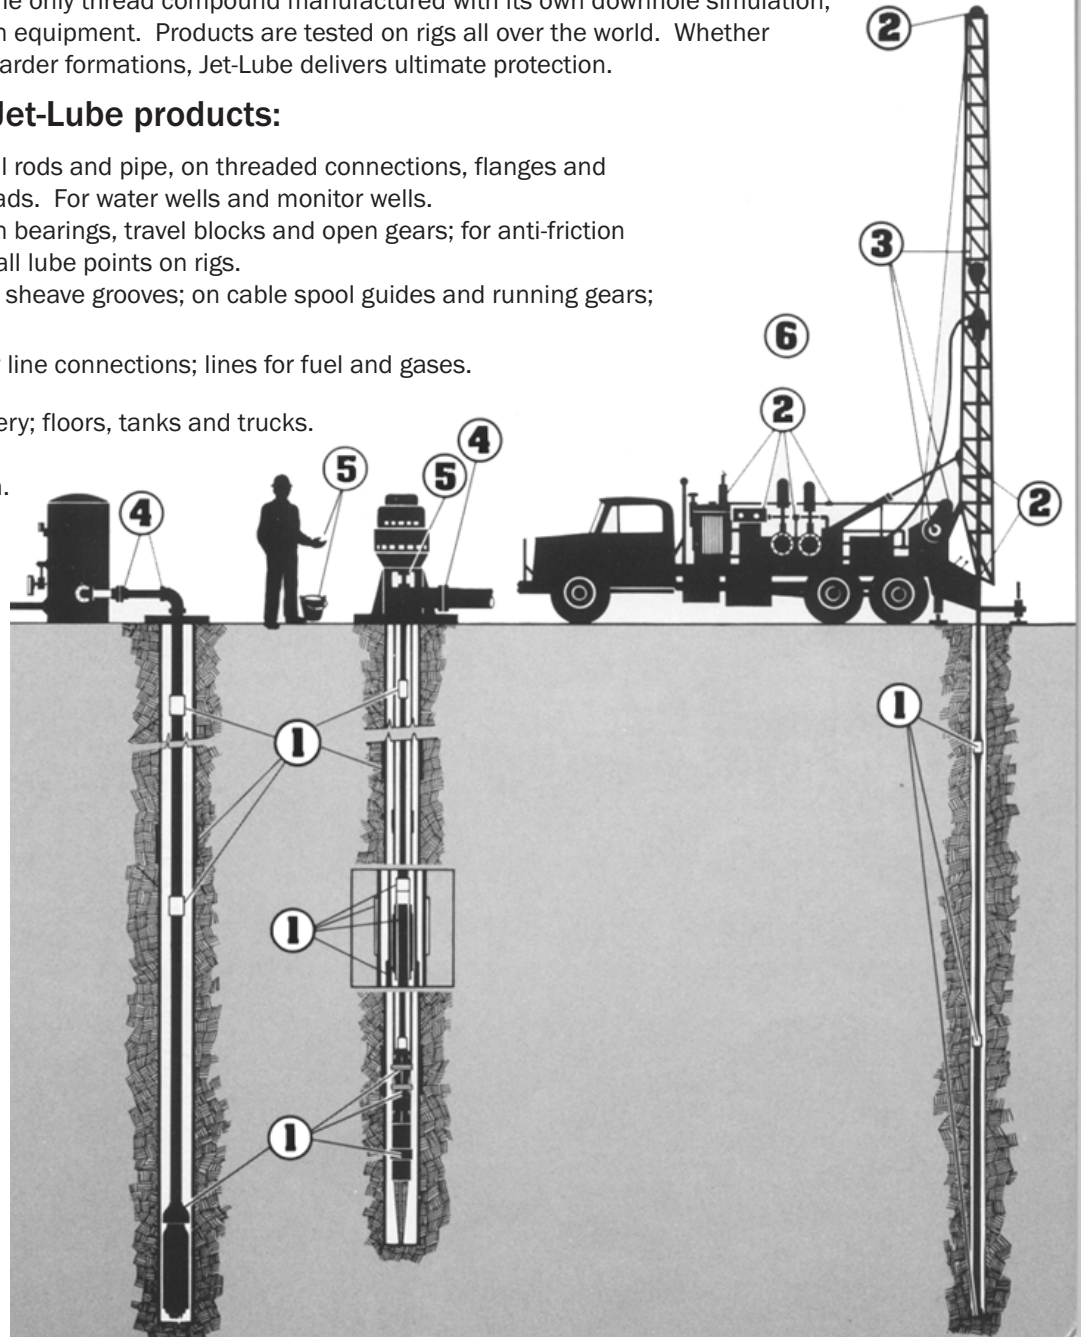



JL100 Series

1

Kopr-Kote® Heavy Duty Drill Pipe Compound (Lead Free)

A high performance, lead free, copper based thread compound for heavy duty drilling. Protects against seizure, galling and downhole makeup.

ARCTIC grade also available. Temp. rating -65 °F to 300 °F.



ISO 9001

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL10023	1 gal pail	11 lbs.	1	1	180.86
JL10012	2 gal pail	21 lbs.	1	1	341.32
JL10015	5 gal pail	52 lbs.	2	1	677.89
JL10512	ARCTIC GRADE 2 gal pail	21 lbs.	1	1	375.46
JL10515	ARCTIC GRADE 5 gal pail	52 lbs.	2	1	745.68



JL109 Series

1

Jet-Lube 21® Intermediate Grade Drill Pipe Compound (Lead Free)

The lead free professional choice for intermediate drilling applications in softer formations. Environmentally safe.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL10923	1 gal pail	10 lbs.	1	1	\$ 117.04
JL10912	2 gal pail	20 lbs.	1	1	227.71
JL10915	5 gal pail	49 lbs.	2	1	466.96



JL145 Series



1

Eco-Safe™ Nonmetallic Thread Compound

Premium quality, nonmetallic thread compound containing carbon based fibers and additives and other extreme pressure and anti-wear additives.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL14523	1 gal pail	12 lbs.	1	1	\$ 168.43
JL14512	2 gal pail	22 lbs.	1	1	340.00
JL14515	5 gal pail	48 lbs.	1	1	555.75



JL668 Series



1

Bullseye™ Water Well and Environmental Compound

High purity thread compound designed for sensitive water well and other environmental drilling applications requiring a petroleum hydrocarbon-free product.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL66823	1 gal pail	12 lbs.	1	1	\$ 276.32
JL66812	2 gal pail	20 lbs.	1	1	525.64



JL03 Series

1

Jet-Lube Dope Brushes

Thread compound dope brushes, taper or bevel style. 1 1/8" x 16". Can be used in 1, 2 or 5 gallon pails.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL03000	1 1/8" x 16" Taper	9 lbs.	1	12	\$ 38.93
JL03500	1 1/8" x 16" Bevel	9 lbs.	1	12	37.18



JL119 Series

1

JLS® Economy Grade Drill Pipe Compound (Lead Free)

Economical choice for use only where drilling conditions are least demanding. For use in light to medium drilling in sandy formations. Environmentally safe.



ISO 9001

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL11923	1 gal pail	10 lbs.	1	1	\$ 93.46
JL11912	2 gal pail	20 lbs.	1	1	173.14
JL11915	5 gal pail	50 lbs.	2	1	364.00



JL185 Series

1



Well-Guard® Monitor Well Drill Thread Compound

A thread compound which provides state-of-the-art protection against galling, seizure and thread damage while being in full compliance with all EPA guidelines. Petroleum hydrocarbon-free and brushable to -10 °F. Test results available.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL18572	1 pint plastic jar	14 lbs.	1	12	\$ 80.46
JL18523	1 gal pail	11 lbs.	1	1	528.07
JL18515	5 gal pail	54 lbs.	2	1	2207.50



JL184 Series

1

Enviro-Guard™ Drop Pipe Lubricant and Sealant.

Specially formulated to aid in the assembly/disassembly of downhole casing for water wells.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL18423	1 gal pail	12 lbs.	1	1	\$ 207.86
JL18412	2 gal pail	24 lbs.	1	1	391.79
JL18415	5 gal pail	48 lbs.	1	1	947.96



JL170 Series

1

Run-N-Seal® Tubing and Casing Sealant

An environmentally safe nonmetallic sealant for threaded tubing and casing. **Passes California COR Title 22**

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL17023	1 gal pail	11 lbs.	1	1	\$ 119.93
JL17012	2 gal pail	22 lbs.	1	1	214.54
JL17015	5 gal pail	54 lbs.	2	1	469.79



JL180 Series

1

RD-N™ Synthetic Rock Drilling Oil for Environmental Drilling

Provides superior lubrication for all makes of pneumatic percussion tools and prevents premature wear of hammer bits. An ISO 100/SAE 30 oil which exceeds all current EPA guidelines. Certified test results available. Can be used as a wire rope lubricant or hydraulic oil on restricted sites where petroleum based products are banned.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL18033	1 gal jug	36 lbs.	1	4	\$ 206.68
JL18035	5 gal jug	42 lbs.	2	1	930.75



2

JL369 Series

ALCO-EP™ ECF™ WW Extreme Service Multipurpose Grease.
Premium multipurpose calcium sulfonate complex grease thickening a blend of synthetic oils selected to provide the level of biodegradation required to meet the most safe environmental ratings.



ISO 9001

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL36950	14 oz. cartridge	36 lbs.	1	30	\$ 25.36



2

JL37341

769 Lubricant® and Penetrant

Heavy duty penetrating lubricant for all environments. When drilling in marshland or near coastlines, protects operating parts against salt corrosion. Frees rusted and frozen parts, displaces moisture, cleans and prevents rust. Non-flammable.

MIL-C-23411A. Federal spec V V-P-216B. USDA-H2

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL37341	12 oz. aerosol	12 lbs.	1	12	\$ 23.07



3

JL28541

WLD™ Wire Rope, Cable and Roller Chain Dressing and Lubricant

Extend the life of wirelines, ropes, cables, grooves. Specially formulated with molybdenum disulfide and graphite to reduce friction and wear on cable strands. Tacky and adhesive for lasting protection. Penetrates wire strands to lubricate the core, then keeps on working to prevent moisture from corroding the cable. Black

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL28541	12 oz. aerosol	12 lbs.	1	12	\$ 23.96



4

JL355 Series

V-2® Multi Purpose PTFE Thread Sealant

A soft setting, non-petroleum based thread sealant for use where immediate pressurization is desired. Non-staining, low odor, off white in color. Use on all types of metals, reinforced fiberglass and PVC. **MIL-TT-S-1732. USDA H-2 Authorized. IAPMO Approved.**



ISO 9001

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL35502	1/2 pint brush top can	11 lbs.	1	12	\$ 32.29
JL35504	1 pint brush top can	19 lbs.	1	12	47.93



4

JL240 Series

TFW™ Anti-Sieze Thread Sealant with PTFE

Low friction and non-toxic, TFW is used to prevent thread leaks of almost all fluids, gases or steam, even at temperatures up to 500 F. Can be used on metal, PVC, ABS and CPVC fittings and piping. **IAPMO approved.**

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL24002	1/2 pint brush top can	9 lbs.	1	12	\$ 29.57
JL24004	1 pint brush top can	17 lbs.	1	12	42.79



4

JL71741

Pitless Adapter Lube™ Assembly Lubricant

Preservative designed to aid in installation of pitless adapters. **USDA H-1 authorized.** Corrosion preventative contains anti-bacterial/anti-fungal additive.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL71741	12 oz. aerosol	13 lbs.	1	12	\$ 25.00



4

JL23023

TF-15® Thread Sealant with PTFE for fiberglass pipe

High pressure thread sealant containing PTFE and EP additives that allow for easy breakout without seizing, stripping or galling. Highly recommended for use as a sealant on fiberglass tubing and casing threads. **Passes California COR Title 22**

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL23023	1 gal pail	11 lbs.	1	1	\$ 173.25



5

JL30519

Easy-Clean® Concentrated Rig Wash

A biodegradable detergent to clean oil and grime from equipment or pumping station machinery. Industrial strength concentrated powdered detergent.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL30519	40 lb. 6 gal pail	43 lbs.	2	1	\$ 380.54



5

JL710 Series

Jet-Lube 5000™ Water Based Cleaner and Degreaser

Emulsifies (lifts and suspends) dirt, carbon, grease, etc., for removal by rinsing or wiping. May be used on surfaces compatible with water. Use full strength or dilute with fresh or salt water. Environmentally safe and **compliant with EPA 624 & 625.**



ISO 9001

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL71043	16 oz. trigger spray	14 lbs.	1	12	\$ 20.68
JL71033	1 gal jug	35 lbs.	1	4	81.25
JL71035	5 gal jug	45 lbs.	2	1	330.64



5

JL72542

Clean-Up Plus™ Organic Solvent Cleaner

Environmentally safe cleaner and degreaser. Blend of organic solvents, safe non-flammable CO2 propellant. Citrus scent. Residue free product is safe on all metals. 29KV dielectric strength. No Tri 1-1-1. **USDA authorized.**

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL72542	15 oz. aerosol	16 lbs.	1	12	\$ 24.07



5

JL61542

Clean-Up™ Industrial Cleaner and Safety Solvent

Heavy duty low foaming cleaner/degreaser. Fast working, non-flammable residue free product formulated with an ozone friendly chlorinated solvent. 29 KV dielectric strength. No Tri 1-1-1.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL61542	18 oz. aerosol	15 lbs.	1	12	\$ 24.21



5

JL16041

Moly Mist™ Dry Film Lubricant

Use to break in equipment and assemble moving parts. Micro-fine molybdenum disulfide suspended in a quick-drying carrier. Bonds to any surface in seconds to provide low coefficient of friction, extended lubrication and improved operation.

Part Number	Net Contents & Container Type	Shipping Weight/Case	Case Equivalents	Case Qty	List Price
JL16041	12 oz. aerosol	13	1	12	\$ 31.18



SECTION 2

FOOT & CHECK VALVES

YARD HYDRANTS



PRODUCT LINE	PAGE
Check Valves	
NL Brass, Brass, Bronze, Stainless Steel	1-4
Clayton Mark	7-9
Plastic	15
Simmons	11-12
Foot Valves	
NL Brass, Brass, Bronze, Stainless Steel	5-6
Cast Iron, Steel Suction Strainer	16
Clayton Mark	10
Plastic	15
Simmons	13
Yard Hydrants	17-20






Check Valves - NO LEAD Brass, Bronze, Stainless Steel



CHECK VALVE Features:

- NO LEAD cast brass, bronze body & poppet.
- Buna-N o-ring.
- Stainless steel springs, washers, locknuts.
- Delrin poppet stem guide.
- 200 psi WOG working pressure.
- 300 lb. max hang weight (down pull) tension.
- Individually cartoned.
- Third party certified to NSF/ANSI 372.

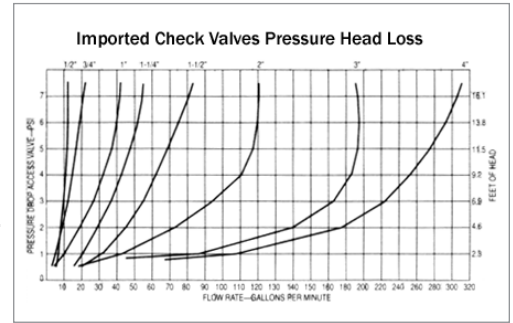

CVNL-BS Series

CVNL-BS Series NO LEAD BRASS Check Valves

- Rough body finish.

Part Number	Size	Ctn Qty	List Price
CVNL50BS	1/2"	100	\$ 11.46
CVNL75BS	3/4"	80	15.39
CVNL100BS	1"	60	20.46
CVNL125BS	1 1/4"	40	32.32
CVNL150BS	1 1/2"	30	40.04
CVNL200BS	2"	20	71.96
CVNL300BS	3"	6	305.89
CVNL400BS	4"	3	625.00




CVNL-B Series

CVNL-B Series NO LEAD BRONZE Check Valves

- Machined body finish.

Part Number	Size	Ctn Qty	List Price
CVNL50B	1/2"	100	\$ 16.61
CVNL75B	3/4"	80	22.32
CVNL100B	1"	60	30.36
CVNL125B	1 1/4"	40	42.68
CVNL150B	1 1/2"	30	56.96
CVNL200B	2"	20	102.79
CVNL300B	3"	6	381.96




SSCV Series


SSCV Series STAINLESS STEEL Check Valves

- 304 cast stainless steel casting, springs, washers, lock nut.
- Viton o-ring

Part Number	Size	Ctn Qty	List Price
SSCV50	1/2"	100	\$ 21.07
SSCV75	3/4"	80	27.54
SSCV100	1"	60	37.32
SSCV125	1 1/4"	40	51.25
SSCV150	1 1/2"	30	71.61
SSCV200	2"	20	119.82
SSCV300	3"	6	512.50
SSCV400	4"	3	966.93
SSCV1025	1" fpt x 1 1/4" mpt	60	50.89




Check Valves - NO LEAD Brass



CHECK VALVE Features:

- NO LEAD cast brass or stainless steel body & poppet.
- Buna-N o-ring.
- Stainless steel springs, washers, locknuts.
- Delrin poppet stem guide.
- 200 psi WOG working pressure.
- 300 lb. max hang weight (down pull) tension.
- Individually cartoned.
- Third party certified to NSF/ANSI 372.

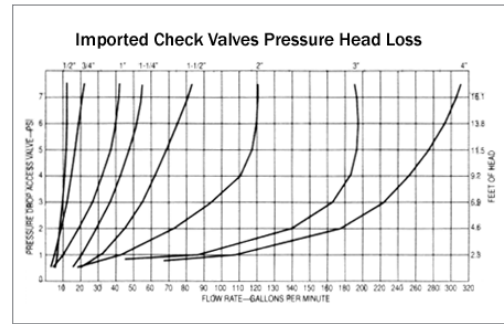

CVXLDNL Series

CVXLDNL Series NO LEAD BRASS Check Valves

- Rough body finish.
- Extra long at discharge end.

Part Number	Size	Ctn Qty	List Price
CVXLDNL100BS	1" x 1"	60	\$ 43.75
CVXLDNL125BS	1 1/4" x 1 1/4"	40	48.21



CVMNL-BS Series

CVMNL-BS Series NO LEAD BRASS Submersible Check Valves

- Rough body finish.
- FPT x MPT

Part Number	Size (FPT X MPT)	Ctn Qty	List Price
CVMNL100BS	1" x 1"	60	\$ 40.54
CVMNL125BS	1" x 1 1/4"	40	40.54
CVMNL1252BS	1 1/4" x 1 1/4"	60	46.25



CVMXLNL Series

CVMXLNL Series NO LEAD BRASS Submersible Check Valves


- Rough body finish.
- Extra long body.

Part Number	Size (M X F)	Ctn Qty	List Price
CVMXLNL100BS	1" x 1"	60	\$ 36.96
CVMXLNL125BS	1 1/4" x 1 1/4"	40	49.11






Check Valves - NO LEAD Brass



CHECK VALVE Features:

- NO LEAD cast brass body & poppet.
- Buna-N o-ring.
- Stainless steel springs, washers, locknuts.
- Delrin poppet stem guide.
- 200 psi WOG working pressure.
- 300 lb. max hang weight (down pull) tension.
- Individually cartoned.
- Third party certified to NSF/ANSI 372.

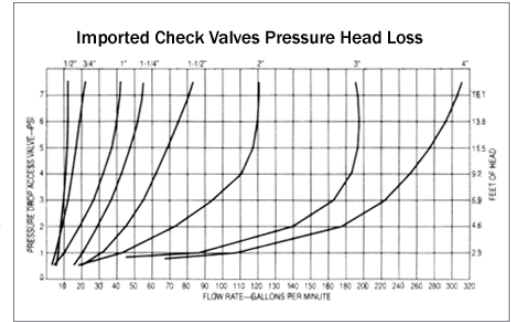

CVTNL-1B Series

CVTNL-1B Series NO LEAD BRASS Single Tap Check Valves

- 1/8" inlet tap.

Part Number	Size	Ctn Qty	List Price
CVTNL1001BS	1"	60	\$ 37.32
CVTNL1251BS	1 1/4"	40	50.36



CVTNL-2BS Series

CVTNL-2BS Series NO LEAD BRASS Double Tap Check Valves

- One 1/8" inlet tap.
- One 1/4" outlet tap.

Part Number	Size	Ctn Qty	List Price
CVTNL1002BS	1"	60	\$ 32.50
CVTNL1252BS	1 1/4"	40	45.54
CVTNL1502BS	1 1/2"	30	74.50
CVTNL2002BS	2"	20	123.00



CVTNL-3BS Series

CVTNL-3BS Series NO LEAD BRASS Control Center Check Valves

- One 1/8" inlet tap.
- One 1/8" and one 1/4" outlet taps.

Part Number	Size	Ctn Qty	List Price
CVTNL1003BS	1"	60	\$ 37.32
CVTNL1253BS	1 1/4"	40	54.00



CVCNL-B Series


CVCNL-B Series NO LEAD BRASS Control Center Check Valves

- One 1/8" inlet tap.
- One 1/8" and two 1/4" outlet taps.

Part Number	Size	Ctn Qty	List Price
CVCNL100BS	1"	60	\$ 38.60
CVCNL125BS	1 1/4"	40	54.00




Check Valves - LEADED Brass



CHECK VALVE Features:

- Cast brass, bronze body & poppet.
- Buna-N o-ring.
- Stainless steel springs, washers, locknuts.
- Delrin poppet stem guide.
- 200 psi WOG working pressure.
- 300 lb. max hang weight (down pull) tension.
- Individually cartoned.
- Imported.

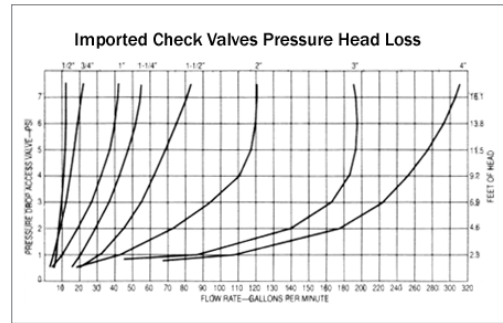

CV-BS Series

CV-BS Series LEADED BRASS Check Valves

- Rough body finish.

Part Number	Size	Ctn Qty	List Price
CV50BS	1/2"	100	\$ 10.54
CV75BS	3/4"	80	13.39
CV100BS	1"	60	17.93
CV125BS	1 1/4"	40	30.54
CV150BS	1 1/2"	30	34.82
CV200BS	2"	20	57.14



CAUTION
DO NOT USE WITH
POTABLE WATER



Foot Valves - NO LEAD Brass, Bronze, Stainless Steel



FOOT VALVE Features:

- NO LEAD Cast Brass, bronze or stainless steel body & poppet.
- Buna-N o-ring (Viton on stainless steel).
- Stainless steel springs, washers, locknuts and strainers.
- 200 psi WOG working pressure.
- Individually cartoned.
- Third party certified to NSF/ANSI 372.

FVNL Series LEAD FREE BRASS Foot Valves

- Rough body finish.

Part Number	Size	Enters Pipe	Ctn Qty	List Price
FVNL50BS	1/2"	1 1/4"	100	\$ 13.39
FVNL75BS	3/4"	1 1/2"	80	14.14
FVNL100BS	1"	2"	60	22.32
FVNL125BS	1 1/4"	2 1/2"	40	24.54
FVNL150BS	1 1/2"	3"	30	42.68
FVNL200BS	2"	3 1/2"	20	59.18
FVNL300BS	3"	5"	8	239.11
FVNL400BS	4"	-	4	416.54



FVNL-BS Series



FVNL-B Series

FV-B Series NO LEAD BRONZE Foot Valves

Part Number	Size	Enters Pipe	Ctn Qty	List Price
FVNL50B	1/2"	1 1/4"	100	\$ 15.57
FVNL75B	3/4"	1 1/2"	80	19.11
FVNL100B	1"	2"	60	25.00
FVNL125B	1 1/4"	2 1/2"	40	31.21
FVNL1251B	1 1/4"	2"	50	35.18
FVNL150B	1 1/2"	3"	30	48.75
FVNL200B	2"	3 1/2"	20	84.82
FVNL300B	3"	5"	8	325.43
FVNL400B	4"	-	4	557.14

FV-B Series NO LEAD BRONZE Dual Purpose Foot Valves

Part Number	Size	Enters Pipe	Ctn Qty	List Price
FVNL100125B	1" FPT x 1 1/4" MPT	2"	60	\$ 35.11



FVNL-B Series

SSFV Series STAINLESS STEEL Foot Valve Features:

- 304 Stainless steel casting, spring, washer, locknut, strainer
- Viton o-ring

Part Number	Size	Enters Pipe	Ctn Qty	List Price
SSFV50	1/2"	1 1/4"	100	\$ 23.21
SSFV75	3/4"	1 1/2"	80	29.30
SSFV100	1"	2"	60	38.75
SSFV125	1 1/4"	2 1/2"	40	50.18
SSFV150	1 1/2"	3"	30	67.68
SSFV200	2"	3 1/2"	20	119.64
SSFV300	3"	5"	8	464.41
SSFV400	4"	-	4	1038.73



SSFV Series



Foot Valves - LEADED Brass



FOOT VALVE Features:

- Cast Brass, bronze body & poppet.
- Buna-N o-ring (Viton on stainless steel).
- Stainless steel springs, washers, locknuts and strainers.
- 200 psi WOG working pressure.
- Individually cartoned.
- Imported.



CAUTION
DO NOT USE WITH
POTABLE WATER



FVR-BS Series

FVR-BS Series LEADED BRASS Foot Valves

- Rough body finish.

Part Number	Size	Enters Pipe	Ctn Qty	List Price
FVR50BS	1/2"	1 1/4"	100	\$ 8.99
FVR75BS	3/4"	1 1/2"	80	11.47
FVR100BS	1"	2"	60	15.11
FVR125BS	1 1/4"	2 1/2"	40	20.62
FVR150BS	1 1/2"	3"	30	34.82

FVSC, CVSP Series Stainless Screen, Endcap, Screw, Spring

- Spring replacement for all imported check and foot valves



FVSC & CVSP Series

Screen/Cap/Screw Part Number	Spring Part Number	Size	FVSC List Price	CVSP List Price
FVSC50	CVSP50	1/2"	\$ 6.36	\$ 2.68
FVSC75	CVSP75	3/4"	6.71	2.68
FVSC100	CVSP100	1"	7.36	2.68
FVSC125	CVSP125	1 1/4"	8.86	3.36
FVSC150	CVSP150	1 1/2"	9.11	3.36
FVSC200	CVSP200	2"	12.04	3.75
FVSC300	CVSP300	3"	43.75	4.43
FVSC400	CVSP400	4"	62.50	4.79



No Lead Check Valves - Clayton Mark


- FOR USE IN WATER WELL SYSTEMS
- Third party certified to NSF/ANSI 372.



6300 No Lead Brass Check Valve

Features:

- The Buna-N rubber coated poppet seals under high & low pressure applications.
- Delrin Stem Guide to improve flow.
- Self locking nut is vibration proof.
- Stainless steel spring.
- 400 PSI rated (WOG).
- For cold water applications only.
- Hex ends for easy installation.

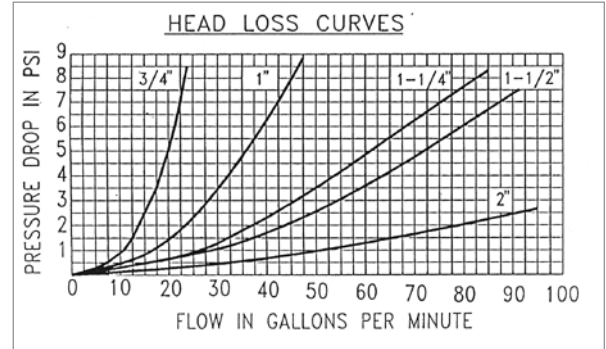


Part Number	Size	Enters Casing	Ctn Qty	List Price
6300-3/4	3/4"	1-1/2"	48	\$ 36.96
6300-1	1"	2"	35	39.95
6300-11/4	1-1/4"	2-1/2"	24	54.78
6300-11/2	1-1/2"	3"	20	80.41
6300-2	2"	3-1/2"	12	134.79



5300 No Lead Brass Check Valve Features:

- Highly finished no lead brass body with a flat seated poppet to withstand increased water pressure for a continuous period of time.
- 400 PSI (W.O.G.)
- For cold water applications only.
- Corrosion resistant, stainless steel poppet core on 5300-1/2".
- No Lead Brass poppet on 5300-2 1/2, 3 & 4".
- Not suitable for all types of oil and gas.
- Heavy hex ends for easy installation.

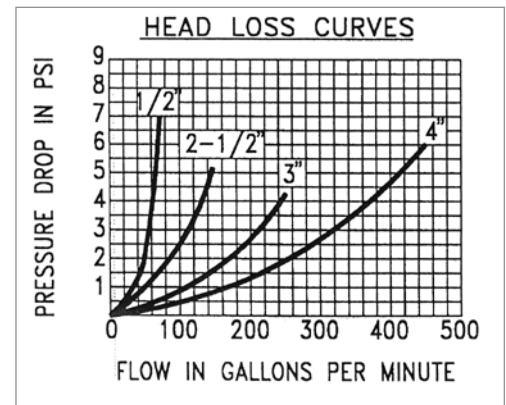

NO LEAD Part Number	Leaded Part Number	Size	Enters Casing	Ctn Qty	NO LEAD List Price	Leaded List Price
5300-1/2		1/2"	1-1/2"	48	\$ 37.48	
5300-21/2		2-1/2"	5"	1	537.68	
5300-3	L5300-3 *	3"	6"	1	733.93	593.26
5300-4	L5300-4 *	4"	8"	1	1251.76	309.53

* Valve is leaded bronze. Do not use for potable water.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

No Lead Check Valves - Clayton Mark



- FOR USE IN WATER WELL SYSTEMS
- Third party certified to NSF/ANSI 372.



CLAYTON MARK®



6300-1 No Lead Brass One Hole Control Center

- 1/8"-27NPS tapping on inlet side for snifter valve.
- NOTE: 2-1/2 inch size has the 5300 poppet design.

Part Number	Size	Ctn Qty	List Price
63001-1	1"	35	\$ 53.95
63001-11/4	1-1/4"	30	75.96
63001-11/2	1-1/2"	20	95.46
63001-2	2"	12	150.55



6300-2 No Lead Brass Two Hole Control Center

- 1/8"-27NPS tapping on inlet side for snifter valve.
- 1/4"-18NPS tapping on outlet side for pressure switch.
- NOTE: 4 inch has the 5300 poppet design.

Part Number	Size	Ctn Qty	List Price
63002-1	1"	35	\$ 54.65
63002-11/4	1-1/4"	30	76.85
63002-11/2	1-1/2"	20	102.58
63002-2	2"	12	152.52



63000218 No Lead Brass Two Hole Control Center

- Two 1/4"-18NPS tappings on outlet side.

Part Number	Size	Ctn Qty	List Price
6300218-1	1"	35	\$ 55.79
6300218-11/4	1-1/4"	30	81.19



6300-3 No Lead Brass Three Hole Control Center

- 1/8"-27NPS tapping on inlet side for snifter valve.
- 1/4"-18NPS tapping on outlet side for pressure switch.
- 1/4"-18NPS tapping on outlet side for pressure gauge.

Part Number	Size	Ctn Qty	List Price
63003-1	1"	35	\$ 51.31
63003-11/4	1-1/4"	30	83.24



No Lead Check Valves - Clayton Mark

- FOR USE IN WATER WELL SYSTEMS
- Third party certified to NSF/ANSI 372.



CLAYTON MARK®



6300-4 No Lead Brass Four Hole Control Center

- 1/8"-27NPS tapping on inlet side for snifter valve.
- 1/4"-18NPS tapping on outlet side for pressure gauge.
- 1/4"-18NPS tapping on outlet side for pressure switch.
- 1/8" tapping on outlet side for drain(1/8" brass plug furnished).

Part Number	Size	Ctn Qty	List Price
63004-1	1"	35	\$ 54.81
63004-11/4	1-1/4"	30	78.72



6302 No Lead Brass Submersible Check Valves

- Fits directly on pump discharge.

Part Number	Size (mpt x fpt)	Ctn Qty	List Price
6302-11/4x1	1-1/4" x 1"	30	\$ 41.14
6302-11/4x11/4	1-1/4" x 1-1/4"	30	56.59
6302-2x2	2" x 2"	12	154.68
6302-3x3	3" x 3"	1	608.54
6302-4x4	4" x 4"	1	992.31



479 No Lead Brass BREMER CHECK VALVES

- Non corrosive no lead brass with tapered seat and poppet with Perma-Kleen facing for positive seal.
- Uses a tapered rubber packer to seal in the well bore.

Part Number	Size	Ctn Qty	List Price
8669A	2"	12	\$ 61.91
8034C	2" Rubber Check Packer		11.17

No Lead Foot Valves - Clayton Mark



- FOR USE IN WATER WELL SYSTEMS
- Third party certified to NSF/ANSI 372.



CLAYTON MARK®



6340 SERIES No Lead Brass Foot Valves

- 400 PSI rating. (W.O.G.)
- Tapered ABS strainer.
- Corrosion resistant, stainless steel core with exclusive cup shape.
- For cold water applications only.
- Jam proof delrin stem guide.


Part Number	Size	Enters Casing	Ctn Qty	List Price
6340-3/4	3/4"	1-1/2"	48	\$ 33.42
6340-1	1"	2"	35	37.15
6340-11/4	1-1/4"	2"	30	44.80
6340-11/2	1-1/2"	3"	20	72.34
6340-2	2"	3-1/2"	12	114.77



5340 SERIES No Lead Brass Foot Valves

- No. 8 perforated stainless steel screen strainer.
- 400 PSI rating.
- Corrosion resistant, stainless steel core with exclusive cup shape.
- For cold water applications only.

Part Number	Size	Enters Casing	Ctn Qty	List Price
5340-3/4	3/4"	1 1/4"	48	\$ 36.78
5340-1	1"	1 1/2"	35	40.89
5340-11/4	1 1/4"	2"	24	49.40
5340-11/2	1 1/2"	2 1/2"	20	90.38
5340-2	2"	3 1/2"	12	128.23



5330 Series No Lead Brass Foot Valves

- No 8 perforated stainless steel strainer.
- Heavy hex end.

NO LEAD Part Number	Leaded Part Number	Size	Enters Casing	Ctn Qty	NO LEAD List Price	Leaded List Price
5330-21/2		2-1/2"	5"	1	\$ 423.57	
5330-3	L5330-3 *	3"	6"	1	604.21	520.05
5330-4		4"	6"	1	952.79	

* Valve is leaded bronze. Do not use for potable water.



No Lead Check Valves - Simmons

- FOR USE IN WATER WELL SYSTEMS

* Silicon bronze components contain less than 0.05% (1/20 of 1%) lead.

Simmons



LF5100 Series Silicon Bronze LEAD FREE* check valves

- Silicon bronze cast body and poppet..
- Buna-N o-ring, stainless steel spring, washer and lock nut.
- 400 PSI (WOG working pressure).
- Made in U.S.A.



Part Number	Simmons	Size	Ctn Qty	List Price
LF5100-1/2	501SB	1/2"	50	\$ 49.99
LF5100-3/4	502SB	3/4"	50	50.60
LF5100-1	503SB	1"	50	53.28
LF5100-1LT	513SB	1" w/ Longer Threads	50	55.58
LF5100-11/4	504SB	1 1/4"	36	73.03
LF5100-11/2	505SB	1 1/2"	24	103.34
LF5100-2	506SB	2"	16	165.11
LF5100-21/2	507SB	2 1/2"	1	704.60
LF5100-3	508SB	3"	1	849.16
LF5100-4	509SB	4"	1	1476.22
LF5100-5	510SB	5" w/ MPT both ends	1	1985.19
LF5100-6	511SB	6"	1	2697.87



LF5100A Series Silicon Bronze LEAD FREE* check valves

- Same as 5100 Series plus:
- 1/8" single inlet tapping.
- Made in U.S.A.



Part Number	Simmons	Size	Ctn Qty	List Price
LF5100A3/4	521SB	3/4"	50	\$ 57.69
LF5100A1	522SB	1"	50	67.96
LF5100A11/4	523SB	1 1/4"	36	90.67
LF5100A11/2	524SB	1 1/2"	24	112.15
LF5100A2	525SB	2"	16	177.54
LF5100A21/2	526SB	2 1/2"	1	837.46
LF5100A3	527SB	3	1	1221.66
LF5100A4	528SB	4	1	1614.99



LF5100B Series Silicon Bronze LEAD FREE* Check Valves

- Same as 5100 Series plus:
- With 1/8" Inlet Tapping, 1/4" Outlet Tappings.
- Made in U.S.A.



Part Number	Simmons	Size	Ctn Qty	List Price
LF5100B3/4	541SB	3/4"	50	\$ 60.76
LF5100B1	542SB	1"	50	72.97
LF5100B11/4	543SB	1 1/4"	36	89.78
LF5100B11/2	544SB	1 1/2"	24	116.28
LF5100B2	545SB	2"	16	180.23
LF5100B21/2	546SB	2 1/2"	1	880.54
LF5100B3	547SB	3	1	1243.32
LF5100B4	548SB	4	1	1625.87



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

No Lead Check Valves - Simmons



- FOR USE IN WATER WELL SYSTEMS
- * Silicon bronze components contain less than 0.05% (1/20 of 1%) lead.



LF5100C Series Silicon Bronze LEAD FREE* Control Center

- Made in U.S.A.



Part Number	Simmons	Size	Inlet Tap	Outlet Tap	Ctn Qty	List Price
LF5100C1	601SB	1"	1/8" (1)	1/4" (2)	1	\$ 73.12
LF5100C11/4	602SB	1 1/4"	1/8" (1)	1/4" (2)	1	94.69
LF5100C11/2	603SB	1 1/2"	1/8" (1)	1/4" (2)	1	120.64
LF5100C2	604SB	2"	1/8" (1)	1/4" (2)	1	215.38
LF5101C1	606SB	1"	-	1/4" (2)	1	73.12
LF5101C11/4	607SB	1 1/4"	-	1/4" (2)	1	94.69



LF5100D Series Silicon Bronze LEAD FREE* submersible Check Valves

- Installation between pump and column pipe.
- Made in U.S.A.



Part Number	Simmons	Size (Fxm)	Ctn Qty	List Price
LF5100D1x1	616SB	1"x1"	1	\$ 54.06
LF5100D1x1LT	610SB	1"x1" w/ longer threads	1	58.09
LF5100D1x11/4	617SB	1"x1 1/4"	1	52.24
LF5100D11/4x11/4	618SB	1 1/4"x1 1/4"	1	74.37



LF6700 Series DUCTILE IRON LEAD FREE* Check Valve

- Ductile iron body - STEMMED
- Silicon bronze poppet and stainless steel spring and nut.
- Non toxic paint.
- For use with large submersible pumps.
- Made in U.S.A.



Part Number	Simmons	Size	Pipe	Ctn Qty	List Price
LF6700-1	653SB	1"	1 7/8"	1	\$ 30.79
LF6700-11/4	654SB	1 1/4"	2 5/16"	1	49.46
LF6700-11/2	655SB	1 1/2"	2 5/8"	1	61.53
LF6700-2	680SB	2"	3 1/4"	1	96.03
LF6700-3	670SB	3"	4 1/8"	1	364.44
LF6700-4	671SB	4"	5 5/8"	1	569.89
LF6700-6	672SB	6"	7 5/8"	1	1033.94



LF7000 Series Silicone Bronze LEAD FREE* Pressure Regulator Valve

- Silicon bronze cast body.
- Adjustable bronze cylinder control
- For deep well pumps.
- Positive o-ring seat.
- PT series with pressure line tapping.
- Made in U.S.A.



Part Number	Simmons	Size	Line Tap	Ctn Qty	List Price
LF7000-3/4	730SB	3/4 x 3/4 x 3/4"	-	1	\$ 84.49
LF7000PT1	731SB	1 x 1 x 1"	1/8"	1	96.14



No Lead Foot Valves - Simmons

- FOR USE IN WATER WELL SYSTEMS
- * Silicon bronze components contain less than 0.05% (1/20 of 1%) lead.



5000S Series Silicone Bronze Foot Valve Features:

- Silicon bronze cast body and poppet.
- Stainless steel perforated screen.
- Specify LFN5000S 1-1/4 special valve for 2" ID casing.
- 400 PSI working pressure
- Made in U.S.A.



Part Number	Simmons	Size	Ctn Qty	List Price
LF5000S3/4	452SB	3/4"	60	\$ 44.57
LF5000S1	453SB	1"	60	49.51
LFN5000S11/4	404SB	1 1/4"	36	58.09
LF5000S11/4	455SB	1 1/4"	36	59.74
LFS5000S11/4	454SB	1 1/4"	36	54.10
LF5000S11/2	456SB	1 1/2"	24	96.46
LF5000S2	457SB	2"	12	153.01
LF5000S21/2	458SB	2 1/2"	1	508.83
LF5000S3	459SB	3"	1	699.16
LF5000S4	460SB	4"	1	1163.32



LF4000 Series SILICON BRONZE Dual Purpose Foot Valve Features:

- Same as LF5000S Series plus:
- Dual purpose foot valve. Threaded inside and outside.
- Made in U.S.A.



Part Number	Simmons	Size (F x M)	Ctn Qty	List Price
LF4000-3/4 x 1	456SB	3/4" x 1"	1	\$ 53.16
LF4000-1 x 11/4	466SB	1" x 1 1/4"	1	55.56
LF4000-11/4 x 11/2	467SB	1 1/4" x 1 1/2"	1	66.13



LF50S Series SILICON BRONZE Suction Strainer Features:

- Same as LF5000S Series plus:
- Full flow suction strainer.
- Made in U.S.A.



Part Number	Simmons	Size	Diameter	Length	Ctn Qty	List Price
LF50S3/4	490SB	3/4"	1 3/8"	3 3/4"	1	\$ 44.57
LF50S1	491SB	1"	1 3/4"	4 3/4"	1	51.61
LF50S11/4	492SB	1 1/4"	2 5/16"	5 1/4"	1	68.73
LF50S11/2	493SB	1 1/2"	2 1/2"	6 5/16"	1	96.69
LF50S2	494SB	2"	3 1/8"	7 3/16"	1	148.24
LF50S21/2	495SB	2-1/2"	4"	9 3/8"	1	356.30
LF50S3	496SB	3"	4 5/8"	9 1/2"	1	474.56
LF50S4	497SB	4"	6"	13 7/8"	1	735.64



www.americangranby.com


FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Check Valves - LF5100 Series Pressure, Head Loss



Applies to all Simmons LF5100 Series check valves on previous pages

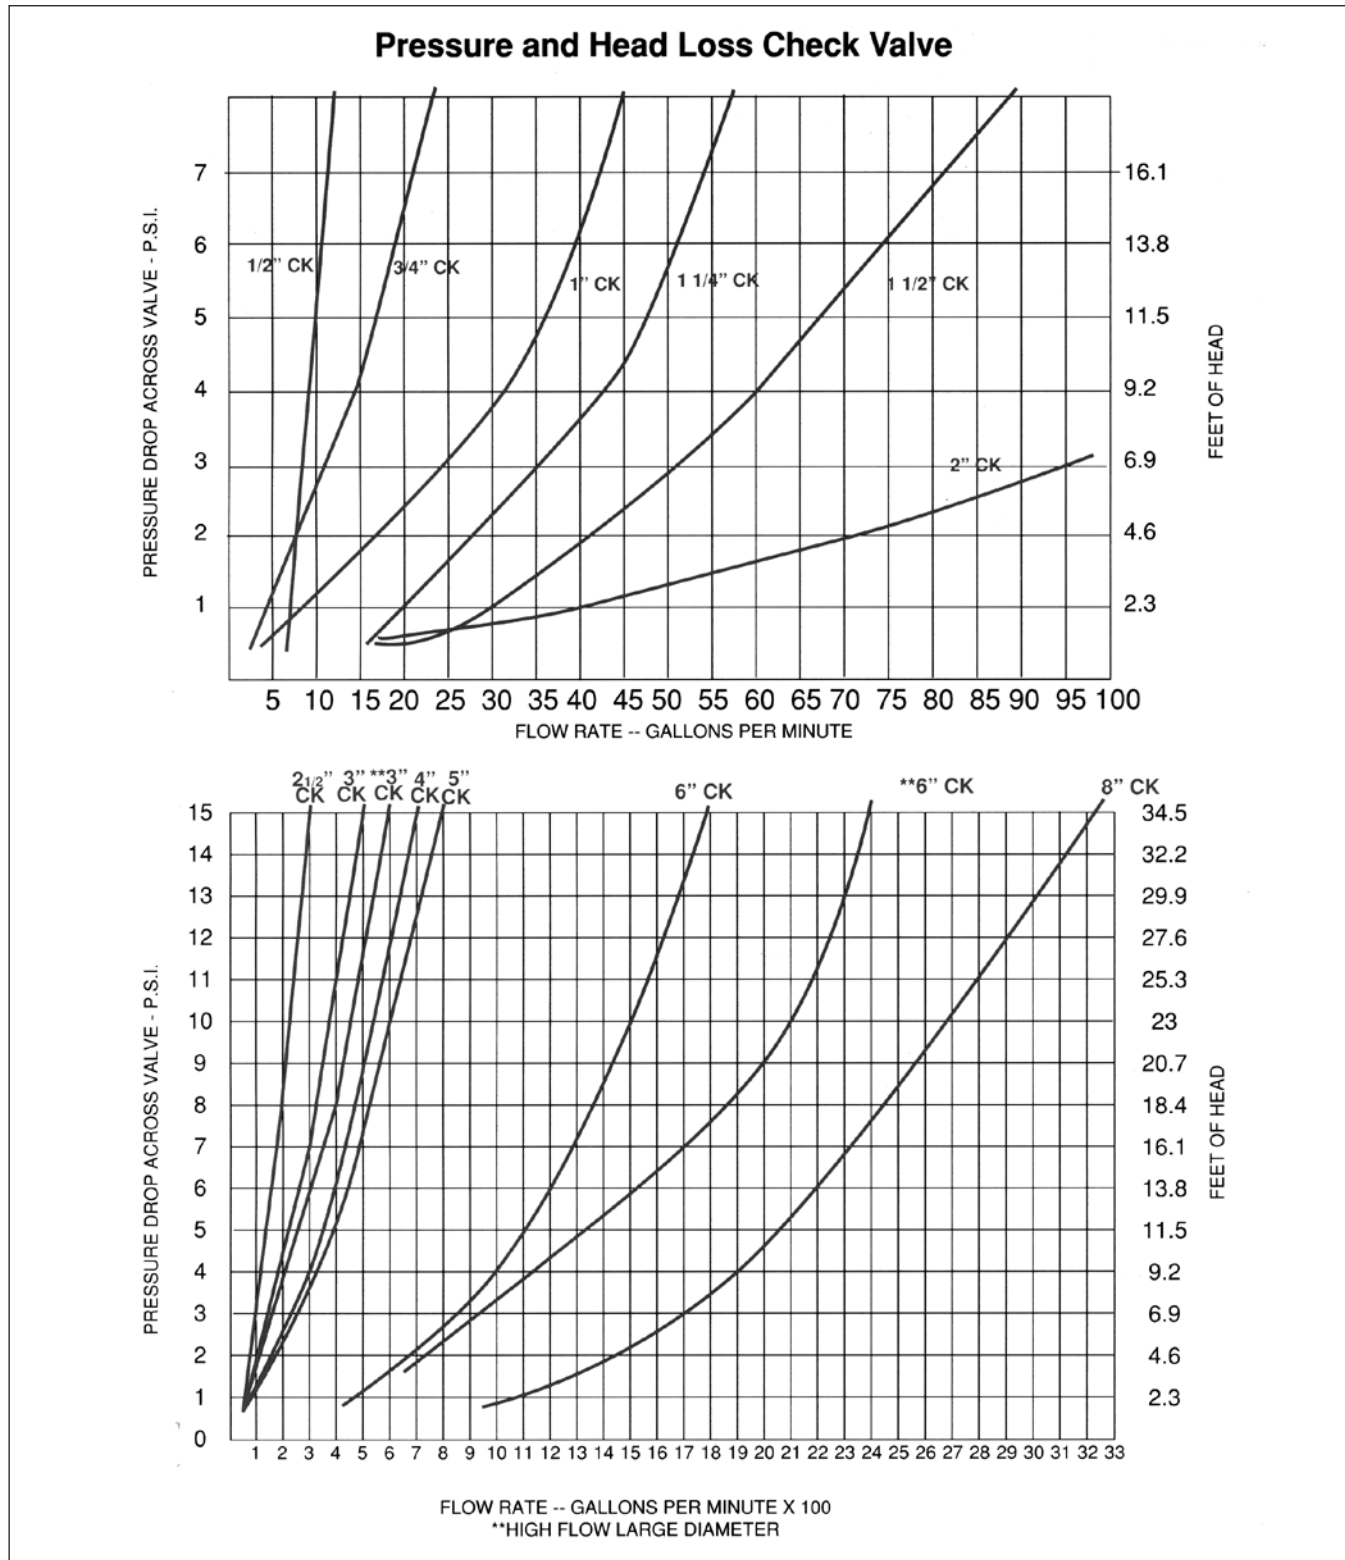



Foot & Check - Plastic



FV441

HARVARD Four in One Plastic Foot Valve

- Positive sealing - spring loaded valve poppet closes against a smooth tapered seat.
- Corrosion resistant nylon body and internals.
- Self cleaning design for continuous positive sealing.
- Large screen designed to assure smooth water passage and better suction.
- Tapered screen eliminates pipe joint hang-ups during installation.
- Fits four pipe sizes., 3/4" through 1 1/2".
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn Qty	List Price
FV441	3/4" through 1 1/2"	100	\$ 16.61



FV Series



LC Series



FV SN Series

Brady Plastic Foot & Check Valve Features:

- "Nose Cone" diffuser reduces friction.
- 50% greater water flow.
- Acetal copolymer construction.
- Non-electrolytic, non-corrosive.
- Spring loaded, 316 stainless steel
- BUNA-N seal
- Pressure max: 175 psi
- Temperature max: 180 F
- LC check valve, FPT x FPT
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn Qty	List Price
Brady Foot Valve - Spring Loaded			
FV75	3/4"	12	\$ 24.71
FV100	1"	30	28.90
FV125	1-1/4"	32	41.51
FV150	1-1/2"	21	49.91
Brady Check Valve- Spring Loaded			
LC75	3/4"	24	21.71
LC100	1"	24	24.23
LC125	1-1/4"	24	36.36
LC150	1-1/2"	12	43.53
Brady Foot Valve Strainer			
FV75SN	3/4"	50	2.35
FV100SN	1"	50	2.60
FV125SN	1-1/4"	50	3.79
FV150SN	1-1/2"	50	3.65

Foot Valves - Cast Iron, Steel Suction Strainer



5400 Series

Cast Iron Foot Valve Features:

- Available in painted red finish.
- Includes neoprene flapper check to maintain prime.
- For use in drainage on construction sites, irrigation projects, pumping from ponds or streams.



CLAYTON MARK®



Part Number	Valve Size	Flapper OD Size	PAINTED List Price
PAINTED RED			
5400-1	1"	2 1/2"	\$ 26.82
5400-11/4	1-1/4"	2 3/4"	40.95
5400-11/2	1-1/2"	3 1/4"	49.18
5400-2	2"	4 1/4"	52.61
5400-21/2	2-1/2"	5"	89.80
5400-3	3"	5 3/4"	93.99
5400-4	4"	7"	190.00
5400-5	5"	9"	345.24
5400-6	6"	10 1/8"	480.13
5400-8	8"	12 7/8"	912.24



5400 Series Complete Repair Kits

- Single kit to repair both painted and galvanized versions.
- Replacement strainers available in galvanized finish only.
- Contains all components required to replace inner flapper assembly.
- Includes valve weight, neoprene flapper, sealing washer, bolt, washer and nut.



Replacement Parts for 5400 Series Foot Valves

Valve Size	LEATHER FLAPPER ONLY		NEOPRENE FLAPPER ONLY		COMPLETE REPAIR KIT (w/ neoprene flapper)	
	Part No.	List Price	Part No.	List Price	Part No.	List Price
1"	5400-1LR	\$ 6.80			CIRK100	28.21
1 1/4"	5400-11/4LR	7.94			CIRK125	28.08
1 1/2"	5400-11/2LR	8.65	8367C	6.09	CIRK150	32.01
2"	5400-2LR	12.36	8367D	8.65	CIRK200	40.57
2 1/2"	5400-21/2LR	13.16	8367E	9.21	CIRK250	53.23
3"	5400-3LR	18.45	8367F	21.91	CIRK300	65.88
4"	5400-4LR	45.83	8367G	31.88	CIRK400	88.31
5"	5400-5LR	61.08	-	-	CIRK500	113.04
6"	5400-6LR	75.16	8367J	52.56	CIRK600	187.56
8"	5400-8LR	117.64	8367K	71.91	CIRK800	271.58



FLAT STEEL ROUND HOLE STRAINERS

- General purpose strainer, zinc plated to prevent corrosion.
- 16 gauge steel.



Part Number	Pipe Size	Hole Size	Height	Diameter	Ctn Qty	List Price
8800B	2"	.375"	4"	6"	20	\$ 30.22



NO LEAD Yard Hydrants - Frost Proof




5451NL Series



HVBAD75NL



NLRBHE Series



NLRBHT Series



SSHE Series



SSHT Series


NO LEAD Series Frost Proof Yard Hydrant

Features:

- Fully frost proof, shut-off valve below frost line.
- Heavy cast iron head with 3/4" brass discharge connection and bucket hook.
- Can be padlocked.
- Heavy, galvanized steel, corrosion resistant, 1" stand-pipe.
- Galvanized carbon steel connecting rod. Stainless steel operating rod.
- Long lasting Buna-N rubber plunger with solid brass core.
- Integral valve seat cast into brass valve body. 3/4" FPT connection with double bypass bottom valve for superior flow, less risk of debris blockage.
- 1/8" FPT back drain hole.
- Rated to 80 PSI, adjustable. See page 2.18 for adjustment procedure.
- Packed securely in individual heavy weight carton.
- Independent lab tested.
- Lead Free. **Third party certified to NSF/ANSI 372.**



CLAYTON MARK®



Part Number	Bury Depth	Overall Length	Weight (Pounds)	List Price
54511NL	1	42"	12.4	\$ 124.52
54512NL	2	54"	15.2	132.01
54513NL	3	66"	17.8	142.83
54514NL	4	78"	21.0	153.11
54515NL	5	90"	22.3	163.93
54516NL	6	102"	26.2	170.96
54518NL	8	126"	30.7	195.85

Part Number	Description	Ctn/Case Qty	List Price
NO LEAD Vacuum Breaker Meets ASSE 1011			
HVBAD75NL	3/4"NL Brass w/ auto back drain fipt x ght	10/100	\$ 16.25

Part Number	Size	# Barbs	Ctn/Case Qty	List Price
No Lead Cast Bronze Hydrant Elbow (INSxMIP)				
NLRBHE3/4	3/4" x 3/4"	5	10/100	\$ 12.96
NLRBHE1X3/4	1" x 3/4"	5	10/100	15.82
NLRBHE1	1" x 1"	5	10/100	18.04
NLRBHE11/4	1 1/4" x 1 1/4"	5	5/50	33.82
No Lead Cast Bronze Extra Long Hydrant Elbow (INS x MIP)				
NLXLRBHE1	1" x 1"	8	10/100	22.57
NLXLRBHE1X3/4	1" x 3/4"	10	10/100	22.46
No Lead Cast Bronze Hydrant Tee (INS x MIP)				
NLRBHT3/4	3/4" x 3/4"	4	10/100	18.04
NLRBHT1x3/4	1" x 3/4"	6	10/100	23.25
NLRBHT1	1" x 1"	4	10/100	25.61
Stainless Steel Hydrant Elbow (INSxMIP)				
SSHE3/4	3/4" x 3/4"	5	10/100	16.75
SSHE1X3/4	1" x 3/4"	5	10/100	19.11
SSHE1	1" x 1"	5	10/100	23.39
SSHE11/4	1 1/4" x 1 1/4"	5	10/50	32.86
Stainless Steel Hydrant Tee (INS x MIP)				
SSHT3/4	3/4" x 3/4"	4	10/100	20.00
SSHT1x3/4	1" x 3/4"	6	10/100	24.34
SSHT1	1" x 1"	4	10/100	28.50



www.americangranby.com


FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204


Yard Hydrants - Replacement Parts



CLAYTON MARK®

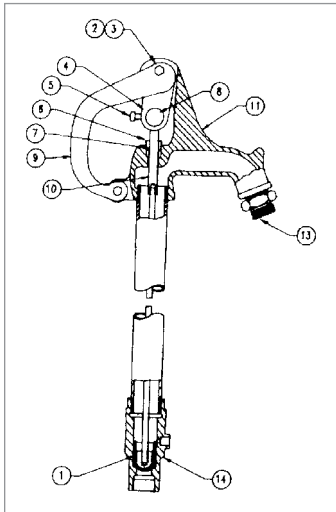

3/4" 5451NL Hydrant Flow Rates

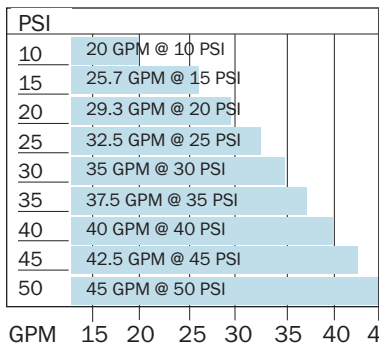

5451NL Series Hydrant Replacement Parts

Part Number	Item Number	Description	List Price
YRK1		Repair Kit (Items 1-8)	\$ 17.33
9175B	1	Plunger - BUNA N rubber/brass	6.37
9023B	2	Fulcrum Bolt - zinc plated steel	0.36
9023C	3	Fulcrum Nut - zinc plated steel	0.27
9023D	4	Links (set of 2) - zinc plated steel	2.38
9023E	5	Set Screw square head - zinc plated steel	0.47
9023A	6	Packing Nut - brass	3.18
29609G	7	Packing - graphite (2 - 1 old, 1 new style)	4.03
9023G	8	Connector - brass	5.79
2506K	9	Handle - painted cast iron	10.14
2222AHSS	10	Clevis Rod - SS NEW STYLE (for double bypass)	11.77
2500K	11	Head only - painted cast iron	34.19
382914	13	Hose Adapter - brass	7.31
381504	14	Valve Body - brass	45.00
2575K		Complete Head Assembly (Items 2-13)	56.18


STEEL ROD (use with double bypass valve 5451 Series)

TA7100099NS	54511 Rod (32.4")	11.89
TA7100100NS	54512 Rod (44.4")	15.46
TA7100101NS	54513 Rod (56.4")	19.03
TA7100102NS	54514 Rod (68.4")	20.60
TA7100103NS	54515 Rod (80.4")	26.17
TA7100104NS	54516 Rod (92.4")	29.74
TA7100105NS	54518 Rod (116.4")	36.89

NOTE: All 5451NL Series Hydrants are preset at factory. There should be no need for any adjustment on initial installation. Adjust only if water does not shut off or hydrant does not operate properly.

5451NL HYDRANT ADJUSTMENT PROCEDURE

- Turn water supply OFF.
- Open hydrant to relieve pressure.
- Loosen set screw. (Item 1)
- Push brass rod down as far as it will go by hand to be sure the plunger is touching the seat.
- Open handle (Item 2) approximately 30° from closed position.
- Tighten set screw snugly.
- Turn water supply ON.
- Operate hydrant and make sure the hydrant is shutting off properly and flowing properly.
- If hydrant still does not shut off, repeat steps 1 through 8.**
- Flow water through hydrant and then close completely to check for proper drainage by:
 - listening for water draining down pipe or
 - putting your hand over the hose connection to feel for a vacuum.
 If hydrant does not drain, see step 11.
- To clear drain hole blockage, close off hydrant spout by using hose cap or by attaching and kinking a hose. Open and close hydrant to allow water pressure to clear blockage. Repeat step 10 to verify proper drainage. If hydrant still does not drain, repeat steps 1 through 10 to fully uncover drain hole.

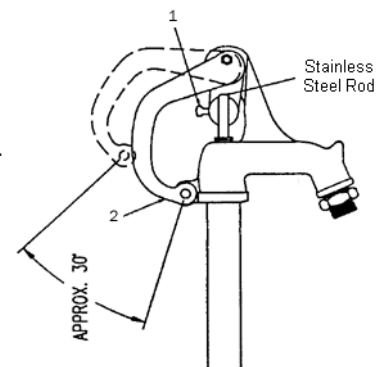

CAUTION: Do not try to make the shutoff adjustment in one attempt or you may overadjust and cause damage to the plunger and rods. For this reason adjust in multiple small increments.



NO LEAD Yard Hydrants - Frost Proof



Deluxe NO LEAD Frost Proof Yard Hydrant Features:

- FROST-PROOF - Shut-off valve operates below the frost line.
- Pistol type handle eliminates pinching.
- Can be padlocked.
- Wheel handle controls water flow at rate desired.
- Stainless steel extension rod will not rust or cut into packing.
- Water in standpipe drains out when hydrant is off.
- Aluminum nozzle threaded for standard 3/4" hose coupling.
- Inner parts removable without digging.
- 120 PSI maximum pressure.
- Individually boxed.

Simmons



NL Series is Lead Free and certified to NSF/ANSI 372 <0.25% Pb by weighted average.

NOT FOR SALE IN CALIFORNIA.
Does NOT meet CA Prop 65.

NO LEAD Part No.	Bury Depth	Pipe Length	Overall Length	Ctn Qty	List Price
H800NL	1 ft	30"	40"	1	\$ 160.91
H801NL	1.5 ft	38"	48"	1	165.12
H802NL	2 ft	44"	54"	1	169.63
H803NL	3 ft	56"	66"	1	178.57
H804NL	4 ft	68.5"	78.5"	1	190.60
H805NL	5 ft	80.5"	90.5"	1	202.69
H806NL	6 ft	92.25"	102.25"	1	217.88
H807NL	7 ft	104"	114"	1	229.91
H808NL	8 ft	116"	126"	1	245.57




HVBAD75NL



Part Number	Description	Ctn/Case Qty	List Price
NO LEAD Vacuum Breaker Meets ASSE 1011			
HVBAD75NL	3/4"NL Brass w/ auto back drain fipt x ght	10/100	\$ 16.25



NLRBHE Series



NLRBHT Series



SSHE Series



SSHT Series

Part Number	Size	# Barbs	Ctn/Case Qty	List Price
No Lead Cast Bronze Hydrant Elbow (INSxMIP)				
NLRBHE3/4	3/4" x 3/4"	5	10/100	\$ 12.96
NLRBHE1X3/4	1" x 3/4"	5	10/100	15.82
NLRBHE1	1" x 1"	5	10/100	18.04
NLRBHE11/4	1 1/4" x 1 1/4"	5	5/50	33.82
No Lead Cast Bronze Extra Long Hydrant Elbow (INS x MIP)				
NLXLRBHE1	1" x 1"	8	10/100	22.57
NLXLRBHE1X3/4	1" x 3/4"	10	10/100	22.46
No Lead Cast Bronze Hydrant Tee (INS x MIP)				
NLRBHT3/4	3/4" x 3/4"	4	10/100	18.04
NLRBHT1x3/4	1" x 3/4"	6	10/100	23.25
NLRBHT1	1" x 1"	4	10/100	25.61
Stainless Steel Hydrant Elbow (INSxMIP)				
SSHE3/4	3/4" x 3/4"	5	10/100	16.75
SSHE1X3/4	1" x 3/4"	5	10/100	19.11
SSHE1	1" x 1"	5	10/100	23.39
SSHE11/4	1 1/4" x 1 1/4"	5	10/50	32.86
Stainless Steel Hydrant Tee (INS x MIP)				
SSHT3/4	3/4" x 3/4"	4	10/100	20.00
SSHT1x3/4	1" x 3/4"	6	10/100	24.34
SSHT1	1" x 1"	4	10/100	28.50





In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com


FALL 2016

2.19

Yard Hydrants - Replacement Parts

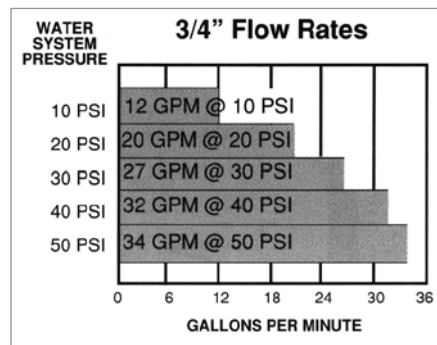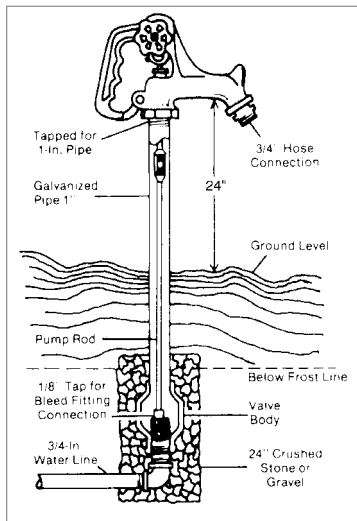

Replacement Parts For H800 Series Hydrants

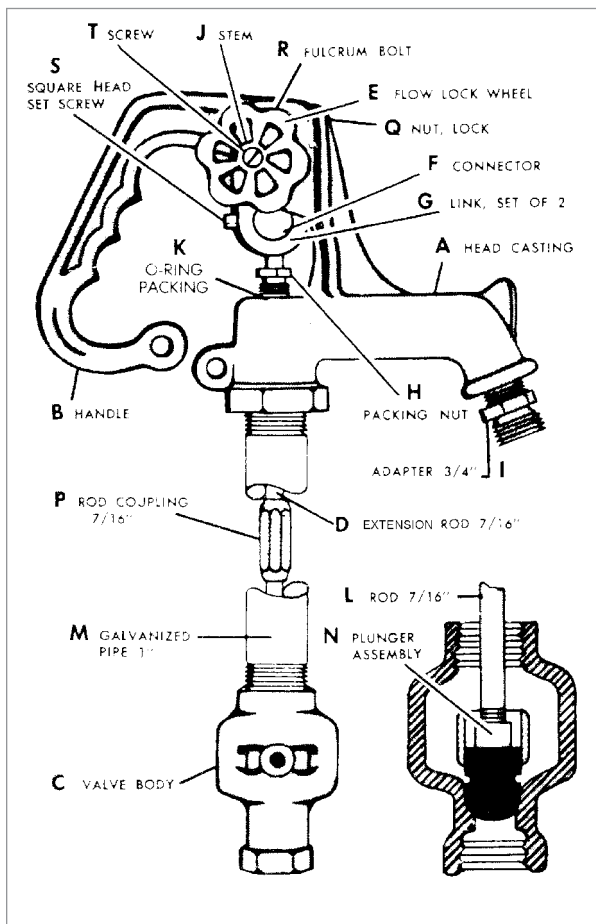

Part Number	Reference Number	Name of Part	List Price
8820	A	Head	\$ 54.32
8821	B	Handle	17.65
8822SB	C	Valve Body NL	66.11
8843	D	Stainless Steel Extension Rod 7/16" NL	12.14
8824	E	Hand Wheel	3.08
8825 *	F	Connector - brass	29.82
8826 *	G	Links(pair) - brass	15.81
8827 *	H	Packing Nut - brass	10.48
8844	I	Aluminum Hose Adapter NL	10.93
8829	J	Brass Stem, Square head	4.26
8839 *	K	O-Ring Packing, BUNA-N (pair)	2.96
8814-0	L	7/16" Pump Rod for H800NL	25.82
8814-1		7/16" Pump Rod for H801NL	32.39
8814-2		7/16" Pump Rod for H802NL	38.63
8814-3		7/16" Pump Rod for H803NL	49.33
8814-4		7/16" Pump Rod for H804NL	59.76
8814-5		7/16" Pump Rod for H805NL	70.25
8814-6		7/16" Pump Rod for H806NL	80.56
8814-7		7/16" Pump Rod for H807NL	91.04
8814-8		7/16" Pump Rod for H808NL	101.36
8815-0	M	Pipe Casing for H800NL	29.63
8815-1		Pipe Casing for H801NL	39.07
8815-2		Pipe Casing for H802NL	46.51
8815-3		Pipe Casing for H803NL	58.93
8815-4		Pipe Casing for H804NL	71.30
8815-5		Pipe Casing for H805NL	83.66
8842 *	N	Plunger - one piece NL	17.23
8834	P	Rod Coupling, 7/16"	4.84
8301 *	Q	Lock Nut - stainless steel	0.96
8836 *	R	Fulcrum Bolt - stainless steel	3.83
8837 *	S	Square Head Set Screw - stainless steel	1.86
8610	T	Screw for Hand Wheel	1.53
840SB		Head, Complete NL	88.44
850SB		Parts Kit NL (* Included)	46.66



SECTION 3 PLUMBING VALVES



PRODUCT LINE	PAGE
Ball Valves	
NL Brass, Brass, Stainless Steel	1-5
CPVC Molded -in-Place Ball Valves	16
PVC Molded -in-Place Ball Valves	14-15
PVC Single Union Ball Valves	17-18
PVC True Union Ball Valves	19-20
Butterfly Valves	23-27
Butterfly Valve Flanges, Bolt Kits, Gaskets, Installation Kits	26-27
Cast Iron Butterfly Valves	23-24
PVC Butterfly Valves	25
Flanges	26
Float Valves, Bronze	6
Gate Valves	7
Plumbing Valves, Low Pressure NL Brass, Brass	9-12
Celcon, PVC & CPVC	13
Slice Gate Valves	21-22
Swing Check Valves	8
Wall Hydrants	28-30



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Ball Valves - NO LEAD Brass



HFBV6-NL Series




MATERIAL SPECIFICATIONS	
Handle nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Gland Follower	NL Forged Brass
Stem Packing	PTFE
Ball	Chrome Plated NL Brass
Seats	PTFE
Body	NL Forged Brass
End Adapter	NL Forged Brass

NO LEAD Forged Brass Full Port Ball Valve

Features:

- Heavy pattern NO LEAD forged brass construction.
- Full port allows maximum flow & minimum pressure drop or turbulence.
- PTFE seats, chrome plated NO LEAD brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow out proof stem design.
- **600 PSI W.O.G.** non-shock; **150 PSI S.W.P.**
- **CSA Certified (TXT only)**
- **Third party certified to NSF/ANSI 372.**



Part Number Threaded	Size	Ctn/Case Qty	List Price Threaded	Part Number Sweat	List Price Sweat
HFBV6-25TNL	1/4"	15/120	\$ 9.01		
HFBV6-38TNL	3/8"	15/120	9.01		
HFBV6-50TNL	1/2"	15/120	12.10	HFBV6-50SNL	\$ 11.95
HFBV6-75TNL	3/4"	10/60	18.24	HFBV6-75SNL	19.50
HFBV6-100TNL	1"	8/48	29.28	HFBV6-100SNL	27.86
HFBV6-125TNL	1 1/4"	4/24	49.07	HFBV6-125SNL	48.49
HFBV6-150TNL	1 1/2"	2/24	73.56	HFBV6-150SNL	69.63
HFBV6-200TNL	2"	2/12	99.04	HFBV6-200SNL	100.43
HFBV6-250TNL	2 1/2"	3/6	245.97		
HFBV6-300TNL	3"	2/4	327.30		
HFBV6-400TNL	4"	1/2	658.56		




HFBV4-PEXNL Series

MATERIAL SPECIFICATIONS	
Handle Nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Stem O-ring (2)	NBR
Ball	Chrome Plated NL Brass
Seats	PTFE
Body	NL Forged Brass
End Adapter	NL Forged Brass

NO LEAD Forged Brass FULL Port Ball Valve with PEX

Connections Features:

- Heavy pattern, full port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- NBR double o-ring stem seal.
- Blow-out proof stem design.
- **400 PSI W.O.G.** non-shock; **125 PSI S.W.P.**
- PEX ends for use with PEX tubing connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price
HFBV4-50PEXNL	1/2"	25/100	\$ 6.39
HFBV4-75PEXNL	3/4"	10/60	10.54
HFBV4-100PEXNL	1"	10/40	15.89

Ball Valves - NO LEAD Brass



HFBV4-PEXSWNL Series

MATERIAL SPECIFICATIONS	
Handle Nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Stem O-ring (2)	NBR
Ball	NL Brass
Seats	PTFE
Body	NL Forged Brass
End Adapter	NL Forged Brass

NO LEAD Forged Brass STANDARD Port Ball Valve with PEX x SWEAT Connections Features:

- Heavy pattern, standard port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- NBR double o-ring stem seal.
- Blow-out proof stem design.
- **400 PSI** W.O.G. non-shock; **125 PSI** S.W.P.
- PEX x SWEAT ends for use with PEX tubing to copper tubing connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price
HFBV4-50PEXSWNL	1/2"	25/100	\$ 9.27
HFBV4-75PEXSWNL	3/4"	10/60	12.45



HFBV6-INL Series

MATERIAL SPECIFICATIONS	
Handle	Zinc Plated Steel
Handle Nut	Zinc Plated Steel
Stem Packing	PTFE
Packing Nut	Brass
Ball	1/2"-1" Lead Free Brass 1 1/4" SS #316
Seats	PTFE
Body	NL Brass
End Adapter	NL Brass

NO LEAD Forged Brass FULL Port Ball Valve with HOSE BARBS Connection Features:

- Heavy pattern, full port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow-out proof stem design.
- **600 PSI** W.O.G. non-shock; **150 PSI** S.W.P.
- Insert hose barb ends for use with polyethylene pipe connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price
HFBV6-50INL	1/2"	50/80	\$ 17.14
HFBV6-75INL	3/4"	6/60	25.66
HFBV6-100INL	1"	6/36	46.24
HFBV6-125INL	1 1/4"	5/20	73.40



HFBV6-IFTNL Series

MATERIAL SPECIFICATIONS	
Handle	Zinc Plated Steel
Handle Nut	Zinc Plated Steel
Stem Packing	PTFE
Packing Nut	Brass
Ball	3/4"-1" Lead Free Brass 1 1/4" SS #316
Seats	PTFE
Body	NL Brass
End Adapter	NL Brass

NO LEAD Forged Brass FULL Port Ball Valve with HOSE BARB x FPT Connection Features:

- Heavy pattern, full port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow-out proof stem design.
- **600 PSI** W.O.G. non-shock; **150 PSI** S.W.P.
- Insert hose barb x FPT ends for use with polyethylene pipe and IPS connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price
HFBV6-75IFTNL	3/4"	6/60	\$ 21.81
HFBV6-100IFTNL	1"	6/36	39.11
HFBV6-125IFTNL	1 1/4"	5/20	60.00



Ball Valves - Stainless Steel



SSBV Series

MATERIAL SPECIFICATIONS

Handle Nut	Stainless Steel
Handle	Stainless Steel
Gland Follower	Stainless Steel
Stem Packing	PTFE
Packing Nut	Stainless Steel
Ball	Stainless Steel
Seats	PTFE
Body	Stainless Steel
End Adapter	Stainless Steel
Seal Gasket	PTFE

Stainless Steel Full Port Ball Valve Features:

- 304 Stainless steel ball valves
- Full Port, 1000 psi WOG
- Locking Handle (padlock not included)
- Investment castings.
- PTFE seal and packing.
- Blow-out proof stem.
- FPT x FPT
- **Third party certified no lead to NSF/ANSI 372.**



Part Number	Description	Size T x T	Case Qty	List Price
SSBV25TLH	Stainless 1000#	1/4"	2/80	\$ 14.49
SSBV38TLH	Stainless 1000#	3/8"	2/80	14.49
SSBV50TLH	Stainless 1000#	1/2"	2/80	14.49
SSBV75TLH	Stainless 1000#	3/4"	2/60	20.67
SSBV100TLH	Stainless 1000#	1"	2/40	32.53
SSBV125TLH	Stainless 1000#	1 1/4"	2/30	46.43
SSBV150TLH	Stainless 1000#	1 1/2"	2/16	60.81
SSBV200TLH	Stainless 1000#	2"	2/10	89.24
SSBV250TLH	Stainless 1000#	2 1/2"	2/4	210.13
SSBV300TLH	Stainless 1000#	3"	2/4	306.55
SSBV400TLH	Stainless 1000#	4"	2/4	543.87

Ball Valves - LEADED Brass



HFBV6 Series



MATERIAL SPECIFICATIONS

Handle nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Gland Follower	Forged Brass
Stem Packing	PTFE
Ball	Chrome Plated Brass
Seats	PTFE
Body	Forged Brass
End Adapter	Forged Brass

Forged LEADED Brass Full Port Ball Valve Features:

- Heavy pattern forged leaded brass construction.
- Full port allows maximum flow & minimum pressure drop or turbulence.
- PTFE seats, chrome plated brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow out proof stem design.
- **600 PSI W.O.G. non-shock; 150 PSI S.W.P.** (400 PSI 21/2", 3" 4")
- **CSA Certified (TxT only), UL Listed.**

Part Number Threaded	Size	Ctn/Case Qty	List Price Threaded	Part Number Sweat	List Price Sweat
HFBV6-25T	1/4"	50/100	\$ 7.75		
HFBV6-38T	3/8"	50/100	7.75		
HFBV6-50T	1/2"	50/100	10.54	HFBV6-50S	\$ 9.78
HFBV6-75T	3/4"	30/60	16.05	HFBV6-75S	15.28
HFBV6-100T	1"	20/40	24.88	HFBV6-100S	23.95
HFBV6-125T	1- 1/4"	12/24	38.75	HFBV6-125S	39.66
HFBV6-150T	1-1/2"	9/18	59.08	HFBV6-150S	54.76
HFBV6-200T	2"	6/12	86.79	HFBV6-200S	77.71
HFBV6-250T	2-1/2"	3/6	212.37		
HFBV6-300T	3"	2/4	252.83		
HFBV6-400T	4"	2	495.64		



HFBV6-I Series



MATERIAL SPECIFICATIONS

Handle nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Gland Follower	Forged Brass
Stem Packing	PTFE
Ball	Chrome Plated Brass
Seats	PTFE
Body	Forged Brass
End Adapter	Forged Brass

Forged LEADED Brass FULL Port Ball Valve with Hose Barbs Features:

- Heavy pattern, full port, forged leaded brass construction.
- PTFE seats, chrome plated brass ball.
- PTFE stem packing with adjustable gland follower.
- Blow-out proof stem design.
- **600 psi W.O.G. non-shock; 150 psi S.W.P.**
- Insert hose barb ends for use with polyethylene pipe connections.

Part Number	Size	Ctn/Case Qty	List Price
HFBV6-50I	1/2"	50/100	\$ 11.13
HFBV6-75I	3/4"	30/60	17.33
HFBV6-100I	1"	20/40	32.39
HFBV6-125I	1-1/4"	12/24	54.47



Ball Valves - Gas



HGBVL Series



HGBVT Series

Forged Brass Gas Ball Valve Features:

- Heavy duty two piece forged brass body.
- For use with natural, manufactured, mixed, liquified petroleum and LP gas/air mixtures.
- Meets ANSI standard Z21.15 for use as a gas appliance connector valve (1/2 lb. system). CSA, US/AGA B-16.44
- Pressure rated at 175 psi W.O.G. non-shock.
- Imported, Mfg for American Granby in an ISO 9001 facility.



ISO 9001




MATERIAL SPECIFICATIONS

Handle Screw	Steel
Handle	Aluminum
Stem O-Rings	NBR
Stem	Forged Brass
Ball	Chrome Plated Brass
Seats	PTFE
Body	Forged Brass
End Adapter	Forged Brass

DIMENSIONS (IN.) SIZE	DIMENSIONS (IN.)			BTU
	A	B	C	Capacity/Hr.
1/2"	2.21	1.46	1.81	295,000
3/4"	2.38	1.75	1.81	795,000
1"	2.91	1.89	1.81	1,200,000

Lever Style	Tee Style	Size	Ctn/Case Qty	List Price
Part Number	Part Number	t x t		
HGBVL50T		1/2"	12/144	\$ 9.17
HGBVL75T		3/4"	12/96	13.57
HGBVL100T		1"	6/96	18.11
	HGBVT100T	1"	6/96	28.99

Float Valves - Bronze, NO LEAD Bronze

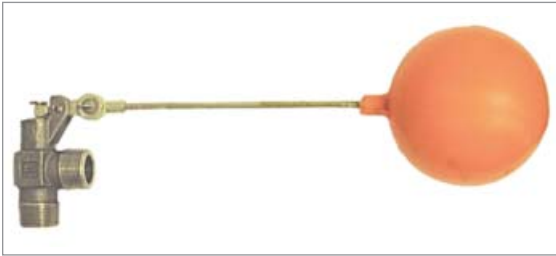

Bronze, NO LEAD Bronze Float Valve Features:

- Cast bronze or NO LEAD bronze body
- Buna-N Disc
- Heavy Duty
- Tapped for 1/4"-20SAE rod
- Threaded outlet
- Rated at 125 psi
- Third party certified to NSF/ANSI 372.



BFV Series

Part Number	Size	Inlet	Outlet	Tapped	Ctn Qty	List Price
BFVNL1/2	1/2"	1/2" mpt	1/2" mpt	1/4"-20SAE	10/100	\$ 42.69
BFVNL3/4	3/4"	3/4" mpt	3/4" mpt	1/4"-20SAE	10/80	44.14
BFVNL1	1"	1" mpt	1" mpt	1/4"-20SAE	10/40	68.65



BFVR Series

Stainless Steel Rods Features:

- Stainless Steel SAE
- Male thread both ends
- Third party certified to NSF/ANSI 372.



Part Number	Length	Thread	Fits Valve Size	Ctn Qty	List Price
BFVR8	8"	1/4"-20SAE	1/2" - 1"	50/400	\$ 6.62
BFVR10	10"	1/4"-20SAE	1/2" - 1"	50/300	7.67
BFVR12	12"	1/4"-20SAE	1/2" - 1"	50/300	8.59



BFVFP Series

Plastic Float Features:

- PVC, Corrosion resistant.
- Lightweight
- Up to 175 °F
- For open tank service only
- Bronze or NO LEAD bronze threaded connection.
- Third party certified to NSF/ANSI 372.



Part Number	Float Diam.	Buoyancy	Female Connection	Ctn Qty	List Price
BFVFPNL5	5"	2.17 lbs.	1/4"-20SAE	100	\$ 21.23
BFVFPNL6	6"	3.8 lbs.	1/4"-20SAE	100	25.00
BFVFPNL8	8"	9.87 lbs.	1/4"-20SAE	20	31.08



Valves - Brass Gate



GV200 Series

GV200 Series Forged Brass Gate Valve Features:

- Constructed of heavy duty forged brass.
- **Die-cast** body, **forged** bonnet are connected with a PTFE body to bonnet gasket for a leak proof seat.
- Screwed bonnet, non-rising stem, solid wedge disc and integral seats.
- Graphite stem seal packing.
- Cast iron hand wheel
- Rated at **200 PSI WOG**; **125 PSI SWP** (working pressure, non shock)
- Threaded ends produced to ANSI/ASME B1.20.1 (NPT) standards.
- Sweat ends produced to ANSI B16.18-1984 standards
- Imported



MATERIAL SPECIFICATIONS	
Wheel Nut	Stainless Steel
Hand Wheel	Gray Iron
Packing Nut	Brass
Gland Follower	Brass
Stem Seal Packing	Graphite
Bonnet	Brass
Body-Bonnet Gasket	PTFE
Lock Nut	Brass
Stem	Brass
Disc	Brass
Body	Brass

DIMENSIONS (IN.)	SIZE	A (IPS)	A (Cx C)	B (IPS)	B (Cx C)	C	d
	1/2"	1.68	1.76	2.80	2.79	2.17	.51
	3/4"	1.76	2.34	2.99	3.10	2.17	.67
	1"	1.97	2.69	3.45	3.63	2.36	.83
	1 1/4"	2.30	3.01	4.06	4.37	2.84	1.07
	1 1/2"	2.46	3.36	4.47	4.96	2.84	1.34
	2"	2.69	3.98	5.26	6.13	3.15	1.77
	2 1/2"	3.43		6.44		3.94	2.21
	3"	3.71		7.48		4.33	2.68
	4"	4.45		9.25		5.12	3.55

Threaded Part Number	Sweat Part Number	Size	Ctn/Case Qty	List Price
GV200-50T		1/2"	10 / 100	\$ 11.75
	GV200-50S	1/2"	10 / 100	13.17
GV200-75T		3/4"	10 / 100	13.40
	GV200-75S	3/4"	10 / 100	14.82
GV200-100T		1"	5 / 50	18.85
	GV200-100S	1"	5 / 50	20.31
GV200-125T		1 1/4"	5 / 50	28.93
	GV200-125S	1 1/4"	5 / 50	22.48
GV200-150T		1 1/2"	2 / 30	39.50
	GV200-150S	1 1/2"	2 / 30	41.49
GV200-200T		2"	2 / 20	59.48
	GV200-200S	2"	2 / 20	70.00
GV200-250T		2 1/2"	1 / 10	133.96
GV200-300T		3"	1 / 10	169.95
GV200-400T		4"	1 / 4	293.92

Valves - Swing Check



HSCV, HSCV-NL Series

Brass and NO LEAD Brass Swing Check Valve Features:

- Constructed of heavy duty cast brass or NO LEAD Brass
- Screwed cap, swing type disc and integral seat.
- Prevents backflow while offering full flow performance with a minimum of turbulence or pressure loss.
- Rated **200 PSI W.O.G.** (working pressure non-shock)
- NO LEAD Brass swing check valves are third party certified to NSF/ANSI 372.
- Manufactured for American Granby in an ISO 9001 factory.

ISO 9001

DIMENSIONS (IN.)	SIZE	BRASS				NO LEAD BRASS			
		A (TxT)	A (CxC)	B (TxT)	B (CxC)	A (TxT)	A (CxC)	B (TxT)	B (CxC)
	1/2"	2.05	2.05	1.47	1.49	2.09	2.40	1.42	1.40
	3/4"	2.32	2.32	1.58	1.58	2.36	3.15	1.56	1.52
	1"	2.56	2.56	1.68	1.68	2.62	3.50	1.77	1.73
	1 1/4"	3.12	3.12	1.84	1.84	3.19	4.15	2.07	2.07
	1 1/2"	3.45	3.45	2.15	2.15	3.54	4.57	2.17	2.13
	2"	4.16	4.16	2.69	2.69	4.21	5.47	2.74	2.68
	2 1/2"	5.11		2.93		5.14		3.09	
	3"	5.74		3.78		5.77		3.80	
	4"	6.79		3.90		6.84		4.25	

Brass



MATERIAL SPECIFICATIONS

Cap	Brass
Body	Brass
Disc	Brass
Hinge Pin	Brass
Screw	Brass

Threaded Part Number	Sweat Part Number	Size	Ctn/Case Qty	List Price
HSCV50T		1/2"	10/120	\$ 15.72
	HSCV50S	1/2"	10/120	15.48
HSCV75T		3/4"	10/80	18.58
	HSCV75S	3/4"	10/80	18.57
HSCV100T		1"	5/60	23.69
	HSCV100S	1"	5/60	24.22
HSCV125T		1-1/4"	5/40	37.04
	HSCV125S	1-1/4"	5/40	38.78
HSCV150T		1-1/2"	5/30	47.65
	HSCV150S	1-1/2"	5/30	53.30
HSCV200T		2"	2/24	71.11
	HSCV200S	2"	2/24	79.27
HSCV250T		2-1/2"	1/15	137.77
HSCV300T		3"	1/10	187.19
HSCV400T		4"	1/6	294.69

NO LEAD Brass



MATERIAL SPECIFICATIONS

Cap	No Lead Brass
Body	No Lead Brass
Disc	No Lead Brass
Hinge Pin	No Lead Brass
Screw	No Lead Brass

NL Threaded Part Number	NL Sweat Part Number	Size	Ctn/Case Qty	List Price
HSCV50TNL		1/2"	12/120	\$ 13.56
	HSCV50SNL	1/2"	12/120	13.56
HSCV75TNL		3/4"	10/80	17.55
	HSCV75SNL	3/4"	10/80	18.90
HSCV100TNL		1"	5/60	24.23
	HSCV100SNL	1"	5/60	27.04
HSCV125TNL		1-1/4"	5/40	41.74
	HSCV125SNL	1-1/4"	5/40	46.60
HSCV150TNL		1-1/2"	5/30	58.91
	HSCV150SNL	1-1/2"	5/30	59.40
HSCV200TNL		2"	2/24	95.61
	HSCV200SNL	2"	2/24	97.55
HSCV250TNL		2-1/2"	1/15	168.05
HSCV300TNL		3"	1/6	222.60
HSCV400TNL		4"	1/4	328.15



Plumbing Valves - NO LEAD Brass, Stainless Steel

BOILER DRAINS • HOSE BIBBS

- 125 PSI WOG (working pressure - non-shock), 200 PSI WOG (1/4 turn ball valve hose bibbs)
- All valves shown are UPC rated and third party certified to NSF/ANSI 372.
- Imported



HNKDNL Series



HBDNL Series



HBD-SBNL Series



IBD-SBNL Series



EIBD-SBNL Series



IBDBVNL Series



HHBNL Series



HHBNHTNL Series



IHBB NL Series



IHBBNHTNL Series



IHBBSS Series



IHBBSSNHT Series

☺ Has combination 1/2" mip and 1/2" solder connection

Part Number	Size	Description	Ctn/Case Qty	List Price
NO LEAD Brass No-Kink Boiler Drains				
HNKD50NL ☺	1/2"	mip x ght	12/144	\$ 8.89
HNKD75NL	3/4"	mip x ght	12/144	10.18
NO LEAD Brass Boiler Drains				
HBD50NL ☺	1/2"	mip x ght	12/144	10.14
HBD75NL	3/4"	mip x ght	12/144	10.91
HBD50SBNL ☺	1/2"	w/ stuffing box mip x ght	12/144	12.16
HBD75SBNL	3/4"	w/ stuffing box mip x ght	12/144	12.64
NO LEAD Brass Full Flow Boiler Drains - ECONOMY				
EIBD50SBNL ☺	1/2"	w/ stuffing box mip x ght	12/144	9.75
EIBD75SBNL	3/4"	w/ stuffing box mip x ght	12/144	10.75
NO LEAD Brass Full Flow Boiler Drains				
IBD50SBNL ☺	1/2"	w/ stuffing box mip x ght	12/144	13.61
IBD75SBNL	3/4"	w/ stuffing box mip x ght	12/144	13.66
NO LEAD 1/4 turn Ball Valve Brass Boiler Drain w/ Butterfly Handle				
IBDBV50NL ☺	1/2"	mip x ght	12/144	13.13
IBDBV75NL	3/4"	mip x ght	12/144	14.14
NO LEAD Brass Hose Bibbs				
HHB50NL ☺	1/2"	mip x ght	12/144	10.71
HHB75NL	3/4"	mip x ght	12/144	11.68
NO LEAD Brass Hose Bibbs - No Garden Hose Thread, Sampling Valve				
HHB50NHTNL ☺	1/2"	mip x spout	12/144	9.82
HHB75NHTNL	3/4"	mip x spout	12/144	10.86
NO LEAD Brass 1/4 turn Ball Valve Hose Bibb w/ T Handle - 200 psi WOG non-shock				
IHBB50NL ☺	1/2"	1/4 turn NL mip x ght	12/144	13.18
IHBB75NL	3/4"	1/4 turn NL mip x ght	12/144	15.82
NO LEAD Brass 1/4 turn Ball Valve Brass Hose Bibbs w/ T Handle - 200 psi WOG non-shock - No garden hose thread - Sampling valve				
IHBB50NHTNL ☺	1/2"	1/4 turn NL mip x spout	12/144	14.23
IHBB75NHTNL	3/4"	1/4 turn NL mip x spout	12/144	16.79
304 STAINLESS STEEL 1/4 turn Ball Valve Hose Bibbs w/ T Handle - 200 psi WOG non-shock (with stainless steel T handle)				
IHBB50SS	1/2"	STAINLESS mip x ght	12/144	21.07
IHBB75SS	3/4"	STAINLESS mip x ght	12/144	21.61
304 STAINLESS STEEL 1/4 turn Ball Valve Hose Bibbs w/ T Handle - 200 psi WOG non-shock - No garden hose thread - Sampling valve				
IHBB50SSNHT	1/2"	STAINLESS mip x spout	12/144	21.07
IHBB75SSNHT	3/4"	STAINLESS mip x spout	12/144	21.61



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

Plumbing Valves - NO LEAD Brass



BENT NOSE GARDEN • ANGLE SILL COCKS

- 125 PSI WOG (working pressure - non-shock)
- Imported



HBNGNL Series



HSCNL Series

Part Number	Size	Description	Ctn/Case Qty	List Price
NO LEAD Brass Full Flow Bent Nose Garden Valves (CA AB1953 certified)				
HBNG50NL	1/2"	fip x ght	12/72	\$ 18.29
HBNG75NL	3/4"	fip x ght	12/72	18.75
HBNG100NL	1"	fip x ght	12/72	19.79
NO LEAD Brass Angle Sill Cocks (CA AB1953 certified)				
HSC50TNL	1/2"	fip x ght	12/144	12.06
HSC75TNL	3/4"	fip x ght	12/144	12.79



HVB75NL



HVBAD75NL

No Lead Brass Vacuum Breaker Features:

- HVBAD has automatic back drain and can be manually drained.
- ASSE 1011
- Third party certified to NSF/ANSI 372.



Part Number	Description	Ctn/Case Qty	List Price
NO LEAD Vacuum Breaker			
HVB75NL	3/4" NL Brass fipt x ght	10/100	\$ 10.50
HVBAD75NL	3/4"NL Brass w/ auto back drain fipt x ght	10/100	16.25



Plumbing Valves - LEADED Brass, Low Pressure

BOILER DRAINS • HOSE BIBBS

- 125 PSI WOG (working pressure - non-shock), 200 PSI WOG (1/4 turn ball valve hose bibbs)
- All valves shown below are UPC rated except IHBB Series
- Imported



↓ Reduced price - Limited quantities available.



HNKD Series



HBD Series



HBD-SB Series



IBD-SB Series



IBDBV Series



HHB Series



HHBNHT Series

Part Number	Size	Description	Ctn/Case Qty	List Price
Brass No-Kink Boiler Drains				
HNKD50 ☺	1/2"	mip x ght	12/144	\$ 7.39
HNKD75	3/4"	mip x ght	12/144	8.58
Brass Boiler Drains				
HBD50 ☺	1/2"	mip x ght	12/144	8.05
HBD75	3/4"	mip x ght	12/144	8.64
HBD50SB ☺	1/2"	w/ stuffing box mip x ght	12/144	9.51
HBD75SB	3/4"	w/ stuffing box mip x ght	12/144	9.84
Brass Full Flow Boiler Drains				
IBD50SB ☺	1/2"	w/ stuffing box mip x ght	12/144	10.38
IBD75SB	3/4"	w/ stuffing box mip x ght	12/144	10.38
1/4 turn Ball Valve Brass Boiler Drain w/ Butterfly Handle				
IBDBV75	3/4"	mip x ght	12/144	10.57
Brass Hose Bibbs				
HHB50 ☺	1/2"	mip x ght	12/144	8.83
HHB75	3/4"	mip x ght	12/144	9.55
Brass Hose Bibbs - No Garden Hose Thread, Sampling Valve				
HHB50NHT ☺	1/2"	mip x spout	12/144	6.89 ↓

☺ Has combination 1/2" mip and 1/2" solder connection



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

3.11

Plumbing Valves - LEADED Brass, Low Pressure



BENT NOSE GARDEN • ANGLE SILL COCKS • FROST PROOF SILL COCKS


- 125 PSI WOG (working pressure - non-shock)
- Imported



↓ Reduced price - Limited quantities available.



HBNG Series



H500 Series



H500AS Series



HVB75

Part Number	Size	Description	Ctn/Case Qty	List Price
Full Flow Bent Nose Garden Valves				
HBNG50	1/2"	fip x ght	12/72	\$ 11.78 ↓
Chrome Plated Brass Frost Proof Sill Cocks, IPS x Sweat Fitting				
H504	1/2 x 4"		2/40	31.04
H506	1/2 x 6"		2/40	32.68
H508	1/2 x 8"		2/40	35.61
H510	1/2 x 10"		2/40	37.50
H512	1/2 x 12"		2/40	38.89
H514	1/2 x 14"		2/40	39.75
Chrome Plated Brass Anti-Siphon Sill Cocks* w/ 1/2" mip x 1/2" swt connection				
H504AS	1/2 x 4"		2/30	38.32
H506AS	1/2 x 6"		2/30	38.64
H508AS	1/2 x 8"		2/30	39.50
H510AS	1/2 x 10"		2/30	41.90
H512AS	1/2 x 12"		2/30	44.11
H514AS	1/2 x 14"		2/30	45.10
* with integral vacuum breaker				
Vacuum Breaker				
HVB75	3/4"	Meets ASSE 1011 specifications	20/200	\$ 7.54



Plumbing Valves - Celcon, CPVC



AGHBF Series



AGSFT Series



AGBDM Series



AGBDF Series



AGSCC Series

Celcon (Acetal) Hose Bibb & Boiler Drain Features:

- Celcon (acetal) construction for use in hot or cold fluid systems up to 180° F.
- Use with water and approved chemicals.
- Bronze color body with red T-handle or wheel handle.
- EPDM stem seal O-Ring for excellent chemical resistance and long life.
- Complies with applicable ASTM and ANSI standards.
- Manufactured for AGI in an ISO9001 facility.
- Made in USA.

Celcon (Acetal) Stop & Waste and Stop Valve Features:

- Stop & Waste allows draining of the non-pressure side of valve via an 1/8" port (polypropylene plug included).
- Complies with applicable ASTM and ANSI standards.
- Manufactured for AGI in an ISO9001 facility.
- Made in USA.

CPVC Stop Valve Features:

- High impact CPVC construction for use in hot or cold fluid systems up to 180° F.
- Use with water and approved chemicals.
- Beige color body with red wheel handle.
- EPDM stem seal O-Ring for excellent chemical resistance and long life.
- Complies with applicable ASTM and ANSI standards.
- Made with **Flow Guard Gold** material.
- Manufactured for AGI in an ISO 9001 facility.
- Made in USA.



Part Number	Description	Size	Inlet x Outlet	Ctn Qty	List Price
AGHBM50T	Celcon 45° Hose Bibb	1/2"	mipt x mht	36	\$ 8.37
AGHBM75T	Celcon 45° Hose Bibb	3/4"	mipt x mht	36	9.89
AGHBF50T	Celcon 45° Hose Bibb	1/2"	fipt x mht	36	9.69
AGHBF75T	Celcon 45° Hose Bibb	3/4"	fipt x mht	36	10.27
AGSFT50T	Celcon Sink Faucet w/ hose end	1/2"	mipt x mht	36	8.69
AGSFT75T	Celcon Sink Faucet w/ hose end	3/4"	mipt x mht	36	9.26
AGBDM50T	Celcon Boiler Drain	1/2"	mipt x mht	36	9.07
AGBDM75T	Celcon Boiler Drain	3/4"	mipt x mht	36	9.08
AGBDF50T	Celcon Boiler Drain	1/2"	fipt x mht	36	9.07
AGBDF75T	Celcon Boiler Drain	3/4"	fipt x mht	36	9.58
AGSCC50S	CPVC Stop Valve	1/2"	slip cts x slip cts	36	5.83 ↓
AGSCC75S	CPVC Stop Valve	3/4"	slip cts x slip cts	36	6.11 ↓



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016



Ball Valves - Economy PVC Molded-in-Place



Economy Series PVC Molded-In-Place Ball Valve Features:

- Heavy duty thermoplastic white PVC (Type 1, Grade 1) construction.
- White body, blue handle.
- Tee handle on 1/2" through 2". Lever handle on 2 1/2", 3" and 4".
- EPDM seats provide excellent chemical resistance.
- EPDM "o" ring stem seal.
- 150 PSI working pressure at 73°F water, non-shock.
- Maintenance free compact design.
- Severe shock loads and misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Third party certified no lead to NSF/ANSI 372.
- Individually cartoned.
- Imported.

EMIP TE/SE Series						
IPS DIMENSIONS (IN.)						
SIZE	d	d1	D	L1	L	H
1/2"	0.591	.0839	1.24	0.80	2.9	1.78
3/4"	0.792	1.051	1.45	0.89	3.4	2.01
1"	0.981	1.315	1.77	1.08	4.0	2.26
1 1/4"	1.262	1.661	2.07	1.06	4.3	2.66
1 1/2"	1.421	1.902	2.49	1.14	4.8	2.91
2"	1.832	2.374	3.01	1.42	5.7	3.32
2 1/2"	2.492	2.874	3.54	1.80	7.2	4.07
3"	3.153	3.5	4.25	2.4	9.3	4.47
4"	3.821	4.5	5.21	2.52	10.1	4.89

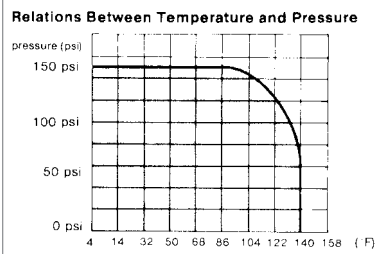

MATERIAL SPECIFICATIONS

1	Screw	Zinc Plated Steel
2	Cap	ABS
3	Handle	ABS
4	Ball	PVC
5	Stem Seal o-ring	EPDM
6	Body	PVC
7	Seat Seal	EPDM

CV (GPM/(1 lbf/in²)^{1/2})
Opening Rate: 90°

SIZE	CV
1/2"	14.5
3/4"	29.5
1"	48.0
1 1/4"	71.0
1 1/2"	135.0
2"	180.0
2 1/2"	225.0
3"	400.0
4"	865.9

Threaded Part Number	Slip Part Number	Size	Master Case Qty	List Price
EMIP50TE	EMIP50SE	1/2"	210	\$ 1.70
EMIP75TE	EMIP75SE	3/4"	137	2.29
EMIP100TE	EMIP100SE	1"	95	3.64
EMIP125TE	EMIP125SE	1 1/4"	56	4.97
EMIP150TE	EMIP150SE	1 1/2"	36	6.79
EMIP200TE	EMIP200SE	2"	24	10.89
EIMP250TE	EMIP250SE	2 1/2"	9	29.47
EMIP300TE	EMIP300SE	3"	8	45.33
EMIP400TE	EMIP400SE	4"	6	83.75



Ball Valves - PVC Sch 80 Molded-in-Place



ISO 9002

MATERIAL SPECIFICATIONS	
Body	PVC
Seat Seal	EPDM, PTFE
Ball	PVC
Stem Seal o-ring	EPDM
Handle	ABS
Bolt	Zinc Plated Steel
Cap	ABS

SCH 80 Series PVC Molded-In-Place Ball Valve Features:


- Heavy duty thermoplastic white PVC (Type 1, Grade 1) construction. Materials meet NSF standards.
- Meets ASTM 2467 Schedule 80.
- White body, red handle.
- Available with PTFE or EPDM seats providing excellent chemical resistance.
- EPDM “o” ring stem seal
- 150 PSI working pressure at 73°F water, non-shock.
- Maintenance free compact design.
- Severe shock loads and misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Individually cartoned.
- Manufactured for AGI in an ISO9002 facility.
- **Third party certified to NSF/ANSI 372.**
- Imported.



Certified to
ANSI/NSF 61 &
ANSI/NSF 61 Annex G




NO LEAD
< 0.25% Pb by
weighted avg
Third Party Certified
to NSF / ANSI 372

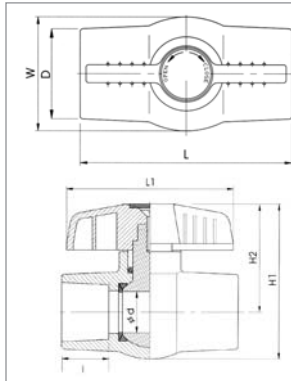

HMIP TE/SE and T/S Series IPS DIMENSIONS (IN.)

SIZE	d	D	L	L1	I	H1	H2	W
1/2"	.55	1.17	3.24	2.73	.87	2.42	1.68	1.48
3/4"	.78	1.48	3.71	3.43	1.00	3.04	2.11	1.67
1"	.98	1.76	4.13	3.90	1.12	3.63	2.54	2.22
1 1/4"	1.17	2.11	4.45	3.90	1.25	3.82	2.61	2.46
1 1/2"	1.40	2.42	5.07	4.25	1.37	4.49	3.04	2.93
2"	1.82	3.00	5.74	5.23	1.50	5.27	3.47	3.59
2 1/2"	2.34	3.59	7.96	6.94	1.75	6.24	4.10	4.29
3"	3.00	4.13	8.93	8.74	1.88	7.41	4.84	5.19
4"	3.94	5.27	11.70	10.76	2.25	9.09	5.77	6.63

Relations Between Temperature and Pressure

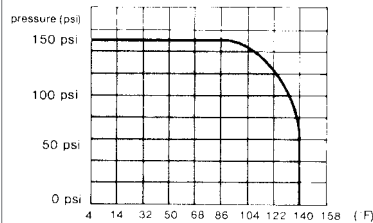

CV (GPM/(1 lbf/in²)^{1/2})

Opening Rate: 90°

SIZE	CV
1/2"	14.5
3/4"	29.5
1"	48.0
1 1/4"	71.0
1 1/2"	135.0
2"	180.0
2 1/2"	225.0
3"	400.0
4"	865.9

WITH EPDM SEATS



Threaded	Slip	Size	Ctn Qty	List Price
Part Number	Part Number			
HMIP50TE	HMIP50SE	1/2"	100	\$ 4.17
HMIP75TE	HMIP75SE	3/4"	100	5.36
HMIP100TE	HMIP100SE	1"	100	7.38
HMIP125TE	HMIP125SE	1 1/4"	100	10.41
HMIP150TE	HMIP150SE	1 1/2"	48	16.87
HMIP200TE	HMIP200SE	2"	24	22.32
HIMP250TE	HMIP250SE	2 1/2"	12	60.30
HMIP300TE	HMIP300SE	3"	12	104.49
HMIP400TE	HMIP400SE	4"	6	188.22

WITH PTFE SEATS



Threaded	Slip	Size	Ctn Qty	List Price
Part Number	Part Number			
HMIP50T	HMIP50S	1/2"	100	\$ 9.39
HMIP75T	HMIP75S	3/4"	100	12.61
HMIP100T	HMIP100S	1"	100	12.76
HMIP125T	HMIP125S	1 1/4"	100	20.22
HMIP150T	HMIP150S	1 1/2"	48	25.82
HMIP200T	HMIP200S	2"	24	35.21



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

3.15

Ball Valves - CPVC Sch 80 Molded-in-Place



ISO 9002

MATERIAL SPECIFICATIONS

Body	CPVC
Seat Seal	PTFE
Ball	CPVC
Stem Seal	EPDM
Handle	ABS
Bolt	Zinc Plated Steel
Cap	ABS

SCH 80 Series CPVC Molded-in-Place Ball Valve Features:

- Made with **Flo Guard Gold CPVC** material.
- Heavy duty thermoplastic CPVC construction for hot water use.
- NSF listed.
- Meets ASTM 2467 Schedule 80.
- CTS slip x slip - cream body, orange handle.
- PTFE seats providing excellent chemical resistance.
- EPDM O-Ring stem seal.
- Working pressure 75 PSI at 180 °F.
- Maintenance free compact design.
- Severe shock loads & misalignment stress are absorbed by the valve body, not the ball & seat, minimizing the chance of uneven wear & leakage.
- Individually cartoned.
- Manufactured for AGI in an ISO 9002 facility.
- Imported
- Third party certified to NSF/ANSI 372.


FLOWGUARD GOLD
PIPE & FITTINGS




Certified to
ANSI-NSF 61 &
ANSI-NSF 61 Annex G



NO LEAD
< 0.25% Pb by
weighted avg
Third Party Certified
to NSF / ANSI 372

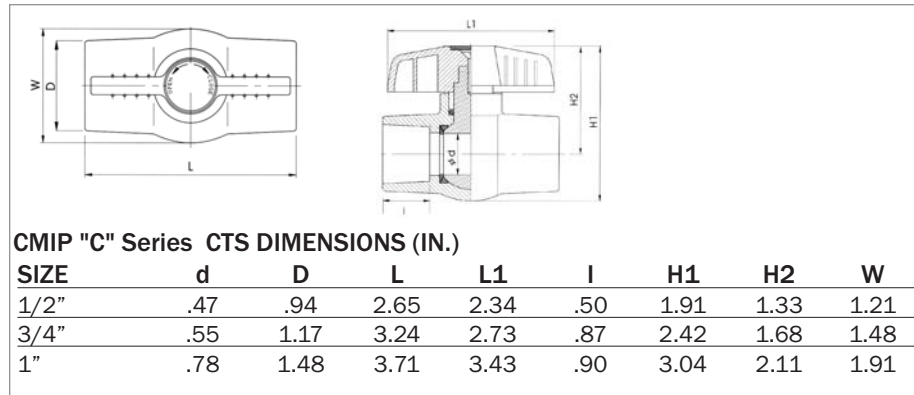

Relations Between Temperature and Pressure

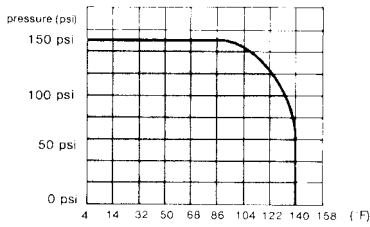

CV (GPM/(1 lbf/in²)^{1/2})
Opening Rate: 90"

SIZE	CV
1/2"	14.5
3/4"	29.5
1"	48.0

Part Number	Description	Ctn Qty	List Price
CPVC Ball Valve, Copper Tube Size, SLIP X SLIP			
CMIP50C	1/2" SLIP X SLIP	100	\$ 8.47
CMIP75C	3/4" slip x slip	100	9.53
CMIP100C	1" slip x slip	100	14.83



Ball Valves - PVC Single Union



PV1450 Series



PV1452, PV1453 Series

ISO 9002




MATERIAL SPECIFICATIONS

Body	PVC
End Adapter	PVC
Union Nut	PVC
Ball	PVC
Stem	PVC
Handle	ABS
Union o-rings	EPDM
Seat Seals	PTFE
Stem o-rings	EPDM

PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- PTFE seats.
- Double EPDM o-ring seal on stem: single EPDM o-ring seal on union end.
- Fully round ball prevents foreign matter from scoring seats.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Manufactured for AGI in an ISO 9002 facility.
- Imported

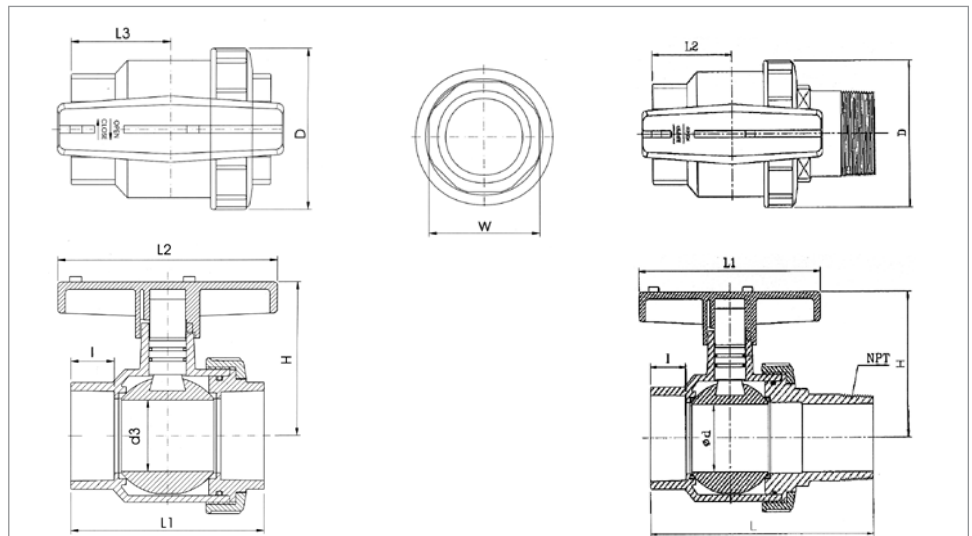

PV1450 Series DIMENSIONS (IN.)

SIZE	d3	D	L1	L2	L3	H	W	I
1 1/2"	1.50	3.42	4.49	4.72	2.21	3.32	2.34	1.09
2"	1.88	4.10	5.07	5.74	2.53	4.07	2.73	1.15

PV1452 Series DIMENSIONS (IN.)

SIZE	d	D	L	L1	L2	H	W	I
1 1/2"	1.50	3.42	6.55	4.72	2.21	3.32	2.34	1.09
2"	1.87	4.10	7.02	5.73	2.52	4.07	2.73	1.15

Part Number	Threaded/Slip	Size	Ctn Qty	List Price
PV1450-11/2	Slip	1-1/2"	48	\$ 21.68
PV1450-2	Slip	2"	24	28.70
PV1451-11/2	Threaded	1-1/2"	48	21.68
PV1451-2	Threaded	2"	24	28.70
PV1452-11/2	Slip x Extended MIP	1 1/2"	24	21.48
PV1452-2	Slip x Extended MIP	2"	24	29.52
PV1453-11/2	FPT x Extended MIP	1 1/2"	24	21.48
PV1453-2	FPT x Extended MIP	2"	12	29.52

Ball Valves - PVC Single Union



1350 Series



PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- **Buna "N" O-Ring seal; HDPE seats.**
- 1-1/4 deep sockets on both ends for extra cementing surface area.
- Acme thread on assembly nut prevents cross threading.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Made in USA.

Part Number	Threaded/Socket	Size	Ctn Qty	List Price
1350-15	Socket	1-1/2"	12	\$ 36.85
1350-20	Socket	2"	6	59.47
1351-15	Threaded	1-1/2"	12	41.69



Ball Valves - PVC True Union



ITUV Series



SCH 80 PVC True Union Ball Valve Features:

- Heavy duty thermoplastic grey Sch 80 PVC (Type 1, Grade 1).
- Full port design.
- Available with either EPDM or Viton® o-ring stem, carrier and union seals.
- PTFE seats are resistant to chemical corrosion.
- 150 PSI working pressure at 73° water, non-shock.
- Working temperature -4°F to 140°F.
- Unique double union/double block design permits in-line maintenance without disconnecting pipe and with no special tools.
- Both ends are blocked with bayonet-style locks which prevents the ball from being blown out. Ball remains in place upon removal of valve.
- External adjustment for seat wear.
- Individually cartoned.
- Imported.

EPDM O-Rings

Socket Part Number	Threaded Part Number	Ctn Qty	List Price
ITUV50SE	ITUV50TE	48	\$ 13.55
ITUV75SE	ITUV75TE	36	18.35
ITUV100SE	ITUV100TE	24	25.15
ITUV125SE	ITUV125TE	24	37.66
ITUV150SE	ITUV150TE	24	51.68
ITUV200SE	ITUV200TE	12	66.78
ITUV250SE	ITUV250TE	12	113.12
ITUV300SE	ITUV300TE	6	198.34
ITUV400SE	ITUV400TE	1	363.06

VITON O-RINGS

Socket Part Number	Threaded Part Number	Ctn Qty	List Price
ITUV50SV	ITUV50TV	48	\$ 24.56
ITUV75SV	ITUV75TV	36	31.52
ITUV100SV	ITUV100TV	24	41.14
ITUV125SV	ITUV125TV	24	56.08
ITUV150SV	ITUV150TV	24	80.80
ITUV200SV	ITUV200TV	12	119.57
ITUV250SV	ITUV250TV	12	180.16
ITUV300SV	ITUV300TV	6	270.58
ITUV400SV	ITUV400TV	1	547.66

ADDITIONAL ENDS - SET OF 2 INCLUDED

Part Number	Part Number	List Price
ITUV50 SOCKET END	ITUV50 THREADED END	\$ 2.78
ITUV75 SOCKET END	ITUV75 THREADED END	3.82
ITUV100 SOCKET END	ITUV100 THREADED END	5.42
ITUV125 SOCKET END	ITUV125 THREADED END	7.44
ITUV150 SOCKET END	ITUV150 THREADED END	8.97
ITUV200 SOCKET END	ITUV200 THREADED END	10.15
ITUV250 SOCKET END	ITUV250 THREADED END	16.13
ITUV300 SOCKET END	ITUV300 THREADED END	32.18
ITUV400 SOCKET END	ITUV400 THREADED END	64.29



Ball Valves - PVC True Union



ITUV Series PVC True Union Ball Valve Specifications:




MATERIAL SPECIFICATIONS:

Part	Material
Body	PVC
Stem o-ring	EPDM or Viton
Stem	PVC
Ball	PVC
Seat Seal	PTFE
Carrier o-ring	EPDM or Viton
Seal Carrier	PVC
Union o-ring	EPDM or Viton
End Connector	PVC
Union Nut	PVC
Handle	ABS
Inserted Nut	C3604 (on 1/2" - 2" only)

CV (GPM/(1 lbf/in²)^{1/2}) Opening Rate: 90"

SIZE	CV
1/2"	7.39
1"	25.16
1 1/4"	43.22
1 1/2"	60.21
2"	101.56
2 1/2"	170.39
3"	
4"	906.95

Relations Between Temperature and Pressure

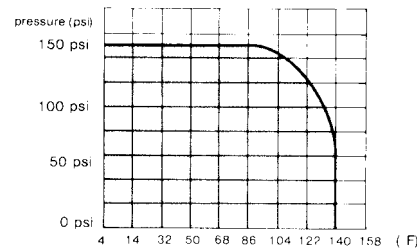

**ITUV Series
1/2" thru 2" DIMENSIONS (IN.)**


SIZE	d	D1	L1	L2	L3	H1	H2
1/2"	.51	1.76	4.33	2.347	3.04	1.87	--
3/4"	.70	2.15	5.07	2.85	3.59	2.26	1.01
1"	.90	2.57	5.66	3.04	3.90	2.54	1.29
1 1/4"	1.17	3.16	6.44	3.39	4.29	2.95	1.48
1 1/2"	1.48	3.74	6.67	3.59	4.72	3.43	1.64
2"	1.87	4.64	7.80	4.37	5.73	4.19	2.07

**ITUV Series
2 1/2" thru 4" DIMENSIONS (IN.)**

SIZE	d	D2	L1	L2	H
2 1/2"	2.34	5.30	7.08	10.73	4.64
3"	2.69	6.08	9.32	11.70	5.03
4"	3.90	8.74	10.84	12.79	6.86



Slice Gate Valves - PVC



VSGV Uni-Body



VSGV 3 piece body



VSGV 3 piece body with union

PVC Slice Gate Valve Features:

- Designed for pool & spa, irrigation, plumbing, waste water and agricultural applications.
- Stainless steel shaft prevent rust and corrosion.
- Ozone & chemical resistant Santoprene™ materials.
- Santoprene™ seals are integrated to the paddle to eliminate any chance of torn or punctured gaskets.
- Maximum working pressure 50 psi (through 2”).
- Solvent cement traps to catch excess glue.
- Every valve tested at double recommended working pressure.
- Valterra’s patent pending triple o-ring neck seal to ensure against any chance of shaft leakage.

Unibody Design


- One piece uni-body design.
- Combination socket ID x spigot OD for installation flexibility.
- Locking handle provides positive shut-off and easy gate opening.

3 Piece body

- Three piece configuration allows for repair or can be used as a union.
- Three piece configuration easily disassembles for inline service.

Part Number	Description	Max PSI	Ctn Qty	List Price
Uni-Body				
VSGV2101	1 1/2" slip x slip	45	30	\$ 18.70
VSGV2201	2" slip x slip	40	20	26.64
* Unibody 2" slip hubs are 2" slip or 2 1/2" spig				
Three Piece Body				
VSGV150SL	1 1/2" slip x slip	45	30	19.57
VSGV150FIPTXMIPT	1 1/2" fipt x mipt	45	40	25.32
VSGV150FIPTxMIPTABS	1 1/2" fipt x mipt ABS	45	26	26.77
VSGV150SLU	1 1/2" slip x union slip	45	38	31.93
VSGV150MTU	1 1/2" mipt x union slip	45	38	33.09
VSGV150SP	1 1/2" slip x spigot	45	30	23.98
VSGV150SD	1 1/2" step down pool hose x mipt ABS		40	23.36
VSGV200SL	2" slip x slip	40	20	28.29
VSGV200SP	2" slip x spigot	40	34	27.47
VSGV300SL	3" slip x slip	30	15	39.32
VSGV400SL	4" slip x slip w/ metal handle	20	6	167.22
VSGV600SL	6" slip x slip w/ stainless handle	10	1	696.67
VSGV800SL	8" slip x slip w/ stainless handle	10	1	975.45
VSGV1000SL	10" slip x slip w/ stainless handle	10	1	1778.33
VSGV1200SL	12" slip x slip w/ stainless handle	10	1	1868.19


Slice Gate Valves - PVC

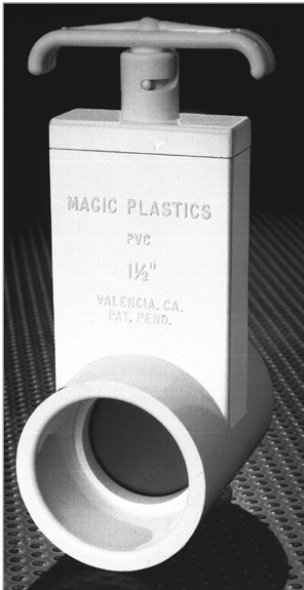

SGV - SL Series

PVC Slice Gate Valve Features:

- One piece “Uni-Body” PVC Construction. Guaranteed NO HUB LEAKS or loose bolts.
- 1/4 turn “Cam-Lock” for 100% shut-off..
- Internal “snap-lock” feature ensures valve will remain totally open, providing 100% flow with no restriction.
- Stainless steel shaft prevents rust and corrosion.
- Glass filled poly-pro tapered gate design for 100% sealing.
- Integrally molded seal on gate. - No pinched or torn gaskets.
- Seals are “Santoprene” that have been impregnated with a permanent lubricant. Never needs lube yet will provide continuous smooth operation. Ozone and chemical resistant for much longer life.
- Santoprene buttons on gate provides smooth operation without sticking.
- Every valve water tested at 100PSI and random quick burst tested at 400 PSI. Virtually no chance of leaky valves in the field at standard operating pressures.
- Maximum recommended operating pressure is 50 PSI.
- Glue wells on all slip-socket configuration catches excess glue during plumbing.
- Constructed and tested for use in pool & spa applications.
- Made in USA

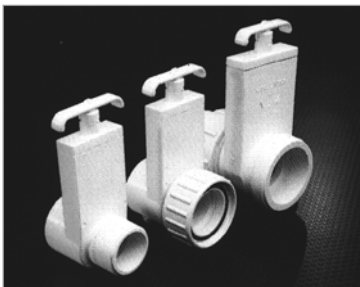

SGV-Sp and SGV-SLU Series

Part Number	Size	Description	Ctn/Case Qty	List Price
SGV150SL	1 1/2"	Slip x Slip	14/56	\$ 20.74
SGV200SL	2"	Slip x Slip	12/48	21.93
SGV250SL	2 1/2"	Slip x Slip	5/20	46.52
SGV150SP	1 1/2"	Slip x Spigot	14/56	19.50
SGV200SP	2"	Slip x Spigot	12/48	21.93
SGV150SLU	1 1/2"	Slip x Slip with Union	10/40	33.57
SGV200SLU	2"	Slip x Slip with Union	10/40	40.53



Butterfly Valves - Ductile Iron



HBFV Series

Ductile Iron Butterfly Valve Features:

- Designed for swimming pool, irrigation and water systems.
- Wafer body features 4 alignment holes.
- Lever lock handle (spring loaded) provides excellent manual control for balancing or shut off services.
- Notched throttling plate allows balancing in 10° increments in any position desired within 90° arc rotation of the disc.
- Positive bubble-tight shutoff with minimum torque.
- Seat face eliminates need for flange gaskets.
- Phenolic backed seats prevent collapse, are stretch resistant, blowout proof and field replaceable.
- **EPDM seats** temperature rated at -30° F to 275° F.
- 420 stainless steel shaft
- Bidirectional dead-end capability for 250 psi (2" - 12").
- Compatible with ANSI 125/150 flanges.
- Designed to comply with MSS SP-67 and API 609.
- **Ductile iron, ENP plated disc.**
- Imported




HBFV GEAR Series





Part No.	Size	Weight(lbs)	Ctn Qty	List Price
Ductile Iron ENP Plated Disc*				
HBFV2	2"	7	1	\$ 75.64
HBFV2 1/2	2-1/2"	8	1	89.21
HBFV3	3"	10	1	95.82
HBFV4	4"	12	1	141.43
HBFV5	5"	15.5	1	175.11
HBFV6	6"	17.5	1	210.46
HBFV8	8"	33	1	335.46
HBFV10	10"	50	1	498.86
HBFV12	12"	74	1	585.90
Ductile Iron ENP Plated Disc - GEAR DRIVE *				
HBFV6-GEAR	6"	28.5	1	290.19
HBFV8 GEAR	8"	54	1	471.90
Replacement Handles for HBFV Series				
BFH2	2"		1	17.46
BFH3	3"		1	17.46
BFH4	4"		1	17.46
BFH5	5"		1	20.87
BFH6	6"		1	20.87
BFH8	8"		1	42.94
BFH10	10"		1	42.94
BFH12	12"		1	48.88

Flanges & Bolt kits available, see page 3.26

Butterfly Valves - Ductile Iron

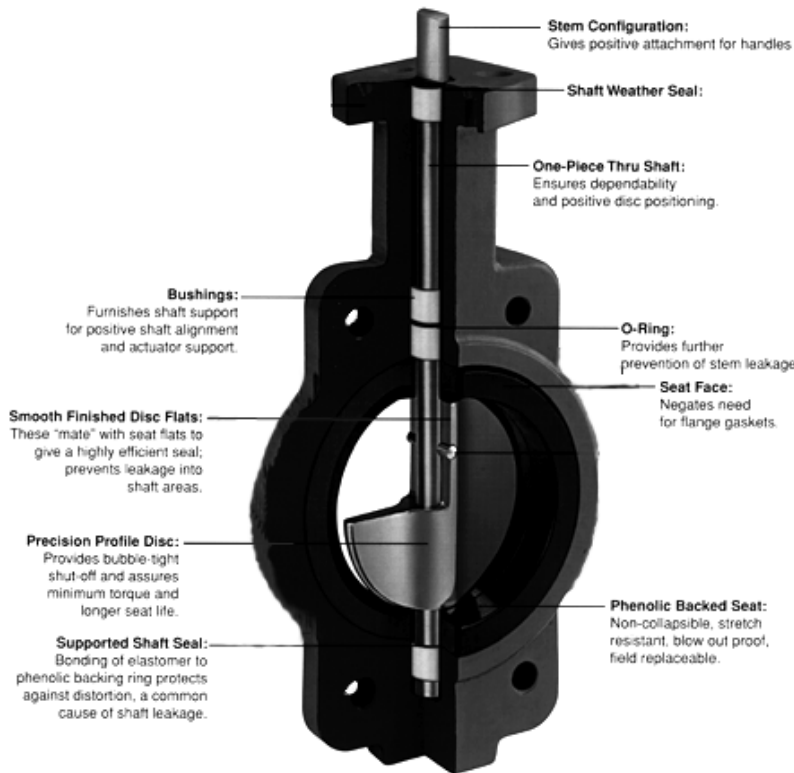

MATERIAL SPECIFICATIONS		
No.	Part	Material
1	Body	DUCTILE Iron
2	Disc	Ductile Iron
3	Seat	EPDM
4	Shaft	420 Stainless Steel
5	Key	Carbon Steel
6	O-ring	EPDM
7-9	Bushing	Nylon

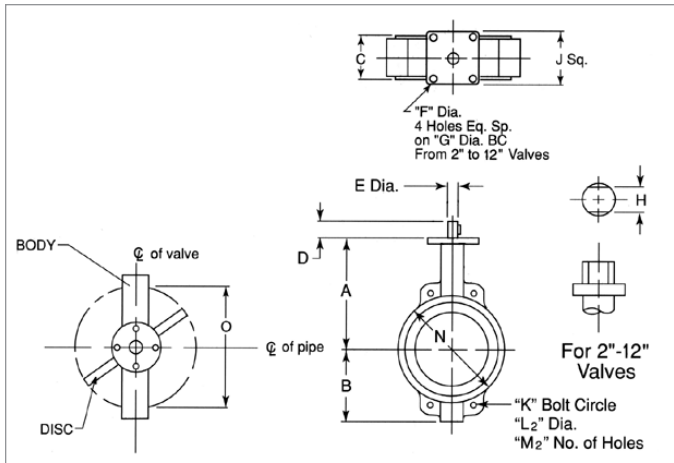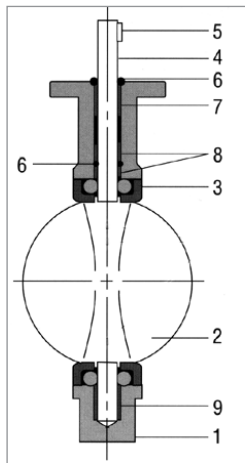

SIZE \ DIMENSION (in) for HBFV Series	A	B	C	D	E	F	G	H	J	K	L2	M2	N	O
2"	5.51	2.44	1.64	1.26	.50	.375	2.76	.39	2.75	4.75	.75	4	4.75	2.12
2 1/2"	6.02	2.76	1.75	1.26	.50	.375	2.76	.39	2.75	5.5	.75	4	5.50	2.57
3"	6.26	2.89	1.75	1.26	.50	.375	2.76	.39	2.75	6.0	.75	4	6.00	3.14
4"	7.01	4.49	2.00	1.26	.625	.375	2.76	.47	2.75	7.50	.75	4	7.50	4.13
5"	7.50	4.79	2.13	1.26	.75	.375	2.76	.55	2.75	8.50	.87	4	8.50	5.12
6"	8.01	5.55	2.12	1.26	.75	.375	2.76	.55	2.75	9.50	.87	4	9.50	6.13
8"	9.50	6.85	2.50	1.26	.875	.438	4.02	.67	3.75	11.75	.87	4	11.75	8.15
10"	10.75	8.19	2.50	1.58	1.125	.438	4.02	.87	3.75	14.25	1.00	4	14.29	9.98
12"	12.25	9.53	2.99	1.58	1.125	.438	4.02	.95	3.75	17.00	1.00	4	17.00	11.89



Butterfly Valves - PVC Sch 80




PBFV Series

ISO 9002

PVC Sch 80 Butterfly Valves Features:

- 150 PSI working pressure.
- PVC body, polypropylene disc, and EPDM seat and o-ring.
- Flanged end design.
- Corrosion resistant.
- Excellent flow characteristics.
- Ideally suited for flow control in a minimum piping space.
- Clear indication of disc opening degree.
- Built in seat requires no additional gaskets between flanges.
- Manufactured for AGI in an ISO 9002 facility.
- Imported.

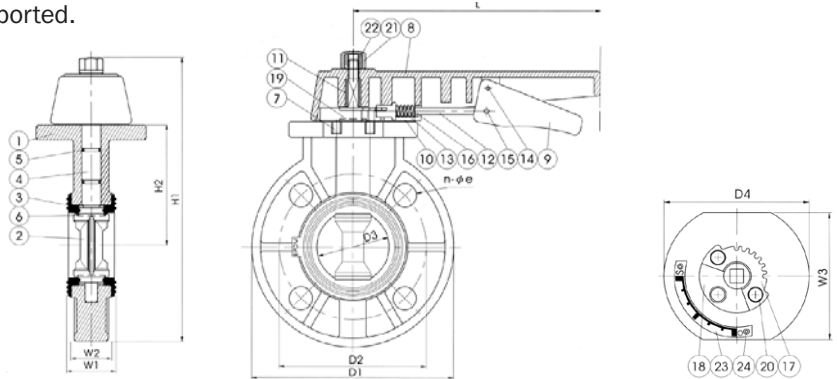

MATERIAL SPECIFICATIONS

No.	Part	Material	Qty
1	Body	PVC	1
2	Disc	PP	1
3	Seat Seal	EPDM	1
4	Stem	SS 410	1
5	O-ring	EPDM	2
6	O-ring	EPDM	2
7	Inserted Nut	SS 41	3
8	Large Handle	ABS	1
9	Small Handle	ABS	1
10	Spring Lock	ABS	1
11	Handle Insert	SS	1
12	Handle Lever	SS 304	1
13	Spring	SS 304	1
14	Spring Pin	SS 304	1
15	Spring Pin	SS 304	1
16	Washer	SS 304	1
17	Locking Plate	SS 304	1
18	Gear Seat	PP + GF	1
19	Washer	SS 304	1
20	Bolt	SS 304	3
21	Nut	PVC	1
22	Insert Nut	C3604	1
23	Level	SS 304	1
24	Rivet	SS	2

CV (GPM/((1 lbf/in²)^{1/2})

Opening Rate: 90°

SIZE	CV
2"	100.87
2 1/2"	137.82
3"	224.08
4"	409.51
5"	523.92
6"	1243.00

DIMENSIONS \ SIZE (in)

	2"	2 1/2"	3"	4"	5"	6"	8"
D1	6.44	7.22	7.80	8.93	9.98	11.12	13.38
D2	4.70	5.44	5.94	7.43	8.42	9.42	11.64
D3	2.20	2.71	3.10	4.01	5.11	6.02	7.91
D4	4.13	4.66	4.84	5.26	6.40	6.64	7.84
L	7.92	7.92	7.92	9.91	11.86	11.86	11.86
H1	9.59	10.37	10.76	12.40	15.21	15.80	18.17
H2	4.02	4.41	4.49	5.27	5.85	6.90	8.19
W1	1.67	1.85	1.85	2.23	2.57	2.88	3.41
W2	1.35	1.45	1.45	1.83	2.22	2.53	3.06
W3	3.67	3.67	3.66	3.89	4.31	3.93	4.76
n-oe	.741	.741	.741	.741	.858	.858	.858

Part Number	Description	Ctn Qty	List Price
PBFV2	2" PVC Butterfly valve	4	\$ 246.11
PBFV21/2	2 1/2" PVC Butterfly valve	4	252.11
PBFV3	3" PVC Butterfly valve	4	248.47
PBFV4	4" PVC Butterfly valve	4	283.14
PBFV5	5" PVC Butterfly valve	4	404.37
PBFV6	6" PVC Butterfly valve	4	464.61
PBFV8	8" PVC Butterfly valve	1	684.31
Replacement handles			
PBFV2 HANDLE	2" PVC valve handle	1	27.87
PBFV21/2 HANDLE	2 1/2" PVC valve handle	1	27.87
PBFV3 HANDLE	3" PVC valve handle	1	27.87
PBFV4 HANDLE	4" PVC valve handle	1	34.47
PBFV5 HANDLE	5" PVC valve handle	1	46.29
PBFV6 HANDLE	6" PVC valve handle	1	46.78
PBFV8 HANDLE	8" PVC valve handle	1	46.78



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

3.25

Flanges, Bolt Kits, Gaskets



PF Series
ISO 9002


PVC Sch 80 Van Stone Flange Features:

- Two-piece van stone socket style.
- Class 150, Schedule 80
- Improve the security and safety of connections between pipes, valves & fittings.
- Imported - Manufactured for AGI in an ISO 9002 facility.



DIMENSIONS \ SIZE (in)	2"	3"	4"	6"	8"	10"	12"
	D1	5.93	7.49	8.93	11.08	13.38	15.83
D2	4.72	5.93	7.45	9.40	11.62	14.12	16.85
D3	2.96	4.21	5.19	7.45	9.28	12.09	14.20
d	1.99	3.00	3.98	6.08	7.96	9.98	11.97
d1	2.35	3.46	4.45	6.55	8.53	10.64	12.62
d2	2.37	3.48	4.48	6.59	8.57	10.68	12.67
H	1.68	2.11	2.50	3.32	4.60	5.85	7.45
T	.78	1.01	1.09	1.25	1.40	1.64	1.64
l	1.49	1.86	2.23	2.97	3.98	4.80	6.44
n-oe	.741	.741	.741	.858	.858	.936	.975

Part Number	Description	Ctn Qty	List Price
PF2	2" Flange	60	\$ 13.23
PF21/2	2 1/2" Flange	36	21.73
PF3	3" Flange	30	21.86
PF4	4" Flange	20	29.25
PF6	6" Flange	10	47.16
PF8	8" Flange	4	76.27
PF10	10" Flange	2	101.93
PF12	12" Flange	2	120.92

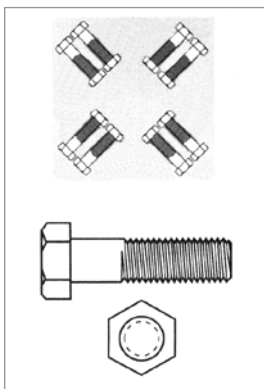

BBK Series

Bolt Kit Features:

- For use with cast iron & PVC butterfly valves. BF8200, HBFV and PBFV Series
- ASTM-A307 grade black steel bolts and A563 finished nuts.
- Washers and Gaskets NOT included- Available upon request.

Part Number	Valve Size	Bolt Size	Bolts/Kit	Ctn Qty	List Price
BBK2	2"	5/8" x 5"	4	16	\$ 22.28
BBK2.5/3	2 1/2" and 3"	5/8" x 5 1/2"	4	16	22.56
BBK4	4"	5/8" x 6"	8	8	41.49
BBK5/6	5" and 6"	3/4" x 6 1/2"	8	8	54.68
BBK8	8"	3/4" x 7"	8	8	60.96
BBK10	10"	7/8" x 7 1/2"	12	3	144.87
BBK12	12"	7/8" x 8 1/2"	12	3	164.87



GSK Series

Red Rubber Gasket Features:

- For use with butterfly valves, Sch 80 flanges
- Red rubber, 150 lbs., 1/8" full face.



Part Number	Valve Size	List Price
GSK11/2R	1 1/2"	\$ 6.45
GSK2R	2"	8.72
GSK21/2R	2 1/2"	11.39
GSK3R	3"	12.80
GSK4R	4"	13.96

Part Number	Valve Size	List Price
GSK5R	5"	\$ 16.19
GSK6R	6"	19.00
GSK8R	8"	26.13
GSK10R	10"	34.79
GSK12R	12"	56.52



Butterfly Valve Installation Kits



PBIK Series

Butterfly Valve Installation Kit Features:

- Everything needed for a quick, easy butterfly valve installation.
- Available with PVC Sch 80 or Ductile Iron butterfly valves.
- Custom kits available upon request.



PVC Butterfly Valve Installation Kit Includes:

- One PBFV Series PVC Sch 80 Butterfly valve.
- Two PF Series PVC Sch 80 Van Stone flanges.
- Two red rubber GSK gaskets.
- Bolt kit with steel nuts and bolts.
- Steel washers.

Part Number	Size	Number of Nuts/Bolts	Number of Washers	Ctn Qty	List Price
PBIK2	2" Kit	4	8	1	\$ 311.99
PBIK2 1/2	2 1/2" Kit	4	8	1	339.67
PBIK3	3" Kit	4	8	1	338.69
PBIK4	4" Kit	8	16	1	411.27
PBIK6	6" Kit	8	16	1	653.81
PBIK8	8" Kit	8	16	1	950.09



PHBFV Series

Ductile Iron Butterfly Valve Installation Kit Includes:


- One HBFV Series Ductile Iron Butterfly valve.
- Two PF Series PVC Sch 80 Van Stone flanges.
- Bolt kit with steel nuts and bolts.
- Steel washers.
- Rubber gaskets NOT included. (Extended EPDM seat on the HBFV valve acts as gasket seal with flange.)




Part Number	Size	Number of Nuts/Bolts	Number of Washers	Ctn Qty	List Price
PHBFV2NG	2" Kit	4	8	1	\$ 126.62
PHBFV2 1/2 NG	2 1/2" Kit	4	8	1	161.80
PHBFV3NG	3" Kit	4	8	1	185.84
PHBFV4NG	4" Kit	4	8	1	224.65
PHBFV6NG	6" Kit	4	8	1	339.14
PHBFV8NG	8" Kit	4	8	1 *	526.08
PHBFV10NG	10" Kit	4	8	1 *	762.76
PHBFV12NG	12" Kit	4	8	1 *	990.63

* Shipped in two cartons

Wall Hydrants - Commercial

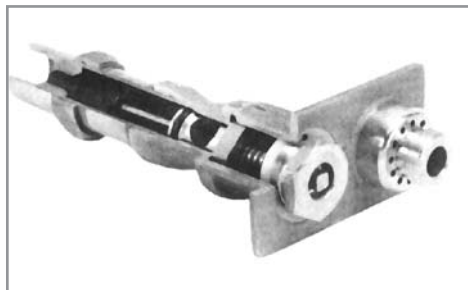

Model 6500 cutaway view.

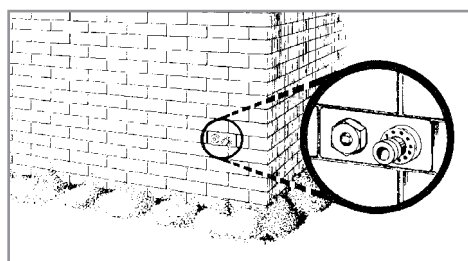

Typical Installation.

The Clayton Mark Model 6500 is a freeze proof sanitary, self-draining, through-the-wall commercial wall hydrant. The Model 6500 is engineered for use on commercial buildings such as restaurants, office buildings, shopping centers, hotels, schools, apartments, and many other types of industrial buildings.



Model 6500 Features:



- IAPMO listed.
- Vacuum Breaker/Backflow Preventer approved under ASSE Standard 1011. Patented design by Clayton Mark (Patent No. 3850190) operates at lower differential pressures than most vacuum breakers & features a self-cleaning design to help prevent clogging, 3/4" outlet.
- Simple, solderless design ensures years of trouble free operation.
- Natural brass finish blends in well with exterior finish and is more resistant than plated surfaces to weathering and normal usage.
- Positive shut-off with a plug type seal. Requires less force to operate.
- 400 Series stainless steel operating rod.
- Heavy duty brass pipe is stronger than ordinary copper tubing. Threaded & sealed joints eliminate problems associated with solder joints.
- Multiple vent holes ensure proper drainage and reduce problems associated with insect nesting.
- Custom brick cutting virtually eliminated by the unique low profile hydrant face.
- Standard hydrant can be used with or without a box. No need for dual inventories or multiple models to track.
- Simple design enables easier and more stable clamping to inner wall. On non-brick surfaces, the design will enable a more secure hold.

Application:

- Provides a year round source of water to areas of structures that are subject to freezing temperatures.
- The patented integral vacuum breaker/backflow preventer provides protection against cross-connection with the potable supply, while venting to eliminate the possibility of a vacuum. An operating key is included to operate the hydrant and is removable to help prevent unauthorized use of the hydrant and reduce vandalism. No special installation tools are required.

Materials of Construction:

- Brass All pressure-containing components (Head, Valve Body, Drive Screw, Hose Piece, Hex Face Nut, Pipe Casing).
- Stainless Steel Operating Rod
- Butyl Rubber Plunger (W/Brass Insert)
- Buna-N-Rubber O-Rings
- Silicon Rubber BFP Diaphragm
- Acetal BFP Check Spider

Specify As Follows:

Wall hydrant shall be the freeze-proof Clayton Mark Model 6500 with automatic draining capabilities and patented integral vacuum breaker/backflow preventer, 3/4" hose connection, freeze-proof water flow and self-draining functions, one-piece valve plunger, natural brass finish, stainless steel operating rod, and positive seal shut-off mechanism. Operating key to be furnished with each hydrant. Wall thickness to be ___* inches. Universal repair kits available to rebuild all moving parts subject to normal wear.


* 4" to 24" in 2" increments



Wall Hydrants - Commercial



CLAYTON MARK



Information:

- All lengths will have cartridge style plunger.

SPECIAL ORDER ONLY - ALLOW 4-6 WEEKS FOR DELIVERY







Part Number	Size/Description	Length	Ctn Qty	List Price
Commercial Wall Hydrants, Freezeproof, Sanitary and Self-Draining, without box				
CWH04	4"	10"	1	\$ 469.38
CWH06	6"	12"	1	482.40
CWH08	8"	14"	1	495.02
CWH10	10"	16"	1	512.35
CWH12	12"	18"	1	523.89
CWH16	16"	22"	1	567.12
Commercial Wall Hydrants, Multi-Temperature, without box				
W8310-4DAB	4"		1	669.96
W8310-6DAB	6"		1	698.58
W8310-8DAB	8"		1	722.83
WH Wall Clamp				
CHWC1	Adjustable Wall Clamp		1	30.53
Wall Hydrant Repair Kits				
CRK1	Repair Kit I (Minor)		1	28.38
CRK2	Repair Kit II (Major)		1	195.20

* Replacement rods are available. Please note length and description of plunger or cartridge seal. Price available upon request.

Wall Hydrants - Specifications




MODEL 6500 ROUGH-IN DIMENSIONS

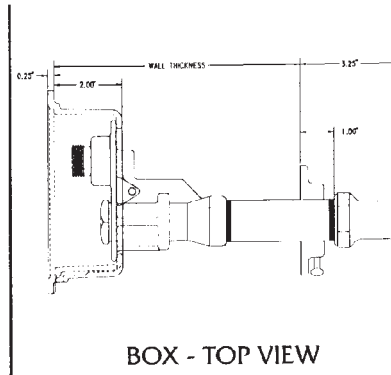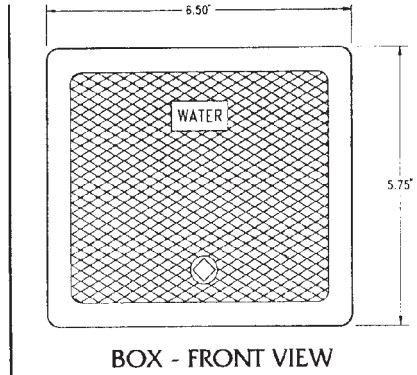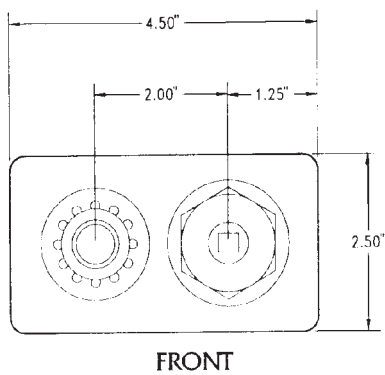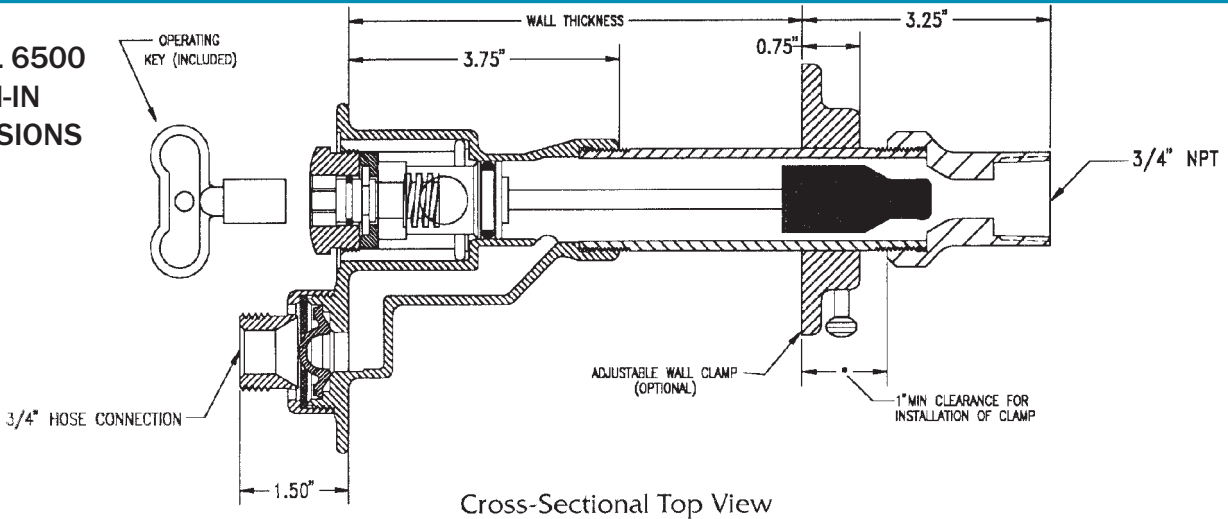

REPLACEMENT PARTS

* Items 2, 5 & 9 are included in minor repair kit CRK1
All items except 3 & 4 are included in major repair kit CRK2

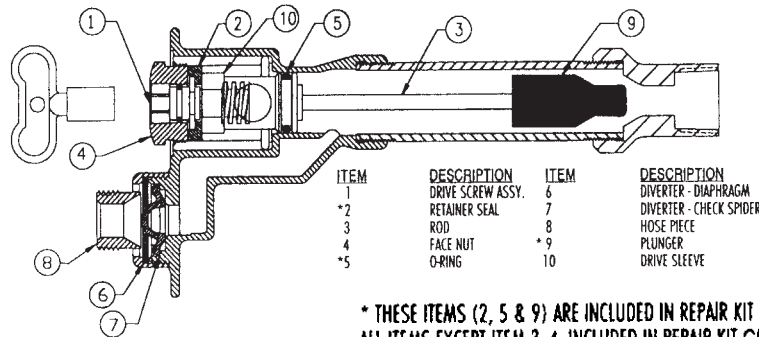

ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	DRIVE SCREW ASSY.	6	DIVERTER - DIAPHRAGM
*2	RETAINER SEAL	7	DIVERTER - CHECK SPIDER
3	ROD	8	HOSE PIECE
4	FACE NUT	*9	PLUNGER
*5	O-RING	10	DRIVE SLEEVE

* THESE ITEMS (2, 5 & 9) ARE INCLUDED IN REPAIR KIT CRK1.
ALL ITEMS EXCEPT ITEM 3, 4 INCLUDED IN REPAIR KIT CRK2.
OPERATING KEY INCLUDED IN BOTH REPAIR KITS.

Approximate Model Equivalents:

Clayton Mark	Woodford	Zurn	Josam	Smith
Model 6500	65 Series	Z-1310	71050	5609
CWH Series		Z-1315-5	71550-81	5610-H
				5611-H
Model 6500	B65 Series	Z-1300	71000	5509
CWH Series		Z-1330	7150-80	5510-H-VB
Plus Box		Z-1340		5511-H-VB
		Z-1305-5		



SECTION 4 WATER FILTRATION & DISINFECTION



PRODUCT LINE	PAGE
Automatic Flush Valve	39
Filter Cartridges	5-7
Filter Cartridges - Big Bubba	10
Filter Cartridges - Pentair	15-21
Filter Housings, Kits & Accessories	1-4
Filter Housings - Big Bubba	9
Filter Housings - Pentair	13-14
Filter Kits & Accessories - Pentair	22
Filtration Systems - Pentek	23
Harmsco™ Filter Systems	25-30
Iron Out	24
Pulsafeeder Chemical Feed Pumps	45-50
R/O & Chemical Containment Systems	11-12
Saddle Tap Valve and Kit	24
LMI Uni-Dose Electronic Metering Pumps	51-52
Vu-Flow Filters & Sand Separators	31-39
Ultraviolet Disinfection Systems	41-44



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Filter Housings & Kits



Harvard Series Housing Features:

- Manufactured from NSF listed, FDA grade 100% polypropylene (polycarbonate for clear).
- Available in slim and large diameter styles.
- 10" and 20" lengths.
- Blue and clear sumps.
- 3/4" inlet/outlets on slimline, 1" inlet/outlets on large diameter.
- All housings have a pressure relief button.
- Patented double EPDM o-ring seals on slimline assures long term seal. Single o-ring seal on large diameter.
- Maximum temperature rating to 125 °F and pressure rating to 125 psi.
- Recommended maximum operating pressure 85 psi for slim style and 90 psi for large diameter.
- Filter housings are bulk packed. Cartridges available separately.



WARNING: Prevent Freezing. Never exceed recommended maximum operating pressures. Use proper pressure reducing valves to protect filter housings from excessive pressure surges.

DO NOT over tighten fittings used to install filter housing. Over tightening will result in cracking the housing threads and will void all limited warranties. Only PTFE thread seal tape OR non-PTFE based thread seal paste approved for plastic threads should be used to seal filter housing threads - NOT BOTH.

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Ctn Qty	List Price
SLIM STYLE Housings with pressure relief for 2 1/2" OD cartridges							
HH75BSLBP	Slim	Blue	Black	3/4"	10"	12	\$ 21.58
HH75BSLBP20	Slim	Blue	Black	3/4"	20"	8	80.18
HH75CSLWP	Slim	Clear	Black	3/4"	10"	12	28.43
LARGE DIAMETER STYLE Housings with pressure relief for 4 1/2" O.D. cartridges							
HHL10BP	Lg. Diam	Blue	Black	1"	10"	6	85.36
HHL10BP20	Lg. Diam	Blue	Black	1"	20"	6	148.21
HHL10CP	Lg. Diam	Clear	Black	1"	10"	6	110.54



Filter Housing Kit Features:

- Slim and Large diameter styles.
- Complete with full size white, powder coated steel mounting bracket, stainless steel screws, sump removal wrench and extra o-ring. (2 o-rings for slim, 1 o-ring for large diameter.)
- Individually cartoned with label.
- Custom kits available. Call Customer Service for quotations.



Part Number	Style	Sump	Head	Inlet/Outlet	Length	Case Qty	List Price
HFHP75BSLBP	Slim	Blue	Black	3/4"	10"	12	\$ 32.27
HFHP75BSLBP20	Slim	Blue	Black	3/4"	20"	8	80.36
HFHP75CSLWP	Slim	Clear	Black	3/4"	10"	12	34.82
HFHPLD10BP	Large Dia	Blue	Black	1"	10"	6	112.67
HFHPLD10BP20	Large Dia	Blue	Black	1"	20"	6	178.39
HFHPLD10CP	Large Dia	Clear	Black	1"	10"	6	133.31



www.americangranby.com


FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Filter Housing Accessories



HS-BA Series



HW Series



HOR Series



HH Series



HH SUMP Series

Part Number	Fits Style	Material	Color	Ctn Qty	List Price
Mounting Brackets for Harvard Series Filter Housings					
Includes stainless steel head and wall mounting screws					
HS10BA	Slim (L)	Powder coated steel	White		\$ 9.10
HS25BA	Large Diam. (L)	Powder coated steel	White		48.94
Wrenches for Harvard Series Filter Housing sump removal					
HWSL	Slim	Polypropylene	White		2.57
HWLD	Large Diam.	Polypropylene	White		8.26
O-rings for Harvard Series Filter Housings					
HOR4	Slim	EPDM			0.67
HOR5	Large Diam.	EPDM			4.21
Replacement Heads w/ pressure relief Harvard Series Filter Housings					
HH75HEAD	Slim		Black	1	6.23
HHLHEAD	Large Diam.		Black	1	37.35
Replacement Sumps for Harvard Series Filter Housings					
HH75SUMPBL	Slim		Blue	1	13.42
HH75SUMPCL	Slim		Clear	1	15.56
HHLDSUMPBL	Large Diameter		Blue	1	44.61
HHLDSUMPBL20	Large Diameter (20")		Blue	1	91.44
HHLDSUMPCL	Large Diameter		Clear	1	68.54



Economy Filter Housings & Kits



EH Series

EH Series Economy Housing Features:

- Manufactured from NSF listed, FDA grade 100% polypropylene.
- Available in slim, standard and large diameter styles, 10" and 20" lengths.
- Opaque and clear sumps with EPDM o-ring seals.
- 3/8" - 1 1/2" inlet/outlets. VIH clear has stainless steel 3/4" FPT inserts.
- All housings have a pressure relief button.
- Rated for temperature to 125° F and pressures to 125 psi.
- Filter housings are bulk packed. Cartridges available separately.



DO NOT over tighten fittings used to install filter housing. Over tightening will result in cracking the housing threads and will void all limited warranties. Only PTFE thread seal tape OR non-PTFE based thread seal paste approved for plastic threads should be used to seal filter housing threads - NOT BOTH.

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Ctn Qty	List Price
SLIM STYLE Housings with pressure relief for 2 1/2" OD cartridges							
EH38BSLBP	Slim	Blue	Black	3/8"	10"	12	\$ 26.72
EH38CSLWP	Slim	Clear	White	3/8"	10"	12	35.52
EH50BSLBP	Slim	Blue	Black	1/2"	10"	12	24.96
EH50CSLWP	Slim	Clear	White	1/2"	10"	12	36.13
EH75BSLBP	Slim	Blue	Black	3/4"	10"	12	27.50
EH75CSLWP	Slim	Clear	White	3/4"	10"	12	36.00
Valve-in-Head SLIM STYLE Housings for 2 1/2" OD cartridges (allows by-pass during cartridge replacement)							
EH75VCP	Slim VIH	Clear	White	3/4" SS FPT	10"	12	86.07
STANDARD STYLE Housings with pressure relief for 2 1/2" OD cartridges							
EH75BP	Standard	Blue	Black	3/4"	10"	12	50.54
EH75CP	Standard	Clear	Black	3/4"	10"	12	57.87
EH75B20P	Standard	Blue	Black	3/4"	20"	12	83.98
EH75C20P	Standard	Clear	Black	3/4"	20"	12	126.59
LARGE DIAMETER STYLE Housings with pressure relief for 4 1/2" O.D. cartridges							
EHL75BP	Lg. Diam	Blue	Black	3/4"	10"	4	94.78
EHL10BP	Lg. Diam	Blue	Black	1"	10"	4	95.93
EHL10CP	Lg. Diam	Clear	Black	1"	10"	4	172.81
EHL15BP	Lg. Diam	Blue	Black	1 1/2"	10"	4	96.08
EHL75B20P	Lg. Diam	Blue	Black	3/4"	20"	4	137.60
EHL10B20P	Lg. Diam	Blue	Black	1"	20"	4	140.26
EHL15B20P	Lg. Diam	Blue	Black	1 1/2"	20"	4	139.55



EFHP Series




Filter Housing Kit Features:


- Slim, VIH, Standard and Large diameter styles.
- Complete with mounting bracket (with stainless steel screws) and sump removal wrench.
- Individually cartoned with label.
- Custom kits available. Call Customer Service for quotations.

Part Number	Style	Sump	Inlet/Outlet	Length	Bracket	Case Qty	List Price
EFHP75BSLBP	Slim	Blue	3/4"	10"	YES	6	\$ 40.53
EFHP75CSLWP	Slim	Clear	3/4"	10"	YES	6	50.65
EFHP75VCP	Slim VIH	Clear	3/4" SS	10"	YES	6	102.80
EFHP75BP	Standard	Blue	3/4"	10"	YES	4	65.78
EFHP75CP	Standard	Clear	3/4"	10"	YES	4	72.54
EFHPLD75BP	Large Dia	Blue	3/4"	10"	YES	1	152.03
EFHPLD10BP	Large Dia	Blue	1"	10"	YES	1	143.42
EFHPLD15BP	Large Dia	Blue	1 1/2"	10"	YES	1	143.42


Economy Filter Accessories



ES-BA Series



EW Series



EOR Series

Part Number	Fits Style	Material	Color	Ctn Qty	List Price
Mounting Brackets for EH Series Filter Housings					
Includes stainless steel head and wall mounting screws					
ES10BA	EH Slim (L)	Aluminum	White		\$ 6.75
ES15BA	EH Valve in Head (U)	Aluminum	--		11.30
ES20BA	EH Standard (L)	Aluminum	White		13.68
ES25BA	EH Large Diam. (L)	Aluminum	---		61.02
Wrenches for EH Series Filter Housing sump removal					
EWSL	Slim	Polypropylene	White		4.01
EWSTND	Standard	Polypropylene	White		3.86
EWLD	Large Diam.	Polypropylene	Black		9.64
O-rings for EH Series Filter Housings					
EOR4	Slim	EPDM			2.19
EOR-VIH	Slim VIH	EPDM			2.18
EOR8	Standard	EPDM			3.30
EOR5	Large Diam.	EPDM			5.87



EFRVM75



RV & Marine Water Filter Features:

- Long life exterior inline water filter effectively reduces chlorine, tastes and odors, sediment, volatile organic chemicals and inhibits bacterial growth.
- Working pressure: 20-125 psi
- Maximum flow rate: 2.5 gpm.
- Temperature range: 40-100 °F
- Ideal for RV, boats and camping.
- Uses KDF/GAC media to control microorganisms while reducing lime and scale buildup.
- Includes connector hose (3/4" MGHT x 3/4" FGHT).

Part Number	Description	Ctn Qty	List Price
EFRVM75	RV/Marine Inline Water Filter Kit (hose & cart in box)	1	\$ 49.88
FP12NK	Connector Hose	1	22.32
FP12GE	Inline GAC Cartridge	1	26.73



EIC100




Inline Ice Maker Carbon Filter Features:

- NSF listed.
- Granular activated carbon medium.
- Removes chlorine, taste and odor from water
- Ideal for refrigerator ice makers, water dispensers and coffee makers.
- Furnished with or without 1/4" fittings.

Part Number	OD	Length	Fits Pipes	Pipe Ftgs	Ctn Qty	List Price
EIC100	2"	10"	1/4" FPT	NO	25	\$ 14.26
EIC100JG	2"	10"	1/4" plastic or copper tubing	1/4" John Guest	25	19.74



Economy Filter Cartridges

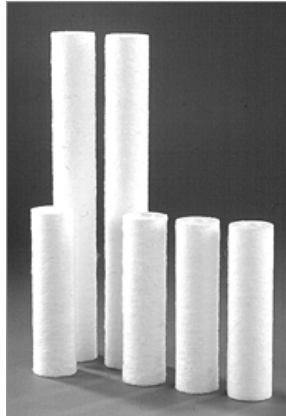

EFP Series



ANSI / NSF
STANDARD 42
COMPONENT
CERTIFIED



EFP Series Melt Blown Polypropylene Filter Cartridge Features:

- Melt blown polypropylene for purity and chemical compatibility.
- Ideal for aggressive chemicals and general sediment filtration when depth filtration is required.
- Max Flow rate 2-8 gpm based on micron.
- Contains no binders, agents, solvents, antistatic materials or wetting agents.
- Meets FDA requirements for food and beverage contact.
- No leachables or extractables to contaminate.
- No surface binders to reduce flow & increase change-out frequency.
- Rated for temperatures up to 140° F
- Shrink wrapped for purity.

Part Number	Micron	O.D.	Length	Ctn Qty	List Price
MELT BLOWN POLYPROPYLENE Filter cartridges for SLIM and STANDARD style housings					
EFP1	1	2 1/2"	9 7/8"	48	\$ 5.30
EFP5	5	2 1/2"	9 7/8"	48	4.32
EFP20	20	2 1/2"	9 7/8"	48	4.32
EFP50	50	2 1/2"	9 7/8"	48	4.32
MELT BLOWN POLYPROPYLENE Filter cartridges for LARGE DIAMETER style housings					
EFPBB1	1	4 1/2"	9 3/4"	24	32.72
EFPBB5	5	4 1/2"	9 3/4"	24	27.60
EFPBB20	20	4 1/2"	9 3/4"	24	27.60
EFPBB50	50	4 1/2"	9 3/4"	24	27.60
EFPBB1-20	1	4 1/2"	20"	12	72.08
EFPBB5-20	5	4 1/2"	20"	12	50.37
EFPBB20-20	20	4 1/2"	20"	12	53.95
EFPBB50-20	50	4 1/2"	20"	12	50.28



EFP_G Series

EFP-G Series Grooved Melt Blown Polypropylene Filter Cartridge Features:

- Grooved cartridges for increased surface area and greater dirt handling capacity.
- Melt blown polypropylene.
- Maximum temperatures 140° F
- Maximum pressure: 40 psid
- Recommended change out 30 psid.
- Maximum flow rate 2-8 gpm based on micron.
- Shrink wrapped for purity.
- Fits slim and standard style housings.



Part Number	Micron	OD	Length	Ctn Qty	List Price
EFP5G	5	2 1/2"	9 3/4"	48	\$ 6.02
EFP20G	20	2 1/2"	9 3/4"	48	6.02
EFP1G-20	1	2 1/2"	20"	24	18.03
EFP5G-20	5	2 1/2"	20"	24	12.15




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Economy Filter Cartridges

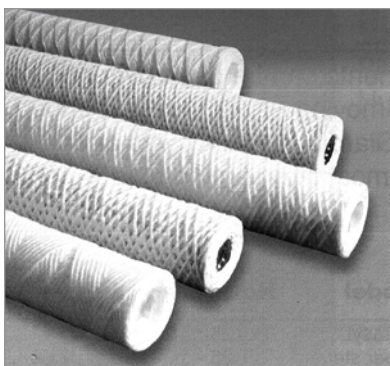


EFWP Series

EFW Series Wound Filter Cartridge Features:

- Excellent depth filtration.
- FDA grade polypropylene fibers.
- Polypropylene center tubes.
- For temperatures to 140 F.
- Individually wrapped.



Part Number	Medium	Type of Construct	Micron	O.D.	Length	Ctn Qty	List Price
WOUND POLYPROPYLENE Filter cartridges for SLIM and STANDARD style housings							
EFWP1	Polypropylene	Wound	1	2 1/2"	9 7/8"	30	\$ 9.34
EFWP5	Polypropylene	Wound	5	2 1/2"	9 7/8"	30	9.06
EFWP10	Polypropylene	Wound	10	2 1/2"	9 7/8"	30	9.58
EFWP20	Polypropylene	Wound	20	2 1/2"	9 7/8"	30	9.06
EFWP30	Polypropylene	Wound	30	2 1/2"	9 7/8"	30	9.41
EFWP50	Polypropylene	Wound	50	2 1/2"	9 7/8"	30	8.91
EFWP1-20	Polypropylene	Wound	1	2 1/2"	20"	15	18.80
EFWP5-20	Polypropylene	Wound	5	2 1/2"	20"	15	18.22
EFWP10-20	Polypropylene	Wound	10	2 1/2"	20"	15	19.13
EFWP20-20	Polypropylene	Wound	20	2 1/2"	20"	15	11.79
EFWP30-20	Polypropylene	Wound	30	2 1/2"	20"	15	18.80
EFWP50-20	Polypropylene	Wound	50	2 1/2"	20"	15	11.79
WOUND POLYPROPYLENE Filter cartridges for LARGE DIAMETER style housings							
EFWPBB1	Polypropylene	Wound	1	4 1/2"	9 3/4"	8	\$ 31.60
EFWPBB5	Polypropylene	Wound	5	4 1/2"	9 3/4"	8	30.94
EFWPBB20	Polypropylene	Wound	20	4 1/2"	9 3/4"	8	30.70
EFWPBB50	Polypropylene	Wound	50	4 1/2"	9 3/4"	8	29.98
EFWPBB1-20	Polypropylene	Wound	1	4 1/2"	20"	4	63.52
EFWPBB5-20	Polypropylene	Wound	5	4 1/2"	20"	4	61.23
EFWPBB20-20	Polypropylene	Wound	20	4 1/2"	20"	4	61.80
EFWPBB50-20	Polypropylene	Wound	50	4 1/2"	20"	4	59.73



EFGAC Series

EFGAC Series Granulated Activated Carbon Filter Cartridge Features:


- For removal of taste, odor, organic chemicals and chlorine.
- 5 micron

Part Number	Fits Housing Style	O.D.	Length	Ctn Qty	List Price
EFGAC10	Slim, Standard	2 1/2"	9 3/4"	24	\$ 15.95
EFGAC20	Slim, Standard	2 1/2"	20"	24	35.99
EFGACBB	Large Diameter	4 1/2"	9 3/4"	8	48.49
EFGACBB20	Large Diameter	4 1/2"	20"	4	81.09





Economy Filter Cartridges

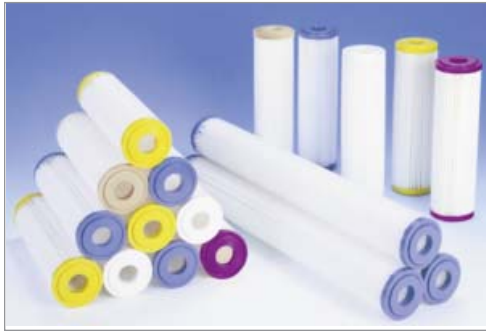

EFSP Series



EFSP Series Pleated Filter Cartridge Features:

- Pleated cartridges provide increased surface area, lower pressure drop and longer service life than other cartridges.
- Cellulose-free, 100% synthetic media is washable and reusable, 5 micron and up, to reduce filter costs.
- Contains no binders or additives to breakdown which may cause foaming and filter degradation.
- Color coded end caps 2 3/4" OD.
- Individually wrapped for purity.

Specifications:

Maximum temperature	140° F
Minimum temperature	40° F
Maximum pressure	40 psid
Recommended change out	25 psid
Filter Media (1 & 5 micron)	Polypropylene
Filter Media (20 & 50 micron)	Polyester
Material - center tube	Polypropylene
Material - end caps	Molded Polyurethane
ID	1 1/6"

Part Number	Micron	End Cap Color	O.D.	Length	Ctn Qty	List Price
PLEATED Filter cartridges for STANDARD style housings						
EFSP1	1	Tan	2 3/4"	9 3/4"	50	\$ 12.02
EFSP5	5	White	2 3/4"	9 3/4"	50	10.92
EFSP20	20	Blue	2 3/4"	9 3/4"	50	8.74
EFSP50	50	Yellow	2 3/4"	9 3/4"	50	8.74
EFSP1-20	1	Tan	2 3/4"	20"	25	31.39
EFSP5-20	5	White	2 3/4"	20"	25	21.87
EFSP20-20	20	Blue	2 3/4"	20"	25	19.69
EFSP50-20	50	Yellow	2 3/4"	20"	25	19.69
PLEATED Filter cartridges for LARGE DIAMETER style housings						
EFSPBB1	1	Blue	4 1/2"	9 3/4"	18	37.11
EFSPBB5	5	Blue	4 1/2"	9 3/4"	18	28.43
EFSPBB20	20	Blue	4 1/2"	9 3/4"	18	24.06
EFSPBB50	50	Blue	4 1/2"	9 3/4"	18	24.06
EFSPBB1-20	1	Blue	4 1/2"	20"	9	63.41
EFSPBB5-20	5	Blue	4 1/2"	20"	9	54.67
EFSPBB20-20	20	Blue	4 1/2"	20"	9	43.75
EFSPBB50-20	50	Blue	4 1/2"	20"	9	43.75





Big-Bubba Filter Housings



Big-Bubba® High Flow Non-Metallic Filter Housing Features:

Big-Bubba® high flow filters are bigger and better than other non-metallic filter housings because of their economical plastic construction, while pressure rating is nearly equal to stainless steel.

Features:

- Made of glass-reinforced polypropylene for greater strength and chemical resistance.
- Will not dent, rust, chip or corrode.
- Filters accept a single cartridge for convenience.
- Swing-bolt lid closure is easy, safe and secure.
- Pressure release for safety.
- Cartridge “lock” adapter to hold cartridge in place.
- Double o-rings on cartridges for superior sealing.
- Two outlets on opposite sides to allow more flexibility with piping configurations.

Typical Applications:

- Whole house filtration for chlorine, taste, odor and sediment reduction.
- Industrial applications for chemical compatability.
- Pre-filtration for reverse osmosis.
- Community water systems for cyst reduction.
- Sea water filtration for non corrosion.

Specifications:

Materials	
Body, cartridge end caps	Glass reinforced PP
Swing Bolts	304SS
O-Ring (lid)	EPDM
Lid closure	
	Swing Bolt
Pipe Fittings (2 inlet, 1 outlet)	2" slip
Overall height	40"
Width(vessel OD)	12"
Maximum Flow Rate	150 gpm *
Maximum temperature (housing)	175° F
Maximum working pressure	125 psi
Burst test	300 psi
Cycle test (0 to 150 psi)	100,000

* Dependent on micron rating (see pressure drop chart)

Parallel Installation



Parallel installations are recommended to achieve high flow rates, by installing filters on a common manifold, feeding all filters installed in a row.

Series Installation



Series installations are recommended for applications such as surface water filtration, where cartridges having different micron ratings are used.



Certified to ANSI-NSF 61



Part No.	Description	Max Flow Rate	Pipe Fitting	List Price
BBH150	Big-Bubba Housing	150 gpm	2" slip	\$ 2,239.34



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Big Bubba Filter Cartridges



BBC-P Series



BBC-D Series



BBC-AC Series

Big-Bubba® High Flow Filter Cartridge Features:

Replacement cartridges for Big-Bubba filters, all with double o-ring seals for superior performance. Cartridges are easy to install, service and replace.

Pleated:

- Pleated cartridges are recommended for typical water filtration applications to remove sediment, hard solids and when high efficiency filtration is required. Available in a wide range of micron ratings, including one micron absolute for surface water filtration to reduce Giardia Cycts and Cryptosporidium.

Depth:

- Select depth cartridges to remove sediment, gelatinous substances and when chemical compatibility is an issue. Big-Bubba melt blown depth cartridges are 100% polypropylene with EPDM o-rings.

Activated Carbon Cartridges:


- Ideal for whole house filtration and other applications to reduce chlorine, tastes, odors and sediment from water. Rated at 5 micron.

Specifications:

	PLEATED	DEPTH
Media	PP	PP
End Caps	PP & FG	PP & FG
Center Tubes	PP	PP
Maximum Flow Rate*	150 gpm	100 gpm
Maximum temperature	175° F	175° F
Maximum Chg pressure (psi)	30	40
Chemical Resistance	Excellent	Excellent
Length (media)	26 1/4"	26 1/4"
O-rings (dual)	EPDM	EPDM

* Flow rates based on each specific application, micron rating, solids content and other factors. End user should consider these factors when selecting the filter housing (or housings) needed for their particular requirement.

PLEATED Cartridge Pressure drop

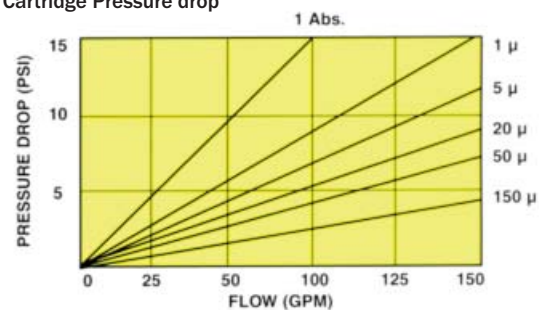

Part Number	Micron	Media Type	Seals	Ctn Qty	List Price
PLEATED					
BBC-150-P1A	1 absolute	Polypropylene 5 ply	Double O-rings	1	\$ 578.66
BBC-150-P1	1	Polypropylene	Double O-rings	1	549.60
BBC-150-P5	5	Polypropylene	Double O-rings	1	528.92
BBC-150-P20	20	Polypropylene	Double O-rings	1	536.61
BBC-150-P50	50	Polypropylene	Double O-rings	1	450.25
DEPTH					
BBC-150-D1	1	Polypropylene	Double O-rings	1	242.96
BBC-150-D5	5	Polypropylene	Double O-rings	1	200.40
BBC-150-D20	20	Polypropylene	Double O-rings	1	150.68
BBC-150-D50	50	Polypropylene	Double O-rings	1	209.45
ACTIVATED CARBON					
BBC-150-AC	5 nominal	Activated carbon	Double O-rings	1	851.26



Residential Reverse Osmosis Systems



HROK4



HROK5



HARVARD Residential Reverse Osmosis System Features:



- Pre-assembled, easy to install 4 or 5 stage RO system.
- Complete with all installation accessories and instructions.
- High rejection, thin film membrane up to 98% efficient with 50 gal/day (4 stage) or 75 gal/day (5 stage) capacity. (Note: Feed water requirements below)
- NSF Standard 58 listed, CE certified, polypropylene tank rated to 100 psi.
- All fittings, tubing, housings, valves, cartridges and membranes are NSF listed or made from NSF listed materials.
- Automatic shut-off valve made from NSF listed materials.
- Lead free, long reach chrome faucet included. Meets California AB1953 requirements.
- Cartridges, valves, fittings, sump wrench, white mounting bracket and complete installation instructions included.

Feed Water Requirements:

- Maximum TDS: 2,000 ppm
- Maximum Iron: 0.3 ppm
- Maximum hardness: 12 gpg
- Temperature: 45-100 °F
- Maximum hydrogen sulfate: 0
- Maximum manganese: 0.05 ppm
- Pressure: 40-85 psi (min/max)
- pH: 4-10

The Benefits (nominal ion rejection characteristics)*

Aluminum	96-98%	Manganese	96-98%
Ammonium	80-90%	Mercury	94-97%
Borate	30-50%	Nickel	96-98%
Boron	50-70%	Nitrate	90-95%
Bromide	90-95%	Orthophosphate	96-98%
Cadmium	93-97%	Phosphate	95-98%
Calcium	93-98%	Polyphosphate	96-98%
Chloride	92-95%	Potassium	92-96%
Chromate	85-95%	Radioactivity	93-97%
Copper	96-98%	Silica	80-90%
Cyanide	85-95%	Silicate	92-95%
Fluoride	92-95%	Silver	93-96%
Hardnes Ca & Mg	93-97%	Sodium	92-98%
Iron	96-98%	Sulfate	96-98%
Lead	95-98%	Thiosulfate	96-98%
Magnesium	93-98%	Zinc	96-98%

* The above percent rejection is for reference only. Actual rejection will depend heavily on the exact chemistry, temperature, pressure & TDS content of the feed water.

HROK Systems Include:

- NSF listed John Guest style quick connect fittings.
- Filter housings made from NSF listed materials.
- NSF Standard 58, CE listed polypropylene tank. (10" diam x 15" high)
- 5 micron sediment pre-filter cartridge.
- Activated GAC granular carbon cartridge (5 stage)
- Activated carbon block cartridge.
- NSF listed Dow/Filmtec thin film membrane. 50 gpd (4 stage) 75 gpd (5 stage).
- Inline post carbon polishing cartridge.
- Automatic shutoff valve made with NSF materials.
- Long reach, lead free chrome faucet, meets California AB1953.
- Sump wrench, tubing, service valve, check valve, ball valves, flow restrictor included.
- Complete installation instructions.
- 5 stage with booster pump for sink water pressure lower than 40 psi.
- Booster pump rated to 125 psi with 110V/60 Hz, 24VDC power.

Note: For cold water use only. Do not install on hot water line. To insure that the membrane is functioning properly, the product water must be tested regularly.

Part No.	Description	List Price
HROK4	4 stage RO system, 50 gpd	\$ 391.61
HROK5	5 stage RO system, 75 gpd	446.61
HROK5BP	5 stage RO system, 75 gpd w/ booster pump	610.54
HROK4MEM50	Dow/Filmtec TFC membrane 50 gpd	97.21
HROK5MEM75	Dow/Filmtec TFC membrane 75 gpd	147.50
HROKTANK32	3.2 gal plastic tank, NSF58/CE	100.04
HROKASV	Auto shutoff valve	10.19




In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com


FALL 2016

4.11


Economy Drinking Water Systems



DWS2



DWS2M



DWS3M

Economy Drinking Water System Features:

- Pre-assembled, easy to install.
- Complete with all installation accessories and instructions.
- Carbon and sediment filter cartridges sold separately.
- Select the appropriate carbon cartridge to reduce taste and odor, chlorine, giardia, cryptosporidium, VOC's, lead and mercury.

DWS Series Includes:

- NSF listed housings
- NSF listed John Guest fittings.
- NSF listed tubing.
- Lead free, long reach chrome faucets. Meets State of California requirements.
- WQA validated, 1800 gallon, patented automatic shut-off valve made from NSF listed materials. (DWS-M Series only)
- White aluminum bracket with stainless steel mounting screws.
- Saddle valve.
- Carbon filter cartridges **NOT** included.



Part No.	Description	List Price
DWS2	2 Stage system (no Auto shut-off)	\$ 183.68
DWS2M	2 Stage system w/ Auto shut-off	238.38
DWS3M	3 Stage system w/ Auto shut-off	298.58

Available Carbon Filter Cartridges
See page 4.13-14 for description and list prices.



Series	PFC	PFGAC	PFCEP	PFCC	PFCBC	PFCBR2
Sediment	5 micron	N/A	5 micron	N/A	1 micron	0.5 micron
Taste & Odor	Yes	Yes	Yes	Yes	Yes	Yes
Chlorine	Yes	Yes	Yes	Yes	Yes	Yes
Cyst Reduction <small>Giardia & Cryptosporidium</small>	No	No	No	No	Yes	Yes
VOC Reduction	No	No	No	Yes	Yes	Yes
Lead & Mercury	No	No	No	No	No	Yes



Filter Housings

Styles:

- Standard
- Slim Line™
- Valve-in-Head
- High Temperature
- Big Blue®

Materials:

- Opaque - Reinforced Polypropylene
- Clear - FDA Styrene-Acrylonitrile (SAN)

Applications:

- Residential/Whole house, Commercial/Industrial, Institutional, OEM



ISO 9001



DO NOT over tighten fittings used to install filter housing. Over tightening will result in cracking the housing threads and will void all limited warranties. Only PTFE thread seal tape OR non-PTFE based thread seal paste approved for plastic threads should be used to seal filter housing threads - NOT BOTH.



PFH75B



PFH75C

Standard Housing Features:

- Ideal for a wide range of residential, commercial and industrial applications.
- 3/4" NPT inlet/outlet.
- Available in 10" and 20" lengths.
- Equipped with pressure relief button on the inlet side of the head.
- NPsuffix - no pressure relief button.
- Available with either clear or opaque sump.
- Maximum operating pressure 125 PSI @ 125° F

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Width	Ctn Qty	List Price
PFH75B	Standard	Blue	Black	3/4" NPT	12 1/4"	5 1/8"	12	\$ 55.41
PFH75C	Standard	Clear	Black	3/4" NPT	12 1/4"	5 1/8"	12	76.71
PFH75B20	Standard	Blue	Black	3/4" NPT	22 3/8"	5 1/8"	8	100.22



PFH38SLC5



PFH38SLC

Slim Line™ Housing Features:

- Ideal for a wide range of residential, commercial and industrial applications.
- 3/8" NPT inlet/outlet.
- Available in 5" and 10" lengths.
- Equipped with pressure relief button on the inlet side of the head.
- Available with either clear or opaque sump.
- Maximum operating pressure 125 PSI @ 125° F

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Width	Ctn Qty	List Price
PFH38SLB5	Slimline	Blue	Black	3/8" NPT	7"	4 3/8"	12	\$ 43.44
PFH38SLC5	Slimline	Clear	Blue	3/8" NPT	7"	4 3/8"	12	66.10
PFH38SLB	Slimline	Blue	Black	3/8" NPT	11 3/4"	4 3/8"	12	31.26
PFH38SLC	Slimline	Clear	Blue	3/8" NPT	11 3/4"	4 3/8"	12	46.88



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Filter Housings



DO NOT over tighten fittings used to install filter housing. Over tightening will result in cracking the housing threads and will void all limited warranties. Only PTFE thread seal tape OR non-PTFE based thread seal paste approved for plastic threads should be used to seal filter housing threads - NOT BOTH.



ISO 9001



PFH75VB20

Valve-in-Head Housing Features:

- Valve-in-Head (VIH) feature closed both the inlet and outlet ports simultaneously with a half turn of the handle.
- Makes cartridge change outs quick and easy.
- Available in 5", 10" and 20" lengths.
- Can be equipped with an optional pressure relief button on the inlet side of the head.
- Available with either clear or opaque sump.
- Maximum operating pressure 125 PSI @ 125° F

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Width	Ctn Qty	List Price
PFH75VB	VIH	Blue	Black w/ VIH	3/4" NPT	12 1/2"	5 1/8"	12	\$ 100.15
PFH75VC	VIH	Clear	Blue w/ VIH	3/4" NPT	12 1/2"	5 1/8"	12	107.80
PFH75VB20	VIH	Blue	Black w/ VIH	3/4" NPT	22 3/8"	5 1/8"	8	144.45



PFH75HR

High Temperature Housing Features:

- Low cost alternative to stainless and carbon steel housings.
- Durable glass reinforced nylon construction.
- Available with 1/2" and 3/4" NPT inlet/outlet
- Maximum temperature rating of 160° F.
- Maximum operating pressure 125 PSI.

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Width	Ctn Qty	List Price
PFH75HR	High Temp	Black	Black	3/4" NPT	12 1/8"	5 1/8"	12	\$ 281.39



Big Blue

Big Blue® Large Diameter Housing Features:

- Large capacity housing designed for whole house and high-flow applications.
- Available with 3/4", 1" or 1 1/2" NPT inlet/outlet.
- Available in 10" and 20" lengths.
- Equipped with a pressure relief button on the inlet side of the head.
- Accepts large capacity 4 1/2" diameter cartridges.
- Maximum operating pressure 100PSI @ 100° F
- PFHD10 and PFHD15 packed in white box with a spanner wrench.
- Bulk packed without spanner wrench

Part No.	Style	Sump	Head	Inlet/Outlet	Length	Width	Ctn Qty	List Price
CPFHD75	Big Blue®	Blue	Black	3/4" NPT	13 1/8"	7 1/4"	6	\$ 88.84
CPFHD75BB	Big Blue®	Blue	Black	3/4" NPT	23 3/8"	7 1/4"	4	125.58
CPFHD10	Big Blue®	Blue	Black	1" NPT	13 1/8"	7 1/4"	6	87.16
PFHD10	Big Blue®	Blue	Black	1" NPT	13 1/8"	7 1/4"	1	119.31
PFHD10HFP20	Big Blue®	Blue	Black	1" NPT	23 3/8"	7 1/4"	4	152.51
CPFHD15	Big Blue®	Blue	Black	1 1/2" NPT	13 5/8"	7 1/4"	6	95.36
PFHD15	Big Blue®	Blue	Black	1 1/2" NPT	13 5/8"	7 1/4"	4	116.67



Filter Cartridges

Cartridge Selection Guide



ISO 9001

SEDIMENT



Series	PFWP	PFS	PFR	PFP	PFPD
Micron Rating	5, 25, 50	20	30, 50	1, 5, 25	1, 5, 25
Avail Lengths	10"	10" & 20"	10"	10" & 20"	10" & 20"
Construction Style	String Wound	Pleated	Pleated	Spun	Therm Bonded
Medium	Polypropylene	Cellulose	Polyester	Polypropylene	Polypropylene
Filtration Style	Depth	Surface	Surface	Depth	Depth
Applications	Chlorinated & Non-Chlorinated	Chlorinated	Chlorinated & Non-Chlorinated	Chlorinated & Non-Chlorinated	Chlorinated & Non-Chlorinated
Avail for Big Blue	Yes	Yes	Yes	No	No

TASTE/ODOR & SEDIMENT



Series	PFC	PFGAC	PFCEP	PFCBC	PFCBR2
Sediment	5 micron	N/A	5 micron	0.5 micron	0.5 micron
Taste & Odor	Yes	Yes	Yes	Yes	Yes
Chlorine	Yes	Yes	Yes	Yes	Yes
Cyst Reduction <i>Giardia & Cryptosporidium</i>	No	No	No	Yes	Yes
VOC Reduction	No	No	No	Yes	Yes
Lead & Mercury	No	No	No	No	Yes
Avail for Big Blue	No	Yes	Yes	Yes	No
Est Filter Life	6 mo.	12 mo.	12 mo.	12 mo.	12 mo.



www.americangranby.com

FALL 2016


In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Filter Cartridges



Sediment Cartridges:

- String wound
- Pleated cellulose
- Pleated polyester
- Spun polypropylene
- Thermally Bonded polypropylene



ISO 9001

String Wound Cartridges

PFWP & PFCW Series String Wound Polypropylene Cartridges

- Ideal for fine sediment reduction, including sand, silt, scale and rust.
- These cord wound cartridges are compatible with most acids, alkalies, corrosive fluids & gases.
- Precise winding pattern ensures high efficiency rate and high dirt loading capacity.
- Core material: FDA Polypropylene
- Max temperature: 180° F
- General purpose filtration.

PFWP-BB Series String Wound Polypropylene Cartridges

- Constructed of fibrous polypropylene over polypropylene core.
- Note: An antistatic agent has been used in the processing of the fibrous polypropylene and may cause some foaming in water.

PFWPX-BB String Wound Fibrillated Polypropylene Cartridges

- Constructed of fibrillated polypropylene on a polypropylene core.
- For use when pressures require minimization of exactables and/or fiber migration.



PFWP
String
Wound

PFWP-BB
String
Wound

PFWPX-BB
Fibrillated

Part No.	Medium	Type of Construction	Micron Opening	GPM	Length	Ctn Qty	List Price
Standard Housing 2 3/8" diameter							
PFWP1	Polypropylene	Wound	1	5	9-7/8"	30	\$ 5.46
PFWP5	Polypropylene	Wound	5	5	9-7/8"	30	5.46
PFWP10	Polypropylene	Wound	10	5	9-7/8"	30	5.46
PFWP20	Polypropylene	Wound	20	5	9-7/8"	30	5.46
PFWP25	Polypropylene	Wound	25	5	9 7/8"	30	5.46
PFWP30	Polypropylene	Wound	30	5	9-7/8"	30	5.46
PFWP50	Polypropylene	Wound	50	5	9-7/8"	30	5.46
PFCWMF	Polypropylene	Wound	med. fine	10	9 7/8"	24	9.14
PFCW50	Polypropylene	Wound	50	10	9-7/8"	24	11.05
PFWP1-20	Polypropylene	Wound	1	5	20"	30	11.98
PFWP5-20	Polypropylene	Wound	5	5	20"	30	11.10
PFWP10-20	Polypropylene	Wound	10	5	20"	30	11.10
PFWP20-20	Polypropylene	Wound	20	5	20"	30	11.10
Large Diameter Housing 4 1/2" diameter							
PFWP.5BB97P	Polypropylene	Wound	0.5	5	9-7/8"	9	23.04
PFWP1BB97P	Polypropylene	Wound	1	5	9-7/8"	9	23.04
PFWP5BB97P	Polypropylene	Wound	5	5	9-7/8"	9	23.04
PFWP10BB97P	Polypropylene	Wound	10	5	9-7/8"	9	23.04
PFWP20BB97P	Polypropylene	Wound	20	5	9-7/8"	9	23.04
PFWP30BB97P	Polypropylene	Wound	30	5	9-7/8"	9	23.04
PFWP50BB97P	Polypropylene	Wound	50	5	9-7/8"	9	23.04
PFWP.5BB20P	Polypropylene	Wound	0.5	5	20"	9	40.32
PFWP1BB20P	Polypropylene	Wound	1	5	20"	9	40.32
PFWP5BB20P	Polypropylene	Wound	5	5	20"	9	37.32
PFWP10BB20P	Polypropylene	Wound	10	5	20"	9	37.32
PFWP20BB20P	Polypropylene	Wound	20	5	20"	9	37.32
PFWP25BB20P	Polypropylene	Wound	25	5	20"	9	37.32
PFWP50BB20P	Polypropylene	Wound	50	5	20"	9	37.32
PFWP60BB20P	Polypropylene	Wound	60	5	20"	9	38.27
PFWPX5BB97P	Fibrillated Polypropylene	Wound	5	10	9-7/8"	8	53.69
PFWPX10BB97P	Fibrillated Polypropylene	Wound	10	15	9-7/8"	8	52.91
PFWPX25BB97P	Fibrillated Polypropylene	Wound	25	20	9-7/8"	8	56.96
PFWPX50BB97P	Fibrillated Polypropylene	Wound	50	30	9-7/8"	8	51.41



Filter Cartridges



PFS

PFS Series Pleated Cellulose Cartridge

- Used for general water filtration purposes.
- This filter is comprised of four square feet of cellulose, providing maximum surface area and strength to prolong cartridge life.
- End caps fused to body assure an integral sealing area and prevent by-pass.
- Nominal 20 micron rating.

ISO 9001



Part No.	Medium	Type of Construct	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFS1	Cellulose	Pleated	20	12	Standard	9-3/4"	24	\$ 9.40
PFS1-20	Cellulose	Pleated	20	15	Standard	20"	14	23.55
PFS1BB	Cellulose	Pleated	20	10	Big Blue	9-3/4"	8	30.14
PFS1-20BB	Cellulose	Pleated	20	12	Big Blue	20"	6	52.82



PFR

PFR Series Pleated Polyester Cartridges

- Excellent for water well, institutional and light industrial applications.
- Four square feet of media on standard and 20 square feet of media on BB
- Pleated polyester fabric filter can be washed and reused several times. †Reuse is not recommended in potable water applications.
- Synthetic construction will not support bacteria growth.
- Available with nominal 30 and 50 micron ratings.

Part No.	Medium	Type of Construction	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFR30-478	Polyester	Pleated	30	5	Compact	4-7/8	24	\$ 19.45
PFR30	Polyester	Pleated	30	12	Standard	9-3/4"	24	24.90
PFR50	Polyester	Pleated	50	12	Standard	9-3/4"	24	25.10
PFR30BB	Polyester	Pleated	30	25	Big Blue	9 3/4"	8	38.89
PFR50BB	Polyester	Pleated	50	25	Big Blue	9 3/4"	8	36.74



PFCP

PFCP Series Pleated Cellulose Polyester Cartridges

- 6 sq. feet of media on standard and 16 sq.ft. on BB provide additional surface area and allow increased dirt holding capacity and low pressure drop
- Ideal for high flow applications.
- Cartridges are encapsulated in polyester outer sheath for added support.

Part No.	Medium	Type of Construction	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFCP1	Cellulose Polyester	Pleated	1	15	Standard	9-3/4"	24	\$ 15.93
PFCP5	Cellulose Polyester	Pleated	5	15	Standard	9-3/4"	24	14.84
PFCP20	Cellulose Polyester	Pleated	20	15	Standard	9-3/4"	24	14.54
PFCP5BB	Cellulose/Poly Blend	Pleated	5	30	Big Blue	9-3/4	8	34.68



Filter Cartridges



PFP Series Spun Polypropylene Fiber Cartridges

- Excellent bacteria and chemical resistance.
- Manufactured from pure 100% polypropylene.
- Fibers are carefully spun to form a cartridge w/ variable density. The density increases closer to core.
- Available in three different lengths and micron ratings



ISO 9001



PFP

Part No.	Medium	Type of Construct	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFP5-478	Polypropylene	Spun	5	5	Compact	4-7/8"	24	\$ 8.06
PFP1	Polypropylene	Spun	1	10	Standard	9-7/8"	24	10.77
PFP5	Polypropylene	Spun	5	10	Standard	9-7/8"	24	9.41
PFP25	Polypropylene	Spun	25	10	Standard	9-7/8"	24	9.41
PFP1-20	Polypropylene	Spun	1	20	Standard	20"	20	22.46
PFP5-20	Polypropylene	Spun	5	20	Standard	20"	20	17.89
PFP25-20	Polypropylene	Spun	25	20	Standard	20"	20	18.33



PFDGD Spun Polypropylene Dual Gradient Cartridge

- Dual gradient filter included pre and post filtration reduce large and fine particles to enhance cartridge performance.
- Eliminates need for multiple housing step-down systems
- Three times the dirt holding capacity

Part No.	Medium	Type of Construct	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFDGD2501-10	Polypropylene	Spun	Pre 25/Post 1	10	Big Blue	10"	8	\$ 31.45
PFDGD2501-20	Polypropylene	Spun	Pre 25/Post 1	20	Big Blue	20"	6	57.67
PFDGD5005-10	Polypropylene	Spun	Pre 50/Post 5	10	Big Blue	10"	8	30.21
PFDGD5005-20	Polypropylene	Spun	Pre 50/Post 5	20	Big Blue	20"	6	55.87
PFDGD7525-10	Polypropylene	Spun	Pre 75/Post 25	10	Big Blue	10"	8	30.00
PFDGD7525-20	Polypropylene	Spun	Pre 75/Post 25	20	Big Blue	20"	6	55.11



PFPD

PFPD Series Thermally Bonded Polypropylene Cartridge

- Manufactured from pure 100% polypropylene.
- 98% efficient, more efficient than resin bonded cartridges.
- Thermal bonded micro-fiber construction.
- Withstands high temperature and pressure differentials.
- No fiber release, brittleness or growth/shrinkage due to climate conditions.
- Available in a wide range of micron ratings and lengths.

Part No.	Medium	Type of Constructions	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFPD-10	Polypropylene	Therm Bonded	10	10	Standard	9-7/8"	24	\$ 13.55
PFPD-5	Polypropylene	Therm Bonded	5	10	Standard	9-7/8"	24	14.23
PFPD-25	Polypropylene	Therm Bonded	25	10	Standard	9-7/8"	24	12.97



Filter Cartridges

Taste/Odor/Sediment Cartridges:

- Carbon Impregnated
- Granular Activated Carbon (GAC)
- Carbon Block



ISO 9001



PFC1

PFC Series Carbon Impregnated Cellulose Cartridges

- Dual purpose cartridge provides taste/odor/chlorine reduction plus sediment filtration.
- A combination of carbon and cellulose creates a dual filter used for removing fine particles and reducing unwanted tastes and odors occasionally found in tap water.
- Excellent “polishing” filter when used in process or closed loop systems.
- Design maximized dirt holding capacity.

Part No.	Medium	Type of Construction	Micron Opening	Chlorine Reduction gal	Fits Housing	Length	Ctn Qty	List Price
PFC2	Carbon/Cellulose	Wrap	5	2500 @ 2 gpm	Compact	4 3/4"	24	\$ 15.48
PFC1	Carbon/Cellulose	Wrap	5	5000 @1 gpm	Standard	9 7/8"	24	15.56
PFC1-20	Carbon/Cellulose	Wrap	5	10,000 @1 gpm	Standard	20"	24	39.67



PFGAC

PFCC

PFGAC Series Granular Activated Carbon (GAC) Cartridges

- Designed to reduce or eliminate unwanted tastes and odors such as chlorine.
- Water enters the filter from the bottom and travels through the entire charcoal bed before exiting at the top. This filtration technique maximizes contact time with carbon to insure maximum absorption.
- Internal expansion pad maintains a tight compact column to minimize channeling or by-pass.
- Nominal 20 micron post filter reduces the content of carbon fines & suspended particles

PFCC Series Granular Activated Coconut Carbon Cartridges

- Coconut Shell based activated carbon to reduce organic chemicals like EDB, TCE & THM plus chlorine.
- Nominal 20 micron post filter to reduce carbon fines and other particles.

Part No.	Medium	Type of Construction	Micron Opening	Chlorine Reduction gal	Fits Housing	Length	Ctn Qty	List Price
PFGAC5	Granular Carbon	Canister	N/A	750 @ .5gpm	Compact	4 7/8"	24	\$ 24.85
PFGAC10	Granular Carbon	Canister	N/A	5000 @ 1gpm	Standard	9 7/8"	12	25.96
PFGAC20	Granular Carbon	Canister	N/A	10000 @ 2gpm	Standard	20"	6	57.35
PFGACBB	Granular Carbon	Canister	N/A	12500 @ 2gpm	Big Blue	9 3/4"	8	66.64
PFGAC20BB	Granular Carbon	Canister	N/A	30000 @ 4gpm	Big Blue	20"	10	150.97
PFCC10	Granular Carbon	Canister	N/A	7500 @ 1gpm	Standard	9 3/4"	12	31.19



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Filter Cartridges



PFCEP



PFCBC

PFCEP Series Carbon Block Cartridges

- Designed for post RO applications.
- Minimizes chlorine and pH rise and produces low extractables.
- Acid washed coconut formulation
- Light brown end cap



ISO 9001



PFCBC Series Carbon Block Cartridges

- Designed to reduce VOC's, chlorine, color bodies, plus remove fine sediment from the residual, commercial & industrial liquids. Filters giardia & cryptosporidium cysts from potable water.
- High chemical adsorption provided by acid washed bituminous powdered, activated carbon block.
- Sediment filter eliminates unwanted particles down to 0.5 nominal micron.
- Excellent polishing filter or prefilter.



PFCBR

PFCBR Series Carbon Block Multimedia Cartridge

- Removes both metals and chemicals with one cartridge.
- All purpose carbon block cartridge removes unpleasant tastes and odors plus greatly reduces the amount of dissolved heavy metals and the taste of chlorine.
- Removes lead up to 96% and mercury up to 98%.
- Also removes up to 99% of giardia and cryptosporidium cysts and sediment particles down to .5 micron in size.

Part No.	Medium	Type of Construction	Micron Opening	Chlorine Reduction gal	Fits Housing	Length	Ctn Qty	List Price
PFCEP10	Acid washed	Carbon Block	5	5000 @ 1 gpm	Standard	9 3/4"	12	\$ 47.31
PFCEP20E	Acid washed	Carbon Block	5	10000 @ 2 gpm	Standard	20"	6	90.74
PFCEPB20	Acid washed	Carbon Block	10	32000 @ 4 gpm	Big Blue	20"	6	148.78
PFCBC10	Acid washed	Carbon Block	0.5	20000 @ 1 gpm	Standard	9 3/4"	12	49.73
PFCBC20	Acid washed	Carbon Block	0.5	45000 @ 1 gpm	Standard	20"	12	71.92
PFCBCBB	Acid washed	Carbon Block	0.5	50000 @ 2 gpm	Big Blue	9 3/4"	4	152.97
PFCBCBB20	Acid washed	Carbon Block	0.5	150000 @ 4 gpm	Big Blue	20"	6	265.42
PFCBR2-10	Acid washed	Carbon Block	0.5	20000 @ 1 gpm	Standard	9 3/4"	12	64.06



Specialty Cartridges



ISO 9001



PFRFC

PFRFC Series Radial Flow Carbon Cartridges

- Radial flow carbon cartridge designed for gas and liquid filtration.
- Activated carbon bed and inner layers of polypropylene remove particles over nominal 7 microns.
- Removes organic and particulate contaminants from plating, acid alkaline and hydrocarbon solutions when used for liquid filtration.

Part No.	Medium	Type of Construction	Micron Opening	GPM	Fits Housing	Length	Ctn Qty	List Price
PFRFC93	Carbon/Polypropylene	Canister	NR	1-3	Standard	9 3/4"	24	\$ 59.17
PFRFCBB	Carbon/Polypropylene	Canister	25	3-10	Big Blue	9 3/4"	8	101.62
PFRFC20BB	Carbon/Polypropylene	Canister	25	5-15	Big Blue	20"	6	199.99



PFIC100

Sealed In-Line Cartridges

- Ideal for refrigerator icemakers and water dispensers, coffee makers and other 1/4" in-line applications.
- Granular activated carbon removes chlorine, bad taste and odor from water.
- **TS100 includes phosphate crystals for clear ice cubes and to prevent line/scale build-up.**
- Connects easily to 1/4" copper or plastic cold water lines.
- Capacity of 2000 gallons, estimated life of 12 months.

Part Number	Description	Casing	Length	Ctn Qty	List Price
Ice Maker Carbon Filter					
PFIC100	Granular Activated Carbon	plastic	10 5/8"	6	\$ 40.36





Housing & Cartridge Combination Kit Features:

- Each kit contains one complete housing, one cartridge and installation sheet.

ISO 9001



Part Number	Size	Sump	Cartridge	List Price
Housing & Cartridge Combination Kits				
PFH75C-S1	3/4" standard	transparent	general purpose/sediment	\$ 97.22
PFH75C-C1	3/4" standard	transparent	taste/odor/sediment	103.97

"PF" Series Housing Replacement Parts:


Including replacement heads, sumps, o-rings, mounting brackets and wrenches.



PFMB75



PFMC1



PFWBBS




PFSW

Part Number	Description	Ctn Qty	List Price
PFC38BL	Blue Head for 3/8" Housing	1	\$ 25.58
PFC75BL	Blue Head for 3/4" Housing	1	30.24
PF75CS	Clear Sump for 3/4" Housing	1	75.15
PFBBS	Big Blue Sump only	1	78.54
PFOR38	O-Ring for 3/8" Series	1	4.86
PFOR75	O-Ring for 3/4" Series	1	4.86
PFBBOR	O-Ring for Big Blue	1	14.55
PFMB3814	Mounting Bracket for 3/8"	1	10.29
PFMB75	Mounting Bracket for 3/4" - U Shaped	1	16.22
PFMC1	Mounting Bracket for 3/4" caps w/ Bosses	1	16.11
PFWBBS	Mount Bracket for 1-1 1/2" Big Blue, Stainless,	1	96.08
PFCC	Standard Cartridge Coupler	1	4.14
PFCCBB	Large Diameter Cartridge Coupler	1	6.04

Housing Wrenches

PFSW1	3/8" Black Wrench for Slimline Housing	1	10.98
PFSW2	3/4" Black Wrench for Standard Housing	1	10.98
PFSW3	Black Wrench for Large Diameter Housing	1	16.55

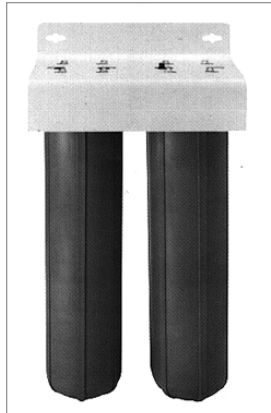

BBFS22

BBFS Filtration System Features:


- Large capacity, multi-housing system.
- Allows for greater cartridge capacity and high flow rates.
- Consists of (2) or (3) 20" big Blue Filter housings with 1" NPT I/O mounting bracket.
- Designed for residential, commercial and industrial applications.
- System does NOT include filter cartridges.

ISO 9001




Part No.	Description	List Price
BBFS22	2 housing Big Blue System (15 1/4" x 8 1/2" x 26 1/2")	\$ 512.09
BBFS222	3 housing Big Blue System (23 1/4" x 8 1/2" x 26 1/2")	754.51

Saddle Tap Valve/Kit and Iron Out®

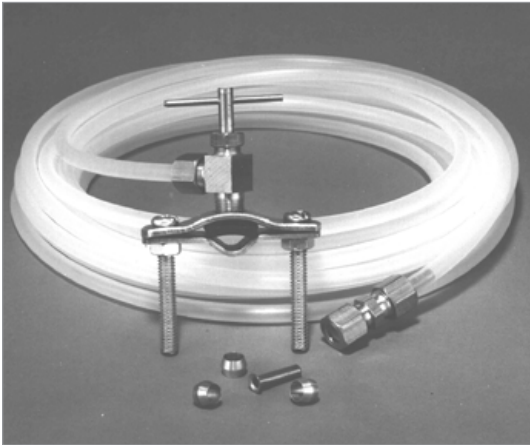

NO LEAD Brass Saddle Tap Valve & Kit Features:

- Self piercing tap valve and clamp for 3/8" to 1" OD copper tube or 3/8" to 3/4" iron pipe.
- Plastic sleeve, brass compression nut and brass or no lead brass insert (for reinforcing polyethylene tubing).
- Brass compression union for connecting polyethylene tubing to 1/4" water inlet at refrigerator, humidifier or cooler.
- 25 feet of 1/4" OD polyethylene tubing.
- The saddle tap valve eliminates plumbing connections and fittings.
- Supplies water to most humidifiers, evaporative coolers and refrigerators with automatic ice maker or water dispenser in door.
- Use for installation of Reverse Osmosis and Chemical Contaminant Filter Systems.
- For use on copper tube or iron pipe.



Part Number	Description	Ctn Qty	List Price
HTVK381NL	NO LEAD Brass Tapping Valve Kit fits 3/8" -1" OD copper tube or 3/8"-3/4" iron pipe	6	\$ 27.82
PFSTVNL	No Lead Brass Saddle Tapping Valve Only	10	8.78



Super Iron Out

Removes the toughest rust and iron stains quickly and easily from white clothes, laundry, toilets, sinks, tubs, dishwashers, exterior surfaces and much more. Also keeps water softeners clean and operating at peak efficiency.

Part Number	Description	Ctn Qty	List Price
IOUT30	Iron Out, 28 oz.	6	\$ 15.55
IOUT5	Iron Out, 76 oz.	6	39.77



Harmsco™ Up Flow Cartridge Filtration . .

A design so superior it's patented!

Harmsco® Up-Flow Cartridge filters outperform conventional filter designs because the outlet is located above the inlet to eliminate air entrapment during operation. With Up-Flow Filters, liquid enters the vessel through the inlet, located at the bottom of the filter. As the liquid travels upward, it flows through the media, past the top seal, separating the dirty and clean water chambers, and down the standpipe as it exits the filter. Because the top of the standpipe is located above the top seal, air is self-purged from the filter to eliminate vents and improve filtration efficiency.

Features:


- Constructed of low carbon 304 stainless steel for durability and long life.
- All stainless steel components are electro-polished for superior finish, resistance to corrosion and increased durability.
- Individual studs for optimum security. No v-clamps with only one bolt to secure lids.
- Wing nuts are used so no tools are required. Finger tight is generally sufficient. Hex nuts are recommended with 75 ft-lbs. or torque above 100 psi.
- All filters are pressure rated to 150 PSI (10bar) and hydrostatically tested.
- Cartridges in some models are arranged in a single "cluster" for easy cartridge installation, removal and service.

Typical Applications:


- Drinking water
- Bottled water
- Ground Water
- Asbestos abatement
- Chill water
- Industrial
- Process water
- Beverages
- Surface water
- Plating baths
- Desalination prefilters
- Commercial
- R/O pre-filtration
- Drinking fountains
- Rinse water
- Cooling water
- Ultrafiltration
- Municipal
- Industrial waste water
- Whole house filtration
- Environmental
- Heating loops
- Spray nozzles

Harmsco Up-Flow Filters Outperform the Competition!


With conventional cartridge filter designs, inlets are located **above** outlets. Therefore, vents are required to relieve air that can accumulate within the filter vessel during operation. By-pass can also occur when unfiltered liquid drains to the sump while the cartridges are removed, when the filter is put back in service. Please see diagrams, below:

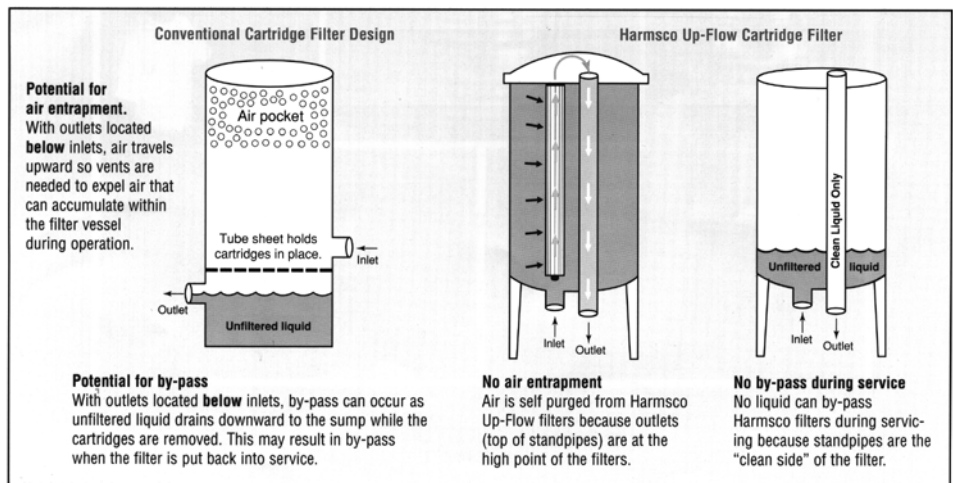


Easy Cartridge Installation and Replacement:




Install cartridge on holding rod.



Tighten threaded pipe cap securely.






Hold cartridge by end cap and rotate until secure.






Cartridge cluster is ready for installation.



Two Filter Styles Cartridge Cluster Filters and High Capacity Models

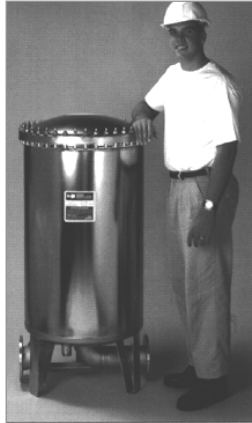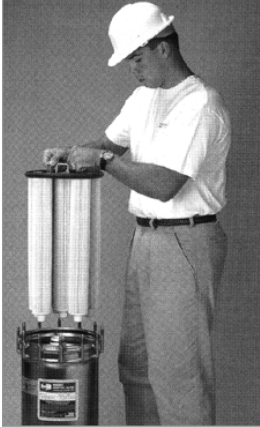

Typical Installations:



Cartridge Cluster Filters

Cartridges in the HIF7, HIF14, HIF16, HIF21 and HIF24 models are arranged in a single "cartridge cluster", so all cartridges are removed at one time.

Hi Capacity Filters

Cartridges in the HIF42, HIF75, HIF100, HIF150-FL, HIF200FL models are installed on lifting rods so a single stack of cartridges are removed at one time for convenience.


Specifications:

Filter Vessel & Metal components	Low carbon 304 stainless steel, electro polished
Rods & standpipes	CPVC, standard models; 304 stainless steel, all stainless models
Pipe caps	CPVC, standard models; 304 stainless steel, all stainless models
Rim gaskets	EPDM, standard. Buna-N and Viton available
O-Rings	Buna-N, standard. EPDM and Viton available
Bottom seals	Natural gum rubber, standard; EPDM and Buna-N available
Wing Nuts	Brass, Brass nuts and stainless steel flat washers available
Temperature	Rated to 140 °F (60 °C) with CPVC rods, pipe caps, stanf pipes & standard Harmsco cartridges. To 200 °F (93 °C) for all stainless models with stainless steel rods, pipe caps, standpipes and Harmsco High-temp cartridges. Temperature limits vary and depend on pressure & time under load.
Pressure	Rated for pressure to 150 psid(10 bar) maximum.
Flow	Typical flow rates are 3-6 GPM per single length 9 3/4" Harmsco cartridges.

Chemical Resistant Coatings:




Harmsco™ filters are available with a DYKOR coating, a high performance material like PTFE used to provide increased resistance to chemicals, abrasion & the environment. The coating is applied to all stainless steel surfaces (inside & out).

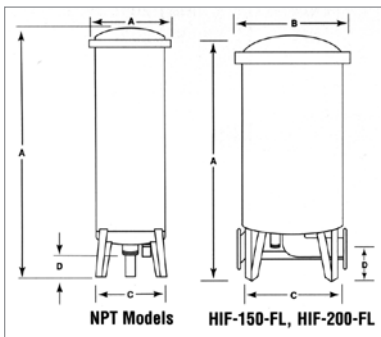


Dimensions:

Model	A	B	C	D	Service Height	Inlet/Outlet	Drain
HIF7	19 1/2"	13"	13"	3 1/2"	35"	1 1/2" NPT	None*
HIF14	28"	13"	13"	3 1/2"	48"	1 1/2" NPT	None*
HIF16	28"	13"	13"	4"	48"	2" NPT	1" NPT
HIF21	37"	13"	13"	3 1/2"	68"	1 1/2" NPT	None*
HIF24	37"	13"	13"	4"	68"	2" NPT	1" NPT
HIF42	40"	18"	18"	5 3/8"	68"	2" NPT	None*
HIF75	42"	20"	20"	5 7/8"	70"	3" NPT	None*
HIF100	52"	20"	20"	5 7/8"	87"	3" NPT	None*
HIF150FL	48"	28"	28"	5 3/16"***	76"	4" Flange	1 1/2" NPT
HIF200FL	58"	28"	28"	5 3/16"***	93"	4" Flange	1 1/2" NPT

* Install tee fittings and valve on inlet for drain. ** To center of flange fittings.

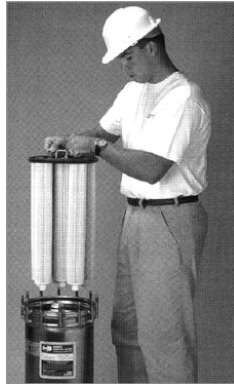

Cluster Models



High Capacity Models

Harmsco™ Filters Features:

Cartridge Cluster Models:

- Entire set of filter cartridges is removed at one time for cleaning or replacement.
- Filter rack assembly is made of CPVC (stainless steel available)
- Rugged 304 electro-polished stainless steel housing.
- Individual studs for safe, secure lid closure.
- Brass wing nuts for hand tightening.
- Pressure rated to 150 PSI.
- For whole house, commercial, industrial and municipal applications.



High Capacity Models:

- Same features as above with:
- CPVC lifing rods to remove a single stack of cartridges at one time.



HIF 7-100

Part Number	HIF7	HIF14	HIF16	HIF21	HIF24
Flow Rate (USGPM)	Up to 30	Up to 60	Up to 75	Up to 90	Up to 100
Flow Rate (LPM)	Up to 113	Up to 226	Up to 284	Up to 340	Up to 397
Flow Rate (M3HR)	Up to 7	Up to 14	Up to 16	Up to 21	Up to 24
# of Std Cartridges	7	14	16	21	24
Alternative cartridge	Single only	Doubles	Doubles	Triples	Triples
Pipe size	1 1/2" NPT	1 1/2" NPT	2" NPT	1 1/2" NPT	2" NPT
Filter Height	19.5"	28"	28"	37"	37"
Floor space required	13" x 13"	13" x 13"	13" x 13"	13" x 13"	13" x 13"
Service Height clearance	35"	48"	48"	68"	68"
Shipping weight	29 lbs.	39 lbs.	39 lbs.	50 lbs.	50 lbs.
Carton dimensions	14" x 14" x 21"	14" x 14" x 38"	14" x 14" x 38"	14" x 14" x 41"	14" x 14" x 41"
LIST PRICE cartridges not included	\$ 2611.73	3709.90	4050.00	4719.80	5054.71



HIF - FL Series

Part Number	HIF42	HIF75
Flow Rate (USGPM)	Up to 175	Up to 300
Flow Rate (LPM)	Up to 662	Up to 1135
Flow Rate (M3HR)	Up to 42	Up to 75
# of Std Cartridges	42	75
Alternative cartridge	Triples	Triples
Pipe size	2" NPT	3" NPT
Filter Height	40"	42"
Floor space required	18" x 18"	20" x 20"
Service Height clearance	68"	70"
Shipping weight	100 lbs.	129 lbs.
Carton dimensions	19" x 19" x 43"	23" x 23" x 53"
LIST PRICE cartridges not included	\$ 11127.11	15846.93

Recommended flow rates for guidelines only. Typical flow rates are 3 to 6 GPM per 9 3/4" cartridge. Standard Harmsco Up-Flow filter housings and filter cartridges rated for temperatures to 140 °F (60 °C) ratings based on pressure and time under load. All stainless filter housings and high temperature cartridges recommended for temperature over 140 °F (60 °C) to 200 °F (93 °C).



HUR-AP Series


Harmsco™ Hurricane Filters

It's a Separator & Cartridge Filter in One

Hurricane filters provide unsurpassed performance because they separate dense solids prior to cartridge filtration for extended filter life, increased dirt holding capacity and reduced maintenance costs. In many respects Hurricane filters are two filters in one. Components include outer chamber for particle separation, inner chamber for cartridge filtration and built-in drain for purge, if required.

Features:

- Outer chamber collects heavy solids at the bottom due to centrifugal force & rotational flow.
- Inner chamber filters liquid through a single cartridge. Liquid enters the filter tangentially to provide rotational flow and centrifugal force for partial separation. Liquid flows out of the filter through the standpipe and outlet fitting.
- Rotational flow pattern continuously “fluffs” filter cake to increase dirt and debris holding capacity to extend filter life and time between cleaning.
- In heavy solid applications, manual or automatic valves may be used to purge solids from the outer chamber. Tests demonstrate approximately half of the heavy solids, like sand, separate prior to the filtration chamber at 50 GPM.
- Constructed of low carbon 3/4 stainless steel for durability and long life.
- All stainless steel components are electro-polished for superior finish, resistance to corrosion & increased durability. (Special chemical resistant coatings available.)
- Fail safe lids with individual studs for optimum security. No v-clamps with only one bolt to secure lids.
- Bronze wing nuts are used so no tools are required. Finger tight is generally sufficient. Hex nuts are recommended with 75 ft-lbs. of torque above 100 psi.
- 90° elbow and 45° sweep on outlet for staggered in-line installation.
- CPVC standpipe for up-flow design.
- 1/4” couplers are installed in inlet and outlet fittings for pressure gauges.

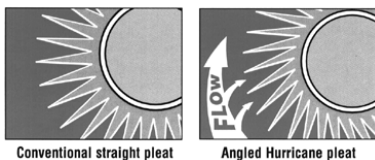


Unlike conventional designs, Hurricane's patented cartridges are made with deep, angles pleats to direct the flow into the pleated area for increased solids removal.



Single “Jumbo” Cartridge Filter


Design of a single, jumbo cartridge is easy to install, remove, clean and replace. Hurricane Cartridges are cleanable and re-usable in most applications.



Part Number	HUR40HP	HUR90HP	HUR170HP
Flow Rate (USGPM)	Up to 50	Up to 100	Up to 150
Flow Rate (LPM)	Up to 189	Up to 378	Up to 568
Flow Rate (M3HR)	Up to 12	Up to 24	Up to 36
Pipe size (NPT)	2”	2”	2”
Drain (NPT)	1”	1”	1”
Filter Height	21”	31”	41”
Floor space required	15” x 15”	15” x 15”	15” x 15”
Service Height clearance	31”	51”	72”
Shipping weight	40 lbs.	51 lbs.	64 lbs.
LIST PRICE	\$ 4891.15	5817.98	8764.61
cartridges not included			



Harmsco® Filter Cartridges

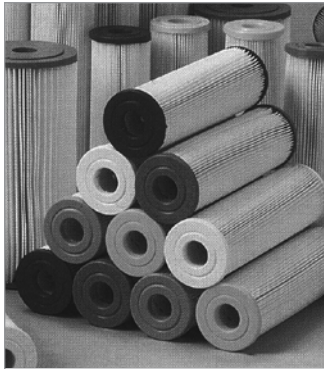


801 Series



Certified to ANSI-NSF 61



NO LEAD
< 0.25% Pb by weighted avg
Third Party Certified to NSF / ANSI 372



HB Series



Certified to ANSI-NSF 61



NO LEAD
< 0.25% Pb by weighted avg
Third Party Certified to NSF / ANSI 372



Certified to ANSI-NSF 61



NO LEAD
< 0.25% Pb by weighted avg
Third Party Certified to NSF / ANSI 372

HAC10W

Genuine Harmsco® Filter Cartridge Features:

- Heavy duty filter applications.
- Pleated polyester design for more surface area, longer life.
- **Six Sq Ft.** of filtration, 50% more than the competition per 9 3/4". (12 sq ft for 19 1/2")
- Thermally bonded construction with FDA listed materials.
- Color coded & branded end caps for easy micron identification.
- Cleanable, reusable in most applications.
- Low pressure drop.
- Individually wrapped.



Specifications:

Media: Polyester-Plus™
 End Caps: Plastisol (pliable PVC)
 Center tubes: Rigid PVC perforated
 Surface Area: Approx 6 sq.ft. (9 3/4")
 Temp limit: Up to 140 °F depending on time & load
 pH: 3-11
 Flow rate: 3-6 GPM per 9 3/4"
 Dimensions: 2 3/4" OD, 1 1/16" ID

Part Number	Micron Size	Cap Color	OD	Length	Ctn Qty	List Price
801-0.35-W	0.35	Brown	2 3/4"	9 3/4"	24	\$ 36.87
801-1-W	1	Tan	2 3/4"	9 3/4"	24	27.16
801-5-W	5	White	2 3/4"	9 3/4"	24	23.22
801-10-W	10	Red	2 3/4"	9 3/4"	24	23.22
801-20-W	20	Blue	2 3/4"	9 3/4"	24	23.22
801-50-W	50	Yellow	2 3/4"	9 3/4"	24	23.22
801-100-W	100	Green	2 3/4"	9 3/4"	24	23.22
921-0.35-W	0.35	Brown	2 3/4"	19 1/2"	24	\$ 69.58
921-1-W	1	Tan	2 3/4"	19 1/2"	24	55.90
921-5-W	5	White	2 3/4"	19 1/2"	24	46.71
921-10-W	10	Red	2 3/4"	19 1/2"	24	46.71
921-20-W	20	Blue	2 3/4"	19 1/2"	24	46.71
921-50-W	50	Yellow	2 3/4"	19 1/2"	24	46.71

Harmsco® Calypso Blue™ Filter Cartridge Features:

- Premium quality made of pleated polyester filter media for long life and high dirt holding.
- Cartridges can be cleaned and reused in most applications.
- Individually shrink wrapped.

Part Number	Micron Size	OD	Length	Ctn Qty	List Price
HB-10-0.35-W	0.35	4 1/2"	9 3/4"	8	\$ 86.04
HB-10-1-W	1	4 1/2"	9 3/4"	8	63.72
HB-10-5-W	5	4 1/2"	9 3/4"	8	56.08
HB-10-20-W	20	4 1/2"	9 3/4"	8	56.08
HB-10-50-W	50	4 1/2"	9 3/4"	8	56.08
HB-20-0.35-W	0.35	4 1/2"	20"	4	\$ 139.84
HB-20-1-W	1	4 1/2"	20"	4	112.99
HB-20-5-W	5	4 1/2"	20"	4	96.74
HB-20-20-W	20	4 1/2"	20"	4	96.74
HB-20-50-W	50	4 1/2"	20"	4	96.74

Genuine Harmsco® Activated Carbon Filter Cartridge Features:

- Composite of pulverized activated carbon & polyolefin fibers bonded together.
- 5 micron rating.
- Max temp 160 °F.
- Substantially removes chlorine, organic chemicals, tastes and odors.
- Max capacity; 3000 gal.chlorine, 500 gal. organic chemicals.

Part Number	Micron Size	OD	Length	Ctn Qty	List Price
HAC10W	5	2 3/4"	9 3/4"	24	\$ 42.45




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Harmsco® Filter Cartridges

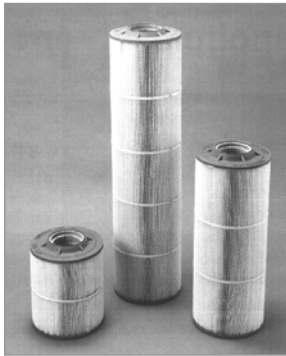


HC Series



Certified to ANSI-NSF 61



Third Party Certified to NSF / ANSI 372




Pressure drop shown above is for filter housing and 20 micron filter cartridge in clean water. Data developed by NSF International.

Genuine Hurricane Replacement Cartridge Features:



- Standard pleated polyester filter elements.
- Polyester-Plus™ filter media is cleanable and reusable in most applications.
- Rated to 140 °F and to 50 psi.
- Separates solids in liquids with pH of 3 to 11.
- Cartridge OD 7 3/4", ID 3" FPT
- Packaged one per carton.

Part Number	Micron Size	Length	Ctn Qty	List Price
HUR40HP Replacement Cartridges				
HC40-0.35	0.35	9 5/8"	1	\$ 320.85
HC40-1	1	9 5/8"	1	285.91
HC40-5	5	9 5/8"	1	262.55
HC40-20	20	9 5/8"	1	262.55
HUR90HP Replacement Cartridges				
HC90-0.35	0.35	19 1/2"	1	452.13
HC90-5	5	19 1/2"	1	367.57
HC90-20	20	19 1/2"	1	367.57
HC90-50	50	19 1/2"	1	367.57
HC90-100	100	19 1/2"	1	367.57
HUR170HP Replacement Cartridges				
HC170-1	1	30 3/4"	1	627.20
HC170-5	5	30 3/4"	1	568.85
HC170-20	20	30 3/4"	1	568.85




PP Series



Certified to ANSI-NSF 61



Third Party Certified to NSF / ANSI 372



Data include cartridge and Hurricane filter housing.

Genuine Hurricane Poly-Pleat™ Replacement Cartridge Features:

- Designed for drinking water applications to remove cryptosporidium and Giardia Cysts.
- Rated to 140 °F
- Polypropylene filter media offers compatibility with many aggressive chemicals.
- PP-S Series Cartridges OD 2 3/4"
- PP-BB Series Cartridges OD 4 1/4"
- PPHC Series Cartridge OD 7 3/4", ID 3" FPT.
- Individually wrapped.

Part Number	Micron Size	Length	Ctn Qty	List Price
PP-S-1	1 absolute	9 3/4"	24	\$ 57.25
PP-BB-10-1	1 absolute	9 3/4"	8	132.21
PP-BB-20-1	1 absolute	19 1/2"	1	217.78
PPHC40-1	1 absolute	9 5/8"	1	500.07
PPHC90-1	1 absolute	19 1/2"	1	791.80



Vu-Flow Screen Filters



EQUIVALENCY CHART

MESH	MICRONS	INCHES
24	711	0.028
* 30	533	0.021
40	381	0.015
* 60	254	0.010
* 100	152	0.006
* 140	104	0.004
250	61	0.0024
500	30	0.0012
1000	15	0.0006

* Also available with stainless steel by special order


Vu-Flow Filter Features:

- Easy installation on suction or discharge side of pump.
- Filtered material collects on the outside of the screen, making it easy to clean.
- Clear polycarbonate housing permits instant visual inspection.
- Molded PVC filter body allows glue together installation similar to standard PVC pipe fittings.
- Molded from UV stabilized weather resistant materials for long service life.
- Most models have 1/2" MNPT cover drain outlet for quick one step purge cleaning.
- Inlet and outlet slip can be bushed to fit required pipe size.
- Polyester screens are easily cleaned and re-used eliminating expensive replacement.
- Stainless steel screens are available special order.
- Maximum operating pressure: 150 psi @ 73°F.
- Flow rates from 1-100 gallons per minute.
- Screen mesh sizes smaller than 250 (61 microns) are supported with No. 30 mesh to assure durability.

• WATER USE ONLY

INSTALLATION

- Install on suction or discharge side of system.
- Install on discharge to allow use of purge valve for easy one step purge cleaning. * Do not install filters with purge valves on suction side of pump.
- Manifold two or more filters for applications with flow rates higher than 100 GPM.
- Hand tighten only - Use of tools voids warranty

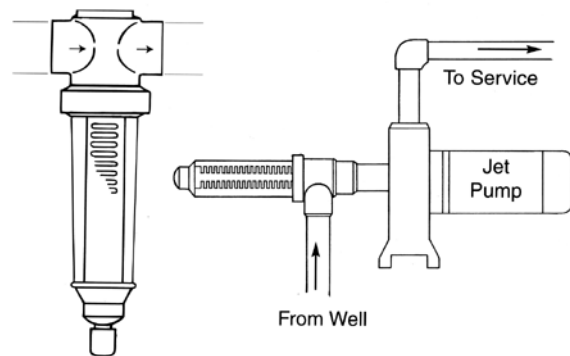

Vu-Flow Screen Filters





CF Series



Combination Style Screen Filter Features:

- Installs as a 90° “L” or 180° in-line “T” installation.
 - 10-100 GPM models.
 - 1-1/4” plug (supplied) adds versatility to unused outlet.
 - Maximum pressure: 150 PSI @ 73°F.
 - 1/2” MPT drain cleanout with purge valve.
 - Supplied with polyester filter screen.
 - Also available with stainless steel screen as special order.
- WATER USE ONLY

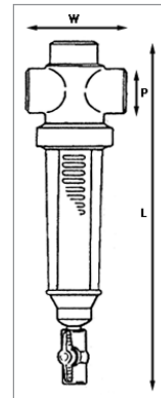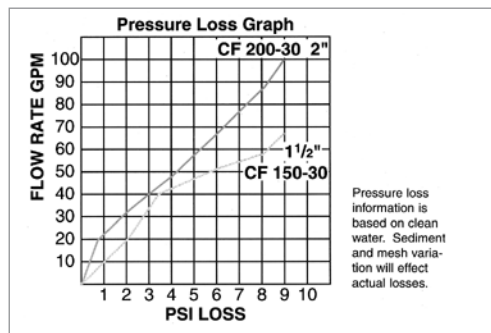

Part Number	Inlet/Outlet "P" Slip x Slip x Slip	Mesh # and Size	Mesh # Opening	Min*/Max Flow GPM	"L"	"W"	List Price w/ Purge Valve
CF150-24P	1 1/2"	24 (711 mic)	0.028	10-50	16 5/8"	5 1/4"	\$ 140.09
CF150-40P	1 1/2"	40 (381 mic)	0.015	10-50	16 5/8"	5 1/4"	140.09
CF150-60P	1 1/2"	60 (254 mic)	0.0100	10-50	16 5/8"	5 1/4"	147.27
CF150-100P	1 1/2"	100 (152 mic)	0.006	10-50	16 5/8"	5 1/4"	147.27
CF150-140P	1 1/2"	140 (104 mic)	0.004	10-50	16 5/8"	5 1/4"	147.27
CF150-250P	1 1/2"	250 (61 mic)	0.0024	10-50	16 5/8"	5 1/4"	151.47
CF150-500P	1 1/2"	500 (30 mic)	0.0012	10-50	16 5/8"	5 1/4"	151.47
CF150-1000P	1 1/2"	1000 (15 mic)	0.0006	10-50	16 5/8"	5 1/4"	151.47
CF200-24P	2"	24 (711 mic)	0.028	18-100	18 7/8"	5 1/2"	227.99
CF200-40P	2"	40 (381 mic)	0.015	18-100	18 7/8"	5 1/2"	227.99
CF200-60P	2"	60 (254 mic)	0.0100	18-100	18 7/8"	5 1/2"	233.92
CF200-100P	2"	100 (152 mic)	0.006	18-100	18 7/8"	5 1/2"	233.92
CF200-140P	2"	140 (104 mic)	0.004	18-100	18 7/8"	5 1/2"	233.92
CF200-250P	2"	250 (61 mic)	0.0024	18-100	18 7/8"	5 1/2"	242.24
CF200-500P	2"	500 (30 mic)	0.0012	18-100	18 7/8"	5 1/2"	242.24

- Do not use metal valve or fitting on 1/2" drain connection.
 - Do not install filters with purge valve on suction side of pump.
- * Minimum flow needed for "spin-out" action.

Carton Quantity of 10 for all products



Vu-Flow Screen Filters





NT Series

T Style Screen Filter Features:

- 180° in-line “T” style installation.
- 1-100 GPM models.
- 1/2” MPT cleanout with purge valve.
- Supplied with polyester filter screen.
- Also available with stainless steel screen as special order.

• WATER USE ONLY

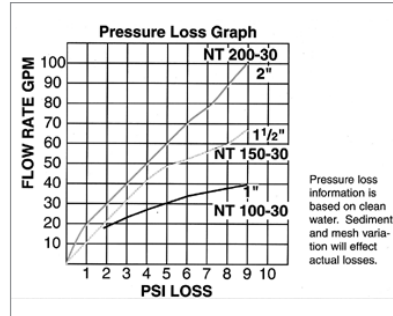

Part Number	Inlet/Outlet "P"	Mesh # & Size	Mesh Opening	Min*/Max Flow GPM	"L"	"W"	List Price
IPS x IPS							
NT75-24P	3/4" x 3/4"	24 (711 mic)	0.028	1-25	11 3/8"	5"	\$ 96.31
NT75-60P	3/4" x 3/4"	60 (254 mic)	0.010	1-25	11 3/8"	5"	97.44
NT75-100P	3/4" x 3/4"	100 (152 mic)	0.006	1-25	11 3/8"	5"	97.44
NT75-140P	3/4" x 3/4"	140 (104 mic)	0.004	1-25	11 3/8"	5"	97.44
NT75-250P	3/4" x 3/4"	250 (61 mic)	0.0024	1-25	11 3/8"	5"	101.02
NT75-500P	3/4" x 3/4"	500 (30 mic)	0.0012	1-25	11 3/8"	5"	101.02
NT75-1000P	3/4" x 3/4"	1000 (15 mic)	0.0006	1-25	11 3/8"	5"	101.02
Slip x Slip							
NT100-24P	1" x 1"	24 (711 mic)	0.028	1-25	11 3/8"	5"	95.89
NT100-30P	1" x 1"	30 (533 mic)	0.021	1-25	11 3/8"	5"	95.89
NT100-40P	1" x 1"	40 (381 mic)	0.015	1-25	11 3/8"	5"	95.89
NT100-60P	1" x 1"	60 (254 mic)	0.01	1-25	11 3/8"	5"	96.25
NT100-100P	1" x 1"	100 (152 mic)	0.006	1-25	11 3/8"	5"	96.25
NT100-140P	1" x 1"	140 (104 mic)	0.004	1-25	11 3/8"	5"	96.25
NT100-250P	1" x 1"	250 (61 mic)	0.0024	1-25	11 3/8"	5"	100.43
NT100-500P	1" x 1"	500 (30 mic)	0.0012	1-25	11 3/8"	5"	100.43
NT100-1000P	1" x 1"	1000 (15 mic)	0.0006	1-25	11 3/8"	5"	100.43
Slip x Slip							
NT150-24P	1-1/2" x 1-1/2"	24 (711 mic)	0.028	10-50	15 3/8"	5 1/4"	126.43
NT150-30P	1-1/2" x 1-1/2"	30 (533 mic)	0.021	10-50	15 3/8"	5 1/4"	126.43
NT150-40P	1-1/2" x 1-1/2"	40 (384 mic)	0.015	10-50	15 3/8"	5 1/4"	126.43
NT150-60P	1-1/2" x 1-1/2"	60 (254 mic)	0.010	10-50	15 3/8"	5 1/4"	130.39
NT150-100P	1-1/2" x 1-1/2"	100 (152 mic)	0.006	10-50	15 3/8"	5 1/4"	130.39
NT150-140P	1-1/2" x 1-1/2"	140 (104 mic)	0.004	10-50	15 3/8"	5 1/4"	130.39
NT150-250P	1-1/2" x 1-1/2"	250 (61 mic)	0.0024	10-50	15 3/8"	5 1/4"	135.54
NT150-500P	1-1/2" x 1-1/2"	500 (30 mic)	0.0012	10-50	15 3/8"	5 1/4"	136.79
NT150-1000P	1-1/2" x 1-1/2"	1000 (15 mic)	0.0006	10-50	15 3/8"	5 1/4"	136.79
Slip x Slip							
NT200-24P	2" x 2"	24 (711 mic)	0.028	18-100	17 7/8"	5 1/2"	200.68
NT200-30P	2" x 2"	30 (533 mic)	0.021	18-100	17 7/8"	5 1/2"	200.68
NT200-40P	2" x 2"	40 (384 mic)	0.015	18-100	17 7/8"	5 1/2"	200.68
NT200-60P	2" x 2"	60 (254 mic)	0.010	18-100	17 7/8"	5 1/2"	206.96
NT200-100P	2" x 2"	100 (152 mic)	0.006	18-100	17 7/8"	5 1/2"	206.96
NT200-140P	2" x 2"	140 (104 mic)	0.004	18-100	17 7/8"	5 1/2"	206.96
NT200-250P	2" x 2"	250 (61 mic)	0.0024	18-100	17 7/8"	5 1/2"	215.00
NT200-500P	2" x 2"	500 (30 mic)	0.0012	18-100	17 7/8"	5 1/2"	215.00
NT200-1000P	2" x 2"	1000 (15 mic)	0.0006	18-100	17 7/8"	5 1/2"	215.00

* Minimum flow needed for “spin-out” action.

• Do not install filters with purge valve on suction side of pump.

Carton Quantity of 10 for all products



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

4.33

Vu-Flow Screen Filters



NT SO Series





T Style Sand Separator Filter Features:

- 180° in-line “T” style.
- 1-100 GPM models
- “Spin-out” action separates heavier than water particles away from screen into the collection chamber.
- Screen portion of element removes lighter than water particles.
- Extended sump provides greater collection area for sediment.
- Supplied with a 1/2” cleanout with purge valve.
- Supplied with polyester filter screen.
- Also available with stainless steel screen as special order.



• WATER USE ONLY

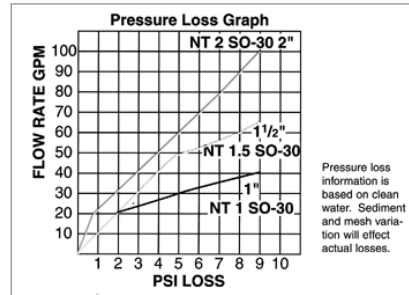

Part Number	Inlet/Outlet "P"	Mesh # & Size	Mesh Opening	Min*/Max Flow GPM	"L"	"W"	List Price w/ Purge Valve
IPS x IPS (Female Thread 3/4" only)							
NT75SO-60P	3/4" x 3/4"	60 (254 mic)	0.01	1-25	14 3/8"	5	\$ 127.07
NT75SO-100P	3/4" x 3/4"	100 (152 mic)	0.006	1-25	14 3/8"	5	127.07
NT75SO-140P	3/4" x 3/4"	140 (104 mic)	0.004	1-25	14 3/8"	5	127.07
NT75SO-250P	3/4" x 3/4"	250 (61 mic)	0.0024	1-25	14 3/8"	5	131.79
Slip x Slip							
NT1SO-60P	1" x 1"	60 (254 mic)	0.01	1-25	14 3/8"	5	127.07
NT1SO-100P	1" x 1"	100 (254 mic)	0.006	1-25	14 3/8"	5	127.07
NT1SO-140P	1" x 1"	140 (104 mic)	0.004	1-25	14 3/8"	5	127.07
NT1SO-250P	1" x 1"	250 (61 mic)	0.0024	1-25	14 3/8"	5	131.79
Slip x Slip							
NT1.5SO-24P	1-1/2" x 1-1/2"	24 (711 mic)	0.028	10-50	15 3/8"	5 1/4"	154.36
NT1.5SO-30P	1-1/2" x 1-1/2"	30 (533 mic)	0.021	10-50	15 3/8"	5 1/4"	154.36
NT1.5SO-40P	1-1/2" x 1-1/2"	40 (384 mic)	0.015	10-50	15 3/8"	5 1/4"	154.36
NT1.5SO-60P	1-1/2" x 1-1/2"	60 (254 mic)	0.010	10-50	15 3/8"	5 1/4"	159.05
NT1.5SO-100P	1-1/2" x 1-1/2"	100 (152 mic)	0.006	10-50	15 3/8"	5 1/4"	159.05
NT1.5SO-140P	1-1/2" x 1-1/2"	140 (104 mic)	0.004	10-50	15 3/8"	5 1/4"	159.05
NT1.5SO-250P	1-1/2" x 1-1/2"	250 (61 mic)	0.0024	10-50	15 3/8"	5 1/4"	165.12
NT1.5SO-500P	1-1/2" x 1-1/2"	500 (30 mic)	0.0012	10-50	15 3/8"	5 1/4"	165.12
Slip x Slip							
NT2SO-24P	2" x 2"	24 (711 mic)	0.028	18-100	17 7/8"	5 1/2"	238.75
NT2SO-30P	2" x 2"	30 (533 mic)	0.021	18-100	17 7/8"	5 1/2"	238.75
NT2SO-40P	2" x 2"	40 (384 mic)	0.015	18-100	17 7/8"	5 1/2"	238.75
NT2SO-60P	2" x 2"	60 (254 mic)	0.010	18-100	17 7/8"	5 1/2"	242.85
NT2SO-100P	2" x 2"	100 (152 mic)	0.006	18-100	17 7/8"	5 1/2"	242.85
NT2SO-140P	2" x 2"	140 (104 mic)	0.004	18-100	17 7/8"	5 1/2"	242.85
NT2SO-250P	2" x 2"	250 (61 mic)	0.0024	18-100	17 7/8"	5 1/2"	248.82
NT2SO-500P	2" x 2"	500 (30 mic)	0.0012	18-100	17 7/8"	5 1/2"	248.82

- Do not use metal valve or fitting on 1/2" drain connections
- Do not install filters with purge valves on the suction side of pump
- * Minimum flow needed for “spin-out” action.

Carton Quantity of 10 for all products



Vu-Flow Screen Filters




L Series




L Style Screen Filter Features:

- 90° “L” style installation.
 - Install on suction or discharge side of pump.
 - 0-100 GPM models.
 - 1/2” MPT drain cleanout is not available on this model.
 - Maximum pressure: 150 PSI @ 73°F.
 - Supplied with polyester filter screen.
 - Also available with stainless steel screen as special order.
- **WATER USE ONLY**

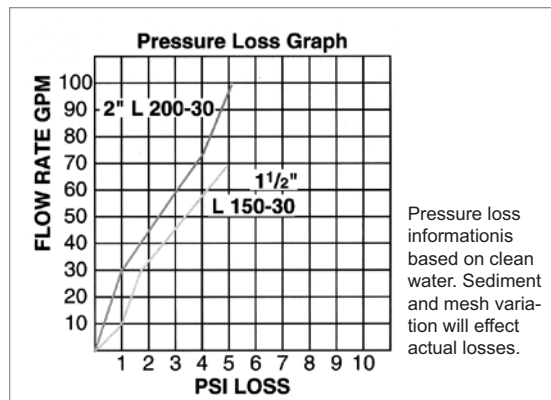

Pressure loss information is based on clean water. Sediment and mesh variation will effect actual losses.



Part Number	Inlet/Outlet "P" Slip	Mesh # and Size	Mesh Opening	Normal Flow GPM	"L"	"W"	List Price
L150-24	1-1/2" x 1-1/2"	24 (711 mic)	0.028	0-50	14 1/4	4-1/2	133.01
L150-30	1-1/2" x 1-1/2"	30 (533 mic)	0.021	0-50	14 1/4	4-1/2	133.01
L150-60	1-1/2" x 1-1/2"	60 (254 mic)	0.010	0-50	14 1/4	4-1/2	138.35
L150-100	1-1/2" x 1-1/2"	100 (152 mic)	0.006	0-50	14 1/4	4-1/2	138.35
L150-250	1-1/2" x 1-1/2"	250 (61 mic)	0.0024	0-50	14 1/4	4-1/2	143.78
L150-500	1-1/2" x 1-1/2"	500 (30 mic)	0.0012	0-50	14 1/4	4-1/2	143.78
L200-24	2" x 2"	24 (711 mic)	0.028	0-100	18	5 1/2"	217.33
L200-30	2" x 2"	30 (533 mic)	0.21	0-100	18	5 1/2"	217.33
L200-60	2" x 2"	60 (254 mic)	0.010	0-100	18	5 1/2"	223.80
L200-100	2" x 2"	100 (152 mic)	0.006	0-100	18	5 1/2"	223.80
L200-250	2" x 2"	250 (61 mic)	0.0024	0-100	18	5 1/2"	231.58
L200-500	2" x 2"	500 (30 mic)	0.0012	0-100	18	5 1/2"	231.58

"L" Style filters do not use purge valves.

Carton Quantity of 10 for all products




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

4.35



Vu-Flow Screen Filters

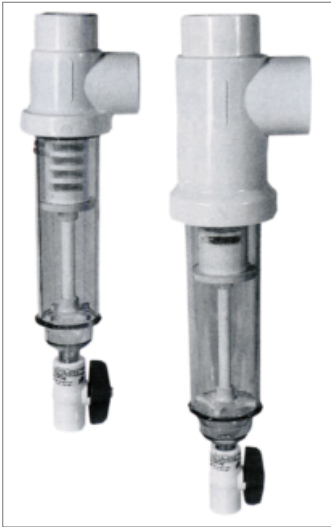

L SO Series

L Style Sand Separator Filter Features:

- 90° “L” style installation.
 - “Spin out action” separates heavier than water particles away from the screen into the collection chamber.
 - 5-90 GPM
 - Screen portion of element removes lighter than water elements.
 - Available in 5-20, 15-40 and 5-90 GPM models. (A minimum flow rate of 5 GPM is required to operate the filter).
 - Extended sump provides greater collection area for sediment.
 - 1/2” MPT cleanout with purge valve.
 - Supplied with polyester filter screen.
 - Also available with stainless steel screen as special order.
 - Available in Low Flow(LF) or High Flow(HF) models.
- **WATER USE ONLY**

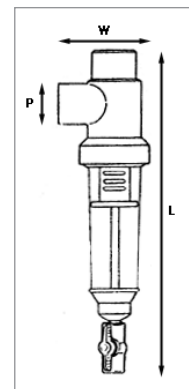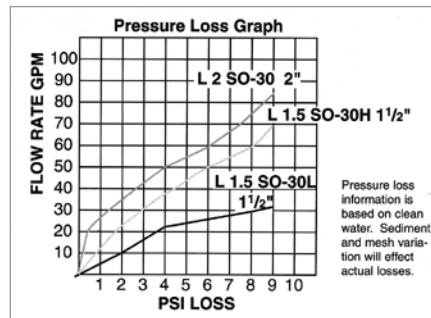

Part Number	Inlet/Outlet Slip x Slip "P"	Mesh # and Size	Mesh Opening	Min*/Max GPM	"L"	"W"	List Price w/ Purge Valve
L1.5SO-60LFP	1-1/2"	60 (254 mic)	0.01	5-20	14 7/8"	4-1/2"	\$ 166.87
L1.5SO-60HFP	1-1/2"	60 (254 mic)	0.01	15-40	14 7/8"	4-1/2"	166.87
L1.5SO-100LFP	1-1/2"	100 (152 mic)	0.006	5-20	14 7/8"	4-1/2"	166.87
L1.5SO-100HFP	1-1/2"	100 (152 mic)	0.006	15-40	14 7/8"	4-1/2"	166.87
L1.5SO-140LFP	1-1/2"	140 (104 mic)	0.004	5-20	14 7/8"	4-1/2"	166.87
L1.5SO-140HFP	1-1/2"	140 (104 mic)	0.004	15-40	14 7/8"	4-1/2"	166.87
L1.5SO-250LFP	1-1/2"	250 (61 mic)	0.0024	5-20	14 7/8"	4-1/2"	173.41
L1.5SO-250HFP	1-1/2"	250 (61 mic)	0.0024	15-40	14 7/8"	4-1/2"	173.41
L1.5SO-500LFP	1-1/2"	500 (30 mic)	0.0012	5-20	14 7/8"	4-1/2"	173.41
L1.5SO-500HFP	1-1/2"	500 (30 mic)	0.0012	15-40	14 7/8"	4-1/2"	173.41
L2SO-60P	2"	60 (254 mic)	0.01	35-90	20 7/8"	5-1/2"	254.67
L2SO-100P	2"	100 (152 mic)	0.006	35-90	20 7/8"	5-1/2"	254.67
L2SO-140P	2"	140 (104 mic)	0.004	35-90	20 7/8"	5-1/2"	254.67
L2SO-250P	2"	250 (61 mic)	0.0024	35-90	20 7/8"	5-1/2"	261.31

- Do not use metal valve or fitting on 1/2" drain connection
 - Do not install filters with purge valves on the suction side of pump
 - LF suffix denotes low flow, HF suffix denotes high flow.
- * Minimum flow needed for "spin-out" action.


Carton Quantity of 10 for all products




Vu-Flow Replacement Screens



REPLACEMENT SCREENS FOR FILTERS



NT Screens	L	OD
NT30	5 1/8	1 1/8
NT60	8 1/8	1 5/8
NT120	10	1 7/8




L Screens	L	OD
L60	9 7/8	1 5/8
L120	14 7/8	1 7/8


3/4" & 1" NT Filters		1-1/2" NT or Combo Filters		2" NT or Combo Filters	
Part No.	List Price	Part No.	List Price	Part No.	List Price
NT30SC24	\$ 23.17	NT60SC24	\$ 38.05	NT120SC24	\$ 64.10
NT30SC30	23.17	NT60SC30	38.05	NT120SC30	64.10
NT30SC40	23.17	NT60SC40	38.05	NT120SC40	64.10
NT30SC60	23.79	NT60SC60	41.64	NT120SC60	68.82
NT30SC100	23.79	NT60SC100	41.64	NT120SC100	68.82
NT30SC140	23.79	NT60SC140	41.64	NT120SC140	68.82
NT30SC250	26.87	NT60SC250	46.46	NT120SC250	76.10
NT30SC500	26.87	NT60SC500	46.46	NT120SC500	76.10
NT30SC1000	26.87	NT60SC1000	46.46	NT120SC1000	76.10

1-1/2" L Filters		2" L Filters	
Part No.	List Price	Part No.	List Price
L60SC24	\$ 39.89	L120SC24	\$ 66.57
L60SC30	39.89	L120SC30	66.57
L60SC40	39.89	L120SC40	66.57
L60SC60	44.00	L120SC60	71.90
L60SC100	44.00	L120SC100	71.90
L60SC140	44.00	L120SC140	71.90
L60SC250	48.10		
L60SC500	48.10	L120SC500	79.59
L60SC1000	48.10	L120SC1000	79.59


REPLACEMENT SCREENS FOR SAND SEPARATORS



NT Sep Scrn	L	OD
NT1SC	5 1/4	1 1/8



NT Sep Scrn	L	OD
NT1.5SC	8 1/8	1 5/8
NT2SC	10	1 7/8



L Sep Scrn	L	OD
L1.5SC	10	1 5/8
L2SC	13 3/4	1 7/8

3/4" & 1" NT Sand Separators		1-1/2" NT Sand Separators		2" NT Sand Separators	
Part No.	List Price	Part No.	List Price	Part No.	List Price
NT1SC24	\$ 26.87	NT1.5SC24	\$ 66.44	NT2SC24	\$ 92.61
NT1SC30	26.87	NT1.5SC30	66.44	NT2SC30	92.61
NT1SC40	26.87	NT1.5SC40	66.44	NT2SC40	92.61
NT1SC60	28.00	NT1.5SC60	67.81	NT2SC60	94.97
NT1SC100	28.00	NT1.5SC100	67.81	NT2SC100	94.97
NT1SC140	28.00	NT1.5SC140	67.81	NT2SC140	94.97
NT1SC250	29.74	NT1.5SC250	70.68	NT2SC250	98.66
NT1SC500	29.74	NT1.5SC500	70.68	NT2SC500	98.66
NT1SC1000	29.74	NT1.5SC1000	70.68	NT2SC1000	98.66

1-1/2" L Sand Separators		2" L Sand Separators	
Part No.	List Price	Part No.	List Price
L1.5SC30	70.15	L2SC24	\$ 96.81
L1.5SC40	70.15	L2SC30	96.81
L1.5SC60	70.68	L2SC40	96.81
L1.5SC100	70.68	L2SC60	99.18
L1.5SC140	70.68	L2SC100	99.18
L1.5SC250	73.74	L2SC140	99.18
L1.5SC500	73.74	L2SC250	116.72
L1.5SC1000	73.74	L2SC500	116.72
		L2SC1000	116.72



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Vu-Flow Strainers & Replacement Parts







4BSK Series



Basket Strainer Features:

- Intake screen for lakes or ponds
- High volume capacity, up to 100 GPM.
- Three mesh sizes.
- All PVC construction with easy clean nylon screen.
- Debris accumulates on outside of strainer screen.
- 2" IPS female inlet slip fittings.



Part Number	Description	Ctn Qty	List Price
Basket Strainers			
4BSK24	2" x 4" x 24", 24 Mesh Nylon Screen	10	\$ 106.35
4BSK60	2" x 4" x 24", 60 Mesh Nylon Screen	10	110.57
4BSK100	2" x 4" x 24", 100 Mesh Nylon Screen	10	114.78
4BSK250	2" x 4" x 24", 250 Mesh Nylon Screen	10	119.08
Filter Bodies (HEADS)			
NT30B	1" NT Screen & NT Separator	1	46.97
NT60B	1-1/2" NT Screen & NT Separator	1	63.59
NT120B	2" NT Screen & NT Separator	1	77.24
CF60B	1-1/2" Combo Screen & Separator	1	76.10
CF120B	2" Combo Screen & Separator	1	96.31
L60B	1-1/2" L Screen	1	66.44
L120B	2" L Screen	1	81.33
L1.5BL	1-1/2" L Separator Low Flow	1	70.23
L1.5BH	1-1/2" L Separator High Flow	1	70.23
L2B	2" L Separator	1	90.77
Screen Filter Covers (CLEAR SUMPS)			
NT30C	1" & 3/4" NT & Combo Style	1	47.48
NT60C	1-1/2" NT & Combo Style	1	71.27
NT120C	2" NT & Combo Style - CLEAR	1	85.53
NT120W	2" NT & Combo Style - WHITE	1	88.39
Separator Filter Covers (CLEAR SUMPS)			
NT1C	1" NT, Combo & L Style	1	65.94
"O" Ring Kits Separator & Screen Filter			
NT30S	1" & 3/4" NT & Combo Style	1	4.45
NT60S	1-1/2" NT & Combo Style	1	5.12
NT120S	2" NT & Combo Style	1	5.70
L60S	1-1/2" L Style	1	5.12
L120S	2" L Style	1	5.70
Cover Guard			
CG100	Black Filter Protector, 1"	1	10.77
CG150	Black Filter Protector, 1-1/2"	1	14.27
CG200	Black Filter Protector, 2"	1	16.61



Automatic Flush Valve



AFV Series

Automatic Flush Valve Specifications:

- Adjustable cycle time 5 min - 24 hours
- Working Pressure 200 PSIG
- Ambient Temperature 25 °F to 165 °F
- Enclosure Nema 4
- Voltage 115V, 1 Phase, 60 Hz
- Current 2.5 Amps
- Valve Construction Brass
- Seals Reinforced PTFE
- Discharge Volume 1/2" NPT-.92
(Gal per cycle @ 30 PSIG)
- Power Cord 8' heavy duty grounded
- Full Port Ball Valve 1/2" NPT
- Discharge Time 3.5 seconds
(Non-adjustable)



Automatic Flush Valve Kit Includes:

- (2) 1/2" barb x 1/2" NPT male hose fittings
- (2) SAE size 8 SS worm drive clamps
- (24") 1/2" braid reinforced flexible PVC tubing. (Rated at 215 psi)

KIT DOES NOT INCLUDE FILTER OR AUTOMATIC FLUSH VALVE.

Please Note: TO insure optimum performance of automatic flush valve, it is recommended that you use the above rated tubing only.

Part Number	Description	Ctn Qty	List Price
AFV	Automatic Flush Valve	1	\$ 829.14
AFV-KIT	Automatic Flush Valve Kit	1	48.85

Warranty and Disclaimer

A one year warranty applies to the original purchaser. The manufacturer warrants that the AFV will be free from original defects in material and workmanship. Manufacturer will **repair or replace** all parts without charge, found to be defective under normal use and service within the warranty period upon return of product at customer's expense.





Ultraviolet Disinfection Systems

Ultraviolet disinfection is an effective way to provide bacteria free water for home or industry.



UVSL Series

- Completely automatic.
- Compact and easy to install.
- No chemicals required.
- Low operating costs.
- Low maintenance.
- No taste or odor.

SAFE LITE Economy Series UV Disinfection System

Features:

- Quick installation.
- Economical.
- 304 stainless steel chamber. Electropolished.
- Sight port to safely view operation.
- 8 gallon complete with flow control.



UV, UVGDS & UV-W Series

Standard Series UV Disinfection System Features:

UV Series:

- Constructed for wall mounting.
- 304 stainless steel chamber. Electropolished.
- Sight port to safely view operation.
- 7 & 15 gallon complete with flow control.

UV-W Series:

- Same as UV series with:
- Internal wiper unit for manual cleaning of quartz sleeve.
- 8 & 15 gallon complete with flow control.



UV-GDS Series:

- Same as UV series with:
- 7 & 15 gallon complete with flow control. Remote flow control adder for 24 gallon (not included)
- Electronic built-in "lamp-out" circuit/alarm.
- ON/OFF indicator light.
- Standard auxillary output terminal for optional solenoid shut-off (UVS077 not included).
- Built in surge protector and fuse.

Ultraviolet Disinfection Systems



Water entering the disinfection unit flows in the space between the quartz sleeve and the chamber wall. Turbulent flow through the unit insures exposure of micro-organisms to lethal dosages of ultraviolet rays. Water exiting the chamber is safe and ready to use.

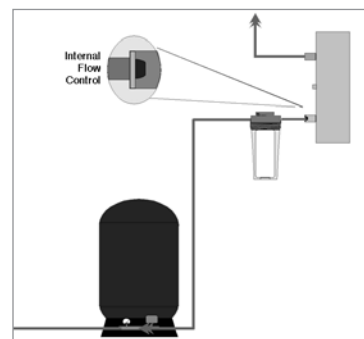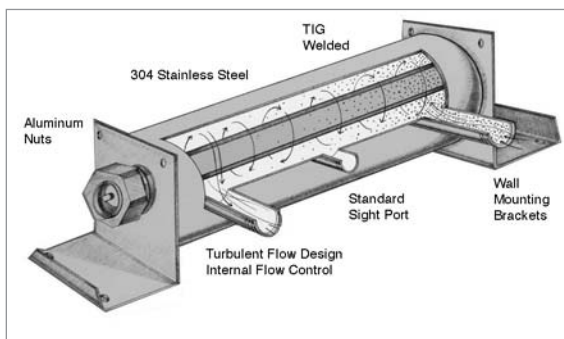

Typical Installation

Part Number	Supplier Part #	Max GPM	# of Lamps	KW @ 120V	AMPS @ 120V 220V	Pipe Size	Dimensions LxWxD	Weight	Lamp Out Alarm	List Price
Safe Lite Economy Series										
UVSL8		8	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	8.5	No	\$ 928.69
Standard Series										
UV7		7	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	17	No	1116.36
UV15		15	1	0.07	.60 .30	1" MIP 3/4" FIP	36"x4"x7"	28	No	1371.53
GDS Series w/ Lamp out alarm										
UV7SE	UV7GDS	7	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	17	Yes	1176.30
UV15SE	UV15GDS	15	1	0.07	.60 .30	1" MIP 3/4" FIP	36"x4"x7"	28	Yes	1478.25

Lamp out circuit board provides a visual and audible alarm when a lamp outage occurs.
Solenoid protection can be added via the on-board relay and the purchase of an UVS079 Solenoid.
220V 50Hz less power cord net adder \$ 35.72. Not available on SE series.



Ultraviolet Disinfection Parts




UVM254




UVS079


Part Number	Description	For Use With Series	List Price
Accessories			
UVM254	UV Dosage meter w/ alarm	UV, UV-W	\$ 2637.69
UVS079	Shut-Off Solenoid 1" FNPT, use w/ UVM254, or UVM257 Specify when ordering	UV, UV-W, UV-SE, UVC	284.22
Maintenance & Repair Parts			
UVP4025	Brass end nut assembly - complete (new)	All models	80.11
UVP5175	Monitor lens kit		160.07
UVP8544	O-ring - Standard for end nut		4.27
UVP1421DWS7	Ballast	UV7	106.68
UVP1421DWS15	Ballast	UV15	106.68
UVP8222	Ballast - (120V, 60 Hz)	UV7SE	106.68
UVP8224	Ballast - (120V, 60Hz)	UV15SE	106.68
UVP8225	Ballast - (120V, 60Hz)	UV15C	131.47
Service Kits - Include bulb, quartz sleeve, o-rings and small tube of silicone.			
Recommended 1 per year.			
UVK07	Includes (1) UVB1805 bulb, (1) UVQS6211 sleeve, (2) UVP8544 o-rings	UV7, UV7SE	159.94
UVK015	Includes (1) UVB8246 bulb, (1) UVQS6608 sleeve, (2) UVP8544 o-rings	All 15 models	213.43
UVK024	Includes (2) UVB8246 bulb, (2) UVQS6608 sleeve, (4) UVP8544 o-rings	All 24 models	421.06




UVB Series - 1 pin each end




UVB Series - 2 pins each end



UVB Series - 4 pins one end



UVQS Series



UVQS-D Series

Part Number	Bulb Length	Description	For Use With Series	List Price
UV Bulbs				
UVB1805	14"	1 pin each end	UV7, UV7SE	\$ 120.80
UVB1814	27.3"	1 pin each end		140.13
UVB8246	33.2"	1 pin each end	All 15 UVC80 24 28 60 120	140.13
UVB11149	45.88"	1 pin each end		140.13
UVB11550	61.2"	1 pin each end	UVC130 bulb	206.60
UVB2436	17"	2 pins each end		140.13
UVB2457	18"	2 pins each end	DWSW-8	140.13
UVB2793	31.34"	2 pins each end		140.13
UVB4287	11.3"	4 pins one end		140.13
UVB4330	13"	4 pins one end		140.13
UVB4357	14.5"	4 pins one end		140.13
UVB4409	16"	4 pins one end		140.13
UVB4436	17"	4 pins one end		140.13
UVB4450	17.71"	4 pins one end	DWS-8V, SE8V, SL5, SL8, SL8V	140.13
UVB4739	29"	4 pins one end	DWS-12V, SE12V	140.13
UVB4793	31.34"	4 pins one end		140.13
UVB4810	32"	4 pins one end		140.13
UVB4854	33.2"	4 pins one end		140.13
Bulb length is from end to end excluding pin connection.				
Quartz Sleeves - Open Ends (22 mm ID, 24.5mm OD)				
UVQS6211	14.37"	Quartz Sleeve	UV7, UV7SE	42.66
UVQS1483	19"	Quartz Sleeve	DWSW-8	54.48
UVQS6608	32.62"	Quartz Sleeve	All 12 15 24 48 60 80 120	87.98
UVQS1575	62"	Quartz Sleeve	UVC130	173.45
Quartz Sleeves - Domed Ends (22 mm ID, 24.5mm OD)				
UVQS1435D	17"	Dome End Quartz Sleeve		88.95
UVQS476D	19"	Dome End Quartz Sleeve	SL5, SL8, DWS-8V	87.98
UVQS335D	34"	Dome End Quartz Sleeve		87.98



Chemical Feed Pumps - CHEMTECH



Chem Tech Series 100

CHEM-TECH Series 100 Features:

- Positive displacement diaphragm metering pump.
- Feed ranges of 15 and 30 gallons per day.
- Operating pressure up to 100 PSI.
- Life-time lubricated, sealed and self-maintaining gear train.
- Four ball valve design for trouble-free operation.
- Strong chemical resistant, flame retardant housing.
- Metal reinforced, short-stroke diaphragm for extra-long life.
- Injection back pressure valve assembly enables injection at an angle and inhibits syphoning.
- Fully adjustable output capacity over operating range.
- Bleed valve assembly aids in priming and relieves pressure from discharge.
- UL, CSA approved for outdoor and indoor applications.
- Manufactured for AGI in an ISO9002 facility.



Chem Tech Series 200

CHEM-TECH Series 200 Features:

- Heavy duty diaphragm feed pump allows for continuous operation.
- Feed ranges of 15 and 30 gallons per day.
- Operating pressure up to 125 PSI.
- High torque motor-gear coupling ensures start-up un maximum pressure.
- Strong fiber core casing & corrosion resistant rubber & plastic components.
- Metal reinforced, short-stroke diaphragm for extra-long life.
- Oil immersed gear train and heavy duty, fan cooled motor with thermal over load protection.
- All wetted components including diaphragm are interchangeable between all Series 200 models.
- Bleed valve assembly aids in priming and relieves pressure from discharge.
- UL, CSA approved for outdoor and indoor applications.
- Manufactured for AGI in an ISO9002 facility.

Materials of Construction:	
Pump Head	SAN
Diaphragm	Hypalon
Valve Seats	Hypalon
Gaskets	PTFE
Disch. Tubing	Polyethylene
Suct. Tubing	Flexible PVC
Ball Checks	Ceramic
Fittings	PVC



ISO 9002

CHEM-TECH Motorized Models:

Includes tubing and suction & discharge fittings

Part Number	Series	Max	Output capacity	Volts	Strokes/ Min.	OD Tube Size	Ctn Qty	List Price
		Pressure PSI	@ Max psi GPD					
015-115	100	100	15	115	25	1/2"	1	\$ 770.19
015-230	100	100	15	230	25	1/2"	1	808.92
030-115	100	100	30	115	51	1/2"	1	770.19
030-230	100	100	30	230	51	1/2"	1	808.92
230-115	200	125	30	115	44	1/2"	1	1904.04
230-230	200	125	30	230	44	1/2"	1	1933.42
260-115	200	125	60	115	88	1/2"	1	2024.76

Additional ChemTech models are available, please contact your sales representative.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

4.45

Chemical Feed Pumps - CHEMTECH Parts



Chem Tech Series 100



Chem Tech Series 200



ISO 9002

Stocked* Parts for Series 100 and Series 200 CHEMTECH Pumps

NEW Part Number	OLD Part Number	Description	List Price
25704	228P	Hypalon Diaphragm	\$ 89.89
28800	242P	SAN Head	94.48
28903	A51P	Head Assembly	204.36
38981	682P	Coupling Spring	11.88
41624	A53P	Anti Siphon valve assembly, 1/2" OD	167.30
J20560	278P	Ceramic Ball Check	11.64
J24960	240P	1/2" OD Standard CPLG nut	11.64
J26907	A54P	PVC Bulk Head Fitting, 1/2" OD, BFH not installed	111.02
J27903	237P	PTFE Gasket	12.30
J30515	J30515	PVC Bleed Valve Kit w/Tubing, 1/2" OD	145.85
J37440	638P	Hypalon Valve Seat	8.41
J38985	285P	Valve Spring	11.88
J40117	A50P	Foot Valve and Strainer Assembly, 1/2" OD	93.83
J41540	244P	Valve Housing Discharge, 1/2" OD	50.43
J41548	247P	Valve Housing, Suction, 1/2" OD	51.91
J41658	A52P	PVC Back Check Valve Assembly, 1/2" OD	105.74
J41694	J41694	1 1/2" long PVC Injection Ftg 1/2" OD tube size	150.60
J61516	J61516	Head Mounting Bolts, S.S. 10 x 24 (4 included) with washers	25.50

* Other Series 100 & 200 parts may be ordered. Contact your sales representative.



Kop Kit®

KOP Kit® for Series 100 & Series 200 CHEMTECH Pumps Feature:

- Designed to guard against unnecessary down time.
- Kop Kit contains recommended spare parts most likely to require normal maintenance.
- Contains valve cartridges with o-rings, head, diaphragm, secondary o-ring seal, head screen, & washers.
- Carded and shrink wrapped for display.

Stocked KOP Kits for Repairs: Keep-On-Pumping Kits


Part Number	Series	Fits Models	Tubing Size	List Price
KX030XAAAAAXX	100&200	3-100 GPD	1/2" OD	\$ 263.69



Chemical Feed Pumps - PULSATRON



C Plus Series



Materials of Construction:	
Pump Head	PVC
Diaphragm	PTFE faced, Hypalon backed
Valve Seats/ O-rings	Hypalon
Tubing	Clear PVC
Ball Checks	Ceramic
Fittings	PVC

PULSATRON®



PULSATRON "C" Series Electronic Metering Pump Features:

- Solenoid driven assembly - no motors.
- Reliable metering performance.
- Rated "hot" for continuous use.
- High viscosity capable up to 1000 cps.
- Leak free, sealless liquid end.
- Diaphragms are PTFE-faced, bonded to a composite of Hypalon & fabric layers and reinforced with a metal insert.
- Manual control by on-line adjustable stroke length (fixed stroke length.)
- Agency approved for outdoor and indoor use.
- Water resistant for outdoor applications.
- Highly reliable timing circuit.
- Guided ball check valve system to reduce back flow and enhance outstanding running characteristics.
- Premium standard wetted component material.
- Few moving parts, wall mountable.
- Safe and easy priming with durable leak-free bleed valve assembly.
- Max pressure rating: 80 psi.
- Maximum 30 gallons per day.

PULSATRON "C PLUS" Series Electronic Metering Pump Features:

- Same as above plus:
- Manual control by on-line **adjustable** stroke length **and** stroke rate.
- Manufactured for AGI in a ISO 9002 facility.

PULSATRON Stocked Electronic Models					Suction & Discharge	
Part Number	Series	Pressure PSI	Max GPD	Voltage	Tube OD	List Price
LC54SA-VHC1-XXX	C	80	30	115	3/8"	\$ 834.29
LD54SA-VHC1-xxx	C Plus	80	30	115	3/8"	998.13
LD54SA-VHCA-xxx	C Plus	80	30	115	1/2"	998.13
LD54SB-VHCA-xxx	C Plus	80	30	230	1/2"	983.80

* Additional Pulsatron models are available. Contact your sales representative.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

4.47

Chemical Feed Pumps - PULSATRON Parts



C Plus Series

PULSATRON®



ISO 9002

Stocked* Parts for PULSATRON C and C Plus Series Pumps

Part Number	Description	List Price
L9906202-00	Replacement C+ Circuit board, 230V	\$ 274.76
L3300H01-PVC	3/8" OD Bleed Valve Assembly	134.59
L3300H03-PVC	1/2" OD Bleed Valve Assembly	134.59
L3101HC1-PVC	3/8" OD C+ Suction valve	62.07
L3101HCA-PVC	1/2" OD Suction Valve	62.07
L3201HC1-PVC	3/8" OD C+ Discharge Valve	62.07
L3201HCA-PVC	1/2" OD C+ Discharge valve	62.07

* Other Series C and C Plus parts may be ordered. Contact your sales representative.



Kop Kit®

KOP Kit® for PULSATRON Series Pumps Feature:

- Designed to guard against unnecessary down time.
- Kop Kit contains recommended spare parts most likely to require normal maintenance.
- Contains valve cartridges with o-rings, head, diaphragm, secondary o-ring seal,, head screen, & washers.
- Carded and shrink wrapped for display.

Stocked K.O.P. Kits for Repairs: Keep-On-Pumping Kits

Part Number	Series	Fits Models	NEW		List Price
			Suction	Disch.	
Part Number	Series	Fits Models	Tubing Size		List Price
K4VHC1	C	30 GPD	3/8" OD		\$ 224.68
K3VHC1	C Plus	12 GPD	3/8" OD		204.61
K3VHCA	C Plus	12 GPD	1/2" OD		204.61
K4VHC1	C Plus	30 GPD	3/8" OD		224.68
K4VHCA	C Plus	30 GPD	1/2" OD		224.68



XP Series

CHEM-TECH XP Series Peristaltic Pump Features:


- Peristaltic technology delivers worry-free dosing, easy operations and minimal maintenance.
- Include adjustable, on/off with current interrupter timer.
- All metal drive gears and gear train. Metal gear housing.
- 3 piece roller design.
- Self priming.
- 115 V, 60 Hz

Part Number	Max PSI	GPD	RPM	Ctn Qty	List Price
XP015LAHX	100	15	30	1	\$ 1016.69
XP030LAHX	100	30	30	1	1016.69


Additional models are available with or without complete tank system.



Chemical Feed Pumps - Accessories



U88 Series

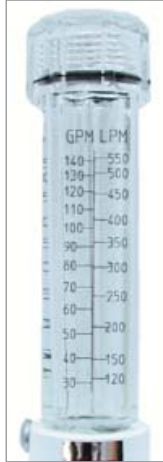


Flow Meter Features:

- Economical, easy to install, easy to maintain.
- Calibrated in GPM/LPM with easy-to-read numbering.
- Available 1" - 4" pipe size.
- Durable acrylic construction.
- Supplied with 2 clamps and rubber gasket seal.
- Maximum temperature limit = 120 °F, Maximum pressure limit = 120 psi.

ISO 9002



Part Number	Nominal Pipe Size	Range GPM/LPM	List Price
U8800424	1"	5-35 / 20-130	\$ 158.80
U8800438	1 1/4"	10-60 / 40-220	158.80
U8800439	1 1/2"	20-80 / 80-300	158.80
U8800440	2"	30-140 / 120-550	158.80
U8800441	2 1/2"	40-200 / 160-750	158.80
U8800442	3"	80-350 / 300-1300	158.80
U8800443	4"	150-600 / 600-2200	158.80

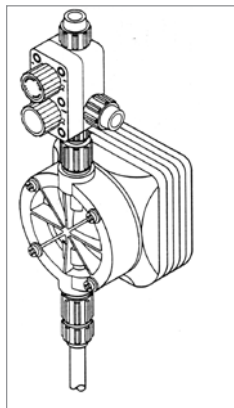

DG/5FV De-gas Five Function Valve Features:


- De-Gas - Bypass gasses and fluid during normal pump operation. Allows for the constant removal of gases that would otherwise "air bind" the pump.
- Back Pressure - Maintains output reproducibility and allows metering into atmospheric discharge.
- Anti-siphon - Prevents siphoning through the pump when point of injection is lower than the pump or into the suction line of another pump. Rated at total vacuum.
- Air Bleed - Used during priming to manually remove air from the pump head.
- Discharge Drain - Depressurize pump discharge line without loosening tubing or fittings. Protects the operator from chemical exposure.

Operation:

- The functions are selected by setting two, independent dual position selector knobs.
- The DG/5FV's compatible with most **PULSATRON** and **CHEMTECH** series pumps. Connected to the existing discharge valve the DG/5FV is capable of handling a large output flow as well as viscous liquids. A return port located on the side body provides flow of chemical back to the solution tank when in the degas, air bleed or drain discharge mode.
- Degas/bypass volume is adjustable, typically 1-10% of pump output.

Specifications:	
Maximum Flow	240 gpd
Minimum Flow	3 gpd
Max Viscosity	1000 cps
Max Pressure	Up to 250 psi

Materials of Construction:	
Valve Body	PVD
Diaphragm	PTFE faced Hypalon
O-rings	Viton or Hypalon
Hardware	188 Stainless steel (recessed)

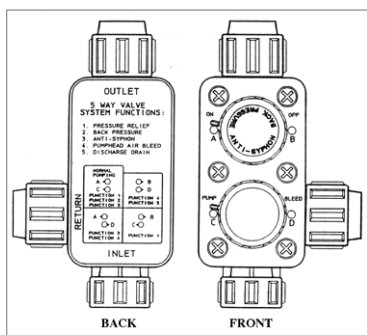

L385 Series

Part Number	Description	O-rings	Valve Body	Connection	List Price
L385KH03-PVD	DG/5FV De-Gas Valve	Hypalon	PVD	1/2" OD tubing	\$ 433.84
L385KV03-PVD	DG/5FV De-Gas Valve	Viton	PVD	1/2" OD tubing	433.84



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

4.49

Chemical Feed Pumps - Accessories



ISO 9002




Solution Tanks

Solution Tank Features:

- High density polyethylene
- 5 gallon marked increments.
- Add "AT" to fitting part number for factory installed bulkhead fittings.

Part Number	Description	List Price
40375	15 Gallon liner with cover 25" x 14 1/2"	\$ 222.71
40360	30 Gallon liner with cover 32" x 18 1/2" Brine Tank	279.99
J40366	50 Gallon liner with rigid cover 42 1/2" x 18 1/2" (b) 23 (t)	522.03
26859	1/2" Bulk Head Fitting (AT) installed at factory	50.40
26860	3/8" Bulk Head Fitting (AT) installed at factory	50.40



Solution Tank Stand for CHEMTECH Series Features:

- Tri-pod stand with pump mounting shelf.
- 12 gauge, 304 stainless steel.


Part Number	Description	Dim. "A"	List Price
39320	15 Gallon with pump mounting shelf	14.13"	\$ 397.60
39322	30-40 Gallon with pump mounting shelf	18.63"	561.19
39321	55 Gallon with pump mounting shelf	18.13"	719.21



Chemical Feed Pumps - Uni-Dose™



U1 and U0 Series



Uni-Dose™ Electronic Metering Pump Features:

- Available with single or dual output control for easy accurate adjustment over operating range.
- Turn down ratio up to 100:1.
- Maximum output from 6 to 30 gallons per day at 80 psi.
- Virtually silent, ideal for household applications.
- Totally enclosed, chemical resistant housings provide superior protection in either indoor or outdoor applications.
- Reliable solid state electronics are fully encapsulated to ensure long life.
- Solenoid design provides power without fans, open housings, motors or gears.
- Safe inherent pressure relief stops pump if system back pressure exceeds the pump strength.
- Thermostatic protection prevents damage from overheating.
- Four self-cleaning Uni-valves designed to maintain prime while eliminating scaling and clogging associated with ball valves.
- Each pump comes complete with an injection check/back pressure valve, a foot valve and strainer, PVC suction tubing, UV resistant PE discharge tubing and tubing straightener.
- Heads and fittings constructed of high strength PVC.
- 1.4 AMPS maximum current @ 120 VAC.
- Made in USA.



Part Number	Description	Max. GPD	Max. PSI	List Price
U01#-281TT	U Series Metering Pump	6	80	\$ 558.45
U02#-281TT	U Series Metering Pump	12	80	558.45
U03#-281TT	U Series Metering Pump	24	80	558.45
U04#-281TT	U Series Metering Pump	30	80	558.45
U12#-281TT	U Series Metering Pump	12	80	602.32
U13# -281TT	U Series Metering Pump	24	80	602.32
U14#-281TT	U Series Metering Pump	30	80	602.32

Insert voltage code/plug type before hyphen:
 1= 120 VAC US plug
 2= 240 VAC US plug (non export)

All LMI pumps are drop shipped direct from factory.



www.americangranby.com

FALL 2016



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Chemical Feed Pumps - Uni-Dose™



U1 and U0 Series

Dimensions:

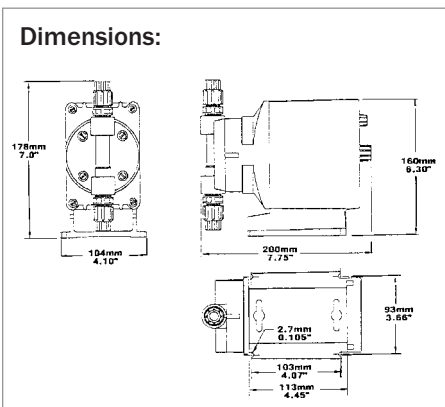

Control and Output Code

Manual Control

Speed (stroking frequency) fixed and stroke length manually adjustable

U016.0 GPD (0.95 L/H)80 PSI (5.5 Bar)

U0212.0 GPD (1.9 L/H)80 PSI (5.5 Bar)

U0324.0 GPD (3.8 L/H)80 PSI (5.5 Bar)

U0430.0 GPD (4.8 L/H)80 PSI (5.5 Bar)

Dual Manual Control

Speed (stroking frequency) fixed and stroke length manually adjustable

U1212.0 GPD (1.9 L/H)80 PSI (5.5 Bar)

U1324.0 GPD (3.8 L/H)80 PSI (5.5 Bar)

U1430.0 GPD (4.8 L/H)80 PSI (5.5 Bar)



Liquid End Materials:

PVC head and fittings, Flexiprene® Liquifram and Uni-Valves.

Model	GPD		GPH		Liters Per Hr.		ml/cc per Min.		ml/cc per Stroke		Strokes per Min.	
	MIN-	MAX	MIN-	MAX	MIN-	MAX	MIN-	MAX	MIN-	MAX	MIN-	MAX
U01	1.2	6.0	0.05	0.25	0.19	0.95	3.2	16	0.13	0.63	Fixed	25
U02	2.4	12.0	0.10	0.5	0.38	1.9	6.3	32	0.13	0.63	Fixed	50
U03	4.8	24.0	0.20	1.0	0.76	3.8	12.7	63	0.13	0.63	Fixed	100
U04	6.0	30.0	0.25	1.25	0.95	4.8	15.8	79	0.16	0.79	Fixed	100
U12	0.12	12.0	0.005	0.5	0.02	1.9	0.3	32	0.13	0.63	2.5	50
U13	0.24	24.0	0.01	1.0	0.04	3.8	0.6	63	0.13	0.63	5	100
U14	0.30	30.0	0.01	1.25	0.05	4.8	0.8	79	0.16	0.79	5	100

Recommended minimum stroke length (adjustable) is 20%



SECTION 5 SUMP & SEWAGE



PRODUCT LINE	PAGE
Accessories Including:	
Basins, Covers & Hubs9
Check Valves4-6
Discharge Kits3
Float Switches, Alarms7-8
Sewage Pumps2
Sump Pumps, Submersible1-2
Sump & Sewage Package Systems10
Utility Pumps1



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Pumps - Utility and Sump



91025 & 91330

Submersible Utility Pump Features:

- 1/5 & 1/3 HP motors, 120 v, 60 Hz
- Corrosion resistant construction.
- 10' waterproof power cord.
- Clog resistant open type impeller.
- Fits in 6" opening.
- Capacities of 26 & 40 gpm.
- 1 year limited warranty.

Specifications:

Discharge: 1 1/4" MNPT
or 3/4" GHT



Housing & Base: Thermoplastic

Impeller: Non-clogging open type

Bearing: Permanently lubricating

Motors: Permanent split capacitor, continuous duty, thermally protected



92250 & 92330
92335

Submersible Sump Pump Features:

- 1/4 & 1/3 HP motors, 120 v, 60 Hz
- Corrosion resistant construction.
- 10' waterproof power cord. 25' on #SP92335.
- Clog resistant open type impeller.
- Switch turns on at 9", off at 4".
- Handles 1/8" solids.
- 1 year limited warranty.

Specifications:



Discharge: 1 1/4" MNPT

Housing & Base: Thermoplastic

Impeller: Non-clogging open type

Bearing: Permanently lubricating

Motors: Permanent split capacitor, continuous duty, thermally protected



92341

Submersible Sump Pump Features:

- 1/3 HP split capacitor motor, 120 V
- Corrosion resistant cast iron construction.
- Bottom & side intake for clog resistant suction.
- 10' waterproof power cord.
- Vertical float switch allows pump to fit in 10" opening.
- Handles 3/8" solids.
- 3 year limited warranty.

Specifications:



Discharge: 1 1/2" MNPT

Housing & Base: Powder Coated Cast Iron

Impeller: Non-clogging open type

Bearing: Permanently lubricating

Motors: Permanent split capacitor, continuous duty, thermally protected



92501

Submersible Sump Pump Features:

- 1/2 HP heavy duty motor, 120 v, 60 Hz.
- Corrosion resistant cast iron construction.
- SP92501 has 10' waterproof power cord.
- SP92507 has 25' waterproof power cord.
- Will handle 1/2" solids.
- Switch turns on at 9", off at 4".
- 3 year limited warranty.

Specifications:



Discharge: 1 1/2" FNPT

Housing & Base: Powder Coated Cast Iron

Impeller: Non-clogging open type

Bearing: Permanently lubricating

Motors: Permanent split capacitor, continuous duty, thermally protected

Model No.	HP	Gallons per minute at discharge height in feet						Min. Lift	Min. Amps	List Price
		0'	5'	10'	15'	20'	25'			
SP91025	1/5	26	21	14	10	7	1	25'	3.6	\$ 186.69
SP91330	1/3	40	34	28	22	12	2	25'	4.1	234.58
SP92250	1/4	30	22	20	16	9	2	25'	3.8	247.49
SP92330	1/3	40	34	28	22	12	2	25'	4.1	266.54
SP92335	1/3	40	34	28	22	12	2	25'	4.1	302.73
SP92341	1/3	46	36	30	25	12	1	25'	4.1	335.39
SP92501	1/2	70	66	58	48	25	10	25'	7.6	332.59
SP92507	1/2	70	66	58	48	25	10	25'	7.6	410.67

NOTE: Use of smaller diameter pipe, or long runs of pipe, will result in lower flow rates than those shown.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266

Fax (800) 729-3299

In Canada:

Phone (800) 268-7570

Fax (905) 629-3204

Pumps - Sump & Sewage



92511

Submersible Sump Pump Features:

- 1/2 HP split capacitor motor, 120 V
- Corrosion resistant cast iron construction.
- Bottom & side intake for clog resistant suction.
- Will handle gray water and up to 1/2" solids.
- 10' waterproof power cord.
- Vertical float switch allows pump to fit in 10" opening.
- 3 year limited warranty.

Specifications:



Discharge: 1 1/2" FNPT
Housing & Base: Powder Coated Cast Iron
Impeller: Non-clogging open type
Bearing: Permanently lubricating
Motors: Split capacitor, cool operation continuous duty, thermally protected



92333 and 92551

Pedestal Sump Pump Features:

- Solid stainless steel drive shaft (92551)
- Plated steel drive shaft (92333).
- Corrosion resistant thermoplastic or cast iron.
- Metal switch arm for durability.
- 92551 uses stainless steel impeller & copper float.
- Full height pump allows cover to fit on basin.
- 1/3 & 1/2 HP motors.
- Capacities up to 60 gallons per minute.
- 10' waterproof power cord.
- 1 year limited warranty on 92333.
- 5 year limited warranty on 92551.

Specifications:



Discharge: 1 1/4" (92333), 1 1/2" (92551)
Housing: Thermoplastic (92333) Powder Coated Cast Iron (92551)
Column: Thermoplastic (92333) Stainless Steel (92551)
Impeller: Non-clogging open type
Bearing: Permanently lubricating
Motors: Permanent split capacitor, continuous duty, thermally protected



93501

Submersible Sewage Pump Features:

- 1/2 HP heavy duty motor, 120 v, 60 Hz.
- Corrosion resistant cast iron construction.
- SP93501 has 10' waterproof power cord.
- SP93507 has 25' waterproof power cord.
- Vortex impeller will handle 2" solids.
- 1 year limited warranty.

Specifications:



Discharge: 2" FNPT
Housing & Base: Painted Cast Iron
Impeller: Cast Aluminum Non-clogging Vortex
Bearing: Permanently lubricating
Motors: Permanent split capacitor, continuous duty, thermally protected

Model No.	HP	Gallons per minute at discharge height in feet _						Max. Head	Min. Amps	List Price
		0'	5'	10'	15'	20'	25'			
SP92511	1/2	70	66	58	48	25	10	25'	7.6	\$ 417.54
SP92333	1/3	50	45	38	35	15	0	20'	2.76	229.32
SP92551	1/2	60	55	45	30	12	5	25'	3.06	325.78
SP93501	1/2	80	68	60	44	13	2	25'	7.6	468.65
SP93507	1/2	80	68	60	44	13	2	25'	7.6	521.15

NOTE: Use of smaller diameter pipe, or long runs of pipe, will result in lower flow rates than those shown.



Sump Pump Discharge Kits



SPDK Series

SPDK Sump Pump Discharge Kits Feature:

- 24 ft of heavy duty corrugated polyethylene tubing, with 8' cutting intervals.
- 1-1/4" or 1 1/2" full size plastic male adapter with stainless steel clamp.
- Individually packaged with instructions included.

Part Number	Description	Ctn Qty	List Price
SPDK125M	Male adapter to fit 1-1/4" FIPT pump discharge	8	\$ 17.62
SPDK150M	Reducing male adapter (1 1/2" mip x 1-1/4" ins) to fit 1-1/2" FIPT pump discharge with 1 1/4" sump hose	8	18.40
SPDK150MHD	Male adapter to fit 1 1/2" FIPT pump discharge w/ 1 1/2" sump hose	6	26.63
SPDH125-300	1 1/4" bulk hose, 300'	1	199.49
SPDH150-150	1 1/2" bulk hose, 150'	1	183.71

SS&E Check Valves




2200 Series



2200 Series Checkmate Features:

- One piece ball/check valve combination.
- Save time, labor and hassle to applications requiring in-line ball valves and check valves.
- True union or compression design allows for removal of check valve for cleaning or repairs.
- Rates at 125 psi. May be installed in vertical or horizontal position.
- Made of PVC type 1 grade 1 material meeting ASTM-D1784.




Part Number	Description	Ctn Qty	List Price
2200-15	1 1/2" Union x Slip	12	\$ 55.26
2200-20	2" Union x Slip	12	83.61
2200-15TU	1 1/2" Union x Union	12	73.20
2200-20TU	2" Union x Union	12	97.08
2200-15UC	1 1/2" Compression x Compression	12	66.84
2200-20UC	2" Compression x Compression	12	89.36




MCV Series

"Smart" Swing Check Valve Features:

- Patented innovation in swing check valve technology eliminates in-line flow restriction of conventional check valves.
- Spring loaded swing check flapper/gate allows full flow and reliable back flow prevention.
- Standard "smart" check valve remains closed to 1/2 psi, then open for full flow.
- Magnetic "smart" check valves remain closed to 2 psi, then open for full flow.



MCV821 Series



MCV823 Series



MCV850 Series

Part Number	Size	Description	Spring Tension	Ctn Qty	List Price
MCV821-10	1"	Slip x Slip	1/2 lb.	12	\$ 22.26
MCV821-10C	1"	Slip x Slip CLEAR	1/2 lb.	12	25.37
MCV821-15	1 1/2"	Slip x Slip	1/2 lb.	12	33.56
MCV821-15C	1 1/2"	Slip x Slip CLEAR	1/2 lb.	12	37.00
MCV821-20	2"	Slip x Slip	1/2 lb.	12	39.46
MCV821-20C	2"	Slip x Slip CLEAR	1/2 lb.	12	42.55
MCV821-20M	2"	Slip x Slip w/magnet	2 lb.	12	43.08
MCV821-20MC	2"	Slip x Slip w/magnet CLEAR	2 lb.	12	45.96
MCV823-10	1"	Union x Union	1/2 lb.	12	33.56
MCV823-10C	1"	Union x Union CLEAR	1/2 lb.	12	37.00
MCV823-15	1 1/2"	Union x Union	1/2 lb.	12	38.21
MCV823-15C	1 1/2"	Union x Union CLEAR	1/2 lb.	12	56.56
MCV823-20	2"	Union x Union	1/2 lb.	12	50.89
MCV823-20C	2"	Union x Union CLEAR	1/2 lb.	12	60.25
MCV823-20M	2"	Union x Union w/magnet	2 lb.	12	60.25
MCV823-20MC	2"	Union x Union w/magnet CLEAR	2 lb.	12	63.97
MCV850-15	1 1/2"	Check/Slice Combo Union x Slip		12	58.49
MCV850-20	2"	Check/Slice Combo Union x Slip		12	84.92



SS&E Check Valves



SUMP CHECK




1500 Series




SPCV Series



SC Series



SC125SRS, SC125/150 DRS

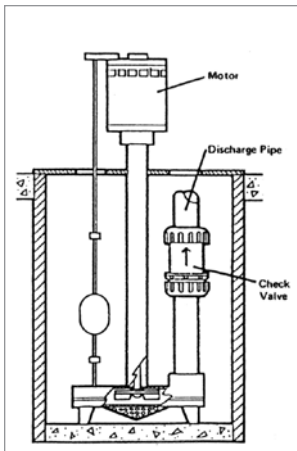

Typical Installation

Sump Check Features:

- Valve fits 1-1/4" or 1-1/2" IPS size PVC, ABS & Galvanized.
- 4 gaskets furnished with each valve (2)1- 1/4" and (2)1- 1/2".
- Easy installation, no hose clamps, cementing or threading.
- Long lasting EPDM weighted flapper.
- Body length 5 1/4"



1500 Series Features:

- Compression PVC Swing Check Valve.
- For IPS plastic or steel pipe.
- Body length is 7 1/2" for 1 1/4" and 1 1/2"; 9 3/4" for 2"



SPCV Series Features:

- Swing Check Valve, rubber boot x rubber boot
- ABS body, Buna-N flapper, rubber boot w/stainless steel clamps.
- Available in 1-1/4", 1-1/2" and 2".




SC Series Features:

- Full flow - positive sealing flapper swing check design.
- Durable sonic welded thermoplastic body.
- Available in 1-1/4" & 1-1/2" and combo 1-1/4"-1-1/2".
- Stainless steel clamps provided on the RS models.
- Single (S) or Double (D) reducing rubber sleeves for flexibility.

Part Number	Inlet	Outlet	Ctn Qty	List Price
SUMP CHECK	1 1/4" or 1 1/2" IPS	1 1/4" or 1 1/2" IPS	12	\$ 32.23
1500-12	1 1/4" ips comp	1 1/4" ips comp	12	42.20
1500-15	1 1/2" ips comp	1 1/2" ips comp	12	47.15
1500-20	2" ips comp	2" ips comp	12	66.35
1500-30	3" ips comp	3" ips comp	2	169.85
SPCV125	1 1/4" rubber boot	1 1/4" rubber boot	10	13.74
SPCV150	1 1/2" rubber boot	1 1/2" rubber boot	10	14.14
SPCV200	2" rubber boot	2" rubber boot	12	27.60
SC125B	1 1/4" mpt	1 1/4" barb or 1 1/2" slip	20	5.62
SC150B	1 1/2" mpt	1 1/4" barb or 1 1/2" slip	20	5.62
SC125	1 1/4" mpt	1 1/4" or 1 1/2" slip	20	5.99
SC125SRS	1 1/4" mpt	1 1/4" or 1 1/2" rubber boot	10	10.48
SC150SRS	1 1/2" mpt	1 1/4" or 1 1/2" rubber boot	10	10.48
SC125/150DRS	1 1/4" or 1 1/2" rub boot	1 1/4" or 1 1/2" rubber boot	10	15.03





SPCV SL Series

SPCV Silent Series Check Valve Features:

- Double flapper design eliminates typical hammering of sump check valve after pump cycles.
- Nested flapper design allows for proper seating and eliminates stress at the hinge point.
- ABS body, Buna-N flapper, rubber boot w/stainless steel clamps.
- Available in 1-1/2" and 2".
- Made in USA.
- Pressure tested.

Part Number	Inlet	Outlet	Ctn Qty	List Price
SPCV150SL	1 1/2" RUBBER BOOT	1 1/2" RUBBER BOOT	16	\$ 39.69
SPCV200SL	2" rubber boot	2" rubber boot	12	50.52



Mechanical Float Switches



GF20W with plug




GF20W NO plug

Mechanical Float Switch Features:

- Precision molded floats.
- Non-mercury design for potable and non-potable water applications.
- Float switches have 16 gauge CPE jacketed cords (SJOW-A/CSA Type SJOW), with 120 or 240 volt series piggy back plugs.
- Unterminated float switches for direct wire applications.
- CSA / UL approved.
- 13 Amps - 1/2 hp @ 120/240 VAC 60 Hz.
- Max operating temp: 140°F (60°C) water resistant, 194°F (90°C) dry.
- Black ABS floats for **PUMP DOWN** (normally open) or emptying applications.
- White ABS floats for **PUMP UP** (normally closed) or filling applications.



Part Number	Description	Cord & Plug	Application	Ctn Qty	List Price
MECHANICAL BLACK ABS FLOAT - PUMP DOWN/NORMALLY OPEN					
GF20W10F1	120V	10' with plug	Pump down	1	\$ 56.25
GF20W15F1	120V	15' with plug	Pump down	1	67.50
GF20W20F1	120V	20' with plug	Pump down	1	69.37
GF20W30F1	120V	30' with plug	Pump down	1	88.13
GF20W50F1	120V	50' with plug	Pump down	1	118.13
GF20W10F2	240V	10' with plug	Pump down	1	77.82
GF20W15F2	240V	15' with plug	Pump down	1	88.13
GF20W20F2	240V	20' with plug	Pump down	1	93.75
GF20W1000	120V/240V	10' NO plug	Pump down	1	49.50
GF20W1500	120V/240V	15' NO plug	Pump down	1	59.81
GF20W2000	120V/240V	20' NO plug	Pump down	1	64.12
GF20W3000	120V/240V	30' NO plug	Pump down	1	74.62
GF20W5000	120V/240V	50' NO plug	Pump down	1	96.56
MECHANICAL WHITE ABS FLOAT - PUMP UP/NORMALLY CLOSED					
GW2CW10F1	120V	10' with plug	Pump up	1	56.25
GW2CW15F1	120V	15' with plug	Pump up	1	67.50
GW2CW20F1	120V	20' with plug	Pump up	1	69.37
GW2CW30F1	120V	30' with plug	Pump up	1	88.13
GW2CW50F1	120V	50' with plug	Pump up	1	118.13
GW2CW10F2	240V	10' with plug	Pump up	1	77.82
GW2CW15F2	240V	15' with plug	Pump up	1	88.13
GW2CW20F2	240V	20' with plug	Pump up	1	93.75
GW2CW1000	120V/240V	10' NO plug	Pump up	1	49.50
GW2CW1500	120V/240V	15' NO plug	Pump up	1	59.81
GW2CW2000	120V/240V	20' NO plug	Pump up	1	64.12
GW2CW3000	120V/240V	30' NO plug	Pump up	1	74.62
GW2CW5000	120V/240V	50' NO plug	Pump up	1	96.56



HWA Series

HWA Series High Water Alarm Features:

- 120v/1HP/60HZ.
- Both visible and audible horn alarms with horn silence switch.
- Nema 1 plastic PVC panel.
- 10' float cord.


Part Number		Power Cord	Ctn Qty	List Price
HWA115-10	High Water Alarm	6'	1	\$ 183.52
HWA115-20-10	High Water Alarm	20'	1	188.78




SP3000 Series

Indoor Water Alarm with Battery Backup Features:

- Monitors liquid levels in sump basins, lift stations tank, wastewater applications.
- Durable NEMA 1 thermoplastic 6" x 3 3/4" x 2 1/2" enclosure rated for indoor use.
- Red "Alarm ON" light, green "Power On" light and 85 decibel horn at 10 feet.
- Alarm test and horn silence button with auto reset.
- Battery backup.
- 6' Power Cord, 15' Float cord.
- Auxiliary contacts. 120 VAC, 5 AMP max 60 Hz.
- External terminal block float connection for easy installation. Do not apply power. Class Two Output, 12 VAC.
- Primary 120 VAC, Secondary 12 VAC, 60 Hz (Alarm condition 2.5 watts max).



Part Number	Description	Ctn Qty	List Price
SP3000-15	Indoor Water Alarm	1	\$ 208.93



9036DG Series

ISO 9001

DG Sumptrol Float® Switch Features:

- For open tank or sump applications.
- 2 Pole, Single lever operated.
- NEMA Type 1.
- Manufactured for AGI in an ISO 9001 facility.



Part Number	Description	Ctn Qty	List Price
9036DG2	Contacts close on liquid rise	1	\$ 96.56
9036DG2R	Contacts open on liquid rise	1	120.73



SS&E Basins, Covers & Hubs




HSB Series

HSB Series Sump & Sewage Basin Features:

- Includes applicable cover, hardware and adapt-a-flex hub.
- Designed to accommodate most any pump on the market.
- Corrosion and impact resistant polyethylene.
- Easy installation with adapt-a-flex weather and gas tight fittings on ejector basins.
- A variety of steel and poly covers and hubs available to fit most any installations.
- Covers in stock have 2" vents, Covers with 3" & 4" vents available by special order.
- Use NH suffix for no hole in basin.

Sizes	Description	Ctn Qty	List Price
Sump Basin			
HSB1822	With 1 piece slotted poly cover, 22 gal	1	\$ 129.96
HSB18221SC	With 1 piece steel cover, 22 gal	1	186.01
HSB1822LC	Basin less cover, 22 gal	1	89.19
Sewage Basin			
HSB1830	With 1 piece steel cover, hub, 2" vent, 30 gal	1	220.94
HSB18302SC	With 2 piece steel cover, hub, 2" vent, 30 gal	1	228.34
HSB1830NH	With 1 piece steel cover, no hole in basin, 30 gal	1	233.57
HSB2424	With S2410SC steel cover, hub, 2" vent, 48 gal	1	524.84
HSB2436	With S2410SC steel cover, hub, 2" vent, 71 gal	1	605.62
HSB2436NH	With S2410SC steel cover, no hole in basin, 71 gal	1	527.74
HSB3036D	With D3008C duplex steel cover, hub, 2" vent, 110 gal	1	1541.06

Sump and Sewage Basin Covers, Hubs and Kits



2SC



1PC

Part Number	Description	Ctn Qty	List Price
1SC	1 pc steel cover 18" dia w/ 2 2" holes & hardware	1	\$ 115.87
2SC	2 pc steel cover 18" dia w/ 2 2" holes & hardware	1	123.86
1PC	1 pc plastic cover 18" dia slotted w/ hardware	1	52.48
4-HUB	Cast iron 4" Hub	1	49.86
4AF-HUB	Adapt-a-flex 4" Hub	1	34.75
HSB1830KIT	Tape, nuts, bolts	1	40.80



HSBB2300STL



HSBC23RSL

HSBB Series Sump & Sewage Basin Features:

- Tapered Corrugated Sump Basin and locking cover
- Made of durable, corrosion resistant polyethylene resin.
- Radon sump lid has gasket kit to seal openings.


Sizes	Description	List Price
HSBB2300STL	18" x 24" basin only, 18 gal. capacity	\$ 64.69
HSBB2300STL30	18" x 30" basin only, 26 gal. capacity	85.41
HSBC23STL	Slotted Locking Cover only	26.46
HSBC23RSL	18" Radon Sump Lid only	127.83



Sump & Sewage Package Systems



Package Systems

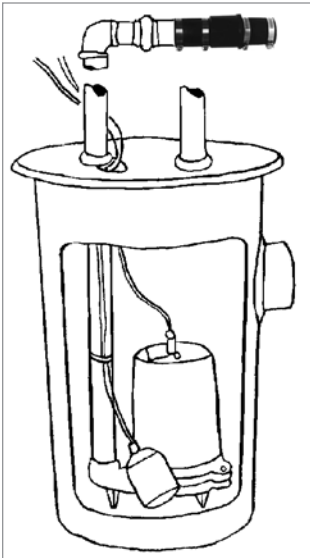

Piping not included

HPA500S Sewage Package Includes:

- SP93501 Sewage pump with 2" FNPT discharge.
- HSB1830 18" x 30" Basin with 1 piece steel cover w/2" discharge.
- Adapt-a-flex hub.
- SPCV200 2" Check valve.
- Cast iron hub available.
- 2 piece cover available.
- 2" compression check valve 1500-20 available at additional cost.

Pricing & Performance Table [USGPM]

Model No.	HP	Pumping Height for SP93501					Min		List Price
		0'	5'	10'	15'	20'	Volts	Amps	
HPA500S	1/2	80	68	60	44	13	120	7.6	\$ 697.40

Laundry Tray Systems



LTS Package Features:

- 1/3 HP SP92341 Sump Pump, 120v
- 11 x 17 x 14 basin with cover.
- SPCV125 Check Valve.
- 1 1/4 x 18 PVC nipple.
- Above the floor sump that accepts most any submersible pump.
- Rotationally molded from polyethylene with no seams.
- Bolt down cover allows easy access for installation or removal of sump pump.
- 1-1/2" threaded inlet connection.

Pricing & Performance Table [USGPM]

Model No.	Pumping Height for SP92341					Volts	Min		List Price
	0'	5'	10'	15'	20'		Amps		
LTS33	40	34	28	22	12	120			\$ 589.00
LTSB	Laundry Tray basin only								216.00



SECTION 6

PLUMBING & HEATING ACCESSORIES & SPECIALTIES



PRODUCT LINE	PAGE
Air Purgers, Vents & Water Hammer Arrestors	6
Clear Braided PVC Hose	11-12
Clips & Van Hangers	24
Closet Flanges/Gaskets	18
Compression Couplings, Imported PVC/CPVC	1
Compression Fittings, Galvanized	2
Couplings - Flexible and No-Hub	4
Drains	13
Iron Out	14
Installation Kits & Cords	13
Perforated Hanger Strapping	23
Pipe Hangers	29-32
Pipe Repair Clamps	3
Pipe Straps & Clamps	25-26
Plumbing Specialty Accessories	20
Roof Flashings	21
Saddle Tapping Valve & Kit	14
Solder Preparation	22
Strap & Tube Hangers	33-34
Stud Protectors	35
Tanks - Thermal Expansion	5
Test Plugs, Caps	19
Trap Wrap™	15-16
Tube & Pipe Hooks	27-28
Tubing	7-8
Tubing Fittings	9-10
Washer Boxes	17



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Compression Couplings-Imported, PVC/CPVC



MATERIAL SPECIFICATIONS

#	Part	Material
1	Body	UPVC, CPVC
2	Compression Nut	UPVC, CPVC
3	Gasket - PVC	NR
	Gasket - CPVC	EPDM

PVC Compressing Coupling Features:

- Iron Pipe Size (PVC), Copper Tube Size (CPVC)
- For use with cold water (PVC) or hot water (CPVC-CTS)
- Natural rubber gasket seals
- Rated at 200 psi at 70 °F
- Imported

"PC" Series IPS DIMENSIONS (IN.)				
SIZE	D	d	d1	L
1/2"	1.85	.91	.83	5.24
3/4"	2.09	1.18	1.04	5.32
1"	2.40	1.42	1.31	5.75
1 1/4"	2.87	1.81	1.65	6.30
1 1/2"	3.15	2.05	1.89	6.89
2"	3.62	2.56	2.37	7.87
2 1/2"	4.53	2.52	2.87	9.92
3"	5.28	3.62	3.49	10.87
4"	6.34	4.65	4.49	11.93
6"	8.78	6.85	6.62	11.22

"HW" Series CTS DIMENSIONS (IN.)				
SIZE	D	d	d1	L
1/2"	1.30	.71	.63	4.49
3/4"	1.85	.95	.88	5.00

Part Number	Material	Size	Case Qty	List Price
PC10-1/2	PVC	1/2" IPS	100	\$ 2.56
PC10-3/4	PVC	3/4" IPS	90	2.97
PC10-1	PVC	1" IPS	60	3.84
PC10-11/4	PVC	1 1/4" IPS	40	4.62
PC10-11/2	PVC	1 1/2" IPS	30	6.37
PC10-2	PVC	2" IPS	20	8.87
PC10-21/2	PVC	2 1/2" IPS	10	20.26
PC10-3	PVC	3" IPS	4	28.67
PC10-4	PVC	4" IPS	2	37.83
PC10-6	PVC	6" IPS	2	91.00
HW10CTS1/2	CPVC	1/2" CTS	20/360	4.48
HW10CTS3/4	CPVC	3/4" CTS	20/240	5.42



SW Series

Part Number	For Use with Coupling Sizes	Ctn Qty	List Price
Adjustable Strap Wrench			
SW400	1/2" through 4"	10/60	\$ 19.47
SW600	1/2" through 6"	10/60	23.18



Compression Fittings, Galvanized



Galvanized Long Pattern Compressing Fitting Features:

- Bodies made of steel tubing. (GC 10), malleable iron (GC10C)
- End nuts made of malleable iron.
- Galvanized finish
- Buna-N gaskets on domestic fittings.
- SBR gaskets on GC10C series.
- Maximum rated service temperature for gaskets: 212 °F (100° C).

WARNING: Designer and/or contractor must provide suitable anchoring of piping to prevent pull-out from fittings when applications subject piping to external forces such as ground shift and temperature variations that cause linear pipe contraction.

Recommended Maximum Pressure (PSI)		
Size	Torque Ft. Lbs	Anchored Piping
1/2"	150	150
3/4"	150	150
1"	225	100
1-1/4"	225	100
1-1/2"	225	100
2"	300	75



GC10C Series

ISO 9002



Coupling GC10C - Long Pattern - Imported - Malleable Iron, 125 PSI, 120° F

Part Number	Size	Pipe O.D.	Ctn/Case Qty	List Price
GC10C1/2	1/2"	.840	30 / 60	\$ 11.77
GC10C3/4	3/4"	1.050	25 / 50	13.20
GC10C1	1"	1.315	15 / 30	15.49
GC10C11/4	1-1/4"	1.660	12 / 24	19.67
GC10C11/2	1-1/2"	1.900	9 / 18	23.31
GC10C2	2"	2.375	14	34.85



GC10 Series

Coupling GC10 - Made in U.S.A. - Steel Tube

Part Number	Size	Pipe O.D.	Ctn Qty	List Price
GC10-1/2	1/2"	.840	12	\$ 31.05
GC10-3/4	3/4"	1.050	12	33.86
GC10-1	1"	1.315	12	39.97
GC10-11/4	1-1/4"	1.660	6	53.38
GC10-11/2	1-1/2"	1.900	6	58.96
GC10-2	2"	2.375	6	74.10




GC12 Series

Adapters GC12 - Made in U.S.A. - Steel Tube

Part Number	Size	Pipe O.D.	Ctn Qty	List Price
GC12-1/2	1/2"	.840	12	\$ 43.73
GC12-3/4	3/4"	1.050	12	45.77
GC12-1	1"	1.315	12	46.35
GC12-11/4	1-1/4"	1.660	6	55.10
GC12-11/2	1-1/2"	1.900	6	76.62
GC12-2	2"	2.375	6	76.76



Pipe Repair Clamps

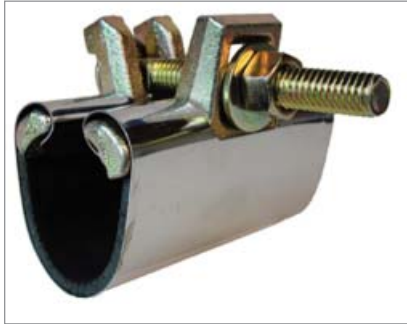

Repair Clamp Features:

- Pipe repair clamps eliminate the need for costly pipe replacement for simple leaks.
- Non-corrosive clamp band is made of annealed stainless steel.
- Nuts and bolts are cadmium plated with a chromate finish; heavy duty hex nut with washer.
- Lugs are made of annealed, malleable iron for maximum strength and permanence; iron phosphate finish.
- Neoprene gasket with maximum rated service temperature of 212° F (100°C).
- Imported



Straight through bolt pull on lugs gives more uniform pressure on the band, more pressure on pipe with less torque on nut.

Oval lug opening in band won't tear - no corners to rip out as with square hole.

Lugs above pipe level don't pull into pipe. Gives more tension on band - more sealing power yet won't crush pipe.

Band covers lead edge of lug. Equal pressure across entire band. No friction - no cutting into pipe surface by raw edge of band opening.

Part Number	Nominal Pipe Size	IPS Pipe O.D.	CTS Tube O.D.	Ctn Qty	List Price
3" Wide, 1 Bolt					
HRC3-3/8	3/8"	.675	.625	6/72	\$ 7.40
HRC3-1/2	1/2"	.840	.875	6/72	7.40
HRC3-3/4	3/4"	1.050	1.125	6/72	7.47
HRC3-1	1"	1.315	1.375	6/72	7.97
HRC3-1 1/4	1 1/4"	1.660	1.625	6/72	9.47
HRC3-1 1/2	1 1/2"	1.900		6/72	9.73
HRC3-2	2"	2.375		6/72	10.67
HRC3-2 1/2	2 1/2"	2.875		6/48	11.37
HRC3-3	3"	3.50		6/48	12.73
HRC3-4	4"	4.50		6/24	13.69
6" Wide, 2 Bolts					
HRC6-1/2	1/2"	.840	.875	6/56	13.60
HRC6-3/4	3/4"	1.050	1.125	6/56	13.99
HRC6-1	1"	1.315	1.375	6/56	14.50
HRC6-1 1/4	1 1/4"	1.660	1.625	6/56	15.68
HRC6-1 1/2	1 1/2"	1.900		6/56	17.62
HRC6-2	2"	2.375		6/56	19.77
HRC6-2 1/2	2 1/2"	2.875		6/24	21.28
HRC6-3	3"	3.50		6/24	22.44
HRC6-4	4"	4.50		6/24	22.92

Couplings, Caps - Flexible & No-Hub



Coupling, Cap Features:

- Flexible couplings for joining all types of sewer pipe, including transitions from one type to another.
- NO-HUB couplings for joining cast iron pipe sections
- End Caps for capping cast iron, steel, PVC and ABS pipe.
- 300 Series stainless steel clamps
- Meets IAPMO File #0317, BOCA ESI RR#90-68, SBCCI PST&ESI Report #9483B
- CSA Approved



C Series



MR Series



MRTC Series




07 Series

Part Number	Size	Connection	Ctn Qty	List Price
NO HUB COUPLINGS				
C150C	1 1/2 X 1 1/2	CI X CI	100	\$ 9.84
C200C	2 X 2	CI X CI	100	9.84
C300C	3 X 3	CI X CI	100	11.47
C400C	4 X 4	CI X CI	100	13.88
FLEXIBLE COUPLINGS				
MR0244	4 X 4	CLAY X CI/PL	18	15.16
MR56125	1 1/2" Tubing, Copper or 1 1/4" PL to Same		24	7.23
MR5615	1 1/2 x 1 1/2	CI/PL X CI/PL	24	7.68
MR5622/125	2 x 1 1/4	CI/PL x CI/PL	24	8.04
MR56215	2 X 1 1/2	CI/PL X CI/PL	24	8.75
MR5622	2 X 2	CI/PL X CI/PL	24	8.27
MR56315	3 x 1 1/2	CI/PL x CI/PL	24	14.63
MR5632	3 X 2	CI/PL X CI/PL	24	10.33
MR5633	3 X 3	CI/PL X CI/PL	18	11.17
MR5642	4 x 2	CI/PL x CI/PL	18	18.05
MR5643	4 X 3	CI/PL X CI/PL	18	15.07
MR5644	4 X 4	CI/PL X CI/PL	24	14.00
MR5655	5 X 5	CI/PL X CI/PL	14	21.92
MR5664	6 x 4	CI/PL x CI/PL	10	32.57
MR5666	6 X 6	CI/PL X CI/PL	12	29.94
DRAIN PIPING TO TUBULAR TRAP *				
MRTC150	1 1/4" x 1 1/2"		24	4.40
MRDTC150	1 1/4" or 1 1/2" x 1 1/4" or 1 1/2"		24	5.39
MRDTC215	2" x 1 1/4" or 1 1/2"		24	7.11
* Any combination of 1 1/4" or 1 1/2" tubular drain (plastic, tubular or copper)				
END CAPS				
0701-011	1 1/2"		24	4.28
0702-019	2"		24	5.04
0703-017	3"		24	6.37
0704-015	4"		24	8.15
0705-020	5"		20	16.29
0706-028	6"		12	16.77



Tanks - Thermal Expansion

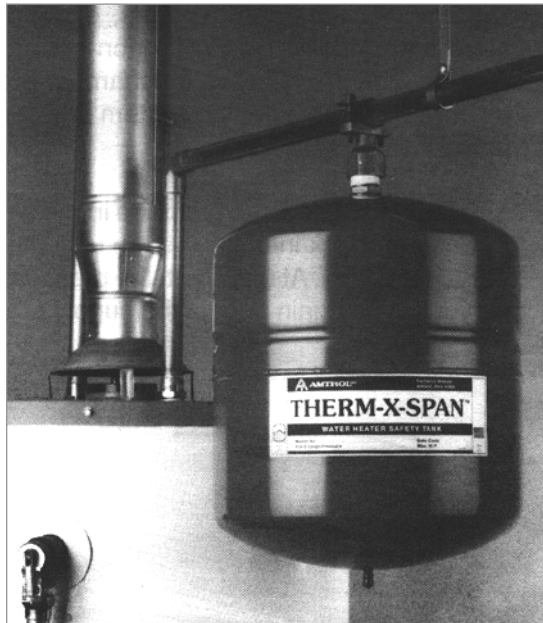


THERM-X-SPAN™

Hot Water Heater Safety Expansion Tank

THERM-X-SPAN™ tanks are diaphragm-type, pre-pressurized expansion tanks specifically designed for use with domestic hot water heaters. They act as a safety tank to accept the increased volume of water created when a water storage tank is heated, therefore keeping the system below the relief valve setting. These tanks are recommended in areas where a backflow preventer, check valve or pressure reducing valve is used, creating a closed system.

Features and Benefits:

- Eliminates relief valve spillage
- Controls pressure build-up
- Protects plumbing fixtures
- Smothers water hammer
- Extends water heater life
- Eliminates hot water waste

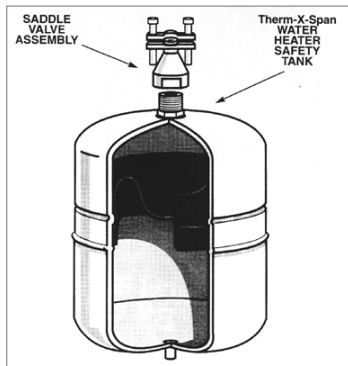

Specifications:

- Steel shell
- Polypropylene liner, butyl diaphragm
- Brass system connection on G5 and G12
- Stainless steel connection on ST25V, ST30V and ST42V
- 200° F maximum operating temperature
- 150 PSI maximum working pressure
- 40 PSI factory precharge



ANSI/NSF 61



IAPMO



REPORT #93126



Part Number	Configuration	Tank Volume	System Connection	Dimensions			
				Diameter	Height	Weight	List Price
G5	IN-LINE	2 gal	3/4" NPTM	8"	12 5/8"	5 lbs.	\$ 149.59
G12	IN-LINE	4.4 gal	3/4" NPTM	11"	15"	9 lbs.	200.70
ST25V	STAND	10.3 gal	1" NPTF	15 3/8"	19 1/4"	23 lbs.	567.30
ST30V	STAND	14.0 gal	1" NPTF	15 3/8"	23 7/8"	25 lbs.	695.05

City of Los Angeles
Approved



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



443

Air Purger Features:

- Reliable and continuous air separation with maintenance free operation.
- Designed using a double water passage way with internal contours and baffles.
- Efficiently separates air from water sending it to the vent for removal.
- In-line unit -- one piece cast iron construction.
- Individually packaged.



700-C

Float Type Air Vent Features:

- Designed to be installed at the hydronic system high points on heaters and baseboard convectors directly on top of the air purger.
- Improves system efficiency.
- Compact size to fit the smallest spaces.
- Rugged cast bronze body construction for durability.
- Industry proven servicable design with take-apart feature.
- Individually packaged.



500



Mini Trol® Water Hammer Arrestor Features:

- Intercepts surges in water lines, preventing damage and annoying shock waves set in motion by quick closing valves.
- Polypropylene liner and diaphragm totally separates water from body.
- Guaranteed not to waterlog or lose air.
- Max. Supply Pressure: 90 psi; Max. Working Pressure: 150 psi;
- Max. Water Temperature: 200 °F


Air Purger Part Number	Pipe Size	Dimensions(Ins.)			Tank Conn	Vent Conn	Ctn Qty	List Price
		"L"	"W"	"H"				
443-1	1"	6	2-1/2	4	1/2 FIPT	1/8 FPS	1	\$ 56.24
444-11/4	1-1/4"	6	2-1/2	4	1/2 fipt	1/8 fps	1	57.96
445-11/2	1-1/2"	8	3-1/2	5	1/2 fipt	1/8 fps	1	123.87
446-2	2"	8	3-1/2	5	1/2 fipt	1/2 fps	1	141.23

Air Vent Part Number	Maximum PSI	Maximum Temp	Connection	Ctn Qty	List Price
700-C	150 PSI	230 °F (110 °F)	1/8 MPS (NPTM)	1	\$ 25.50

Mini Trol® Part Number	Description	Connection	Ctn Qty	List Price
500	Mini Trol	1/2 Male	24	\$ 69.76



Tubing - Polyethylene



Physical Properties of Polyethylene Tubing

Secant Modulus	3200 PSI
Tensile Strength	1600 PSI
Ultimate Elongation	500%
Water Absorption	0.01%
Density912g/cm ³
Vicat Softening Point	201°F
Melt Index	1.0g/10 min
Thermal Coefficient of Expansion11x10 ⁻⁵ in/in/°F
Thermal Conductivity8x10 ⁻⁴ cal/sq cm/sec/°C/cm
Brittleness Temperature	-76°F
Tear Resistance475lb/in. of thickness

Polyethylene Tubing Features:


- Economical.
- Extremely Flexible.
- Translucent.
- Resists Corrosion.
- **NOT FOR USE WITH HOT WATER**

• SOLD IN COIL LENGTHS ONLY.


- ORDER BY THE NUMBER COIL LENGTHS REQUIRED.

Ex: For 500' of MV4040-5 order Qty 1 MV4040-5

Part Number Bulk Boxed	Part Number Dispenser Box	OD	ID	Wall	Coil Length	List Price Per Coil
MV4040-1BLACK		1/4"	.17"	0.04"	100'	\$ 28.18
MV4040-1		1/4"	.17"	0.04"	100'	28.18
MV4040-5		1/4"	.17"	0.04"	500'	140.95
MV4040M		1/4"	.17"	0.04"	1000'	281.92
MV4062-1		1/4"	1/8"(.125)	1/16"(.062)	100'	32.02
MV4062-5		1/4"	1/8"(.125)	1/16"(.062)	500'	160.14
MV4062M		1/4"	1/8"(.125)	1/16"(.062)	1000'	320.28
MV5062-1		5/16"	3/16"(.1875)	1/16"(.040)	100'	44.62
MV5062-5		5/16"	3/16"(.1875)	1/16"(.062)	500'	223.06
MV5062M		5/16"	3/16"(.1875)	1/16"(.062)	1000'	446.15
MV6062-1		3/8"	1/4"(.250)	1/16"(.062)	100'	53.38
MV6062-5		3/8"	1/4"(.250)	1/16"(.062)	500'	274.03
MV6062-5BLACK		3/8"	1/4"(.250)	1/16"(.062)	500'	274.03
MV6062M		3/8"	1/4"(.250)	1/16"(.062)	1000'	544.63
MV8062-1		1/2"	3/8"(.375)	1/16"(.062)	100'	76.51
MV8062-5		1/2"	3/8"(.375)	1/16"(.062)	500'	382.56
MV10062-1		5/8"	1/2"(.500)	1/16"(.062)	100'	96.58
MV10062-5		5/8"	1/2"(.500)	1/16"(.062)	500'	483.01
MV12075-1		3/4"	.6	.075	100'	133.22
MV12075-5		3/4"	.6	.075	500'	700.58
MV16093-1		1"	.814	.093	100'	200.99
	TP308	1/4"	.17"	0.04"	100'	\$ 40.64
	TP309	5/16"	3/16"(.1875)	1/16"(.040)	100'	37.26
	TP310	3/8"	1/4"(.250)	1/16"(.062)	100'	64.82
	TP311	1/2"	3/8"(.375)	1/16"(.062)	100'	90.60



POLYETHYLENE TUBING SIZING GUIDE

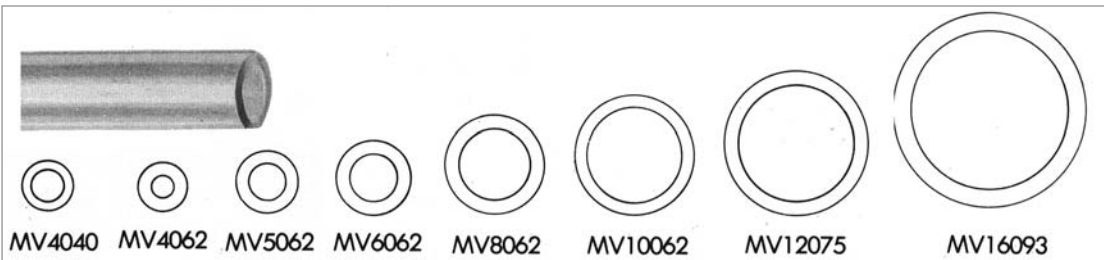


www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Tubing - Clear Vinyl

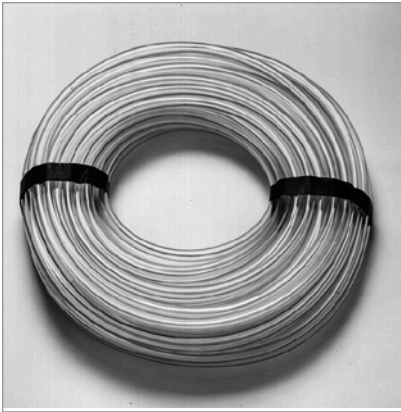

Physical Properties of Vinyl Tubing

100% Modulus of Elasticity.....	800 PSI
Durometer "A".....	68
Tensile Strength.....	2000 PSI
Specific Gravity.....	1.20
Elongation.....	400%
Brittle Temperature.....	-40°F
Color.....	Crystal Clear
Odor.....	Slight
Taste.....	None
Toxicity.....	Non-Toxic
Aging Characteristics.....	Excellent

Vinyl Tubing Features:


- Flexible.
- Transparent.
- Tasteless.
- Non-Toxic.
- **NOT FOR USE WITH HOT WATER**

Applications:

- Pool slides
- RV use cold water
- Water softeners
- Ice maker
- Livestock
- Hobby and pet use


• **SOLD IN COIL LENGTHS ONLY.**
 • **ORDER BY THE NUMBER COIL LENGTHS REQUIRED.**
 Ex: For 500' of IV7062-5 order Qty 1 IV7062-5

Part Number	Bulk Box	Dispenser Box	OD	ID	Coil Wall	Length	List Price Per Coil
IV4062-1			1/4"	1/8"(.125)	1/16"(.062)	100'	\$ 55.43
IV5062-1			5/16"	3/16"(.1875)	1/16"(.062)	100'	70.02
IV6062-1			3/8"	1/4"(.250)	1/16"(.062)	100'	87.47
IV7062-1			7/16"	5/16"(.3125)	1/16"(.062)	100'	88.61
IV7062-5			7/16"	5/16"(.3125)	1/16"(.062)	500'	439.02
IV8062-1			1/2"	3/8"(.375)	1/16"(.062)	100'	112.24
IV8062-5			1/2"	3/8"(.375)	1/16"(.062)	500'	561.26
IV8062M			1/2"	3/8"(.375)	1/16"(.062)	1000'	1122.41
IV10062-1			5/8"	1/2"(.500)	1/16"(.062)	100'	152.00



TV308	1/4"	1/8"(.125)	1/16"(.062)	100'	49.60
TV309	5/16"	3/16"(.1875)	1/16"(.062)	100'	54.88
TV310	3/8"	1/4"(.250)	1/16"(.062)	100'	69.95
TV3105	7/16"	5/16"(.3125)	1/16"(.062)	100'	77.70
TV311	1/2"	3/8"(.375)	1/16"(.062)	100'	92.14
TV3125	5/8"	1/2"(.500)	1/16"(.062)	100'	118.86
TV313-1	7/8"	5/8"	1/8"	100'	282.96
TV314	1"	3/4"	1/8"	50'	176.21
TV315	1 1/4"	1"	1/8"	50'	219.15

VINYL TUBING SIZING GUIDE

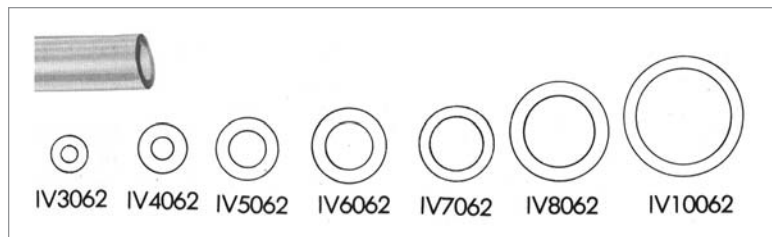



Fittings for Plastic Tubing - NL Brass




Barb Fitting Features:


- Superior NO LEAD brass fittings for soft plastic tubing for oil, water, air, vacuum, gas and liquid low pressure lines.
- Exclusive self-clinching double barbs actually tighten under strain.

Compression Fitting Features:


- NO LEAD Brass compression fittings designed for plastic tubing.
- Built-in tube support prevents tube collapse and allows easy assembly.




VT22




VT224



VT229




VT26




VT28

Part Number	Fits Tube OD	Fits Tube ID	Thread Size	Qty	List Price
Coupling (Ins x Ins)					
VT22-4-4NL	3/8"	1/4"		Bulk	\$ 4.13
VT22-6-6NL	1/2"	3/8"		Bulk	5.15
VT22-8-8NL	5/8"	1/2"		Bulk	7.65
Tee (Ins x Ins x Ins)					
VT224-4NL	3/8"	1/4"		Bulk	13.98
VT224-6NL	1/2"	3/8"		Bulk	13.06
Elbow (Ins x MIP)					
VT229-4-4NL	3/8"	1/4"	1/4" mip	Bulk	11.58
VT229-6-4NL	1/2"	3/8"	1/4" mip	Bulk	10.20
VT229-8-6NL	5/8"	1/2"	3/8" mip	Bulk	18.21
Female Adapter (Ins x FIP)					
VT26-4-2NL	3/8"	1/4"	1/8" fip	Bulk	5.46
VT26-6-4NL	1/2"	3/8"	1/4" fip	Bulk	6.68
Male Adapter (Ins x MIP)					
VT28-4-2NL	3/8"	1/4"	1/8" mip	Bulk	3.88
VT28-4-4NL	3/8"	1/4"	1/4" mip	Bulk	5.51
VT28-6-4NL	1/2"	3/8"	1/4" mip	Bulk	6.28
VT28-8-6NL	5/8"	1/2"	3/8" mip	Bulk	9.44


Fittings for Plastic Tubing - NL Brass




VT62




VT64




VT65



VT69



VT66




VT68



VT60



VT61



VT63

Part Number	Fits Tube OD	Fits Tube ID	Thread Size	Qty	List Price
Union w/ inserts (Comp x Comp)					
VT62-4NL	1/4" x 1/4"	.17"		Bulk	\$ 10.19
Tee w/ inserts (Comp x Comp x Comp)					
VT64-4NL	1/4" x 1/4" x 1/4"	.17"		Bulk	15.29
VT64-6NL	3/8" x 3/8" x 3/8"	1/4"		Bulk	20.33
Elbow w/ inserts (Comp x Comp)					
VT65-6NL	3/8" x 3/8"	1/4"		Bulk	23.24
VT65-8NL	1/2" x 1/2"	3/8"		Bulk	33.43
Male Elbow w/ inserts (Com x MIP)					
VT69-4-4NL	1/4"	.17"	1/4" mip	Bulk	17.43
VT69-6-4NL	3/8"	1/4"	3/8" mip	Bulk	20.33
Female Connector w/ inserts (Com x FIP)					
VT66-4-4NL	1/4"	.17"	1/4" fip	Bulk	10.95
VT66-6-4NL	3/8"	1/4"	1/4" fip	Bulk	14.52
VT66-8-8NL	1/2"	3/8"	1/2" fip	Bulk	13.10
Male Connector w/ inserts (Comp x MIP)					
VT68-4-4NL	1/4"	.17"	1/4" mip	Bulk	9.48
VT68-6-4NL	3/8"	1/4"	1/4" mip	Bulk	10.19
Delrin Sleeve					
VT60-4	1/4"			Bulk	0.49
VT60-6	3/8"			Bulk	0.82
VT60-8NL	1/2"			Bulk	8.05
Nut					
VT61-4NL	1/4"			Bulk	1.43
VT61-5NL	5/16"			Bulk	1.79
VT61-6NL	3/8"			Bulk	1.99
Tube Support					
VT63-4NL	1/4"	.17"		Bulk	0.51
VT63-6NL	3/8"	1/4"		Bulk	0.97
VT63-8NL	1/2"	3/8"		Bulk	2.50



Clear Braided PVC Hose



Clear Braided PVC Hose

Standard Wall, Class 125 Features:

- Flexible, see through clear hose with braid pattern reinforcement of two polyester spirals.
- Flexible clear PVC NSF 51 certified to 100°F (38°C), USP CLASS V1 rated.
- All hose compound ingredients used are listed in US FDA CFR, Title 21.
- Temperature range + 25° to 150° F / -5° to +65°C.
- Silicone free.
- Food and beverage grade, standard wall.
- Use for air, water lines.



Part Number	Nominal (inches)		Max Working Pressure		Reel Length	Approx Wt per CFT.	List Price Per Reel
	ID	OD	PSI@68°F	PSI@122°F			
CBH316-1	3/16	0.375	250	105	100'	4.5 lbs	\$ 132.77
CBH25-1	1/4	0.438	250	105	100'	5.7 lbs	117.14
CBH516-1	5/16	0.525	250	105	100'	7.5 lbs	169.17
CBH38-1	3/8	0.594	225	97	100'	9.0 lbs	161.76
CBH50-1	1/2	0.750	200	86	100'	13.8 lbs	220.11
CBH50-3	1/2	0.750	200	86	300'	13.8 lbs	660.32
CBH58-1	5/8	0.875	200	86	100'	16.5 lbs	262.11
CBH75-1	3/4	1.030	150	65	100'	21.9 lbs	333.12
CBH75-3	3/4	1.030	150	65	300'	21.9 lbs	999.40
CBH100-1	1	1.300	125	54	100'	31.5 lbs	433.22
CBH100-2	1	1.300	125	54	200'	31.5 lbs	809.76
CBH125-50	1 1/4	1.625	100	43	50'	45.0 lbs	407.26
CBH125-1	1 1/4	1.625	100	43	100'	45.0 lbs	814.55
CBH150-50	1 1/2	1.937	100	43	50'	64.0 lbs	495.66
CBH150-1	1 1/2	1.937	100	43	100'	64.0 lbs	991.29
CBH200-1	2	2.490	75	33	100'	95.0 lbs	1662.80

**** Temperatures higher than 68° F reduce available working pressure. See next page for temperature, working pressure calculation chart and cautionary note.**


Clear Braided PVC Hose



Effects of Elevated Temperatures on Thermoplastic Hose.


The compounds used in clear braided PVC hose are generally referred to as thermoplastics. These materials achieve their optimum physical properties at room temperature, 68°F (20°C). As these materials are exposed to increased ambient temperatures, they will soften and their physical properties will change. This will have the effect of sharply reducing the available working pressure. Coupling retention will also be reduced. The charts below illustrate this effect. In all cases, the product should be tested in a controlled, secure and safe environment, and all operating conditions should be considered prior to use.

All published working pressures of AGI Series CBH hose are based on a room temperature of 68°F (20°C).

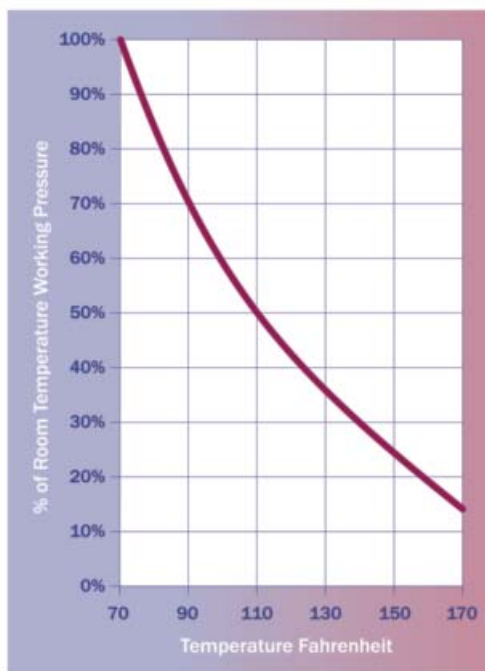

Example from the Fahrenheit Chart

If working pressure at 68°F is 200 psi, then the WP at 110°F is $200 \times 50\%$, or 100 psi

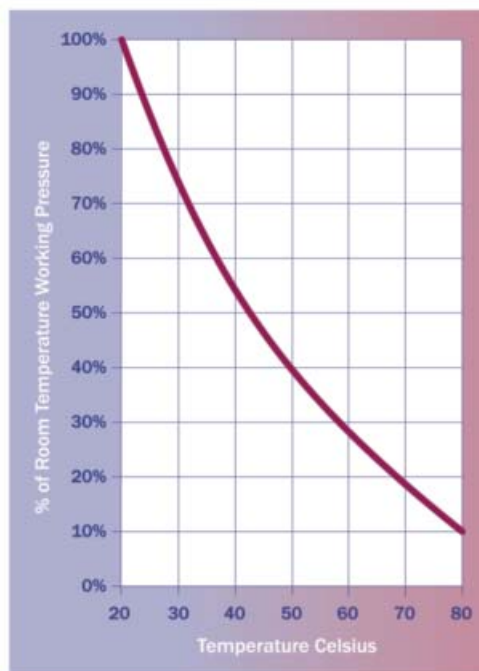

Example from the Celsius Chart

If working pressure at 20° is 14 bar, then the WP at 50°C is $14 \times 50\%$, or 5.6 bar

CAUTIONARY NOTE

The charts are to be used as a guideline only. The information and recommendations contained here are, to the best of our manufacturer's knowledge, accurate and reliable, but no guarantee of their accuracy is made. All products are sold upon the condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses, and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Variability in length of exposure, temperature, pressure, velocity of fluid, and chemical concentration all contribute to reduced working pressure and hose reliability.



Plumbing Installation Kits & Cords



HARVARD Garbage Disposal Wiring Kit Features:

- Complete with 3 wire nuts and one SE/U oval cable connector.
- 6' long, 16 gauge, 3 conductor wire cord.
- Polybagged with header card.



Part Number	Description	Ctn Qty	List Price
HGDWK6ST	Kit w/ 6' cord straight plug	24	\$ 18.30
HGDWK6RA	Kit w/ 6' cord right angle plug	24	18.30



PTC163-6 Series



HARVARD Garbage Disposal Cord Features:

- Three prong straight or 90 degree (right angle) molded plugs.
- 16 gauge, 3 conductor.
- 13 amp, 125 Volt rating.
- Six foot length. Free end is split, stripped 3/8".
- UL and CSA listed in US and Canada.



Part Number	Description	Ctn Qty	List Price
PTC163-6ST	Straight plug cord	50	\$ 10.89
PTC163-6RA	Right angle plug cord	50	10.89

Saddle Tapping Valve, Iron Out®



NO LEAD Brass Saddle Tap Valve & Kit Features:

- Self piercing tap valve and clamp for 3/8" to 1" OD copper tube or 3/8" to 3/4" iron pipe.
- Plastic sleeve, brass compression nut and brass or no lead brass insert (for reinforcing polyethylene tubing).
- Brass compression union for connecting polyethylene tubing to 1/4" water inlet at refrigerator, humidifier or cooler.
- 25 feet of 1/4" OD polyethylene tubing.
- The saddle tap valve eliminates plumbing connections and fittings.
- Supplies water to most humidifiers, evaporative coolers and refrigerators with automatic ice maker or water dispenser in door.
- Use for installation of Reverse Osmosis and Chemical Contaminant Filter Systems.
- For use on copper tube or iron pipe.


Part Number	Description	Ctn Qty	List Price
HTVK381NL	NO LEAD Brass Tapping Valve Kit fits 3/8" -1" OD copper tube or 3/8"-3/4" iron pipe	6	\$ 27.82
PFSTVNL	No Lead Brass Saddle Tapping Valve Only	10	8.78



Super Iron Out

Removes the toughest rust and iron stains quickly and easily from white clothes, laundry, toilets, sinks, tubs, dishwashers, exterior surfaces and much more. Also keeps water softeners clean and operating at peak efficiency.

Part Number	Description	Ctn Qty	List Price
IOUT30	Iron Out, 28 oz.	6	\$ 15.55
IOUT5	Iron Out, 76 oz.	6	39.77

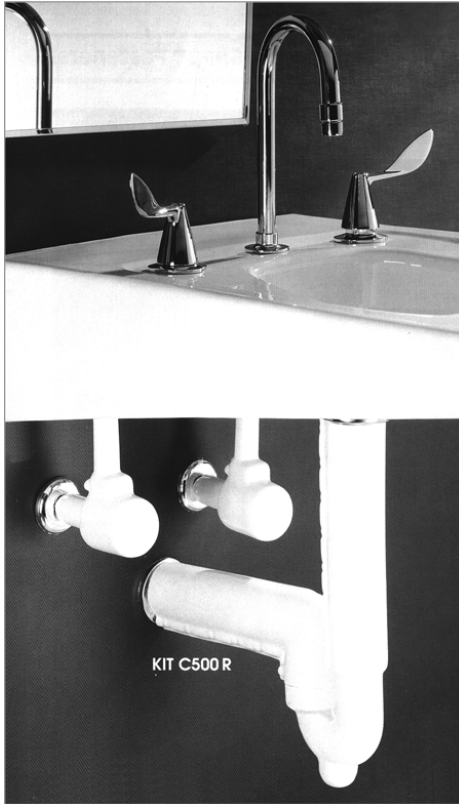

HC500R Series

Trap Wrap™ brand insulation kits offer an economical way to professionally insulate exposed undersink piping. Integrally molded fasteners press together to provide an easy, seamless, retrofit installation.



Trap Wrap™ Features:


- Press-snap™ fasteners.
- Molded-in measurements.
- A.D.A. compliant.
- China White in color.
- Removable for service.
- Completely covers pipes and supplies.
- Sanitary surface.
- 2 piece P-trap assembly, 1 piece angle valve.
- Patented.

Satisfies the following requirements:

- A.D.A article 4.19.4
- A.N.S.I. A117.1
- California article P.1504B
- B.O.C.A. article P1203.4

Part Number	Description	Ctn Qty	List Price
HC500R	Standard Trap Wrap	15	\$ 97.23
HC500RHS	Trap Wrap with extra sink bend	15	130.47

TrapWrap is a trademark of Brocar Products, Inc.

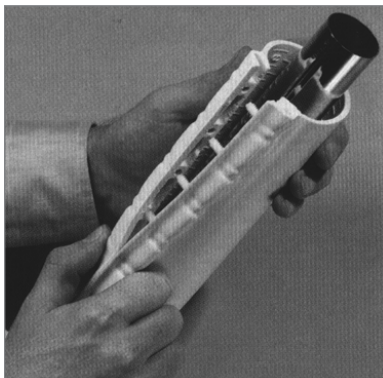


Angle valve cover allows for easy and quick emergency shut-off without removing cover

- Virtually seamless for enhanced appearance
- Reinstallable after service
- Highly tamper resistant
- Easily cleaned.






Formerly Brocar Products, Inc.



Includes 15" tail piece and trap cover, 8" waste arm insulation, fasteners, and hot and cold angle valve cover.



Includes all parts of HC500R plus C500HS off-set grid drain cover.

ASTM DATA


ASTM G21	Anti-Bacterial	No measurable bacterial growth
ASTM G22	Anti-Fungal	No measurable fungal growth
ASTM D635	Burning Characteristics	Less then 5 sec (ATB) 10 MM (AEB)
ASTM C177	Thermal conductivity	BTU - in/hr - ft ² - °F k value = 1.02

Sample Specification:

Wheelchair accessible lavatories and sinks shall be insulated with TrueBro Trap Wrap™ Insulation Kit (indicate model #, color and accessories). Trap assemblies shall have vinyl insulating outer shell with concealed integral fasteners for a virtually seamless finished installations. Angle stop covers shall permit unrestricted access to angle valves without removal of cover.



Washer Boxes & Drains



Washer Box

Washer Box Features:

- Center drain or dual drain.
- High impact polystyrene.
- 4 support brackets.
- Easy drain knockout.
- Top mount knockouts
- Box dimensions: 8 3/4" w x 7 1/2" h x 3 5/8" d
- Faceplate dimensions: 11 3/4" w x 10 1/8" h

Part Number	Valve Connection	Valve Type	Drain	Ctn Qty	List Price
Standard Washer Boxes					
38100	1/2" Sweat	1/4 turn brass ball valves	Center	12	\$ 74.79
38104	1/2" PEX	1/4 turn brass ball valves	Center	12	75.85
Dual Drain Washer Boxes					
38200	1/2" Sweat	2X4 Single Lever ball valves	Dual	12	86.35



General Purpose

General Purpose & Shower Drain Features:

- Universal 4 1/2" Snap-Tite Strainer.
- Mechanically attach or solvent weld over 2" DWV pipe.
- No-Calk drain is designed for use with preformed shower bases and is ideal for slab construction.
- Solvent Weld drain body is sealed to shower base with rubber gasket and fiber slip washer.



42097 Shower Drain



42099 Shower Drain

Shower Drain for Tile Base Features:

- Designed for use on built-up shower bases of tile, marble, where a shower pan liner is used.
- Reversible clamping collar is secured with stainless steel bolts into brass inserts to prevent slipping.
- Low profile design for use in tight spaces.
- Solvent welds over 2" or inside 3" Sch 40 DWV.
- Universal 4 1/4" Screw-Tite strainer.

Part Number	Material	Description	Size	Ctn Qty	List Price
General Purpose Drains					
43583	PVC	Drain w/ 5" stainless steel Screw-Tite strainer	3" or 4"	12	\$ 26.63
43601	PVC	Drain w/ 5" nickle alloy grate	3" or 4"	12	44.24
43599	PVC	Drain w/ 5" brass grate and metal ring	3" or 4"	12	58.26
Shower Drains					
42097	PVC	Solvent weld drain w/ stainless steel strainer	2"	12	19.80
42099	PVC	No caulk drain w/ stainless steel strainer	2"	12	24.95
Shower Drain for Tile Shower Bases					
42213	PVC	Drain w/ round stainless steel Screw-Tite strainer	2" or 3"	12	29.16



Closet Flanges & Gaskets



43503

Level Fit Closet Flange Features:

- 3" or 4" all plastic flange solvent welds inside of 4" or over 3" Sch 40 DWV pipe.
- Four mounting slots.
- Four countersunk holes for secure attachment to the floor.



43513

Level Fit Closet Flange with metal ring Features:

- The metal ring provides added strength and cracking resistance to the flange and can be rotated to allow precise alignment of bolts and screws.
- 3" or 4" flange solvent welds inside of 4" or over 3" Sch 40 DWV pipe.



43500

Level Fit Offset Closet Flange with metal ring Features:

- The metal ring provides added strength and cracking resistance to the flange and can be rotated to allow precise alignment of bolts and screws.
- 3" or 4" flange solvent welds inside of 4" or over 3" Sch 40 DWV pipe.
- 2" offset allows a margin of error for drain pipe/flange alignment.

Part Number	Material	Description	Size	Ctn Qty	List Price
Closet Flanges					
43505	PVC	Plastic ring closet flange w/ KO	3" x 4"	12	\$ 8.05
43503	PVC	Plastic ring closet flange	3" x 4"	12	7.12
43502	ABS	Plastic ring closet flange	3" x 4"	12	7.59
Closet Flanges with Metal Adjustable Ring					
43513	PVC	Metal ring closet flange	3" x 4"	12	11.76
43512	ABS	Metal ring closet flange	3" x 4"	12	14.30
Offset Closet Flanges					
43501	PVC	Offset closet flange	3" x 4"	12	21.37
43500	ABS	Offset closet flange	3" x 4"	12	30.48



Adjustable Urinal Flange Kit Features:

- Horizontal mounting slots accommodate urinals with 3 1/2" to 7" mount centers.
- Kit includes all bolts, nuts, washers and gaskets.
- Flanges solvent weld into any 2" fitting. They do not weld "over".

Part Number	Material	Description	Size	Ctn Qty	List Price
43543	PVC	Urinal flange kit	2"	10	\$ 42.49



Wax Closet Gasket Features:

- Amber-color.
- Meets Federal specifications HH-C-536A.

Part Number	Description & Material	Size	Ctn Qty	List Price
AGWAX	Standard wax gasket	3", 4"	48	\$ 2.60
AGWAXH	Wax gasket w/Horn	3", 4"	24	3.25
AGWAXJ	Jumbo wax gasket 1 1/2"	3", 4"	24	6.33



Test Plugs, Caps



Sure-Grip® Test Plug Features:

- Polypropylene construction.
- Fits all types of pipe at nominal sizes.
- Permanent or temporary use.

Part Number	Description	Size	Pipe ID	Ctn Qty	List Price
271158	Sure-Grip® plug	1- 11/2"	1.48" - 1.63"	50	\$ 8.33
271208	Sure-Grip® plug	2"	1.89" - 2.09"	50	9.36
271308	Sure-Grip® plug	3"	2.89" - 3.09"	30	11.00
271408	Sure-Grip® plug	4"	3.87" - 4.09"	30	17.31



Techno-Cap Features:

- Heavy duty, PVC, high pressure.
- Easily solvent cemented over end of CWV pipe.
- Will not clog or go down in pipe.

Part Number	Description	Size	Ctn Qty	List Price
33468	Tests 1 1/2" DWV Pipe	1-1/2"	100	\$ 0.67
33470	Tests 2" DWV Pipe	2"	100	0.91
33472	Tests 3" DWV Pipe	3"	50	1.33
33474	Tests 4" DWV Pipe	4"	25	1.46



Knock-Out™ Test Cap Features:

- Solvent cements to Sch 40 ABS and PVC DWV pipe.
- Deeper design provides stronger leak-free connections.
- "Tab" feature keeps hands free of solvent cement.
- Will withstand 10 PSI or 30' head pressure.

Part Number	Description	Size	Ctn Qty	List Price
39100	Knock-Out test cap	1-1/2"	50	\$ 0.80
39101	Knock-Out test cap	2"	50	0.80
39102	Knock-Out test cap	3"	50	1.36



Tub Box

Tub Box Features:

- Provides a quick, economical & clean way to install tub waste & drain.
- Made of a semi-flexible, very durable plastic polymer.
- Built in cut-out for up to 2" Sch 40 drain.

Part Number	Size	Ctn Qty	List Price
34080	13" x 13" x 6 1/2"	12	\$ 25.98



Shower Pan Liner 41597

Shower Pan Liner Features:

- Gray PVC shower pan liner is 40 mil – One roll per case.
- Liner marked in 6" increments for ease of measuring.
- Meets ASTM D-4551.

Part Number	Size	Ctn Qty	List Price
41597	5' x 40' 40 mil	1	\$ 622.90



Water Heater Pan

Plastic Water Heater Pan Features:

- Recommended for electric water heater protection.
- Pre-drilled to accept 1" or 1 1/2" fittings.
- Manufactured from semi-flexible, tough and durable 0.0625" plastic polymer.

Part Number	Size	Ctn Qty	List Price
34061	20"	12	\$ 20.36
34062	22"	12	22.08
34063	24"	12	23.22
34064	26"	12	25.92
34065	30"	12	32.72



Water Heater Stand

Gas Water Heater Stand Features:

- Allows the placement of the water heater tanks 18" above the ground as required by National Fuel Gas Code.
- Constructed of 18 gauge spangled galvanized sheet metal, holds up to 50 gallon water heaters.

Part Number	Size	Ctn Qty	List Price
34057	21" x 21" x 18" high	4	\$ 123.88



Approvals:



Report #93126



File #2326



Thermoplastic Self-Seal Roof Flashing Features:

- Non fading and non cracking rigid black thermoplastic base.
- Slides over pipe - for pitch to 40 degrees.
- 3" self-seal flashing can be used on 3" plastic, copper, steel or cast iron.
- Matte finish blends in better with roof surfaces.

Uni-Seal Flex Self-Seal Flexible Roof Flashing Features:



- Flexible base conforms to most flat or contoured roof surfaces including clay tile.
- No caulking needed.
- Slides over pipe - for pitch to 40 degrees.
- Unique dual bead configuration that seizes the vent pipe with a locking grip preventing leaking entirely.

Aluminum Self-Seal Roof Flashing Features:

- Rustproof 0.032 stamped aluminum standard base. Non fading sealing collar.
- Slides over pipe - for pitch to 40 degrees.

Galvanized Base Roof Flashing Features:

- Rustproof, stamped galvanized, 24 to 28 gauge. Non fading sealing collar.
- Slides over pipe - for pitch to 40 degrees.



Part Number	Description	Size	Ctn Qty	List Price
Thermoplastic Self-Seal Roof Flashings				
14101	Thermoplastic Flashing	1-1/4", 1-1/2"	12	\$ 11.45
14102	Thermoplastic Flashing	2"	12	12.07
14103	Thermoplastic Flashing	3"	12	10.27
14185	Thermoplastic Flashing	1 1/2, 2, 3"	12	9.81
14104	Thermoplastic Flashing	4"	12	11.97
Uni-Seal Flex Self-Seal Roof Flashings				
30101	Flexible Flashing	1-1/4", 1-1/2"	12	8.85
30102	Flexible Flashing	2"	12	10.60
30103	Flexible Flashing	3"	12	11.39
30104	Flexible Flashing	4"	12	12.40
Aluminum Self-Seal Roof Flashings				
12101	Aluminum Flashing	1-1/4", 1-1/2"	12	22.22
12102	Aluminum Flashing	2"	12	23.93
12103	Aluminum Flashing	3"	12	24.78
12104	Aluminum Flashing	4"	12	31.14
Galvanized Self-Seal Roof Flashings				
12201	Galvanized Flashing	1 1/4", 1 1/2"	20	18.66
12202	Galvanized Flashing	2"	20	19.28
12203	Galvanized Flashing	3"	20	21.25
12209	Galvanized Flashing	1 1/4, 1 1/2, 2, 3"	20	17.99
12204	Galvanized Flashing	4"	20	21.52

Solder Preparation Accessories



Economy Fitting Brush Features:

- Galvanized stem wire with stainless steel bristles.

Standard Fitting Brush Features:

- High carbon crimped steel bristles.
- Two-wire galvanized stem with plastic hanging hole.



FB-E Series



FB Series

Part Number	Description	Ctn Qty	List Price
FB50E	1/2" Economy Fitting Brush	12	\$ 2.13
FB75E	3/4" Economy Fitting Brush	12	2.18
FB100E	1" Economy Fitting Brush	12	2.45
FB125E	1-1/4" Economy Fitting Brush	8	3.42
FB150E	1-1/2" Economy Fitting Brush	6	3.78
FB200E	2" Economy Fitting Brush	6	4.16
FB50	1/2" Standard Fitting Brush	12	2.92
FB75	3/4" Standard Fitting Brush	12	3.05
FB100	1" Standard Fitting Brush	12	3.25
FB125	1-1/4" Standard Fitting Brush	8	4.05
FB150	1-1/2" Standard Fitting Brush	6	4.51
FB200	2" Standard Fitting Brush	6	4.83



AC310

Plumber's Abrasive Cloth Features:

- 120 grit.
- Water resistant abrasive cloth.
- Specially processed for cleaning copper tubing and fittings.
- As a utility cloth, plumbers find many uses on metal and wood.

Part Number	Description	Size	Ctn Qty	List Price
AC310	120 grit abrasive	11/2" x 10 yards	24 rolls	\$ 8.72
OM5	Open Mesh cloth	1 1/2" x 5 yards	24 rolls	12.61
OM10	Open Mesh cloth	1 1/2" x 10 yards	24 rolls	20.50



Perforated Hanger Strapping



101 Series Galvanized Duct Tape


- 24 and 28 gauge
- Alternate 1/4" and 5/16" bolt and nail holes
- 3/4" width

102 Series Plastic Polypropylene Hanger Strapping


- 1/8" dia. holes
- Max working load - 15# @ 85° F
- Breaking Strength - 100# @ 68° F

100G Series Galvanized or Zinc Plated


- Perforated hanger strapping
- 20 to 28 gauge
- 1/4" bolt holes
- 3/4" width



101 Series



102 Series



100G and 100S Series

Part Number	Size	Ctn Qty	List Price
101 Series - Galvanized Duct Tape			
101-10	3/4" x 10' x 24 gauge	50	\$ 2.57
101-50	3/4" x 50' x 24 gauge	10	14.78
101-100	3/4" x 100' x 24 gauge	5	28.60
101-10-28	3/4" x 10' x 28 gauge	50	2.28
101-50-28	3/4" x 50' x 28 gauge	10	13.56
101-100-28	3/4" x 100' x 28 gauge	5	24.64
102 Series - Plastic Polypropylene			
102-10	3/4" x 10' x .05 gauge	BULK/100	2.42
102-25	3/4" x 25' x .05 gauge	1/40	4.71
102-50	3/4" x 50' x .05 gauge	1/20	12.59
102-100	3/4" x 100' x .05 gauge	1/10	22.50
100G Series - Galvanized or Zinc Plated			
100G-10-24	3/4" x 10' x 24 gauge	50	2.56
100G-50-24	3/4" x 50' x 24 gauge	10	14.78
100G-100-24	3/4" x 100' x 24 gauge	5	28.60
100G-10-28	3/4" x 10' x 28 gauge	50	2.12
100G-10-22	3/4" x 10' x 22 gauge	50	3.21
100G-50-22	3/4" x 50' x 22 gauge	10	18.48
100G-100-22	3/4" x 100' x 22 gauge	5	34.56
100G-10-20	3/4" x 10' x 20 gauge	50	3.75
100G-50-20	3/4" x 50' x 20 gauge	10	20.19
100G-100-20	3/4" x 100' x 20 gauge	5	23.42
100S Series - Steel Plain			
100S-10-24	3/4" x 10' x 24 gauge	50	2.28





604 Series Insulated Glide Clip Features:

- Specially compounded material wrapped around copper clad steel permits smooth, silent pipe movement.
- Prevents electrolysis and corrosion.
- Resists temperature up to 280° F(137° C). Ideal for hot water heating or supply lines -- eliminates creaking noises made by pipe expanding and contracting against wood surfaces.

606 Series Van Hanger Features:

- Unique design for applications that require space between pipe and mounting surface.
- Copper clad steel, heavy duty metal construction.



604 Series



606 Series



608 Series

608 Series Copper Tube Strap Features:

- Copper clad steel; heavy duty metal construction.

Part Number	Size	Mounting Hardware (incl)	Ctn Qty	List Price
Insulated Glide Clips				
604-1/2	1/2"	Copper Clad Nails	10	\$ 4.33
604-3/4	3/4"	Copper Clad Nails	10	4.65
604-1	1"	Copper Clad Nails	10	5.70
604-1 1/4	1-1/4"	Copper Clad Nails	10	6.57
Copper Clad Van Hangers				
606-1/2	1/2"	Copper Clad Screw	20	3.35
606-3/4	3/4"	Copper Clad Screw	20	3.60
606-1	1"	Copper Clad Screw	20	3.92
Copper Tube Straps				
608-1/2	1/2"	Copper Clad Nails	100	0.49
608-3/4	3/4"	Copper Clad Nails	50	0.55
608-1	1"	Copper Clad Nails	50	0.71
608-1 1/4	1-1/4"	Copper Clad Nails	50	0.86



500 Series Copper Clad Tube Straps

- 2 ear and one ear styles

510 Series Copper Clad Tube Straps

- One ear styles

511 Series Plastic Tube Tallon

- Made of polyethylene
- 1/2, 3/4 and 1" sizes available

513 Series Single Shot Hanger


- Plastic with nail

515 Series Suspension Clamp


- Made of polyethylene




500 Series




510 Series



511 Series



513 Series



515 Series

Part Number	Size	Ctn Qty	List Price
Copper Clad Tube Straps, TWO HOLE			
500-1/2	1/2"	100	\$ 0.13
500-3/4	3/4"	100	0.16
500-1	1"	100	0.19
500-1 1/4	1 1/4"	100	0.47
Copper Clad Tube Straps, ONE HOLE			
510-1/4	1/4"	100	0.43
510-3/8	3/8"	100	0.43
510-1/2	1/2"	100	0.45
510-3/4	3/4"	100	0.49
510-1	1"	100	0.96
510-1 1/2	1 1/2"	50	2.27
510-2	2"	50	2.65
Tube Tallon Clamp			
511-1/2	1/2"	100	0.23
511-3/4	3/4"	100	0.32
511-1	1"	50	0.86
Suspension Clamp			
513-1/2	1/2"	50	0.65
513-3/4	3/4"	50	0.81
Suspension Clamp			
515-1/2	1/2"	100	0.47
515-3/4	3/4"	100	0.50
515-1	1"	50	1.45

Pipe Straps



600 Series Galvanized Pipe Straps


- 2 ear
- 1/2 - 2" sizes available

603 Series Plastic Coated Pipe Straps


- 2 ear
- 1" - 2" sizes available

610 and 620 Series Galvanized Pipe Straps


- 1 ear
- 1" - 2" sizes available



600 Series



603 Series




610/620 Series

Part Number	Size	Ctn Qty	List Price
Galvanized Pipe Straps			
600-1/4	1/4"	100	\$ 0.18
600-3/8	3/8"	100	0.18
600-1/2	1/2"	100	0.15
600-3/4	3/4"	100	0.21
600-1	1"	100	0.34
600-1 1/4	1 1/4"	50	0.44
600-1 1/2	1 1/2"	50	0.51
600-2	2"	50	0.79
600-2 1/2	2 1/2"	25	1.28
600-3	3"	25	1.64
600-4	4"	25	2.73
Plastic Coated Pipe Straps			
603-1	1"	50	4.02
603-1 1/4	1 1/4"	50	4.28
603-1 1/2	1 1/2"	50	4.68
603-2	2"	50	4.96
603-3	3"	25	8.57
603-4	4"	25	10.71
603-6	6"	10	28.39
One Hole Pipe Straps			
610-1/4	1/4" Pipe	100	0.25
610-3/8	3/8" Pipe	100	0.32
610-1/2	1/2" Pipe	100	0.37
610-3/4	3/4" Pipe	100	0.61
610-1	1" Pipe	100	0.70
610-1 1/4	1 1/4" Pipe	100	1.13
610-1 1/2	1 1/2" Pipe	50	1.94
610-2	2" Pipe	50	2.27
One Hole EMT Straps			
620-1/2	1/2" EMT	100	0.37
620-3/4	3/4" EMT	100	0.38
620-1	1" EMT	100	0.48
620-1 1/4	1 1/4" EMT	100	0.83
620-1 1/2	1 1/2" EMT	50	1.19
620-2	2" EMT	50	2.27




Tube & Pipe Hooks

200 S Series Bright Steel
200 C Series Copper Clad



200S Series




200C Series

Part Number	Size (pipe x length)	Ctn Qty	List Price
Bright Steel			
200S-1/2X4	1/2" X 4"	50	\$ 0.51
200S-1/2X6	1/2" X 6"	50	0.57
200S-1/2X8	1/2" X 8"	50	0.68
200S-1/2X10	1/2" X 10"	50	1.26
200S-1/2X12	1/2" X 12"	50	1.41
200S-3/4X4	3/4" X 4"	50	0.51
200S-3/4X6	3/4" X 6"	50	0.57
200S-3/4X12	3/4" X 12"	50	1.41
200S-1X4	1" X 4"	50	0.51
200S-1X6	1" X 6"	50	0.57
200S-1X8	1" X 8"	50	0.68
200S-1X10	1" X 10"	50	1.26
200S-1 1/4X6	1 1/4" X 6"	50	0.92
200S-1 1/4X8	1 1/4" X 8"	50	1.11
200S-1 1/4X10	1 1/4" X 10"	50	1.26
200S-1 1/4X12	1 1/4" X 12"	50	1.41
200S-1 1/2X6	1 1/2" X 6"	50	0.92
200S-1 1/2X8	1 1/2" X 8"	50	1.11
200S-1 1/2X10	1 1/2" X 10"	50	1.26
200S-1 1/2X12	1 1/2" X 12"	50	1.41
200S-2X6	2" X 6"	50	0.92
200S-2X8	2" X 8"	50	1.11
200S-2X10	2" X 10"	50	1.26
200S-2X12	2" X 12"	50	1.41
Copper Clad			
200C-1/2X4	1/2" X 4"	50	0.59
200C-1/2X6	1/2" X 6"	50	0.66
200C-1/2X8	1/2" X 8"	50	0.82
200C-1/2X10	1/2" X 10"	50	1.54
200C-1/2X12	1/2" X 12"	50	1.74
200C-3/4X4	3/4" X 4"	50	0.59
200C-3/4X6	3/4" X 6"	50	0.66
200C-3/4X8	3/4" X 8"	50	0.82
200C-3/4X10	3/4" X 10"	50	1.54
200C-3/4X12	3/4" X 12"	50	1.74
200C-1X4	1" X 4"	50	0.59
200C-1X6	1" X 6"	50	0.66
200C-1X8	1" X 8"	50	0.82
200C-1X10	1" X 10"	50	1.54
200C-1X12	1" X 12"	50	1.74


Tube & Pipe Hooks



200 C Series Copper Clad
200 P Series Plastic Coated



200C Series



200P Series


Part Number	Size (pipe x length)	Ctn Qty	List Price
200C-11/4X6	1 1/4" X 6"	50	\$ 0.66
200C-11/4X8	1 1/4" X 8"	50	0.82
200C-11/4X10	1 1/4" X 10"	50	1.54
200C-11/4X12	1 1/4" X 12"	50	1.74
200C-11/2X6	1 1/2" X 6"	50	1.08
200C-11/2X8	1 1/2" X 8"	50	1.17
200C-11/2X10	1 1/2" X 10"	50	1.54
200C-11/2X12	1 1/2" X 12"	50	1.74
200C-2X6	2" X 6"	50	1.08
200C-2X8	2" X 8"	50	1.17
200C-2X10	2" X 10"	50	1.54
200C-2X12	2" X 12"	50	1.74
Plastic Coated			
200P-1/2X4	1/2" X 4"	50	1.77
200P-1/2X6	1/2" X 6"	50	1.88
200P-1/2X8	1/2" X 8"	50	2.72
200P-1/2X10	1/2" X 10"	50	4.87
200P-1/2x12	1/2" x 12"	50	6.27
200P-3/4X4	1/2" Pipe* x 4"	50	1.77
200P-3/4X6	1/2" Pipe* x 6"	50	1.88
200P-3/4X8	1/2" Pipe* x 8"	50	2.72
200P-3/4X10	1/2" Pipe* x 10"	50	4.87
200P-3/4X12	1/2" Pipe* x 12"	50	6.27
200P-1x4	3/4" Pipe* x 4"	50	1.77
200P-1X6	3/4" Pipe* x 6"	50	1.88
200P-1X8	3/4" Pipe* x 8"	50	2.72
200P-1X10	3/4" Pipe* x 10"	50	4.87
200P-1X12	3/4" Pipe* x 12"	50	6.27
200P-11/4X6	1" Pipe * x 6"	50	3.44
200P-11/4X8	1" Pipe * x 8"	50	4.53
200P-11/4X10	1" Pipe * x 10"	50	4.87
200P-11/4X12	1" Pipe * x 12"	50	6.27
200P-11/2X6	1 1/4" Pipe * x 6"	50	3.44
200P-11/2X8	1 1/4" Pipe * x 8"	50	4.53
200P-11/2X10	1 1/4" Pipe * x 10"	50	4.87
200P-11/2X12	1 1/4" Pipe * x 12"	50	6.27
200P-2X6	1 1/2" Pipe * x 6"	50	3.44
200P-2X8	1 1/2" Pipe * x 8"	50	4.53
200P-2X10	1 1/2" Pipe * x 10"	50	4.87
200P-2X12	1 1/2" Pipe * x 12"	50	6.27

* For plastic coated steel pipe hooks, order tube hook of next larger size.
Ex: For 3/4" x 6" pipe use 1" x 6" hook.




DWV Hanger - Galvanized

- Not plastic coated



Clevis

Part Number	Size	Ctn Qty	List Price
Light Clevis			
104-1/2	1/2"	100	\$ 1.68
104-3/4	3/4"	100	1.72
104-1	1"	100	1.77
104-1 1/4	1 1/4"	100	1.88
104-1 1/2	1 1/2"	100	2.04
104-2	2"	50	2.17
104-2 1/2	2 1/2"	25	3.80
104-3	3"	25	4.19
104-4	4"	25	5.68
Copperclad Clevis			
406-1/2	1/2"	100	1.93
406-3/4	3/4"	100	1.98
406-1	1"	100	2.31
406-1 1/4	1 1/4"	100	2.47
406-1 1/2	1 1/2"	100	2.73
406-2	2"	50	3.27
Standard Clevis, Black			
204-1/2	1/2"	100	1.93
204-3/4	3/4"	100	1.93
204-1	1"	100	2.04
204-1 1/4	1 1/4"	100	2.33
204-1 1/2	1 1/2"	100	2.52
204-2	2"	50	2.76
204-2 1/2	2 1/2"	25	5.41
204-3	3"	25	5.84
204-4	4"	25	7.23
204-5	5"	15	13.82
204-6	6"	10	15.27
204-8	8"	8	23.90
204-10	10"	BULK	64.28
204-12	12"	BULK	61.69
DWV Hanger - Galvanized			
120-1 1/2	1 1/2"	50	2.35
120-2	2"	50	2.47
120-3	3"	50	2.57
120-4	4"	50	2.95



DWV Hanger

Pipe Hangers




Adjustable Swivel Ring

- Galvanized, or copperclad
- 1/2" to 4" - 3/8" rod
- 5" to 8" - 1/2" rod




900 All Thread Rod


- 6' length, plain



300 Swivel Ring



108 Riser Clamp



900 Rod


Part Number	Size	Ctn Qty	List Price
Adjustable Swivel Ring, Galvanized			
300-1/2	1/2"	100	\$ 1.55
300-3/4	3/4"	100	1.55
300-1	1"	100	1.64
300-11/4	1 1/4"	100	1.64
300-11/2	1 1/2"	100	1.93
300-2	2"	100	2.09
300-21/2	2 1/2"	50	3.75
300-3	3"	50	4.44
300-4	4"	25	5.68
300-5	5"	20	7.88
300-6	6"	20	8.62
300-8	8"	10	10.61
Adjustable Swivel Ring, Copperclad			
301-1/2	1/2"	100	2.67
301-3/4	3/4"	100	2.72
301-1	1"	100	2.82
301-11/4	1 1/4"	100	2.87
301-11/2	1 1/2"	100	2.92
301-2	2"	100	3.20
Riser Clamp, Black			
108-1	1"	25	5.68
108-11/4	1 1/4"	25	5.89
108-11/2	1 1/2"	25	6.65
108-2	2"	25	7.39
108-21/2	2 1/2"	25	8.15
108-3	3"	25	9.86
108-4	4"	25	12.59
108-5	5"	15	18.48
108-6	6"	10	19.45
108-8	8"	BULK	50.36
108-10	10"	BULK	62.95
All Thread Rod			
900-1/4	1/4"	50	5.20
900-3/8	3/8"	25	9.80
900-1/2	1/2"	15	18.52
900-5/8	5/8"	9	31.12
900-3/4	3/4"	6	47.96
900-1	1"	3	90.87



Split Ring Pipe Hangers

Split Ring Hangers - Malleable Iron


- Galvanized, black or copper clad
- 3/8" to 2" - 3/8" rod
- 2 1/2" to 4" - 1/2" rod




Split Ring Hangers

Part Number	Size	Rod Size	Ctn Qty	List Price
Split Ring Pipe Hanger, Black malleable				
202-3/8	3/8"	3/8"	50	\$ 3.02
202-1/2	1/2"	3/8"	50	3.02
202-3/4	3/4"	3/8"	50	3.14
202-1	1"	3/8"	50	3.49
202-1 1/4	1 1/4"	3/8"	25	4.31
202-1 1/2	1 1/2"	3/8"	25	5.34
202-2	2"	3/8"	25	5.59
Split Ring Pipe Hanger, Galvanized malleable				
385-3/8	3/8"	3/8"	50	3.37
385-1/2	1/2"	3/8"	50	3.37
385-3/4	3/4"	3/8"	50	3.60
385-1	1"	3/8"	50	4.13
385-1 1/4	1 1/4"	3/8"	25	4.94
385-1 1/2	1 1/2"	3/8"	25	6.92
385-2	2"	3/8"	25	6.39
385-2 1/2	2 1/2"	1/2"	25	14.53
385-3	3"	1/2"	25	17.44
385-4	4"	1/2"	25	23.25
Split Ring Pipe Hanger, Copper Clad, Malleable				
485-3/8	3/8"	3/8"	50	2.68
485-1/2	1/2"	3/8"	50	2.68
485-3/4	3/4"	3/8"	50	2.73
485-1	1"	3/8"	50	3.08
485-1 1/4	1 1/4"	3/8"	25	3.66
485-1 1/2	1 1/2"	3/8"	25	3.78
485-2	2"	3/8"	25	4.47
485-2 1/2	2 1/2"	1/2"	25	14.53
485-3	3"	1/2"	25	17.44
485-4	4"	1/2"	25	23.25


Plastic Pipe Hangers & Accessories




DWV Hanger



DWV Extension Bar



Stop Keys



Flanges



C Clamps



Top Beam Clamp

Part Number	Size	Ctn Qty	List Price
DWV Hanger Plastic Coated			
220-11/2	1 1/2"	50	\$ 5.63
220-2	2"	50	5.89
220-3	3"	50	6.56
220-4	4"	50	7.37
220-6	6"	25	19.49
DWV Extension Bar			
221-3	16 gauge x 3'	25	2.59
Stop Keys			
413-6	6'	6	101.79
413-8	8'	6	138.48
413-10	10'	6	158.62
Ceiling Flanges			
208-3/8BT	3/8" bolt thread, malleable iron	100	1.66
389-3/8BT	3/8" bolt thread, galvanized	100	1.76
389-1/2BT	1/2" bolt thread, galvanized	100	4.56
489-3/8BT	3/8" bolt thread, copper clad	100	2.04
C Clamps			
122-1/4	For Pipe Sizes	Fits Rods Size	
122-3/8	1/2" - 2"	1/4" without locknut	50 4.03
122-1/2	2 1/2" - 3 1/2"	3/8" without locknut	100 3.35
123-3/8	1/2" - 2"	1/2" without locknut	100 4.91
123-1/2	2 1/2" - 3 1/2"	3/8" with locknut	100 3.37
123-5/8	4" - 5"	1/2" with locknut	100 4.02
123-3/4	6"	5/8" with locknut	50 14.73
		3/4" with locknut	50 18.86
Top Beam Clamp , 3/4" Standard Opening			
125-3/8	3/8" rod	100	2.79
125-1/2	1/2" rod	100	3.49



Strap & Tube Hangers



601 Series American Tube Hanger Features:

- Designed to utilize scrap 1/2" copper tube for extension.
- Packaged 10 sets (hanger clamp and tube brace).
- Copper clad wood mounting screws are included.



601 Series

602 Series Insulated Strap Hanger Features:

- Specially compounded material prevents pipe noise from reaching the floor joists.
- Copper clad steel with mounted machine screw and fiber washer.
- Copper clad nails are included.



602 Series

Part Number	Pipe Diameter	Fits Extension Tube Size	Mounting Hardware Included	Ctn Qty	List Price
American Tube Hangers					
601-1/2	1/2"	1/2"	Wood Screws	10	\$ 4.12
601-3/4	3/4"	1/2"	Wood Screws	10	5.11
601-1	1"	1/2"	Wood Screws	10	5.89
601-11/4	1-1/4"	1/2"	Wood Screws	10	7.13
601-11/2	1-1/2"	1/2"	Wood Screws	10	7.73
601-2	2"	1/2"	Wood Screws	10	8.20
Insulated Strap Hangers Hanger Length					
602-1/2x6	1/2"	6"	Copper Clad Nails	25	6.05
602-1/2x12	1/2"	12"	Copper Clad Nails	25	7.02
602-3/4x6	3/4"	6"	Copper Clad Nails	25	6.17
602-3/4x12	3/4"	12"	Copper Clad Nails	25	7.09
602-1x6	1"	6"	Copper Clad Nails	25	6.33
602-1x12	1"	12"	Copper Clad Nails	25	7.29
602-11/4x6	1-1/4"	6"	Copper Clad Nails	25	6.54
602-11/4x12	1-1/4"	12"	Copper Clad Nails	25	7.33



337 Series

J-Hook Features:

- Made of high impact ABS for increased load capacity.
- Supports copper, CPVC, drain, waste and vent plastic pipe from joists and rafters.



Part Number	Description	Bag/Ctn Qty	List Price
J-Hooks			
33745	1/2" x 4" CTS	25/300	\$ 1.97
33746	3/4" x 4" CTS	25/300	1.97
33747	1" x 4" CTS	25/200	2.35
33740	1 1/2" x 7 1/2" DWV	25/300	2.72
33741	2" x 7 1/2" DWV	25/300	2.86
33742	3" x 7 1/2" DWV	25/300	2.79



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

6.33



603 Series Natick Strap Hanger Features:

- Made from copper clad steel, will not rust or rot.
- A tapered end, copper clad machine screw with fiber washer is mounted on every hanger for quick, tumble free installations.
- Can be mounted cross beam or along the beam.
- Copper clad mounting nails are included.



603 Series

Part Number	For Pipe Size	Hanger Length	Mounting Hardware Included	Ctn Qty	List Price
Natick Strap Hangers					
603-1/2x6	1/2"	6"	Copper Clad Nails	25	\$ 3.44
603-1/2x12	1/2"	12"	Copper Clad Nails	25	4.22
603-3/4x6	3/4"	6"	Copper Clad Nails	25	3.47
603-3/4x12	3/4"	12"	Copper Clad Nails	25	4.22
603-1x6	1"	6"	Copper Clad Nails	25	3.48
603-1x12	1"	12"	Copper Clad Nails	25	4.42
603-11/4x6	1-1/4"	6"	Copper Clad Nails	25	3.51
603-11/4x12	1-1/4"	12"	Copper Clad Nails	25	4.42



918, 919, 916 and 913 FHA Plates

- 1 1/2" width and 3" width in 18 gauge
- 18, 16 and 13 gauge

530 Stud Guards

- Triangle points
- 1 1/2" width
- 18 gauge

531 Stud Guards


- Triangle points
- 1 1/2" width
- 20 gauge

920 Stud Guards


- Twist points
- 1 1/2" width
- 19 gauge

922 Stud Guards


- Interlocking
- 1 1/2" width
- 20 gauge




918/916/913 FHA Plates



530 & 531 Stud Guards



920 Stud Guards



922 Stud Guards

Part Number	Size and Gauge	Ctn Qty	List Price
FHA Plates			
918-11/2X9	1 1/2" X 9", 18 gauge	50	\$ 0.90
918-11/2X12	1 1/2" X 12", 18 gauge	50	1.13
918-11/2X18	1 1/2" X 18", 18 gauge	50	1.71
916-11/2X9	1 1/2" X 9", 16 gauge	50	1.11
916-11/2X12	1 1/2" X 12", 16 gauge	50	1.56
916-11/2X18	1 1/2" X 18", 16 gauge	50	2.32
913-11/2X9	1 1/2" X 9", 13 gauge	50	1.47
913-11/2X12	1 1/2" X 12", 13 gauge	25	2.19
913-11/2X18	1 1/2" X 18", 13 gauge	25	3.28
919-3X9	3" X 9", 18 gauge	50	1.59
919-3X12	3" X 12", 18 gauge	50	2.12
919-3X18	3" X 18", 18 gauge	50	3.21
Stud Guards			
530-11/2X3	1 1/2" X 3", 18 gauge	100	0.28
530-11/2x5	1 1/2" x 5", 18 gauge	100	0.42
530-11/2X6	1 1/2" X 6", 18 gauge	100	0.46
531-11/2X3	1 1/2" X 3", 20 gauge	100	0.23
531-11/2x5	1 1/2" x 5", 20 gauge	100	0.37
531-11/2X6	1 1/2" X 6", 20 gauge	100	0.39
920-11/2X3	1 1/2" x 3", 19 gauge	100	0.24
920-11/2X6	1 1/2" X 6", 19 gauge	100	0.41
922-11/2X3	1 1/2" x 3", 20 gauge	100	0.21
922-11/2X6	1 1/2" X 6", 20 gauge	100	0.42





SECTION 6A

PEX & RADIANT TUBING, FITTINGS & ACCESSORIES



PRODUCT LINE	PAGE
CanPex™ OXY Oxygen Barrier Radiant Tubing	2
CanPex™ UV Tubing	1
PEX Insert Fittings - NL Brass	13-15
PEX Insert Fittings - PAL	16
PEX & Radiant Valves	9-10
PEX Tubing Installation Accessories	5-6
Push Fittings	17-18
Radiant Manifolds & Accessories	11-12
Tubing Cutters	7
Vipert™ Potable Tubing	3
Vipert™ Radiant Tubing	4

- STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.



www.americangranby.com




In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



CANPEX™ UV Plus Tubing



PEX Tubing



CANPEX™ UV PLUS Tubing Features:

- Single layer PEX in white, red and blue.
 - NSF-PW PEX 5306 certification for maximum protection against UV radiation and chlorine resistance.
 - 100% continuous hot water recirculation up to 140°F.
 - Includes metal deactivation additive to protect against polymer degradation.
 - 100 PSI@180°F, 160 PSI@73°F SDR-9
 - CSA B137.5
 - ASTM F876/F877/F2023
 - CL-R/CL-TD
 - CAN/ULC S101/UL263, CAN/ULC S102.2-03/UL E84, CTS-OD Coils
 - **STANDARD AGI DISCOUNTS DO NOT APPLY.**
- Contact your sales representative for pricing.



CB PRODUCT CODE #1.
Potable CANPEX PEX Tubing

Part Number			Nominal Size	Coil Length	List Price
CANPEX™ UV PLUS TUBING - COILS					
PX1C1			1/4" (3/8" OD)	100'	\$0.50/ft
PX1C5			1/4" (3/8" OD)	500'	0.50/ft
PX1C10			1/4" (3/8" OD)	1000'	0.50/ft
PX2C1	PXR2C1	PXB2C1	3/8" (1/2" OD)	100'	0.67/ft
PX2C2.5	PXR2C2.5	PXB2C2.5	3/8" (1/2" OD)	250'	0.67/ft
PX2C5	PXR2C5	PXB2C5	3/8" (1/2" OD)	500'	0.67/ft
PX2C10	PXR2C10	PXB2C10	3/8" (1/2" OD)	1000'	0.67/ft
PX3C1	PXR3C1	PXB3C1	1/2" (5/8" OD)	100'	0.76/ft
PX3C2.5	PXR3C2.5	PXB3C2.5	1/2" (5/8" OD)	250'	0.76/ft
PX3C3	PXR3C3	PXB3C3	1/2" (5/8" OD)	300'	0.76/ft
PX3C5	PXR3C5	PXB3C5	1/2" (5/8" OD)	500'	0.76/ft
PX3C10	PXR3C10	PXB3C10	1/2" (5/8" OD)	1000'	0.76/ft
PX4C1	PXR4C1	PXB4C1	3/4" (7/8" OD)	100'	1.38/ft
PX4C2.5	PXR4C2.5	PXB4C2.5	3/4" (7/8" OD)	250'	1.38/ft
PX4C3	PXR4C3	PXB4C3	3/4" (7/8" OD)	300'	1.38/ft
PX4C5	PXR4C5	PXB4C5	3/4" (7/8" OD)	500'	1.38/ft
PX4C10	PXR4C10	PXB4C10	3/4" (7/8" OD)	1000'	1.38/ft
PX5C1	PXR5C1	PXB5C1	1" (1 1/8" OD)	100'	2.40/ft
PX5C2.5	PXR5C2.5	PXB5C2.5	1" (1 1/8" OD)	250'	2.40/ft
PX5C3	PXR5C3	PXB5C3	1" (1 1/8" OD)	300'	2.40/ft
PX5C5	PXR5C5	PXB5C5	1" (1 1/8" OD)	500'	2.40/ft
PX5C10			1" (1 1/8" OD)	1000'	2.40/ft
CANPEX™ UV PLUS TUBING - BUNDLED STRAIGHT LENGTHS of 10' or 20'					
	PXR2L10	PXB2L10	3/8" x 20' (5/8" OD)	1000' BDL	0.67/ft
PX3L-S	PXR3L-S	PXB3L-S	1/2" x 10' (5/8" OD)	500' BDL	0.76/ft
PX3L10	PXR3L10	PXB3L10	1/2" x 20' (5/8" OD)	1000' BDL	0.76/ft
PX4L-S	PXR4L-S	PXB4L-S	3/4" x 10' (7/8" OD)	250' BDL	1.38/ft
PX4L5	PXR4L5	PXB4L5	3/4" x 20' (7/8" OD)	500' BDL	1.38/ft
PX5L-S		PXB5L-S	1" x 10' (1 1/8" OD)	100' BDL	2.40/ft
PX5L1	PXR5L1	PXB5L1	1" x 20' (1 1/8" OD)	100' BDL	2.40/ft
PX6L1			1 1/4" x 20'	100' BDL	3.79/ft
CANPEX™ UV PLUS TUBING - MANAPAC REELS					
	PXM2R5	PXM2B5	3/8" (1/2" OD)	500'	351.00/reel
	PXM3R3	PXM3B3	1/2" (5/8" OD)	300'	293.37/reel
	PXM4R1	PXM4R1	3/4" (7/8" OD)	100'	248.29/reel



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

CANPEX™ OXY Oxygen Barrier Radiant PEX



PEX OXY Tubing


CANPEX™ OXY Oxygen Barrier Tubing Features:

- For use in both residential and commercial hydronic radiant heating systems.
- Extruded with an oxygen barrier layer to prevent system component corrosion.
- Manufactured and tested to the requirements of ASTM F876/F877/F2023 and to CSA B137.5.
- 100 PSI@180° F, 160 PSI@73° F SDR-9 CTS-OD Coils
- DIN 4726 Standard
- Third Party Certified
- CAN/ELC S101/UL 263, CAN/ULC S102.2-3/E84




• **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #6.
Radiant CANPEX OXY Tubing



Part Number	Color	Nominal		Description	Coil	
		Size			Length	List Price
CANPEX™ OXY Oxygen Barrier Red PEX TUBING - COILS						
PXOB3C1	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	100'	\$ 0.87/ft
PXOB3C2.5	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	250'	0.87/ft
PXOB3C3	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	300'	0.87/ft
PXOB3C5	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	500'	0.87/ft
PXOB3C6	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	600'	0.87/ft
PXOB3C10	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	1000'	0.87/ft
PXOB3C12	Red	1/2"		CANPEX™ OXY Tubing (5/8" OD)	1200'	0.87/ft
PXOB58C1	Red	5/8"		CANPEX™ OXY Tubing (3/4" OD)	100'	1.46/ft
PXOB58C3	Red	5/8"		CANPEX™ OXY Tubing (3/4" OD)	300'	1.46/ft
PXOB58C4	Red	5/8"		CANPEX™ OXY Tubing (3/4" OD)	400'	1.46/ft
PXOB58C5	Red	5/8"		CANPEX™ OXY Tubing (3/4" OD)	500'	1.46/ft
PXOB58C10	Red	5/8"		CANPEX™ OXY Tubing (3/4" OD)	1000'	1.46/ft
PXOB4C1	Red	3/4"		CANPEX™ OXY Tubing (7/8" OD)	100'	1.74/ft
PXOB4C2.5	Red	3/4"		CANPEX™ OXY Tubing (7/8" OD)	250'	1.74/ft
PXOB4C3	Red	3/4"		CANPEX™ OXY Tubing (7/8" OD)	300'	1.74/ft
PXOB4C5	Red	3/4"		CANPEX™ OXY Tubing (7/8" OD)	500'	1.74/ft
PXOB4C10	Red	3/4"		CANPEX™ OXY Tubing (7/8" OD)	1000'	1.74/ft
PXOB5C1	Red	1"		CANPEX™ OXY Tubing (1 1/8" OD)	100'	3.42/ft
PXOB5C2.5	Red	1"		CANPEX™ OXY Tubing (1 1/8" OD)	250'	3.42/ft
PXOB5C3	Red	1"		CANPEX™ OXY Tubing (1 1/8" OD)	300'	3.42/ft
PXOB5C5	Red	1"		CANPEX™ OXY Tubing (1 1/8" OD)	500'	3.42/ft
PXOB5C10	Red	1"		CANPEX™ OXY Tubing (1 1/8" OD)	1000'	3.42/ft
CANPEX™ OXY Oxygen Barrier Red PEX TUBING - BUNDLED 20' STRAIGHT LENGTHS						
PXOB3L5	Red	1/2"x20'		CANPEX™ OXY Tubing	500' BDL	0.87/ft
PXOB4L2	Red	3/4"x20'		CANPEX™ OXY Tubing	200' BDL	1.74/ft
PXOB5L1	Red	1"x20'		CANPEX™ OXY Tubing	100' BDL	3.42/ft





VIPERT™ Potable Tubing





VIPERT™ Potable Tubing Features:

- VIPERT polyethylene raised temperature tubing is based on patented technology and made with Hypertherm PE-RT resins from The Dow Chemical Company.
- VIPERT provides increased flexibility and excellent hydrostatic strength at high temperatures and burst pressures that surpass required industry standards.
- Offers improved flexibility with relaxed memory for less spring back than PEX. Maintains excellent flexibility in extreme cold or hot environments.
- CTS compatible with crimp fittings, F2080 cold expansion, push fittings or heat fusion systems.
- VIPERT is recyclable and requires less energy to produce than PEX.
- 25 year warranty.
- 100 PSI@180° F, 200 PSI@73° F SDR-9
- CSA B137.18
- ASTM D2769, ASTM E84
- CAN/ULC S101/UL263, CAN/ULC S102.2-03



- **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #1.
Potable Tubing



Part Number	WHITE	RED	BLUE	Nominal Size	Coil Length	List Price
VIPERT™ POTABLE TUBING - COILS						
PRT3C1	PRTR3C1	PRTB3C1		1/2"	100'	0.76/ft
		PRTR3C2.5	PRTB3C2.5	1/2"	250'	0.76/ft
PRT3C3	PRTR3C3	PRTB3C3		1/2"	300'	0.76/ft
PRT3C5	PRTR3C5	PRTB3C5		1/2"	500'	0.76/ft
PRT3C10	PRTR3C10	PRTB3C10		1/2"	1000'	0.76/ft
VIPERT™ POTABLE TUBING - BUNDLED STRAIGHT LENGTHS of 10' or 20'						
PRT3L-S	PRTR3L-S	PRTB3L-S		1/2" X 10'	500' BDL	0.76/ft
PRT3L10	PRTR3L10	PRTB3L10		1/2" X 20'	1000' BDL	0.76/ft
PRT4L-S	PRTR4L-S	PRTB4L-S		3/4" X 10'	250' BDL	1.38/ft
PRT4L5	PRTR4L5	PRTB4L5		3/4" X 20'	500' BDL	1.38/ft
PRT5L-S		PRTB5L-S		1" X 10'	100' BDL	2.40/ft
PRT5L1	PRTR5L1	PRTB5L1		1" X 20'	100' BDL	2.40/ft
PRT6L1				1 1/4" X 20'	100' BDL	3.79/ft



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

VIPERT™ Oxy Barrier Radiant Tubing




VIPERT™ Oxy Barrier Radiant Tubing Features:

- VIPERT Radiant tubing is polyethylene raised temperature with oxy-barrier. Made with Dowlex PE-RT resins based on patented technology from The Dow Chemical Company.
- It is Ideal for hydronic radiant heating, cooling and snow melting systems utilizing water or a water/glycol mix as the heat or cold transfer medium.
- Offers improved flexibility with relaxed memory for less spring back than PEX. Maintains excellent flexibility in extreme cold or hot environments.
- CTS compatible with crimp fittings, F2080 cold expansion, push fittings or heat fusion systems.
- VIPERT is recyclable and requires less energy to produce than PEX.
- 25 year warranty.
- 100 PSI@180 ° F, 160 PSI@73 ° F SDR-9 CTS-OD Coils.
- Meets the requirements of ASTM F2623, ASTM E84.
- CAN/ULC-S101, UL 263, CAN/ULC S102.2.



- **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #6.
Radiant Tubing



Part Number	Color	Nominal Size	Description	Coil Length	List Price
VIPERT™ Oxygen Barrier TUBING - COILS					
PRTOB3C1	Green	1/2"	VIPERT Oxy Barrier Radiant	100'	0.87/ft
PRTOB3C2.5	Green	1/2"	VIPERT Oxy Barrier Radiant	250'	0.87/ft
PRTOB3C3	Green	1/2"	VIPERT Oxy Barrier Radiant	300'	0.87/ft
PRTOB3C5	Green	1/2"	VIPERT Oxy Barrier Radiant	500'	0.87/ft
PRTOB3C6	Green	1/2"	VIPERT Oxy Barrier Radiant	600'	0.87/ft
PRTOB3C10	Green	1/2"	VIPERT Oxy Barrier Radiant	1000'	0.87/ft
PRTOB3C12	Green	1/2"	VIPERT Oxy Barrier Radiant	1200'	0.87/ft
VIPERT™ Oxygen Barrier TUBING - BUNDLED 20' STRAIGHT LENGTHS					
PRTOB3L5	Green	1/2"x20'	VIPERT Oxy Barrier Radiant	500' BDL	0.87/ft
PRTOB4L2	Green	3/4"x20'	VIPERT Oxy Barrier Radiant	200' BDL	1.74/ft
PRTOB5L1	Green	1"x20'	VIPERT Oxy Barrier Radiant	100' BDL	3.42/ft





PEX Tubing Installation Accessories

PEX Accessories:

- Approved for use with ASTM F876/F877 SDR-9 PEX plumbing and hydronic radiant heating systems incorporating ASTM F-1807 insert fittings.
- Copper crimp rings manufactured from UNS C10200 or UNS C12200 copper alloy and are annealed to 35-45 Rockwell 15T scale for ease of crimping.



- **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #7.
Crimp Rings



Crimp Rings




Crimp Sleeves

Part Number	Size Description	Bag/Ctn Qty	List Price
COPPER CRIMP RINGS			
CBXCR2	Copper Crimp Ring for 3/8" PEX Tubing	100/2000	\$ 0.29
CBXCR3	Copper Crimp Ring for 1/2" PEX Tubing	100/4000	0.47
CBXCR58	Copper Crimp Ring for 5/8" PEX Tubing	100	0.80
CBXCR4	Copper Crimp Ring for 3/4" PEX Tubing	100/2000	0.65
CBXCR5	Copper Crimp Ring for 1" PEX Tubing	50/250	0.78
CBXCR6	Copper Crimp Ring for 1 1/4" PEX Tubing	100/400	1.48
CBXSS3	Stainless Steel Crimp Sleeve 1/2" PEX	50/5000	0.56
CBXSS4	Stainless Steel Crimp Sleeve 3/4" PEX	50/3200	0.79
CBXSS5	Stainless Steel Crimp Sleeve 1" PEX	25/1600	1.20


- **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #3.
Tools




HCM Crimper

HAD Crimper



HAC34 Caliper



Uncoiler

Part Number	Size Description	Bag/Ctn Qty	List Price
CRIMP TOOLS			
HCM2	3/8" SINGLE HAND CRIMPER	1	239.40
HCM3	1/2" SINGLE HAND CRIMPER	1	239.40
HCM4	3/4" SINGLE HAND CRIMPER	1	239.40
HAD2	3/8" CRIMP TOOL PEX	1	190.00
HAD3	1/2" CRIMP TOOL PEX	1	190.00
HAD4	3/4" CRIMP TOOL PEX	1	215.00
HAD5	1" CRIMP TOOL PEX	1	387.00
HAD34	1/2 X 3/4" CRIMP TOOL PEX	1	300.00
HADSS3	1/2" STAINLESS STEEL RATCHET CRIMPER	1	195.00
HADSS4	3/4" STAINLESS STEEL RATCHET CRIMPER	1	195.00
HADSS5	1" STAINLESS STEEL RATCHET CRIMPER	1	195.00
PEX CRIMP RING GAUGE			
HAC34	3/8, 1/2 and 3/4 GO-NO GO RING GAUGE	1	11.11
HAC5	1" CRIMP RING GAUGE	1	11.11
UNCOILER			
TATK200	Tubing Uncoiler	1	565.00



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016


6A.5

PEX Tubing Installation Accessories



- STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.

CB PRODUCT CODE #3.
PAL Accessories, Clamps, Tubes



Tube Clamps



Cone Seals



Escutcheons




Risers



PTO Bend Support

Part Number	Size Description	Bag/Ctn Qty	List Price
TUBE CLAMPS			
CLJ2	3/8" J-Clamp with Nail	100/500	\$ 0.10
CLJ3	1/2" J-Clamp with Nail	100/500	0.10
CLJ4	3/4" J-Clamp with Nail	100/500	0.12
CLJ5	1" J-Clamp with Nail	50/250	0.19
CONE SEALS			
RXTC2	1/2 ID CLOSET CONE	100/1000	0.29
RXTL2	1/2 ID LAV CONE	100/1000	0.14
RXTL3	3/4 ID LAV CONE	100/1000	0.29
PLASTIC ESCUTCHEONS			
RXEW2	WHITE ESCUTCHEON, 3/8 TUBE	50/500	0.43
RXEW2D	WHITE DBL ESCUTCHEON, 3/8	25/250	0.60
RXEW3	WHITE ESCUTCHEON, 1/2 TUBE	50/500	0.43
RXEW3D	WHITE DBL ESCUTCHEON, 1/2	25/250	0.60
RISERS			
RLX112	3/8" x 12" LAV Riser w/ compression ferrule	100	1.04
RLX115	3/8" x 15" LAV Riser w/ compression ferrule	100	1.25
RLX120	3/8" x 20" LAV Riser w/ compression ferrule	100	1.37
RLX130	3/8" x 30" LAV Riser w/ compression ferrule	100	1.93
RLX136	3/8" x 36" LAV Riser w/ compression ferrule	100	2.23
RKX112	3/8" x 12" CLOSET Riser w/ compression ferrule	100	1.04
RKX115	3/8" x 15" CLOSET Riser w/ compression ferrule	100	1.25
RKX120	3/8" x 20" CLOSET Riser w/ compression ferrule	100	1.37
RXF1	FERRULE FOR 3/8 OD RISER"	100	0.11
RXF3	FERRULE FOR 5/8 OD RISER"	100	0.12
RX9S2	INSERT STIFFENER FOR 3/8 TUBE"	10	0.35
BEND SUPPORT			
PTO3	1/2" Bend Support	50	2.94
PTO4	3/4" Bend Support	50	4.07



Ice Maker Tubing

- STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.

CB PRODUCT CODE #1.
Potable CANPEX PEX Tubing

Part Number	Size Description	Bag/Ctn Qty	List Price
ICE MAKER TUBING 200 psi, CTS-OD SDR-11			
TBOC1	1/8" Nominal (1/4" OD) Natural PE	100'	41.00



Pex & Radiant Tubing Cutters



• STANDARD AGI DISCOUNTS DO APPLY to items on this page.



T Series Cutter

Part Number	Color	Blade Material	Cuts	Ctn Qty	List Price
HARVARD CONTRACTOR Pipe & Hose Cutters					
T100	Black	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	\$ 21.53
YT100	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	21.53
T100SS	Black	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
YT100SS	Yellow	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
T135	Black	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
YT135	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
T135SS	Black	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
YT135SS	Yellow	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
HARVARD CONTRACTOR Replacement Blades (includes one knock out pin) DP is DOUBLE PACK					
BT100	PTFE Coated Hardened Steel Blade		T100, YT100	100	8.20
BT100SS	Stainless Steel Blade		T100SS, YT100SS	100	9.16
BT135	PTFE Coated Hardened Steel Blade		T135, YT135	100	8.98
BT135DP	PTFE Coated Hardened Steel Blades (2)		T135, YT135	100	17.42
BT135SS	Stainless Steel Blade		T135SS, YT135SS	100	9.91
BT135DPSS	Stainless Steel Blades (2)		T135SS, YT135SS	100	19.29





PEX & Radiant Tubing Installation Valves

* STANDARD AGI DISCOUNTS APPLY to items on this page only.



HFBV4-PEXNL Series

MATERIAL SPECIFICATIONS

Handle Nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Stem O-ring (2)	NBR
Ball	Chrome Plated NL Brass
Seats	PTFE
Body	NL Forged Brass
End Adapter	NL Forged Brass

NO LEAD Forged Brass FULL Port Ball Valve with PEX Connections Features:

- Heavy pattern, full port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- NBR double o-ring stem seal.
- Blow-out proof stem design.
- **400 PSI** W.O.G. non-shock; **125 PSI** S.W.P.
- PEX ends for use with PEX tubing connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price*
HFBV4-50PEXNL	1/2"	25/100	\$ 6.39
HFBV4-75PEXNL	3/4"	10/60	10.54
HFBV4-100PEXNL	1"	10/40	15.89



HFBV4-PEXSWNL Series

MATERIAL SPECIFICATIONS

Handle Nut	Zinc Coated Steel
Handle	Zinc Coated Steel
Stem O-ring (2)	NBR
Ball	NL Brass
Seats	PTFE
Body	NL Forged Brass
End Adapter	NL Forged Brass

NO LEAD Forged Brass STANDARD Port Ball Valve with PEX x SWEAT Connections Features:

- Heavy pattern, standard port, forged NO LEAD brass construction.
- PTFE seats, chrome plated NO LEAD brass ball.
- NBR double o-ring stem seal.
- Blow-out proof stem design.
- **400 PSI** W.O.G. non-shock; **125 PSI** S.W.P.
- PEX x SWEAT ends for use with PEX tubing to copper tubing connections.
- **Third party certified to NSF/ANSI 372.**



Part Number	Size	Ctn/Case Qty	List Price*
HFBV4-50PEXSWNL	1/2"	25/100	\$ 9.27
HFBV4-75PEXSWNL	3/4"	10/60	12.45

PEX & Radiant Tubing Installation Valves



- STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.



NO LEAD Brass Chrome Plated Ball Valve with PEX Connections Features:

- Chrome Plated No Lead Brass.
- Plastic Oval Handle.
- For use with PEX tubing connections.
- Third party certified to NSF/ANSI 372.

CB PRODUCT CODE #2.
PEX NL Brass Insert Valves



Straight Stop Valve



Angle Stop Valve



Straight Stop Valves

Part Number	Size Description	Bag Qty	List Price
STRAIGHT STOP Valve Insert x Insert			
70-10-10-005NL	1/2" PEX Straight Stop Valve Chrome Plated NL	25	\$ 8.52
ANGLE STOP Valve Insert x Compression			
70-20-20-074NL	1/2" PEX x 3/8 Comp Angle Stop Ch Plated NL	25	9.62
70-30-10-072NL	1/2" PEX x 1/4 Comp Angle Stop Ch Plated NL	25	9.33
STRAIGHT STOP Valve Insert x Compression			
70-20-10-074NL	1/2" PEX x 3/8 Comp Straight Stop Ch Plated NL	25	9.33




Radiant Installation Accessories




Radiant Manifolds:

- Pre-Assembled manifold with red and blue butterfly handle isolator ball valves, thermometers, automatic airvents, fill port, flow meters and mounting brackets




Manifold




Compression x Manifold Ftg 271




419 418T 448B

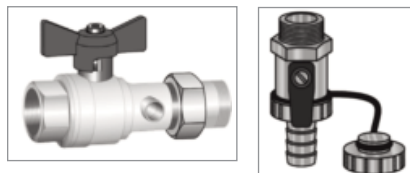

422 Valves 476A

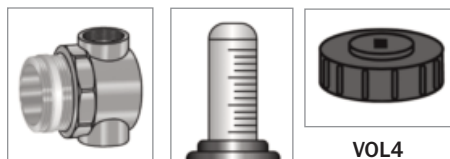

229 GRM6 VOL4

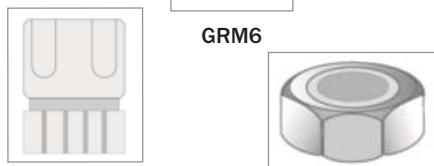

399 227

- **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.

CB PRODUCT CODE #8.
Hydronic Heating Manifolds & Accessories

Part Number	Size Description	Ctn	List Price
PRE-ASSEMBLED RADIANT MANIFOLDS			
VGMC342S	2 Loop Vanguard 1" Manifold W/Flo Meter	1	\$ 239.50
VGMC343S	3 Loop Vanguard 1" Manifold W/Flo Meter	1	337.50
VGMC344S	4 Loop Vanguard 1" Manifold W/Flo Meter	1	389.75
VGMC345S	5 Loop Vanguard 1" Manifold W/Flo Meter	1	454.01
VGMC346S	6 Loop Vanguard 1" Manifold W/Flo Meter	1	496.00
VGMC347S	7 Loop Vanguard 1" Manifold W/Flo Meter	1	572.00
VGMC348S	8 Loop Vanguard 1" Manifold W/Flo Meter	1	622.00
VGMC349S	9 Loop Vanguard 1" Manifold W/Flo Meter	1	697.56
VGMC350S	10 Loop Vanguard 1" Manifold W/Flo Meter	1	757.96
VGMC346S.25	6 Loop Vanguard 1 1/4" Manifold W/Flo Meter	1	623.43
VGMC347S.25	7 Loop Vanguard 1 1/4" Manifold W/Flo Meter	1	688.11
VGMC348S.25	8 Loop Vanguard 1 1/4" Manifold W/Flo Meter	1	760.39
VGMC349S.25	9 Loop Vanguard 1 1/4" Manifold W/Flo Meter	1	821.10
VGMC350S.25	10 Loop Vanguard 1 1/4" Manifold W/Flo Meter	1	892.71
COMPRESSION X MANIFOLD FITTINGS			
R2038CP	3/8" COMPRESSION X MANIFOLD FTG	25	6.75
R2012CP	1/2" COMPRESSION X MANIFOLD FTG	25	6.75
R2058CP	5/8" COMPRESSION X MANIFOLD FTG	10	8.50
R2034CP	3/4" COMPRESSION X MANIFOLD FTG	10	9.80
RADIANT HEATING MANIFOLD COMPONENTS			
271	Manifold Bracket (Set of 2)	1	14.00
419	Manifold Automatic Air Flow Vent	1	10.17
418T	Manual Air Flow Vent	1	2.17
448B	Manifold Thermometer Temperature Indicator	1	17.50
422R	Manifold Isolator Valve (Red Handle)	1	48.90
422B	Manifold Isolator Valve (Blue Handle)	1	48.90
229	Manifold Fill Port Adapter	1	7.40
476A	Manifold Fill Port	1	11.10
GRM6	Manifold Flow Meter, 0-6 GPM	1	14.70
VOL4	Red Handle for Flow Meter	1	1.27
399	Manifold Return Valve Cap	1	3.57
227	3/4" Manifold Circuit Cap	1	2.40



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

6A.11

Radiant Installation Accessories




Radiant Accessories



- STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.

CB PRODUCT CODE #8.
Hydronic Heating Manifolds & Accessories



HRTP




Circuit Actuator



Digital Thermostat



In-Slab Repair Kit



Slip-on Slab Elbow



Staples



Part Number	Size Description	Ctn	List Price
Heat Transfer Plates			
HRTP3	Aluminum Heat Transfer Plates 19" x 5"	25	\$ 2.45
CIRCUIT ACTUATORS			
AM24V	24V Actuating Valve 2 Wire	1	99.36
AM24V4	24V Actuating Valve 4 Wire	1	107.99
Digital Thermostat			
TH115-A-24T	Programmable Ambient Thermostat	1	129.06
TH115-AF-024T	Programmable Ambient Floor Thermostat	1	182.22
TH114-A-024V	Non-Programmable Ambient Thermostat	1	109.06
TH114AF024T	Non-Programmable Ambient Floor Thermostat	1	160.74
In Slab Repair Kit			
CBXRK33HR	In-slab repair kit 1/2"	1	1.75
CBXRK58HR	In-Slab repair kit 5/8"	1	2.15
CBXRK44HR	In-slab repair kit 3/4"	1	2.15
Slip-on Elbow for Slab			
HRSL3	1/2" PEX Plastic Slip On Elbow for Slab	1	2.10
HRSL4	3/4" PEX Plastic Slip On Elbow for Slab	1	2.25
Foam Staples			
STAP1	1 1/2" Staple 300/box	1	73.30
STAP2	2 1/2" Staple 300/box	1	94.55



NO LEAD Brass PEX Insert Fittings


NO LEAD Brass PEX Insert Fitting Features:

- Approved for use with ASTM F876/F877 SDR-9 PEX tubing/PEX distribution systems.
- No Lead Brass PEX fittings are manufactured and certified to ASTM F1807 requirements.
- Certified lead free to NSF/ANSI 372.




• **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.


CB PRODUCT CODE #2.
PEX NL Brass Insert Fittings




NLCBXE Elbow




NLCBXME Male Elbow



NLCBXT Tee



NLCBXC Coupling



NLCBXC Transition Coupling

Part Number	Size Description	Bag Qty	List Price
ELBOWS			
Ins x Ins			
NLCBXE22	3/8 PEX 90 Elbow - NL	50	\$ 2.39
NLCBXE33	1/2 PEX 90 Elbow - NL	50	2.37
NLCBXE43	3/4 x 1/2 PEX 90 Elbow -NL	25	2.80
NLCBXE44	3/4 PEX 90 Elbow - NL	25	3.34
NLCBXE55	1 PEX 90 Elbow - NL	10	5.46
NLCBXE66	1 1/4 PEX 90 Elbow - NL	10	15.29
Ins x MIP			
NLCBXME32	1/2 PEX x 3/8 MPT 90 Elbow - NL	50	4.44
NLCBXME33	1/2 PEX x 1/2 MPT 90 Elbow - NL	50	5.63
NLCBXME44	3/4 PEX x 3/4 MPT 90 Elbow - NL	25	9.84
NLCBXME55	1 PEX x 1 MPT 90 Elbow - NL	25	14.51
NLCBXME66	1 1/4 PEX x 1 1/4 MPT 90 Elbow - NL	10	32.67
TEES			
Ins x Ins x Ins			
NLCBXT222	3/8 PEX Tee - NL	25	2.96
NLCBXT333	1/2 PEX Tee - NL	50	2.54
NLCBXT334	1/2 x 1/2 x 3/4 PEX Tee - NL	25	5.32
NLCBXT433	3/4 x 1/2 x 1/2 PEX Tee - NL	25	4.58
NLCBXT434	3/4 x 1/2 x 3/4 PEX Tee - NL	25	4.41
NLCBXT443	3/4 x 3/4 x 1/2 PEX Tee - NL	25	3.64
NLCBXT444	3/4 PEX Tee - NL	25	4.27
NLCBXT445	3/4 x 3/4 x 1 PEX Tee - NL	10	6.54
NLCBXT534	1 x 1/2 x 3/4 PEX Tee - NL	10	6.72
NLCBXT543	1 x 3/4 x 1/2 PEX Tee - NL	10	6.72
NLCBXT544	1 x 3/4 x 3/4 PEX Tee - NL	10	8.65
NLCBXT545	1 x 3/4 x 1 PEX Tee - NL	10	8.44
NLCBXT553	1 x 1 x 1/2 PEX Tee - NL	10	6.33
NLCBXT554	1 x 1 x 3/4 PEX Tee - NL	10	8.86
NLCBXT555	1 PEX Tee - NL	25	8.37
NLCBXT666	1 1/4 PEX Tee - NL	10	15.92
COUPLINGS			
Ins x Ins			
NLCBXC22	3/8 PEX Coupling - NL	100	1.26
NLCBXC32	1/2 x 3/8 PEX Coupling - NL	50	1.51
NLCBXC33	1/2 PEX Coupling - NL	100	1.31
NLCBXC43	3/4 x 1/2 PEX Coupling - NL	50	2.24
NLCBXC44	3/4 PEX Coupling - NL	50	2.43
NLCBXC54	1 x 3/4 PEX Coupling - NL	25	4.01
NLCBXC55	1 PEX Coupling - NL	25	4.44
NLCBXC66	1 1/4 PEX Coupling - NL	10	9.50
TRANSITION COUPLINGS Ins PEX x Ins Polybutylene - includes crimp rings			
NLCBXC22	3/8 PEX x 3/8 PB Transition Coupling - NL	100	2.71
NLCBXC33	1/2 PEX x 1/2 PB Transition Coupling - NL	100	2.90
NLCBXC44	3/4 PEX x 3/4 PB Transition Coupling - NL	25	4.50
NLCBXC55	1 PEX x 1 PB Transition Coupling - NL	10	6.65



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204


6A.13

NO LEAD Brass PEX Insert Fittings




• STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.


CB PRODUCT CODE #2.
PEX NL Brass Insert Fittings




NLCBP Plug




NLCBXM Male Adapter



NLCBXFC Female Adapter



NLCBXC Male Sweat Adapter



NLCBXC Female Sweat Adapter


Part Number	Size Description	Bag Qty	List Price
PLUGS			
NLCBXP2B	3/8 PEX Plug - NL	100	0.87
NLCBXP3B	1/2 PEX Plug - NL	100	0.98
NLCBXP4B	3/4 PEX Plug - NL	50	1.89
NLCBXP5B	1 PEX Plug - NL	50	2.95
NLCBXP6B	1 1/4 PEX Plug NL	10	8.86
MALE ADAPTERS Ins x MPT			
NLCBXM23	3/8 PEX x 1/2 MPT Adapter - NL	25	\$ 3.74
NLCBXM33	1/2 PEX x 1/2 MPT Adapter - NL	50	3.19
NLCBXM34	1/2 PEX x 3/4 MPT Adapter - NL	25	4.88
NLCBXM43	3/4 PEX x 1/2 MPT Adapter - NL	25	3.48
NLCBXM44	3/4 PEX x 3/4 MPT Adapter - NL	25	4.98
NLCBXM45	3/4 PEX x 1 MPT Adapter - NL	10	9.28
NLCBXM54	1 PEX x 3/4 MPT Adapter - NL	10	6.19
NLCBXM55	1 PEX x 1 MPT Adapter - NL	10	9.58
NLCBXM66	1 1/4 PEX x 1 1/4 MPT Adapter NL	10	22.21
FEMALE ADAPTERS Ins x FPT			
NLCBXFC23	3/8 PEX x 1/2 FPT Adapter - NL	25	4.77
NLCBXFC33	1/2 PEX x 1/2 FPT Adapter - NL	25	3.90
NLCBXFC43	3/4 PEX x 1/2 FPT Adapter - NL	25	5.79
NLCBXFC34	1/2 PEX x 3/4 FPT Adapter - NL	25	6.09
NLCBXFC44	3/4 PEX x 3/4 FPT Adapter - NL	25	5.42
NLCBXFC45	3/4 PEX x 1 FPT Adapter - NL	25	10.66
NLCBXFC54	1 PEX x 3/4 FPT Adapter - NL	25	6.13
NLCBXFC55	1 PEX x 1 FPT Adapter - NL	50	11.19
NLCBXFC66	1 1/4 PEX x 1 1/4 FPT Adapter - NL	10	25.43
MALE SWEAT ADAPTERS Ins x Male Sweat			
NLCBXC23M	3/8 PEX x 1/2 Male Sweat Adapter - NL	50	1.79
NLCBXC33M	1/2 PEX x 1/2 Male Sweat Adapter - NL	50	1.65
NLCBXC34M	1/2 PEX x 3/4 Male Sweat Adapter - NL	25	3.45
NLCBXC44M	3/4 PEX x 3/4 Male Sweat Adapter - NL	25	3.17
NLCBXC55M	1 PEX x 1 Male Sweat Adapter - NL	25	5.78
NLCBXC66M	1 1/4 PEX x 1 Male Sweat Adapter NL	10	12.77
FEMALE SWEAT ADAPTER Ins x Female Sweat			
NLCBXC23F	3/8 PEX x 1/2 Female Sweat Adapter - NL	50	1.97
NLCBXC33F	1/2 PEX x 1/2 Female Sweat Adapter - NL	50	1.81
NLCBXC44F	3/4 PEX x 3/4 Female Sweat Adapter - NL	25	3.25
NLCBXC55F	1 PEX x 1 Female Sweat Adapter - NL	10	5.93
NLCBXC66F	1 1/4 PEX x 1 1/4 Female Sweat Adapter NL	10	11.43




NO LEAD Brass PEX Insert Fittings

• STANDARD AGI DISCOUNTS DO NOT APPLY.
Contact your sales representative for pricing.

CB PRODUCT CODE #2.
PEX NL Brass Insert Fittings




NLCBXE Sweat Elbows




NLCBXDE Drop Ear Elbows



CBXE Stubout Elbows



NLCBXSE Swivel Elbows



NLCBXSA Transition Ftg

Part Number	Size Description	Bag Qty	List Price
MALE SWEAT ELBOWS Ins x Male Sweat			
NLCBXE33MC	1/2 PEX x 1/2 Male Sweat Elbow - NL	25	3.44
NLCBXE44MC	3/4 PEX x 3/4 Male Sweat Elbow - NL	10	6.87
FEMALE SWEAT ELBOWS Ins x Female Sweat			
NLCBXE33FC	1/2 PEX x 1/2 Female Sweat Elbow - NL	10	3.89
NLCBXE44FC	3/4 PEX x 3/4 Female Sweat Elbow - NL	10	6.67
NLCBXE55FC	1 PEX x 1 Female Sweat Elbow - NL	25	12.73
DROP EAR ELBOWS Ins x FPT			
NLCBXDE33C	1/2 PEX x 1/2 FPT Drop Ear Elbow - NL	10	8.18
NLCBXDE43C	3/4 PEX x 1/2 FPT Drop Ear Elbow - NL	25	12.89
NLCBXDE44C	3/4 PEX x 3/4 FPT Drop Ear Elbow - NL	10	13.10
STUB OUT ELBOWS Ins x Closed			
CBXE33SO	4" x 6" Ins x 1/2 Closed End Copper	50	7.20
CBXE33SO8	4" x 8" Ins x 1/2 Closed End Copper	50	6.72
CBXE33SOE	4" x 6" Ins x 1/2 Closed End w/ Ear Copper	25	10.55
CBXE33SOE8	4" x 8" Ins x 1/2 Closed End w/ Ear Copper	25	11.74
SWIVEL ELBOWS Ins x FPT			
NLCBXSE23C	3/8 PEX x 1/2 FPT Swivel Elbow-NL	50	3.40
NLCBXSE33C	1/2 PEX x 1/2 FPT Swivel Elbow-NL (plastic nut)	50	3.36
NLCBXSE44C	3/4 PEX x 3/4 FPT Swivel Elbow-NL (plastic nut)	25	7.41
TRANSITION SWIVEL ADAPTER Ins x Female Swivel			
NLCBXSA23	3/8 PEX x 1/2 FPT Thrd Swivel Adapter NL (pl nut)	25	2.09
NLCBXSA33	1/2 PEX x 1/2 FPT Thrd Swivel Adapter NL(pl nut)	25	2.04
NLCBXSA34	1/2 PEX x 3/4 FPT Thrd Swivel Adapter NL (pl nut)	10	3.72
NLCBXSA44	3/4 PEX x 3/4 FPT Thrd Swivel Adapter NL (pl nut)	10	3.97
NLCBXSA33B	1/2 PEX x 1/2 FPT Thrd Swivel Adapter NL (BR nut)	25	5.70
NLCBXSA44B	3/4 PEX x 3/4 FPT Thrd Swivel Adapter NL (BR nut)	10	9.65



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

6A.15

NO LEAD PAL PEX Insert Fittings




Polyalloy PAL PEX Insert Fitting Features:

- Approved for use with ASTM F876/F877 SDR-9 PEX tubing/PEX distribution systems.
- PAL fittings are marked with ASTM F877 and/or F2159 and NSF PW.
- Certified lead free to NSF/ANSI 372.




• **STANDARD AGI DISCOUNTS DO NOT APPLY.**
Contact your sales representative for pricing.


CB PRODUCT CODE #3.
PAL Insert Fittings




XPT Tee




XPMC Male Adapter




XPC Coupling




XPE Elbow




XPME Male Elbow



XPMSW Swivel Elbow



XPSA Transition Swivel Adapter



CBXP Plug

Part Number	Size Description	Bag Qty	List Price
TEES			
	Ins x Ins x Ins		
XPT333	1/2 PAL TEE	50	\$ 0.90
XPT334	1/2 X 1/2 X 3/4 PAL TEE	25	1.28
XPT433	3/4 X 1/2 X 1/2 PAL TEE	25	1.28
XPT434	3/4 X 1/2 X 3/4 PAL TEE	25	1.28
XPT443	3/4 X 3/4 X 1/2 PAL TEE	25	1.14
XPT445	3/4 x 3/4 x 1 PAL TEE	10	2.85
XPT444	3/4 PAL TEE	25	1.28
XPT544	1 X 3/4 x 3/4 PAL TEE	10	2.85
XPT545	1 x 3/4 x 1 PAL TEE	25	2.85
XPT553	1 X 1 X 1/2 PAL TEE	10	2.85
XPT554	1 x 1 x 3/4 PAL TEE	25	2.85
XPT555	1 PAL TEE	10	3.55
MALE ADAPTERS			
	Ins x MPT		
XPMC33	1/2 PAL MPT ADAPTER	50	1.16
XPMC34	1/2 X 3/4 PAL MPT ADAPTER	25	1.55
XPMC44	3/4 PAL MPT ADAPTER	25	1.55
XPMC43	3/4 X 1/2 PAL MPT ADAPTER	25	1.55
XPMC55	1 x 1 PAL MPT ADAPTER	25	2.97
COUPLINGS			
	Ins x Ins		
XPC32	1/2 x 3/8 PAL COUPLING		0.52
XPC33	1/2 PAL COUPLING	100	0.52
XPC43	3/4x1/2 PAL COUPLING	50	0.84
XPC44	3/4 PAL COUPLING	50	0.76
XPC55	1 PAL COUPLING	10	1.69
XPC54	1X3/4 PAL COUPLING	25	1.69
ELBOWS			
	Ins x Ins		
XPE33	1/2 PAL ELBOW	50	0.71
XPE43	3/4X1/2 PAL ELBOW	25	1.05
XPE44	3/4 PAL ELBOW	25	1.02
XPE55	1 PAL ELBOW	10	2.94
MALE THREADED ELBOWS			
	Ins x MPT		
XPME32	1/2 X 3/8 PAL MPT ELBOW	10	1.25
XPME33	1/2 PAL MPT ELBOW	25	1.10
XPME43	3/4 X 1/2 PAL MPT ELBOW	25	1.82
XPME44	3/4 PAL MPT ELBOW	25	1.65
SWIVEL ELBOWS			
	Ins x FPT		
XPSE44	3/4 PAL FPT SWIVEL ELBOW	25	4.56
TRANSITION SWIVEL ADAPTER			
	Ins x FPT		
XPSA23	3/8 X 1/2 PAL SWIVEL ADAPT	50	1.26
XPSA33	1/2 PAL SWIVEL ADAPT	50	1.26
XPSA44	3/4 PAL SWIVEL ADAPT	1	2.21
PLUGS			
CBXP2	3/8 PLASTIC INSERT TEST PLUG	100	0.37
CBXP3	1/2 PLASTIC INSERT TEST PLUG	100	0.37
CBXP4	3/4 PLASTIC INSERT TEST PLUG	50	0.47
CBXP5	1 PLASTIC INSERT TEST PLUG	50	0.70



NO LEAD Brass Push Fittings

HARVARD NO LEAD Brass Push Fitting Features:

- Use for above ground potable water, hydronic heating and other plumbing systems.
- No soldering, clamps, unions or glue needed.
- For use with copper, CPVC, PEX and PERT tubing in any combination.
- Integral tube liner (stiffener) for PEX/PERT installation.
- Easy disconnect with special removal tool.
- Lead free, forged brass body construction.
- Full fluid flow without PEX/PERT stiffeners.
- Fittings can be rotated 360° after assembly for easier installation.
- Max working pressure at max working temperature: 200 psi at 200°F water. (Caution: may exceed the max service pressure/temperature of PEX/PERT or CPVC tubing.)
- Not suitable for steam service.
- Tested, certified and listed in accordance with ASSE1061-2006.
- cUPC listed.
- Certified lead free to NSF/ANSI 372.



MATERIAL SPECIFICATIONS

Body	Forged NL Brass
O-ring	EPDM
Gripper Ring	SS304
Push Ring	Acetal
Locking Ring	Acetal
Seat Ring	Acetal
Stiffener	Polysulfone

• **STANDARD AGI DISCOUNTS DO APPLY to items on this page.**



BPCNL



BPRCNL



BPMANL



BPRMANL



BPFANL



BPRFANL



BPENL



BPRENL

Part Number	Description & Size	Ctn Qty	List Price
Couplings			
BPC1/2NL	BRS PUSH CPL NL FITXFIT 1/21/2	50/200	\$5.89
BPC3/4NL	BRS PUSH CPL NL FITXFIT 3/4X3/4	30/120	8.75
BPC1NL	BRS PUSH CPL NL FITXFIT 1X1	15/60	16.25
Reducing Coupling			
BPRC3/4X1/2NL	BRS PUSH CPL NL FITXFIT 3/4X1/2	35/140	7.82
BPRC1X3/4NL	BRS PUSH CPL NL FITXFIT 1X3/4	20/80	15.18
Male Adapters			
BPMA1/2NL	BRS PUSH M/A NL FITXMPT 1/2X1/2	60/240	5.57
BPMA3/4NL	BRS PUSH M/A NL FITXMPT 3/4X3/4	40/160	8.39
BPMA1NL	BRS PUSH M/A NL FITXMPT 1X1	20/80	16.25
Reducing Male Adapter			
BPRMA1/2X3/4NL	BRS PUSH M/A NL FITXMT 1/2X3/4	50/200	8.39
BPRMA3/4X1/2NL	BRS PUSH M/A NL FITXMT 3/4X1/2	40/160	8.39
Female Adapters			
BPFA1/2NL	BRS PUSH F/A NL FITXFPT 1/2X1/2	60/240	5.71
BPFA3/4NL	BRS PUSH F/A NL FITXFPT 3/4X3/4	40/160	8.93
BPFA1NL	BRS PUSH F/A NL FITXFPT 1X1	20/80	14.54
Reducing Female Adapter			
BPRFA1/2X3/4NL	BRS PUSH F/A NL FITXFPT 1/2X3/4	40/160	8.75
BPRFA3/4X1/2NL	BRS PUSH F/A NL FITXFPT 3/4X1/2	40/160	8.75
BPRFA3/4X1NL	BRS PUSH F/A NL FITXFPT 3/4X1	25/100	13.21
BPRFA1X3/4NL	BRS PUSH F/A NL FITXFPT 1X3/4	25/100	13.21
Elbows			
BPE1/2NL	BRS PUSH ELL NL FITXFIT 1/2X1/2	40/160	8.50
BPE3/4NL	BRS PUSH ELL NL FITXFIT 3/4X3/4	20/80	11.89
BPE1NL	BRS PUSH ELL NL FITXFIT 1X1	12/48	25.18
Reducing Elbows			
BPRE3/4X1/2NL	BRS PUSH ELL NL FITXFIT 3/4X1/2	25/100	11.96
BPRE3/4X1NL	BRS PUSH ELL NL FITXFIT 3/4X1	15/60	21.17

CAUTION: FAILURE TO PROPERLY CHAMFER TUBING OD WILL RESULT IN A DAMAGED O-RING AND A LEAK. FAILURE TO PROPERLY CHAMFER THE TUBE VOIDS FITTING WARRANTY.



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

6A.17

NO LEAD Brass Push Fittings



• **STANDARD AGI DISCOUNTS**
DO APPLY to items on this page.



BPFE1/2NL



BPFE3/4NL



BPME1/2NL



BPME3/4NL



BPT1/2NL



BPT3/4NL



BPT1NL



BPRT1/2X1/2X3/4NL



BPRT1/2X1/2X1NL



BPRT1/2X3/4X3/4NL



BPRT3/4X1/2X1/2NL



BPRT3/4X3/4X1/2NL



BPRT1X1X3/4NL




BPFT1/2NL




BPFT3/4NL



BPMT1/2NL



BPMT3/4NL



BPDE1/2NL



BPWPE1/2NL



BPECA1/2NL



BPECA3/4NL

Part Number	Description & Size	Ctn Qty	List Price
Female Elbow			
BPFE1/2NL	BRS PUSH FEM ELBOW NL FITXFPT 1/2	40/160	\$ 9.11
BPFE3/4NL	BRS PUSH FEM ELBOW NL FITXFPT 3/4	20/80	12.82
BPFE1NL	BRS PUSH FEM ELBOW NL FITXFPT 1	13/52	17.68
Male Elbow			
BPME1/2NL	BRS PUSH MALE ELBOW NL FITXMPT 1/2X1/2	40/160	9.11
BPME3/4NL	BRS PUSH MALE ELBOW NL FITXMPT 3/4X3/4	20/80	13.39
BPME1NL	BRS PUSH MALE ELBOW NL FITXMPT 1X1	13/52	19.50
Tees			
BPT1/2NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X1/2	30/120	12.54
BPT3/4NL	BRS PUSH TEE NL FITXFIT 3/4X3/4X3/4	15/60	18.68
BPT1NL	BRS PUSH TEE NL FITXFIT 1X1X1	7/28	35.54
Reducing Tee			
BPRT1/2X1/2X3/4NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X3/4	20/80	18.46
BPRT1/2X1/2X1NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X1	15/60	23.75
BPRT1/2X3/4X3/4NL	BRS PUSH TEE NL FITXFIT 1/2X3/4X3/4	15/60	20.56
BPRT3/4X1/2X1/2NL	BRS PUSH TEE NL FITXFIT 3/4X1/2X1/2	20/80	16.25
BPRT3/4X3/4X1/2NL	BRS PUSH TEE NL FITXFIT 3/4X3/4X1/2	15/60	17.32
BPRT1X1X3/4NL	BRS PUSH TEE NL FITXFIT 1X1X3/4	8/32	29.46
Female Tee			
BPFT1/2NL	BRS PUSH FEM TEE NL FITXFITXFPT 1/2X1/2X1/2	30/120	14.13
BPFT3/4NL	BRS PUSH FEM TEE NL FITXFITXFPT 3/4X3/4X3/4	15/60	20.88
Male Tee			
BPMT1/2NL	BRS PUSH MALE TEE NL FITXFIT 1/2X1/2X1/2	30/120	14.13
BPMT3/4NL	BRS PUSH MALE TEE NL FITXFIT 3/4X3/4X3/4	15/60	20.88
Drop Elbow			
BPDE1/2NL	BRS PUSH DROP ELBOW NL FITXFPT 1/2X1/2	30/120	11.25
Wall Plate Elbow			
BPWPE1/2NL	BRS PUSH WALL PLATE EL NL FITXFPT 1/2X1/2	30/120	12.11
End Cap			
BPECA1/2NL	BRS PUSH END CAP NL FIT 1/2	100/400	3.54
BPECA3/4NL	BRS PUSH END CAP NL FIT 3/4	60/240	5.93
BPECA1NL	BRS PUSH END CAP NL FIT 1	30/120	9.82
Slip Repair Coupling			
BPSRC1/2NL	BRS PUSH REPAIR CPL NL FITXFIT 1/2X1/2	20/80	12.11
BPSRC3/4NL	BRS PUSH REPAIR CPL NL FITXFIT 3/4X3/4	15/60	18.32
BPRSC1NL	BRS PUSH REPAIR CPL NL FITXFIT 1X1	10/40	28.02
Ball Valve			
BPBV1/2NL	BRS PUSH BALL VALVE NL FITXFIT 1/2X1/2	10/40	18.90
BPBV3/4NL	BRS PUSH BALL VALVE NL FITXFIT 3/4X3/4	7/28	25.32
BPBV1NL	BRS PUSH BALL VALVE NL FITXFIT 1X1	5/20	40.75
Removal Tool			
BPTOOL1/2NL	BRS PUSH REMOVAL TOOL NL 1/2	150/600	0.15
BPTOOL3/4NL	BRS PUSH REMOVAL TOOL NL 3/4	100/400	0.26
BPTOOL1NL	BRS PUSH REMOVAL TOOL NL 1	50/200	0.33
Stiffener for PEX			
BPSTIFF1/2NL	BRS PUSH PEX STIFFENER NL 1/2	400/1600	0.28
BPSTIFF3/4NL	BRS PUSH PEX STIFFENER NL 3/4	200/800	0.40
BPSTIFF1NL	BRS PUSH PEX STIFFENER NL 1	150/600	0.56



SECTION 7 TAPES, SEALANTS & SOLVENT CEMENTS



PRODUCT LINE	PAGE
Boss136™ Firestop/Draft Sealant	11-12
Boss™ Expanding Foam Sealant	7
Boss™ Adhesives, Lubricants & Sealants	8
Concrete Repair	13-14
Dow Corning™ Silicones	9-10
Hand Cleaner Towels	16
Spray Adhesive	15
Tapes	1-5
Uni-Weld/Oatey Solvent Cements, Primers & Cleaners	17-26



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Tapes - PTFE Thread Seal



HTST Series



Imported PTFE Thread Seal Tape Features:

- Medium density thread seal tape requires fewer wraps.
- Manufactured from 100% virgin PTFE.
- 3.5 mil thick.
- Mil. Spec. T-27730A.
- Meets ASTM D-3308.
- Not for use on oxygen lines.

Part Number	Width	Length	Color	Ctn/Case Qty	List Price
HTST260-1/2	1/2"	260 inches	White	144/576	\$ 0.95
HTST260-3/4	3/4"	260 inches	White	144/576	1.38
HTST260-1	1"	260 inches	White	144/576	1.44
HTST520-1/2	1/2"	520 inches	White	144/576	1.42
HTST520-3/4	3/4"	520 inches	White	144/576	1.68
HTST520-1	1"	520 inches	White	144/576	1.72



HTST SS Series



HARVARD® Master Contractor™ Imported PTFE Thread Seal Tape For Stainless Steel Threads Features:



- High density thread seal tape for stainless steel threads.
- Silver color. 4 mil thick.
- Impregnated with nickel for smooth thread connections.
- Prevents galling and seizing during assembly.
- No need for additional thread seal paste.
- Meets ASTM D-3308. Mil. Spec. T-27730A.
- Not for use on oxygen lines.

Part Number	Width	Length	Color	Ctn/Case Qty	List Price
HTST60-1/2SS	1/2"	60 inches	Silver	144/576	\$ 1.19
HTST120-1/2SS	1/2"	120 inches	Silver	144/576	2.36
HTST260-1/2SS	1/2"	260 inches	Silver	144/576	4.04
HTST520-1/2SS	1/2"	520 inches	Silver	144/576	8.89



HTST XHD Series



HARVARD® Master Contractor™ Imported Extra High Density PTFE Thread Seal Tape Features:



- Professional grade density.
- Thickness 3.5 mil, density 0.8g/cm³
- Same as Blue Monster™ and Hercules® Megatape.
- Use on steel, stainless steel, brass, aluminum, copper and all plastics.
- No need for additional thread seal paste.
- White color.
- Mil. Spec. T-27730A. Meets ASTM D-3308. UL Listed.
- Counter display packed.
- Not for use on oxygen lines.

Blue Monster™ is a trademark of The Mill Rose Company. Hercules® is a registered trademark of Oatey.



Part Number	Width	Length	Color	Display Ctn/Case Qty	List Price
HTST260-1/2XHD	1/2"	260"	White	150/900	\$ 1.14
HTST520-1/2XHD	1/2"	520"	White	100/600	1.71
HTST1429-1/2XHD	1/2"	1429"	White	45/270	4.04
HTST260-3/4XHD	3/4"	260"	White	100/600	1.65
HTST520-3/4XHD	3/4"	520"	White	100/600	2.45
HTST1429-3/4XHD	3/4"	1429"	White	27/162	5.89



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

Tapes - PTFE Thread Seal



HTT Series



Made in USA PTFE Thread Seal Tape Features:

- UL Listed.
 - 100% virgin PTFE.
- HTT260/HTT520 Medium Density PTFE Tape
- White general purpose
 - Medium density.
- HTT260-1/2SS Gray Stainless Steel PTFE Tape
- Nickel pigment added for use on all stainless steel threads.
 - Prevents galling, seizing and corrosion.
 - High density for course SS threads.
- HTT260-1/2PP Pink Plumbers PTFE Tape
- For plumbers and pipe fitters.
 - Pink to signify heavier than standard or medium density.
- HTT260-1/2GAS Yellow Gas Service PTFE Tape
- For gas lines of all types- Natural gas, butane, propane.
- HTT260-1/2OXY Green Oxygen PTFE Tape
- Green for oxygen applications. Grease free.
 - For all oxygen lines. Will not support combustion.
- HTT260-1/2XHD White Extra High Density PTFE Tape
- For all industrial applications.
 - Can be used for water, oil, chemical, medical or food processing.

Part Number	Color	Usage	Thickness	Density	Temp Range	Specs
HTT260	White	General	3.5 mil	.90	-450°F to +550°F	Mil T-27730A
HTT520	White	General	3.5 mil	.90	-450°F to +550°F	Mil T-27730A
HTT260-1/2OXY	Green	Oxygen lines	3.5 mil	1.55	-450°F to +550°F	Mil T-27730A/AA58092
HTT260-1/2PP	Pink	Plumbing	3.5 mil	1.55	-450°F to +550°F	Mil T-27730A/AA
HTT260-1/2XHD	White	Industrial	3.5 mil	1.20	-450°F to +550°F	Mil T-27730A
HTT260-1/2SS	Light Gray	Stainless Steel	3.5 mil	1.55	-450°F to +550°F	Mil T-27730A/AA58092
HTT260-1/2GAS	Yellow	Gas lines	3.5 mil	1.20	-450°F to +550°F	Mil T-27730A

Part Number	Width	Length	Color	Case Qty	List Price
HTT260	1/2"	260 in	White	144	\$ 2.98
HTT520	1/2"	520 in	White	144	4.26
HTT520-3/4	3/4"	520 in	White	144	5.90
HTT520-1	1"	520 in	White	144	7.50
HTT260-1/2OXY	1/2"	260 in	Green	144	7.03
HTT260-1/2PP	1/2"	260 in	Pink	144	7.03
HTT260-1/2XHD	1/2"	260 in	White	144	7.03
HTT120-1/2SS	1/2"	120 in	Light Gray	144	4.42
HTT260-1/2SS	1/2"	260 in	Light Gray	144	7.03
HTT260-1/2GAS	1/2"	260 in	Yellow	144	7.03



Tapes - Electrical, Vinyl



T60NL



General Purpose NO LEAD Vinyl Electrical Tape Features:

- Third party certified to NSF/ANSI 372.
- Economical, flexible, general purpose electrical tape.
- Use for insulation, protective jacketing and harnessing.
- 7 mil thickness.
- Temperature Range 32°F and 176°F.
- Meets mil spec. MIL-I-7798A.
- Imported



Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
T60NL	7 mil	3/4" x 60 feet	Black	64	\$ 2.12



AWT60NL Series



Premium All Weather NO LEAD Vinyl Electrical and Pipe Wrap Tape Features:

- Third party certified to NSF/ANSI 372.
- For use in **all weather** applications.
- Use for insulation, protective jacketing and harnessing and pipe wrap.
- 7 mil thickness, 3/4" or 2" width.
- Temperature range 14 °F and 176 °F.
- Meets Mil. Spec. MIL-1-7798A.
- Tested to ASTM D-1000
- Imported



Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
AWT60NL	7 mil	3/4" x 60 feet	Black	64	\$ 2.39
AWT60-2NL	7 mil	2" x 60 feet	Black	48	6.07

Tapes - 3M Vinyl, Rubber



3M® 1700 Temflex™ Vinyl Electrical Tape Features:

- Economical, flexible, general purpose electrical tape.
- Use for protective jacketing and harnessing.
- 7 mil thickness.
- Temperature rating to 176 °F, 80 °C.
- Meets ASTM D-2301 Type 1.
- Imported

1700



LISTED 539H
Insulating Tape

LR48769

Third Party Certified to NSF / ANSI 372

Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
1700	7 mil	3/4" x 60 feet	Black	100	\$ 4.00



3M® Scotch® Professional Use Premium Vinyl Plastic Tape Features:

- Highly conformable, super stretchy in **all weather** applications.
- Resists UV rays, abrasion, corrosion, alkalis and acids.
- Flame Retardent.
- 7 mil tape thickness Super 33+. 8.5 mil thickness Super 88
- Temperature range 0 °F to 220 °F.
- Use as a primary insulation for wire cable splices up to 600V.
- Use as protective jacketing.
- Made in USA. Made for AGI in a ISO 900X facility.

Super 33+ ASTM D-3005 Type I UL273 & CSA LR48769
Super 88 MIL-I-24391C ASTM D-3005 Type I UL 539H & CSA LR48769

TS Series

ISO 900 X



• Scotch® is a 3M registered trademark

Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
TS33-20	7 mil	3/4" x 20 feet	Black	10/100	\$ 6.78
TS33-44	7 mil	3/4" x 44 feet	Black	10/100	12.35
TS33-66	7 mil	3/4" x 66 feet	Black	10/100	15.26
TS88-66	8.5 mil	3/4" x 66 feet	Black	10/100	19.35



3M® 2242 Linerless Electrical Rubber Tape Features:

- Multi-purpose rubber insulating tape.
- Designed for use in splicing and terminating wires and cables.
- Rated up to 194 °F (90 °C) continuous.
- Highly conformable, linerless EPR (Ethylene Propylene Rubber) based tape.
- No Liner for easier handling.
- Excellent thermal dissipation for longer cable life.
- Excellent moisture seal.
- With Flame retardant.
- Meets HH-I-553C and ASTM D-4388 Type I, II, III.

2242

ISO 900 X



Part Number	Thickness	WidthxLength	Ctn Qty	List Price
2242	30 mil	3/4" x 15 feet	24	\$ 22.56



Contractor/Industrial Grade Cloth Reinforced Duct Tape Features:

- Multi-purpose duct tapes.
- Polyethylene coated cloth backing.
- Natural rubber based adhesive.
- Temperature range: 40°F to 200 °F.
- Superior tensile strength, adhesion and tack.
- For seaming, sealing and hanging polyethylene or vinyl.
- HDT Series recommended for pool liner installations.
- Conformable and will not curl or twist during application.
- Manufactured for AGI in an ISO9001 facility.

AGDUCT / HDT / EDT Series

Meets UL723

ISO 9001

Part Number	Thickness	Width x Length	Color	Ctn Qty	List Price
EDT260	7.5 mil	48mm x 55m (2" x 60 yds)	Silver	24	\$ 12.57
AGDUCT	9 mil	48mm x 55m (2" x 60 yds)	Silver	24	20.06
HDT260	10 mil	48mm x 55m (2" x 60 yds)	Silver	24	23.73
HDT260 BLUE	10 mil	48mm x 55m (2" x 60 yds)	Blue	24	23.73
HDT260 RED	10 mil	48mm x 55m (2" x 60 yds)	Red	24	23.73
HDT260 BLACK	10 mil	48mm x 55m (2" x 60 yds)	Black	24	23.73
HDT260 WHITE	10 mil	48mm x 55m (2" x 60 yds)	White	24	23.73

Part Number	Adhesive	Total Thickness (mil)	Tensile Strength (lb/in)	Adhesion to Steel (oz/in)	Flame Spread	Smoked Developed Index
EDT260	Rubber	7.5	19.0	28	--	--
AGDUCT	Rubber	9.0	29.0	45	--	--
HDT260	Rubber	10.0	24.0	60	10	5





BOSS® Expanding Foam Sealant




BOSS® 333 Expanding Foam Sealant Features:

- Easy to use, multi-purpose urethane foam.
- Unlike ordinary sealants, it expands **three** times it's original volume.
- Adheres to all building materials except PTFE, silicone and polyethelene.
- Seals by expanding into gaps, cracks and crevices.
- Uses including insulating, sealing and filling gaps around pipes, plumbing fixtures, ductwork and foundations.
- UL classified.

DIRECTIONS FOR USE:

1. Shake can before and during use.
2. Surface must be clean and free of grease and oil.
3. Can must be held UPSIDE DOWN during application.
4. Insert straw into void and depress the trigger. The use of protective gloves is highly recommended.
5. Fill void 50% full to allow for expansion.
6. Uncured foam can be cleaned with acetone or paint thinner.
7. Cured foam can be trimmed, sanded, painted or stained. Foam MUST be painted or covered if application is exposed to UV light.

	R19028 CAULKING AND SEALANTS SURFACE BURNING CHARACTERISTICS APPLIED TO INORGANIC REINFORCED CEMENT BOARD*
	FLAME SPREAD: 5 SMOKE DEVELOPED: 20 38FN
* Tested as applied in three 3/4" beads 5" on center covering 12.5% of the exposed test sample area.	

Part Number	Description	Ctn Qty	List Price
33316B *	Expanding Foam Sealant, 12 oz can w/ application tip	12	\$ 14.99
33324B *	Expanding Foam Sealant, 24 oz can w/ application tip	12	29.32

* SHIPPING NOTE: Ground shipping only. Can NOT be shipped via air.



BOSS® line of adhesives, grouts and lubricants are specifically formulated for use with pools and whirlpool baths.



BOSS® 801 Neutral Cure Silicone Adhesive Features:

- A one part, low odor, non-corrosive, oxime cure adhesive and sealant.
- Provides excellent adhesion to ceramic tile, spa jets, skimmers, lighting fixtures, plumbing and fiber optic lighting.
- Adheres well to fiberglass, ABS, acrylic, PVC, wood and masonry.



BOSS® 802 Acetoxy Cure Silicone General Purpose Adhesive Features:

- A one part, acetoxy cure, adhesive/sealant.
- Performs well in jet sealing applications.
- Designed for many other pool and spa maintenance and repair needs.

BOSS® 804 Neutral Cure Silicone Ceramic Tile Grout Features:

- A one part, low odor, non-corrosive, oxime cure silicone grout.
- Spreads easily and provides ample tooling time.
- Excellent adhesion to all ceramic tiles.



BOSS® 820 Pool & Spa Silicone Lubricant Features:

- Water washout resistant and non-solidifying compound.
- Provides superb lubricant for rubber o-rings.
- Non-corrosive, silicone lubricant compound.

BOSS® 315 RTV 100% Silicone Sealant Features:

- 100% Silicone rubber clear adhesive/sealant.
- Paste-like one component material cures to a tough, rubbery solid when exposed to moisture in the air.
- Can be applied overhead or on walls without sagging.
- Adheres to clean metal, glass, wood, ceramic and painted or plastic surfaces.

Part Number	Description	Ctn Qty	List Price
80100B	Silicone Adhesive Clear, 10.3 oz cart	12	\$ 17.85
80101B	Silicone Adhesive White, 10.3 oz cart	12	17.85
80200B	Silicone Adhesive Gen Purpose, Clear 10.3 oz. cart	12	10.52
80201B	Silicone Adhesive Gen Purpose, White 10.3 oz cart	12	10.52
80131B	Silicone Adhesive Grout, Clear 3 oz. tube	12	8.92
80401B	Silicone Ceramic Tile Grout, White 10.3 oz cart	12	17.85
82001B	Pool & Spa Lubricant Clear, 1 oz tube bulk	288	5.98
82002B	Pool & Spa Lubricant Clear, 1 oz tube 36 pc tub	36	288.64
82030B	Pool & Spa Lubricant Clear, 3 oz tube	12	9.10
82000B	Pool & Spa Lubricant Clear, 5.3 oz tube	12	15.26
31500B	RTV Silicone Seal CLR 10.0 oz tube	12	14.00
31580B	RTV Silicone Seal CLR 8 oz pressurized can	12	30.57



Dow Corning® General Purpose Silicone Sealant




PLB 90 Series



Dow Corning® General Purpose Silicone Sealant Features:

- Cures to 100% silicone rubber.
- One part, ready to use. Fast cure, high strength.
- Resistant to sunlight & weather extremes.
- Remains flexible; will not become brittle, crack or tear.
- Removable, reusable, resealable nozzle.
- Meets the requirements of FDA Regulation No. 21CFR177.2600.



Dow Corning General Purpose Silicone Sealant is a one-part acetoxycure silicone sealant for general purpose applications. Provides a flexible bond and will not harden or crack. Trademate General Purpose Silicone Sealant is a high performance sealant, with +/- 25% movement capability when properly applied.

It can be used as a bedding material, formed-in-place gaskets and bumpers. Adhere trim, name plates, signs. Seal around sinks, faucets, showers, tubs, toilets and vents. It can be used for most marine applications. Seal between hull and deck, most boat decks, windows, port lights, windshields and hatches.

Product Properties:

Tooling Time *	.5-10 minutes
Tack Free Time *	.15-20 minutes
Complete Set-up time *	.24 hours (1/8")
Cure System	Acetoxycure
Application Temperature Range	-20°F to 122°F -29°C to 50°C
As Cured (after 7 days)	
Durometer hardness Shore A	.27 points
Tensile Strength	.350 psi
Elongation	.600 %
Temperature Range - continuous	-40°F to 350°F -40°C to 176°C
Movement capability	+/- 25%

* At 77°F (25°C) and 50% relative humidity

Approval/Specifications:

- ASTM C920 Type S, Grade NS, Class 25, Use NT, G and A.
- Federal Specification TT-S-001543A, Type non-sag, Class A,
- Federal Specification TT-S-00230C, Type II, Class A

Storage:

- Store below 90° F (32° C) in a dry place.
- To store short term, replace cap.
- To store long term, unscrew nozzle, screw cap in cartridge and store nozzle in cap.

Limitations:

- Not for structural glazing
- Not paintable
- Not suited for prolonged submersion in water or below-grade applications.
- May not adhere to oily woods or be compatible with substrates made of methylmethacrylate, polycarbonate, polypropylene, polyethylene and polytetrafluoroethylene.
- Not suitable for surfaces that might bleed oils, plasticizers or solvents or porous surfaces such as cement-like materials, stone or surfaces prone to attack by weak acids.
- May not cure properly if used in spaces confined from atmospheric moisture.
- May cause corrosion on some brass, copper, zinc or zinc-alloy containing fixtures (galvanized).
- This product is neither tested nor represented as suitable for medical or pharmaceutical uses.
- Not for use where abrasion and physical abuse are encountered.



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
PLB90C	10.3 oz. cartridge	Clear	12	\$ 10.40
CG9	9" Ratchet	Blue	20	6.36



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Dow Corning® Tub, Tile & Ceramic Silicone Sealant



PLB 100 Series



Dow Corning® Tub, Tile & Ceramic Silicone Sealant Features:

- Cures to 100% silicone rubber.
- One part, ready to use. Fast cure, high strength.
- **Cured silicone is mildew resistant**
- Remains flexible; will not become brittle, crack or tear.
- Removable, reusable, resealable nozzle.
- Clear & almond colors meet the requirements of FDA Regulation No. 21CFR177.2600.

Dow Corning Tub, Tile & Ceramic Silicone Sealant is a one-part acetoxycure silicone sealant for non-porous surface applications requiring a **mildew-resistant** sealant. This versatile material can be used as an adhesive, sealant, or grout for repairing or replacing ceramic tiles as well as in many other plumbing applications. It can be used for tub and shower enclosures.

It can be used to form watertight seals around bathtubs, shower enclosures, sink vanities, countertops, lavatories, faucets, saunas, hot tubs, plumbing fixtures, drains, piping, shower doors and floor seams.

Product Properties:

Tooling Time *	.5-10 minutes
Tack Free Time *	.15-20 minutes
Complete Set-up time *	.24 hours (1/8")
Cure System	.Acetoxycure
Application Temperature Range-20°F to 122°F-29°C to 50°C
As Cured (after 7 days)	
Durometer hardness Shore A27 points
Tensile Strength325 psi
Elongation600 %
Temperature Range - continuous-40°F to 350°F-40°C to 176°C
Movement capability+/- 25%
* At 77°F (25°C) and 50% relative humidity	

Approval/Specifications:

- ASTM C920 Type S, Grade NS, Class 25, Use NT, G and A.
- Federal Specification TT-S-001543A, Type non-sag, Class A,
- Federal Specification TT-S-00230C, Type II, Class A

Storage:

- Store below 90° F (32°C) in a dry place.
- To store short term, replace cap.
- To store long term, unscrew nozzle, screw cap in cartridge and store nozzle in cap.

Limitations:

- Not for structural glazing
- Not paintable
- Not suited for prolonged submersion in water or below-grade applications. Not for aquarium use as product contains a fungicide.
- May not adhere to oily woods or be compatible with substrates made of methylmethacrylate, polycarbonate, polypropylene, polyethylene and polytetrafluoroethylene.
- Not suitable for surfaces that might bleed oils, plasticizers or solvents or porous surfaces such as cement-like materials, stone or surfaces prone to attack by weak acids.
- May not cure properly if used in spaces confined from atmospheric moisture.
- May cause corrosion on some brass, copper, zinc or zinc-alloy, containing fixtures (galvanized).
- This product is neither tested nor represented as suitable for medical or pharmaceutical uses.
- Not for use where abrasion and physical abuse are encountered.



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
PLB103C	3 oz tube	Clear	12	\$ 7.31
PLB103W	3 oz tube	White	12	7.31
PLB100C	10.3 oz cartridge	Clear	12	11.55
PLB100W	10.3 oz cartridge	White	12	11.55
CG9	9" Ratchet	Blue	20	6.36



Boss® 136 Firestop/Draft Sealant



BOSS® 136 Firestop/Draft Sealant is a single component fire rated sealant and is a noncombustible filler caulking used for firestopping applications in the annular space around wires, pipes, ducts, vents, cable lines and other penetrations to the building envelope. It is a non-slumping sealant that sets to form a hard surface. **BOSS® 136** can be applied to any gap or penetration where the specification is noncombustible and/or ASTM-E136 rated. **BOSS® 136** is to be used for interior applications only.

The noncombustible specification is common to one and two family construction and to non-rated penetrations in multifamily and commercial construction. **BOSS® 136** is colored red for ease of inspection.

In the event of a fire **BOSS® 136** will prevent the spread of fire, smoke and toxic gases through penetration openings.


BOSS® 136 serves to form a “gasket or seal against air infiltration” as required by the Model Energy Code in both performance and prescriptive versions.

REQUIRED AREAS OF USAGE FOR FIRESTOPPING*

Seal ALL areas of penetration as shown in the illustration below.

- ALL - Exterior wall studs (including horizontal penetrations.)
- ALL - Floor penetrations.
- ALL - Ceiling penetrations.
- ALL - Framing around chimneys (at ceiling and floor levels.)

* Always consult local buliding codes.

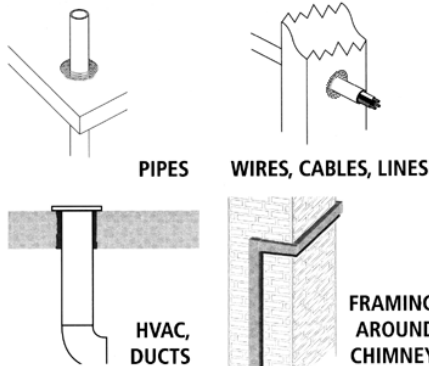

FEATURES:

- Completely non-toxic and contains no asbestos or PCB's.
- Noncombustible.
- Applied with a conventional caulking gun.
- Easily applied sealant with water cleanup capabilities.
- An accredited fire block/smoke seal caulk.
- Single component system, no mixing necessary and no additions required.
- Meets residential construction code approvals including I.R.C.
- For interior applications only.
- Available in traditional cartridge and NEW aerosol can.
- Excellent adhesion to a wide variety of substrate material.

APPLICABLE STANDARDS

- UBC Page 1-378, 1997 edition.
- CABO Section 602.7, Item 4 of the 1995 edition.
- BOCA (NBC) regulation 704.4.1.1 1996.
- ASTM E-136.

Part Number	Description	Ctn Qty	List Price
BOSS136	10.1 oz cartridge	12	\$ 11.96



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Boss® 136 Firestop/Draft Sealant



HOW TO USE

- Cut nozzle to desired bead size. Insert cartridge into standard caulking gun.
- For a smooth seal, hold at 45° angle and apply by pushing sealant ahead of nozzle.
- Apply at 40°F or above.
- To ensure good adhesion, all surfaces should be clean and free of dust, oil, loose materials or any other substances.
- Make sure that BOSS® 136 makes complete contact with the entire surface of the opening and also the surface of the penetrating item.

Always follow cartridge directions. Clean the area to be treated so that it is free of all particles and debris. For large openings, mineral wool fibers can be used as a backer to help hold the product in place until cured. Steel screen wire can be stapled in place over the material when a large opening is overhead or configured such that the material will not support its own weight during cure.

TEMPERATURE RANGE

BOSS® 136 freezes in the cartridge at temperatures below 32° F. The product can be warmed and applied at any temperature but will not cure below 40° F. Freeze thaw cycles do not alter the cured product. Cure time may exceed 72 hours at non-freezing temperature.

CAUTION

- Keep from freezing
- Do not take internally
- Keep out of reach of children.

CONTAINS

- Sodium Silicate CAS# 1344-09-8.

COLOR

Boss® 136 Fire/Smoke and Draft Sealant is red in color for ease of inspection.

PACKAGING


Boss® 136 Firestop/Draft Sealant is available in standard 10.1 fl. oz cartridges and 11.0 oz. net wt. aerosol cans.

STORAGE & SHELF LIFE

Boss® 136 should not be stored where the ambient temperatures exceed 120°F or below 35°F. Should freezing occur, insure that product is defrosted fully prior to use. Shelf life is 12 months from the date of shipment. Ensure stock is rotated.

SPECIFICATIONS

Meets or exceeds ASTM E-136 for noncombustible building materials. Conforms to BOCA National Building Code (1996), CABO one and two family dwelling code (1995), Uniform Building Code (1997), Section 796, Fire Block and Draft Stop. BOCA-SBCCI-ICBO-NFPA Building Codes. Consult your local code official for the proper use of product.



ALSO CLASSIFIED IN ACCORDANCE WITH ASTM E 136-96a, "Standard test method for the behavior of materials in a vertical tube furnace at 750°C."



A simple squeeze to repair horizontal cracks and spalls, and to set anchors

DP600

Horizontal Concrete Repair Features:

Hardens in as little as 5 minutes,

Cracks and spalls in concrete floors are an eyesore as well as a potential safety risk. Fixing them has meant either hiring and waiting for an outside contractor or doing it yourself with a repair method that takes the floor out of service for up to 24 hours. Now with 3M Concrete Repair, you save money and time.

- Self-leveling urethane flows smoothly into cleaned cracks and gaps and hardens in as little as 5 minutes. A fork lift can pass over a repair in as few as 15 minutes.
- Hardens to any depth without cracking or shrinking.
- Flexible urethane expands and contracts for durability that outlasts repairs made with concrete.
- Do it yourself with a common caulking gun and eliminate the cost and wait for an outside contractor.
- *Easy to use - Just clean damaged area and fill. With every squeeze of the caulking gun trigger, cartridge nozzle meters and mixes precise proportions for optimum performance.*



Part Number	Description	Ctn Qty	List Price
DP600	Concrete Repair, 8.4 fl oz cartridge supplied with 2 nozzles	6	\$ 147.86



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
CG9	9" Ratchet	Blue	20	\$ 6.36



Horizontal Concrete Repair Specifications:

- Gray, self-leveling urethane concrete repair.
- 8.4 fl oz. cartridge of concrete repair and 2 nozzles.
- Work life of 70 sec.
- Handling time of 5 minutes
- Cure time of 60 minutes

Applications:

- Repairing cracks and spalls on concrete floors or horizontal surfaces.
- Setting anchors in concrete floors or horizontal surfaces.
- Light-duty custom threading and anchoring.
- Use outdoors or in highly ventilated area.

Approximate coverage:

Crack Width	Crack Depth	Linear Feet per 8.4 fl. oz.
1/4"	1/4"	19.3
1/2"	1/4"	9.9
3/4"	1/4"	6.4
1"	1/4"	4.9
1/4"	1/2"	9.9
1/2"	1/2"	4.9
3/4"	1/2"	3.0
1"	1/2"	2.0

Bead Size dimension	Linear Feet per 8.4 fl oz.
1/16"	815.0
1/8"	205.0
1/4"	51.9
3/8"	22.2
1/2"	12.4

Quick and Easy Spall Repair



Clean
Remove all loose material from area to be filled. Concrete should be dry and grease-free.



Fill
Dispense product into deepest part of repair areas, slightly overfilling. Product self-levels and is tack-free in as little as one minute.



Finish
In as little as 15 minutes, product can be sanded to remove rough edges. It can be painted within one hour.



ISO 9002



3M™ BLUE 72 Spray Adhesives

- Pressure sensitive repositionable adhesive
- Aggressive tack and low soak-in.
- Use it for temporarily positioning and holding many fabrics.
- Precise spray control with a wide spray pattern.
- Ideal for pool liner installation
- Manufactured for AGI in an ISO 900 facility.



3M™ ORANGE FOAM FAST 74 Spray Adhesives

- 74 Foam Fast Adhesive gives fast tack with foam-tearing strength and a soft, non-dimpling glue line.
- Bonds foam to foam, foam to metal.
- Non-misting, precise spray pattern.
- Not for sale in California. Does not meet Aerosol Consumer Products VOC limits.
- Manufactured for AGI in an ISO 900 facility.

Product	Bond Type	Bonding Time	Spray Width	Spray Pattern	Color	Temperature Resistance	Coverage
72	Temp or Permanent	One side-8 hrs Two sides-7 days	3-3.5 in	Controlled Lace	Blue	120°F 48°C	100 sq ft. 9.3 m ²
74	Permanent	One side -not recommended Two sides-15 minutes	1-3 in variable	Lace	Light Orange	120°F 48°C	260 sq ft. 25 m ²

Part Number	Can Size	Ctn/Pallet Qty	List Price
BLUE 72	Blue Spray Adhesive 24 fl oz. can 17.33 oz. net	12/768	\$ 41.36
ORANGE74	Orange spray adhesive 24 fl oz. can 17.33 oz. net	12/768	50.18

Pallet pricing available. Call your Sales Representative.

Hand Cleaning Towels



SCRUBS® WATERLESS HAND CLEANING TOWELS



So unique they needed a patent! Powerful yet safe cleaning agents work together with an absorbent, non scratching abrasive hand cleaning towel. The result is hands that are clean and protected, with a pleasant fragrance...and are residue free. These shop size, durable towels quickly remove tough to clean substances including: Dirt, Heavy Grease, Adhesives, Lubricants, Oils, Ink, Tar, Wax, Caulk, Sealants, Paint and more.

Scrubs® is registered by Dymon Inc.

Features:

- Pre-moistened, heavy duty towel with pumice scrubbing power.
- Works fast to loosen, dissolve and absorb dirt & grease.
- Deep cleaning scrubbers remove embedded grime easily.
- Conditions and softens hands... *No rinsing. No drying. No residue.*

Part Number	Description	Ctn Qty	List Price
SCRB72	Scrubs 72 Count Bucket	6	\$ 38.15



Pipe Joint Compound



Oatey Great Blue® and Great White® (with PTFE) Pipe Joint Compounds are non-separating thread sealant compounds formulated to seal threaded connections against leakage on metal and plastic pipe and fittings.



- Can be used on pipe made of: ABS, Aluminum, Iron, Brass, Copper, CPVC, Fiberglass, PVC, Polypropylene, Polyethylene and **STAINLESS STEEL**.
- Compounds permit a tighter assembly with lower torque, secure permanent sealing of threaded connections and allow for easy disassembly without stripping or damaging threads.
- For use on pipe up to and including 2" diameter.
- Soft set, flexible, non-hardening paste.
- Non-toxic, lead free, non-staining.
- Brush top applicator included.

Product Properties:	GREAT BLUE	GREAT WHITE W/ PTFE
Pressure Rating		
Liquids	.10,000 psi	10,000 psi
Gases	.3,000 psi	3,000 psi
Temperature Rating	-50° F to 400° F	-50° F to 400° F
Required Dry Time	Up to 125 psi, no wait .Over 125 psi, 4 hours	Up to 125 psi, no wait Over 125 psi, 4 hours
Appearance	.Blue Paste	White Paste
Shelf Life	.2 years from mfg	2 years from mfg

Approvals & Listings:			
	Requirement 4-90	Standard 61 for potable water	IAPMO listed
			Standard 61 for potable water

FGG/BM System Compatible indicates that this product has been tested and is monitored on an ongoing basis to assure its chemical compatibility with FlowGuard Gold® water distribution and Blazemaster® fire sprinkler systems.

Directions for Use:

Clean all pipe threads. Be sure all joints are free from rust, scale, grease or other contamination. Remove any debris with a clean cloth or wire brush. Stir contents thoroughly and apply evenly to male threads.

Part Number	Description	Size	Color	Ctn Qty	List Price
31261	Great Blue Pipe Joint Compound	4 oz.	Blue	12	\$ 9.88
31262	Great Blue Pipe Joint Compound	8 oz.	Blue	12	18.04
31263	Great Blue Pipe Joint Compound	16 oz.	Blue	24	28.30
31230	Great White PTFE Pipe Joint Compound	4 oz.	White	12	10.98
31231	Great White PTFE Pipe Joint Compound	8 oz.	White	12	21.45
31232	Great White PTFE Pipe Joint Compound	16 oz.	White	24	33.63
31233	Great White PTFE Pipe Joint Compound	32 oz.	White	12	59.82



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

7.17

PVC Solvent Cements



United Elchem
UNI-WELD

PVC REGULAR CLEAR CEMENTS

LO-VOC



2200 Series
CLEAR

- Regular bodied, clear cement for use on PVC pipe and fittings. Up to 4" for DWV Sch 40 and up to 2" for Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Sets up quickly.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2266S	4 oz.	24	\$ 8.60
2256S	8 oz.	24	12.60
2246S	16 oz.	24	18.86
2236S	32 oz.	12	36.13
2224	1 gallon	6	138.48

PVC REGULAR CLEAR ADVANCED CEMENTS

LO-VOC



2800 Series
CLEAR

- Regular bodied, clear cement for use on PVC pipe and fittings. Up to 4" for DWV Sch 40 and up to 2" for Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe, gas, conduit and DWV.
- Sets up quickly.
- Recommended application temperature 40°F to 100°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2866S	4 oz.	24	\$ 7.65
2856S	8 oz.	24	12.84
2836S	32 oz.	12	39.53
2824	1 gallon	6	139.01

PVC MEDIUM CLEAR CEMENTS

LO-VOC



1200 Series
CLEAR

- Medium bodied, clear cement for use on PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, drain, waste and vent pipe, and potable water
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1266S	4 oz.	24	\$ 8.60
1256S	8 oz.	24	12.65
1246S	16 oz.	24	22.15
1236S	32 oz.	12	35.25
1224	1 gallon	6	116.71



PVC Solvent Cements

United Elchem
UNI-WELD

PVC MEDIUM GRAY CEMENTS

LO-VOC



1600 Series
GRAY

- Medium bodied, gray colored cement for use on PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental disctict rules.



Part Number	Size	Case Qty	List Price
1666S	4 oz.	24	\$ 9.52
1656S	8 oz.	24	14.57
1636S	32 oz.	12	41.68
1624	1 gallon	6	131.30

PVC MEDIUM "HOT" BLUE CEMENTS

LO-VOC

PLUMB-TITE™



2000 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Blue color fades to clear in direct sunlight.
- No primer needed on non-pressure DWV, where local codes permit.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental disctict rules.



Part Number	Size	Case Qty	List Price
2066S	4 oz.	24	\$ 9.60
2056S	8 oz.	24	14.99
2046S	16 oz.	24	22.80
2036S	32 oz.	12	41.18
2024	1 gallon	6	199.21



United Elchem
UNI-WELD

PVC ALL WEATHER CEMENTS LO-VOC POLAR-WELD



2600 Series
CLEAR

- Medium bodied, clear cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Non-pressure DWV, up through 4" diameter: No primer needed, where local codes permit.
- **Formulated for fast initial set-up at temperatures down to -5°F to 110°F.**
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2666S	4 oz.	24	\$ 11.27
2656S	8 oz.	24	13.20
2646S	16 oz.	24	22.65
2636S	32 oz.	12	35.68

PVC MEDIUM RAIN-R-SHINE® BLUE CEMENTS LO-VOC



308 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Pool/Irrigation installations.
- **No primer needed on non-pressure DWV, where local codes permit.**
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
30890	4 oz.	24	\$ 9.09
30891	8 oz.	24	14.69
30893	16 oz.	24	21.08
30894	32 oz.	12	42.54
30895	1 gallon	6	140.56



PVC Solvent Cements

United Elchem
UNI-WELD

PVC MEDIUM "HOT" BLUE CEMENTS LO-VOC TURF-TITE



2400 Series BLUE

- Medium bodied, blue colored cement for PVC pipe and fitting. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Irrigation installations.
- Fades to clear in sunlight.
- No primer needed on non-pressure DWV, where local codes permit.
- Recommended application temperature 40° F to 110° F.
- Meets ASTM D-2564.  
- Meets California Air Quality Management District and other environmental district rules.

Part Number	Size	Case Qty	List Price
2466S	4 oz.	24	\$ 9.60
2456S	8 oz.	24	14.99
2446S	16 oz.	24	22.80
2436S	32 oz.	12	41.18
2424	1 gallon	6	129.14

PVC MEDIUM "HOT" BLUE CEMENTS LO-VOC POOL-TITE



2300 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe, gas, conduit, PVC flex pipe and DWV.
- **Color fades to clear in sunlight.**
- **No primer needed on non-pressure DWV, where local codes permit.**
- Recommended application temperature 40° F to 100° F.
- Works on flex to rigid pipe applications.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.

Part Number	Size	Case Qty	List Price
2366S	4 oz.	24	\$ 9.60
2356S	8 oz.	24	14.99
2346S	16 oz.	24	22.80
2336S	32 oz.	12	41.18
2324	1 gallon	6	129.14



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

7.21

PVC, CPVC Solvent Cements



United Elchem
UNI-WELD

PVC MEDIUM CLEAR FAST SET CEMENTS LO-VOC POOL-CLEAR



2900 Series
CLEAR

- Medium bodied, clear cement for PVC pipe and fitting. Up to 6"
- Recommended for Sch 40 and Sch 80 pipe and fittings.
- Also recommended for PVC flex pipe.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
30875	4 oz.	24	\$ 9.15
2946S	16 oz.	24	22.37
2936S	32 oz.	12	39.78
2924	1 gallon	6	170.34

CPVC MEDIUM ORANGE CEMENTS LO-VOC



3200 Series
ORANGE

- Medium bodied, orange colored cement for use on CPVC pipe and fittings. Up to 6"
- For copper tube size (CTS) and Sch 80, potable water pressure pipe.
- Recommended application temperatures down to 40°F to 110°F.
- Meets ASTM F-493.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
3266S	4 oz.	24	\$ 11.42
3256S	8 oz.	24	17.65
3246S	16 oz.	24	34.43
3236S	32 oz.	12	46.74

CPVC FLOWGUARD® GOLD™ LO-VOC 1-STEP YELLOW CEMENTS



319 Series

- Exceeds new environmental requirements and meets various CA district rules.
- For copper tube size (CTS) CPVC hot and cold potable water pipe and fittings up to 2" interference fit only.
- May be used without primer where local codes permit.
- For cold water systems and hot water systems up to 180°F.
- Faster cure time/reduced installation time.
- Meets ASTM F-493.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
31910	4 oz.	24	\$ 12.35
31911	8 oz.	24	19.75
31912	16 oz.	24	35.61



PVC and Multipurpose Solvent Cements

United Elchem
UNI-WELD

PVC HEAVY DUTY CLEAR CEMENTS

LO-VOC



1500 Series
CLEAR

- Heavy bodied, clear cement for PVC pipe and fittings. Up to 18" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Thick formula fills gaps in large diameter pipe and loose fitting joints.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1566S	4 oz.	24	\$ 7.47
1556S	8 oz.	24	11.74
1546S	16 oz.	24	25.70
1536S	32 oz.	12	41.95
1524	1 gallon	6	129.97

PVC HEAVY DUTY GRAY CEMENTS

LO-VOC



1700 Series
GRAY

- Heavy bodied, gray colored cement for use on PVC pipe and fittings. Up to 18" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Thick formula fills gaps in large diameter pipe and fitting.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1756S	8 oz.	24	\$ 15.48
1746S	16 oz.	24	28.30
1736S	32 oz.	12	46.50
1724	1 gallon	6	173.69

ALL PURPOSE MEDIUM MILKY CLEAR CEMENTS

LO-VOC



308 Series
MILKY CLEAR

- Medium bodied, milky clear cement for ABS, PVC or CPVC up to 6".
- Recommended for pipe and fittings Sch 40 and Sch 80, potable water, conduit pipe and DWV.
- Recommended application temperature 40°F to 110°F.
- Meets performance requirements of ASTM D-2564, D-2235, F-493.
- Meets California Air Quality Management District and other environmental district rules.

Part Number	Size	Case Qty	List Price
30818	4 oz.	24	\$ 10.46
30821	8 oz.	24	16.99
30834	16 oz.	24	23.88
30847	32 oz.	12	46.48
30848	1 gallon	6	143.43



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

7.23



United Elchem
UNI-WELD

ABS MEDIUM BLACK CEMENTS

LO-VOC



4400 Series BLACK

- Medium bodied, black cement for ABS pipe and fittings. Up to 6".
- For ALL types and grades of ABS pipe and fittings for DWV.
- **For all non-pressure applications.**
- Recommended application temperatures 40°F to 110°F.
- Meets ASTM D-2235.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
4466S	4 oz.	24	\$ 8.88
4456S	8 oz.	24	12.49
4446S	16 oz.	24	23.98
4436S	32 oz.	12	35.20
4424	1 gallon	6	137.24

ABS TO PVC TRANSITION GREEN CEMENTS

LO-VOC



309 Series GREEN

- Medium bodied, green colored cement for use in joining **ABS to PVC in non-pressure transition joints.**
- All schedules up to 6" pipe fittings.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-3138.
- Meets California Air Quality Management District and other environmental district rules.




Part Number	Size	Case Qty	List Price
30900	4 oz.	24	\$ 10.21
30925	16 oz.	24	26.19
30926	32 oz.	12	46.42



United Elchem UNI-WELD

CLEAR PRIMER - NSF LISTED

LO-VOC



9300 Series
CLEAR

- A clear aggressive primer for use on PVC and CPVC pipe and fittings.
- All schedules and diameters.
- Removes all surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.
- Meets ASTM F-656.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
9366S	4 oz.	24	\$ 9.27
9356S	8 oz.	24	12.05
9346S	16 oz.	24	22.65
9336S	32 oz.	12	32.36
9324	1 gallon	6	127.53

PURPLE PRIMER - NSF LISTED

LO-VOC



8700 Series
PURPLE

- A purple tinted aggressive primer for use on PVC and CPVC pipe and fittings.
- **Exceeds new environmental requirements and meets various CA district rules.**
- For use in areas where plumbing code calls for verification that a primer has been used.
- Removes all surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.



Part Number	Size	Case Qty	List Price
8766S	4 oz.	24	\$ 9.05
8756S	8 oz.	24	14.56
8746S	16 oz.	24	25.66
8736S	32 oz.	12	32.97
8724	1 gallon	6	136.21

BLUE PRIMER - NSF LISTED

LO-VOC

PRIME-TITE™



8000 Series
BLUE

- A blue-tinted aggressive primer for use on PVC and CPVC pipe and fittings.
- **Blue color fades to clear in direct sunlight.**
- Formulated to work with "TITE" products.
- Meets ASTM F-656.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
8056S	8 oz.	24	\$ 16.57
8046S	16 oz.	24	28.31
8036S	32 oz.	12	50.73



United Elchem
UNI-WELD

PURPLE PRIMER/CLEANER LO-VOC



8800 Series
PURPLE

- Purple tinted all purpose primer/cleaner for PVC and CPVC pipe and fittings.
- Removes surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.
- Less aggressive than clear primer and purple primer.
- Purple tint for verification for code.
- **Exceeds new environmental requirements and meets various CA district rules.**

Part Number	Size	Case Qty	List Price
8866S	4 oz.	24	\$ 9.12
8856S	8 oz.	24	13.61
8846S	16 oz.	24	22.47
8836S	32 oz.	12	32.31
8824S	1 gallon	6	126.83

CLEANER LO-VOC



7300 Series
CLEAR

- Clear cleaner for ABS, PVC and CPVC pipe and fittings.
- All schedules and diameters.
- **Exceeds new environmental requirements and meets various CA district rules.**
- Fast-acting cleaner removes surface dirt, grease and grime.
- Flows freely and evaporates quickly.

Part Number	Size	Case Qty	List Price
7366S	4 oz.	24	\$ 7.55
7356S	8 oz.	24	10.50
7346S	16 oz.	24	17.37
7336S	32 oz.	12	24.87
7324	1 gallon	6	86.80

DAUBERS and EMPTY CANS



- Replacement product daubers.
- Reusable cone top metal containers.

Part Number	Size	Case Qty	List Price
DAUBERS			
31312	Fits 32 oz quart can	48	\$ 4.07
31310	Fits 16 oz pint can	48	3.40
31309	Fits 8 oz 1/2 pint can	24	3.86
EMPTY CANS			
30901	Gallon 2 7/8" mouth	6	23.70



SECTION 8

SUPER LUBE®

DEVCON/PERMATEX®



PRODUCT LINE

PAGE

Devcon/Permatex® Industrial Products	Permatex 1-4
Super Lube®	1-5



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



Lubricants - Super Lube®



Super Lube® is a patented, multi-purpose synthetic lubricant, containing SYNCOLON® (PTFE) particles held in suspension. Super Lube lasts longer and outperforms conventional petroleum-based greases and oils. Packaging includes tubes, grease cartridges, aerosols, bottles, pails and drums.

How does the chemistry of SuperLube differ from conventional petroleum-based greases and mineral oils? Super Lube grease and oils are exceptionally pure lubricants because they are synthetic. This gives SuperLube very stable and predictable chemical properties. Petroleum-based machine and gear oils are made from refined crude oil and contain impurities which cannot be removed. These impurities interfere with film strength and wear protection. They also form deposits at high temperatures

and solidify at low temperatures. Petroleum-based greases are formulated by adding lithium, calcium or sodium thickeners to petroleum-based oil.



31110

Super Lube Aerosol

A multi-purpose PTFE based synthetic lubricant available in aerosol form. Super Lube aerosol disperses and penetrates while lubricating & loosening rust and dirt. Super Lube aerosol offers continuous protection as it "sets up" and forms a grease film barrier that defends against oxidation. This barrier helps extend the life of equipment and reduces maintenance.



51600

Super Lube Non-Aerosol Pump

Because of environmental concerns, many industrial facilities do not allow the use of aerosol products. Super Lube Oil with PTFE is available in a one quart trigger spray container to address these needs.

Benefits:

- Synthetic with PTFE
- Provides more reliable lubrication and outlasts petroleum based greases & oils
- Non-toxic, odorless
- USDA H-1 for use in federally inspected meat & poultry plants.
- Remains free flowing in freezing temperatures
- High dielectric strength
- Water and saltwater waterproof
- Will not stain or harm wood, rubber, leather, plastics, fabric & paint
- Won't drip, run or evaporate
- 1A copper corrosion
- Excellent salt spray performance
- Repels dirt, dust, grit and grime
- Prevents rust and corrosion while reducing friction
- Reduces maintenance for longer machinery life

Applications:

- Plain & anti-friction bearings
- Ball & roller bearings
- Wheel bearings
- Chassis points
- Fifth wheels
- Electric motor bearings
- Disc brake assemblies
- Pumps
- Blowers
- Cams
- Slides
- Conveyors
- Chains
- Water pumps
- Valves
- Open gears



Super Lube® and SYNCOLON® are trademarks of SYNCO Chemical Corp.

Part Number (old)	Description	Case Qty	List Price
31040 (23755)	6 oz. aerosol	12	\$ 14.77
31110 (20029)	11 oz. aerosol	12	16.90
51600 (24575)	32 oz. non-aerosol trigger spray	12	39.34



www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204



11016



Super Lube Dri Lube (Dri-Film)

Super Lube Dri-Lube is a self-cleaning lubricant that actually cleans while lubricating. Super Lube Dri-Lube leaves behind a protective shield lubricant that will not attract dust. The dry coating provides a low coefficient of friction which gives excellent lubrication and release properties. Dri-Lube can be used on wood, metal and most plastics not under stress and has excellent thermal and chemical stability, forming a natural insulating barrier when used on electronics.

Benefits:

- Clean, non-staining
- For uses from -40°F to +500°F
- Non-conducting
- Easy to use
- Resists acid attacks
- Dries on contact
- Effective mold release agent
- Not affected by oil, water or solvents
- Long lasting lubrication
- Cleans while lubricating
- Stops squeaking, sticking
- Prevents corrosion

Applications:

- Industrial slides and glides
- High speed machinery
- Precision instruments
- Door and trunk hinges
- Pipe fittings
- Electronic & electrical equipment
- Chains
- Tools
- Zippers
- Lock cylinders
- Rusted nuts and bolts
- Cable pivots

Part Number	Description	Case Qty	List Price
11016	11 oz. aerosol	12	\$ 20.19



51010

Super Lube Oil with PTFE

Super Lube Oil with PTFE is a premium synthetic oil with suspended PTFE particles that bond to surfaces to add lubricity to moving parts. Super Lube Oil with PTFE is used for applications which allow parts to be confined (ie. gear box). Use it as a general purpose lubricant for industrial machinery and equipment. Super Lube Oil with PTFE provides long life protection against friction, wear, rust and corrosion. Machinery lasts longer, downtime is reduced, and productivity is increased. Super Lube Oil with PTFE is safe on metal, rubber, plastic, wood, leather, fabric & painted surfaces.

Benefits:

- Waterproof
- Non-toxic (USDA rating H1)
- Synthetic with PTFE
- Reduces friction and wear
- Extends machinery & equipment life
- Reduces maintenance
- Viscosity stable
- Long-lasting

Applications:

- Plain, anti-friction & roller bearings
- Enclosed industrial gears
- Enclosed chains
- Gearhead motors
- Paper machines
- Conveyors
- Machine ways
- Reciprocating compressor lubricant additive
- Machine tools
- Centralized systems
- Straight, helical, bevel & spiral gears

Typical Properties:

Color: Translucent white
 Viscosity tested to ASTM D445
 cSt@ 100°F: 14-17
 cSt @ 40°F: 118-122
 ISO grade: 220
 Replaces ISO grade: 150-320
 Replaces SAE grade gear oils: 90
 Viscosity index: 145
 Shelf Life: 24 months

Part Number (old)	Description	Case Qty	List Price
51010SL (82333)	7 ml precision oiler	12	\$ 8.07
51040 (82334)	1 gallon	4	145.15



41150

21030



TYPICAL PROPERTIES

Color: Translucent white
 Operating Temperature
 Range: -45° to 450° F
 NLGI Grade (ASTM D1092): 2
 Dropping point (ASTM D566):
 >500° F (260C)
 Four ball test (ASTM D2783):
 Load wear index: 81.73 kg
 Weld point: 400 kg
 Oxidation stability 100 hrs.
 (ASTM D942): 0 psi
 Wheel bearing leakage
 (ASTM D1263): 0.2g
 Copper corrosion 24 hrs @
 100° C (ASTM D4048): 1B,
 shiny
 Shelf life: 24 months

Super Lube Grease

Super Lube is a patented synthetic NLGI grade 2 heavy-duty, multi-purpose lubricant with PTFE. Synthetic base fluids and the addition of PTFE micro powders combine to form a premium lubricant that provides long life protection against friction, wear, rust and corrosion. Machinery lasts longer, downtime is reduced, and productivity is increased.

Super Lube is a USDA listed Food Grade Lubricant, rated H1 for incidental food contact. Super Lube will not run or drip, does not evaporate or form gummy deposits and will not dry out, melt or separate.

Super Lube is a synthetic, heavy duty lubricant that is compatible with most other lubricants. Super Lube Grease outlasts conventional greases 50-100% and has excellent adhesion.



Benefits:

- Clean
- Non-toxic
- Non-staining
- Dielectric
- USDA Rating H1
- Will not drip, run or evaporate
- Impervious to salt water, safe in potable water
- Long lasting
- Prevents rust & corrosion while reducing friction
- Compatible with conventional lubricants
- Repels dirt, dust, grit & grime
- Extends machinery and equipment life
- Reduces maintenance while saving time & money
- Reduces friction and wear
- Will not stain or harm wood, rubber, leather, plastic, fabrics and paint.

Super Lube Grease Replaces

- Lithium, Bentone, Calcium or Aluminum complex grease
- High & low temperature greases
- Electric motor grease
- Food grade grease
- Bearing, wheel bearing grease
- Multi-purpose grease
- Dielectric grease
- Valve sealant
- O-ring lubricant

Applications:

- Plain and anti-friction bearings
- Ball and roller bearings
- Wheel bearings
- Chassis points
- Fifth wheels
- Electric motor bearings
- Disc brake assemblies
- Pumps
- Blowers
- Cams
- Slides
- Conveyors
- Chains
- Water pumps
- Valves
- Open gears
- Switch assemblies
- Cables
- Fans
- Electronic equipment
- Deep drawing application

Part Number (old)	Description	Case Qty	List Price
21010 (82324)	1/2 oz. tube	12	\$ 6.99
21030 (82325)	3 oz. tube	12	11.35
72350 (41150)	400 g cartridge	12	24.02
41160 (82329)	400 g jar	12	25.00
41050 (82330)	5 lb. pail	4	130.10
41030 (82331)	30 lb. pail	1	733.06



Super Lube Air Tool Lubricant

Super Lube Air Tool Lubricant is formulated to meet the special requirements for industrial, household and agricultural tools. It absorbs water and eliminates any ice buildup and frost in air tools. Blended rust and corrosion inhibitors and a special base fluid oil minimizes wear and allows operation of air tools at temperatures as low as -40°F.



Applications:

- Air impact tools
- Drills
- Grinders
- Screwdrivers
- Sanders
- Percussion tools
- Household shop tools
- All air tool oil lubricated

Benefits:

- Wide temperature range
- Works on types of pneumatic equipment
- Prevents rust and corrosion
- Can be used as a light oil
- Gives worn tools new life
- Less friction and wear
- Protects against corrosives
- Less tendency for bubbles
- Absorbs moisture
- Eliminates ice buildup and frost in air tools.

Part Number	Description	Case Qty	List Price
12004	4 oz. bottle	6	\$ 9.35
12016	16 oz. bottle	12	20.63



Super Lube Syncopen

Super Lube Synthetic Penetrant is a super fast acting, penetrating, synthetic oil that cuts through rust or corrosion. Syncopen penetrates hard to reach areas to allow easy removal of rusted and corroded screws, nuts or bolts. Syncopen penetrates, lubricates and leaves a protective film to help prevent future rusting or corrosion.

Benefits:

- Cleans and Penetrates
- Loosens rusted parts
- Frees sticky mechanisms
- Stops squeaks
- Protects against rust & corrosion
- Drives out moisture
- Leaves a protective lubricating film

Typical Properties:

TEST	METHOD	SYNCOPEN
Color		Translucent Brown
Specific Gravity	ASTM D1298	.85
Pour Point	ASTM D97	-40 °F
Salt Spray Test (500 hrs)	ASTM B117	Pass
Copper Corrosion 24 hrs @ 100 °C	ASTM D130	1A
USDA Rating	NSF	H1
Shelf Life		24 months

Part Number	Description	Case Qty	List Price
85011	11 oz. aerosol	12	\$ 17.74
85010	1 gallon	4	142.08



Lubricants - Super Lube[®] Displays




21013 and 51013



Super Lube Grease w/ PTFE Counter display



- Packaged in a cardboard counter display
- Contains 40, 1/2 oz. tubes Super Lube w/ PTFE grease



Super Lube Precision Oiler w/ PTFE Counter display



- Packaged in a cardboard counter display
- Contains 48, 7 ml precision oiler pens of Super Lube w/ PTFE

Part Number	Description	Display Qty	List Price
21013	Counter display w/ Grease	40	271.82
51013	Counter display w/ Oiler	48	385.38





American Granby

ITW Polymers Adhesives

North America



User Price Schedule ID-0116-US

Effective 4/19/16 - Supersedes all previous published price schedules

Contact AGI Toll Free at 1-800-776-2266 or www.americangranby.com for technical information or name and number of your nearest distributor or sales representative.

Stock No.	Brand	Product Description	Stock Class*	Items Per Case	Gross. Wt. Per Case (lbs)	AGI LIST Price (each)
10050	DV	DEVCON® Carbide Putty - 3 lb	1	6	23.00	\$530.75
10080	DV	DEVCON® Carbide Putty - 20 lb	1	1	24.00	\$2,647.04
10110	DV	DEVCON® Plastic Steel® Putty (A) - 1 lb	1	6	9.00	\$133.01
10120	DV	DEVCON® Plastic Steel® Putty (A) - 4 lb	1	6	29.00	\$499.32
10130	DV	DEVCON® Plastic Steel® Putty (A) - 25 lb	1	1	28.00	\$1,844.86
10210	DV	DEVCON® Plastic Steel® Liquid (B) - 1 lb	1	6	9.00	\$132.76
10220	DV	DEVCON® Plastic Steel® Liquid (B) - 4 lb	1	6	26.00	\$517.76
10230	DV	DEVCON® Plastic Steel® Liquid (B) - 25 lb	1	1	26.00	\$1,862.76
10240	DV	DEVCON® Plastic Steel® 5 Minute® Putty (SF) - 1 lb	1	6	9.00	\$166.57
10260	DV	DEVCON® Bronze Putty (BR) - 1 lb	1	6	9.00	\$252.83
10270	DV	DEVCON® Stainless Steel Putty (ST) - 1 lb	1	6	9.00	\$243.68
10610	DV	DEVCON® Aluminum Putty (F) - 1 lb	1	6	9.00	\$194.24
10620	DV	DEVCON® Aluminum Putty (F) - 3 lb	1	6	22.00	\$529.49
10710	DV	DEVCON® Aluminum Liquid (F-2) - 1 lb	1	6	9.00	\$193.88
10720	DV	DEVCON® Aluminum Liquid (F-2) - 3 lb	1	6	22.00	\$524.41
10760	DV	DEVCON® Titanium Putty - 1 lb	1	6	9.00	\$320.38
10770	DV	DEVCON® Titanium Putty - 2 lb	1	6	17.00	\$592.57
10780	DV	DEVCON® FasMetal™ - 3/4 lb	1	6	6.00	\$231.81
11320	DV	DEVCON® DFense Blok™ Quick Patch- 1 lb	1	6	10.60	\$261.47
11330	DV	DEVCON® DFense Blok™ - 30 lb	1	1	34.00	\$2,289.74
11340	DV	DEVCON® DFense Blok™ Surface Wetting Agent - 1 lb	1	2	3.45	\$212.82
11350	DV	DEVCON® DFense Blok™ Fast Cure (FC) - 9 lb	1	1	11.00	\$1,104.01
11410	DV	DEVCON® Wear Resistant Putty (WR-2) - 1 lb	1	6	9.00	\$206.81
11420	DV	DEVCON® Wear Resistant Putty (WR-2) - 3 lb	1	6	23.00	\$559.54
11450	DV	DEVCON® Combowear FC (Fast Cure) - 9 lb	1	1	11.00	\$716.74
11460	DV	DEVCON® Wear Guard™ (High Impact) - 30 lb	1	1	34.00	\$1,534.33
11470	DV	DEVCON® Wear Guard™ (Fine Load) - 30 lb	1	1	34.00	\$1,998.10
11475	DV	DEVCON® Wear Guard™ Ultra - 30 lb	1	1	37.00	\$4,246.84
11480	DV	DEVCON® Wear Guard™ High Temp - 30 lb	1	1	34.00	\$2,240.38
11489	DV	DEVCON® HV Tile Adhesive - 20 lb	1	1	23.00	\$887.10
11490	DV	DEVCON® Wear Guard™ High Load - 30 lb	1	1	34.00	\$1,174.90
11495	DV	DEVCON® Tile Adhesive - 20 lb	1	1	23.00	\$887.10
11500	DV	DEVCON® Zip Patch™ - 4"x9" patch	1	6	2.58	\$158.04
11700	DV	DEVCON® Ceramic Repair Putty - 3 lb	1	6	23.00	\$597.06
11730	DV	DEVCON® Ceramic Repair Putty - 32 lb	1	1	37.00	\$2,965.93
11760	DV	DEVCON® Brushable Ceramic red - 2 lb	1	6	17.00	\$509.45
11762	DV	DEVCON® Brushable Ceramic red - 12 lb	1	1	15.00	\$1,141.05
11765	DV	DEVCON® Brushable Ceramic blue - 2 lb	1	6	17.00	\$509.45
11767	DV	DEVCON® Brushable Ceramic blue - 12 lb	1	1	15.00	\$1,152.11
11770	DV	DEVCON® Brushable Ceramic white - 2 lb	1	6	17.00	\$546.86
11800	DV	DEVCON® Underwater Repair Putty (UW) - 1 lb	1	6	9.00	\$257.15
12560	DV	DEVCON® Epoxy Concrete Sealer - 2 gal	1	1	29.00	\$1,356.87
12710	DV	DEVCON® Epoxy Coat™ 7000 Non VOC - 2 gal	1	1	26.00	\$1,164.09
12750	DV	DEVCON® Epoxy Coat™ 7000 AR (Acid Resistant) - 2 gal	1	1	23.00	\$1,348.73
13090	DV	DEVCON® Floor Grip™ - 2 gal	1	1	28.00	\$1,217.74
13100	DV	DEVCON® Floor Patch™ - 10 lb	1	1	12.00	\$288.92

Stock No.	Brand	Product Description	Stock Class*	Items Per Case	Gross. Wt. Per Case (lbs)	AGI LIST Price (each)
13110	DV	DEVCON® Floor Patch™ FC (Fast-Cure) - 10 lb	1	1	13.00	\$324.28
13120	DV	DEVCON® Floor Patch™ - 40 lb	1	1	44.00	\$787.51
13130	DV	DEVCON® Floor Patch™ Resurfacer - 41 lb	1	1	44.00	\$786.70
13550	DV	DEVCON® Ultra Quartz™ - 35 lb	1	1	39.00	\$1,071.77
13800	DV	DEVCON® Deep Pour Grout™ - 50 lb.	1	1	50.00	\$829.52
14200	DV	DEVCON® 5 Minute® Epoxy [1-1] - 15 oz	1	6	7.00	\$145.22
14210	DV	DEVCON® 5 Minute® Epoxy [1-1] - 2.5 oz	1	24	6.00	\$29.94
14240	DV	DEVCON® 5 Minute® Epoxy Gel opaque [1-1] - 25ml Dev-Tube™	1	24	5.00	\$23.09
14250	DV	DEVCON® 5 Minute® Epoxy [1-1] - 25ml Dev-Tube™	1	24	4.00	\$17.01
14251	DV	DEVCON® 10 Minute™ Epoxy clear [1-1] - 50ml	1	12	2.00	\$45.23
14255	DV	DEVCON® 10 Minute™ Epoxy Black [1-1] - 50ml	1	12	2.00	\$44.36
14260	DV	DEVCON® 2 Ton® Epoxy [1-1] - 50ml	1	12	2.00	\$40.83
14265	DV	DEVCON® 5 Minute® Epoxy Gel opaque [1-1] - 50ml	1	12	3.00	\$42.15
14270	DV	DEVCON® 5 Minute® Epoxy [1-1] - 50ml	1	12	3.00	\$37.74
14277	DV	DEVCON® 1 Minute™ Epoxy Gel amber [1-1] - 80ml	1	12	3.00	\$49.39
14278	DV	DEVCON® Epoxy Plus™ 25 grey [1-1] - 50 ml cartridge	1	12	3.00	\$49.05
14300	DV	DEVCON® Plastic Welder™ straw [1-1] - 25ml Dev-Tube™	1	24	5.00	\$31.01
14310	DV	DEVCON® 2 Ton® Epoxy [1-1] - 25ml Dev-Tube™	1	24	4.00	\$19.50
14315	DV	DEVCON® HP250 (2-1 ratio) straw - use with 74001 GP Manual Gun	1	12	3.00	\$49.75
14320	DV	DEVCON® Plastic Welder™ straw [1-1] - 47ml	1	12	3.00	\$45.46
14330	DV	DEVCON® Plastic Welder™ straw [1-1] - 2 liter kit	1	1	6.00	\$843.91
14340	DV	DEVCON® Plastic Welder™ II straw [1-1] - 47ml	1	12	3.00	\$45.46
14350	DV	DEVCON® Epoxy Plus™ 25 grey [1-1] - 400ml	1	12	18.00	\$187.73
14355	DV	DEVCON® 2 Ton® Epoxy [1-1] - 400ml	1	12	17.00	\$181.86
14360	DV	DEVCON® 2 Ton® Epoxy [1-1] - 9 lb	1	1	10.00	\$983.91
14385	DV	DEVCON® Plastic Welder™ straw [1-1] - 400ml	1	12	17.00	\$169.60
14390	DV	DEVCON® Plastic Welder™ II straw [1-1] - 400ml	1	12	17.00	\$169.60
14415	DV	DEVCON® HP250 straw [2-1] - 400ml	1	12	17.00	\$185.51
14500	DV	DEVCON® Dev-Thane 5™ grey [1-1] - 400ml	1	10	4.30	\$193.88
14503	DV	DEVCON® Dev-Thane 5™ grey [1-1] - 50ml	1	12	3.00	\$48.41
14630	DV	DEVCON® 5 Minute® Epoxy [1-1] - 9 lb	1	1	10.00	\$926.69
15049	DV	DEVCON® Flexane® Fast Cure Putty [4-1] - 400ml	1	4	6.00	\$186.10
15050	DV	DEVCON® Flexane® Fast Cure Liquid [4-1] - 400ml	1	4	6.00	\$182.88
15165	DV	DEVCON® Flexane® Belt Repair Kit - Kit	1	1	6.00	\$589.20
15250	DV	DEVCON® Flexane® 94 Liquid - 1 lb	1	6	19.00	\$163.18
15260	DV	DEVCON® Flexane® 94 Liquid - 10 lb	1	1	13.00	\$1,179.41
15330	DV	DEVCON® Flexane® High Performance Putty - 1 lb	1	6	19.00	\$234.84
15350	DV	DEVCON® Flexane® Brushable - 1 lb	1	6	19.00	\$244.13
15550	DV	DEVCON® R-Flex® Belt Repair Kit - 4lb	1	1	6.00	\$1,312.20
15565	DV	DEVCON® R-Flex® Belt Repair Kit - 1.5lb	1	4	9.750	\$556.88
15800	DV	DEVCON® Flexane® 80 Liquid - 1 lb	1	6	19.00	\$163.18
15810	DV	DEVCON® Flexane® 80 Liquid - 10 lb	1	1	15.00	\$1,179.41
15820	DV	DEVCON® Flexane® 80 Putty - 1 lb	1	6	15.00	\$163.18
15850	DV	DEVCON® Flexane® 80 Putty - 4 lb	1	1	6.00	\$555.67
15940	DV	DEVCON® Flex-Add™ - 8 oz	1	6	5.00	\$70.52
15980	DV	DEVCON® FL-10 Flexane® Primer - 4 oz	1	6	2.58	\$64.91
15984	DV	DEVCON® FL-40 Flexane® Rubber Primer - 4 oz	1	6	2.58	\$69.31
15985	DV	DEVCON® FL-20 Flexane® Primer - 4 oz	1	6	2.58	\$65.97
17100	DV	DEVCON® Sillite® RTV Silicone clear - 3 oz	1	24	8.00	\$12.66
17130	DV	DEVCON® Sillite® RTV Silicone red - 10.3 fl oz	1	12	10.00	\$35.95
17140	DV	DEVCON® Sillite® RTV Silicone white - 10.3 fl oz	1	12	10.00	\$23.23
17150	DV	DEVCON® Sillite® RTV Silicone clear - 10.3 fl oz	1	12	8.00	\$22.36
19510	DV	DEVCON® Cleaner Blend 300 - 1 pt	1	6	7.00	\$109.83
19600	DV	DEVCON® Liquid Release Agent - 1 pt	1	6	6.00	\$180.66
19650	DV	DEVCON® Metal Prep 90™ Primer - 1 pt.	1	6	7.00	\$114.66
19770	DV	DEVCON® FasMetal™ 10 HVAC Repair (Special F) - 6-1/2 oz tube	1	12	5.26	\$98.61
81095	DV	Korrobond 95 Backing Compound	1	1	23.00	\$316.73
DA033	DV	DEVCON® Plastic Welder™ - Adhesive straw - 5 gal.	2	1	45.00	\$3,352.81
DA034	DV	DEVCON® Plastic Welder™ Activator - 5 gal.	2	1	45.00	\$3,190.08

Stock No.	Brand	Product Description	Stock Class*	Items Per Case	Gross. Wt. Per Case (lbs)	AGI LIST Price (each)
DA051	DV	DEVCON® 5 Minute® Epoxy [1-1] - 400ml	1	12	17.00	\$167.47
DA052	DV	DEVCON® 5 Minute® Epoxy Gel opaque [1-1] - 400ml	1	12	17.00	\$186.33
DA160	DV	DEVCON® Plastic Welder™ white [1-1] - 400ml	1	12	17.00	\$172.89
DA290	DV	DEVCON® Plastic Welder™ black [1-1] - 47ml	1	12	3.00	\$46.36
DA291	DV	DEVCON® Plastic Welder™ white [1-1] - 47ml	1	12	3.00	\$46.36
DA295	DV	DEVCON® Plastic Welder™ black [1-1] - 400ml	1	12	17.00	\$178.10
DA307	DV	DEVCON® Plastic Welder™ Activator - 50 gal.	2	1	437.00	\$25,081.18
DA309	DV	DEVCON® Plastic Welder™ Adhesive straw - 50 gal.	2	1	437.00	\$26,399.49
DA999	DV	DEVCON® Food Grade Pot & Seal white [1-1] - 400ml	1	6	17.00	\$184.42
DF039	DV	DEVCON® Edge & Seal T-35 black [4-1] - 400ml	1	4	6.00	\$196.46
09128	PX	PERMATEX® Copper Anti-Seize Lubricant - 8 oz. brush top bottle	1	6	4.34	\$34.67
23218	PX	PERMATEX® FAST ORANGE® Hand Cleaner (Smooth Lotion) - 1 gal. plastic bottle with pump	1	4	36.24	\$64.83
24010	PX	PERMATEX® Medium Strength Threadlocker Blue GEL - 10 gm GEL TWIST™ tube, carded	1	6	0.72	\$33.95
24105	PX	PERMATEX® ULTRA BLACK® Max Oil Resistance Gasket Maker - 13 oz. cartridge	1	12	11.59	\$58.34
24210	PX	PERMATEX® Medium Strength Threadlocker Blue - 10 ml bottle, carded	1	6	0.57	\$31.25
24225	PX	PERMATEX® Medium Strength Threadlocker Blue - 250 ml bottle	1	2	1.53	\$312.63
24250	PX	PERMATEX® Medium Strength Threadlocker Blue - 50 ml bottle	1	6	1.33	\$89.30
24325	PX	PERMATEX® Surface Insensitive Threadlocker Blue - 250 ml bottle	1	2	1.56	\$328.25
24350	PX	PERMATEX® Surface Insensitive Threadlocker Blue - 50 ml bottle	1	6	1.33	\$94.71
25219	PX	PERMATEX® FAST ORANGE® Hand Cleaner (Pumice Lotion) - 1 gal. plastic bottle with pump	1	4	36.24	\$63.01
25224	PX	PERMATEX® THE RIGHT STUFF® Instant Rubber Gasket Maker - 7 oz net wt. pressurized can	1	6	4.29	\$64.23
26210	PX	PERMATEX® Permanent Strength Threadlocker Red - 10 ml bottle, carded	1	6	0.59	\$31.25
26225	PX	PERMATEX® Permanent Strength Threadlocker Red - 250 ml bottle	1	2	1.56	\$312.63
26250	PX	PERMATEX® Permanent Strength Threadlocker Red - 50 ml bottle	1	6	1.62	\$89.30
27010	PX	PERMATEX® High Strength Threadlocker Red GEL - 10 gm GEL TWIST™ tube, carded	1	6	0.66	\$33.95
27110	PX	PERMATEX® High Strength Threadlocker Red - 10 ml bottle, carded	1	6	0.72	\$31.25
27125	PX	PERMATEX® High Strength Threadlocker Red - 250 ml bottle	1	2	1.61	\$312.63
27150	PX	PERMATEX® High Strength Threadlocker Red - 50 ml bottle	1	6	1.32	\$89.30
27250	PX	PERMATEX® High Temperature Threadlocker Red - 50 ml bottle	1	6	1.27	\$94.71
27725	PX	PERMATEX® Large Diameter Threadlocker Red - 250 ml bottle	1	2	1.59	\$312.63
29050	PX	PERMATEX® Penetrating Grade Threadlocker Green - 50 ml bottle	1	6	1.24	\$90.17
31163	PX	PERMATEX® Copper Anti-Seize Lubricant - 1 lb. bottle	1	12	14.85	\$58.14
33694	PX	PERMATEX® THE RIGHT STUFF® Instant Rubber Gasket Maker - 10.1 fl. oz. cartridge	1	6	6.33	\$80.15
51531	PX	PERMATEX® Anaerobic Flange Sealant - 50 ml tube	1	10	1.76	\$40.56
51580	PX	PERMATEX® Anaerobic Flange Sealant - 300 ml cartridge	1	10	9.09	\$170.73
51813	PX	PERMATEX® Anaerobic Gasket Maker - 50 ml tube, carded	1	6	1.33	\$40.56
51845	PX	PERMATEX® Anaerobic Gasket Maker - 300 ml cartridge	1	10	10.00	\$170.73
54550	PX	PERMATEX® Pneumatic / Hydraulic Sealant - 50 ml bottle	1	6	1.33	\$90.19
56521	PX	PERMATEX® High Performance Thread Sealant - 50 ml tube, carded	1	6	1.30	\$39.61
56525	PX	PERMATEX® High Performance Thread Sealant - 250 ml tube	1	2	1.49	\$133.85
56725	PX	PERMATEX® Maximum Temperature Thread Sealant - 250 ml tube	1	2	1.52	\$132.59
56750	PX	PERMATEX® Maximum Temperature Thread Sealant - 50 ml tube, carded	1	6	1.36	\$39.61
59235	PX	PERMATEX® High Temperature Thread Sealant - 50 ml tube, carded	1	6	1.36	\$39.61
60950	PX	PERMATEX® Bearing Mount for Close Fits - 50 ml bottle	1	6	1.33	\$90.17
68050	PX	PERMATEX® Bearing Mount for Relaxed Fits - 50 ml bottle	1	6	1.25	\$94.71
70144	PX	PERMATEX® ZipGrip® GPE 3 Wicking - 14 gm bottle	1	12	1.00	\$42.63
70145	PX	PERMATEX® ZipGrip® GPE 3 Wicking - 3 x 2 gm tubes	1	12	1.00	\$35.69
70213	PX	PERMATEX® ZipGrip® GPE 15 Rubber Bonder - 1/3 oz. bottle	1	12	1.00	\$49.46
70350	PX	PERMATEX® ZipGrip® GPE 30 All Purpose - 1 oz. bottle	1	10	1.30	\$48.08
70450	PX	PERMATEX® ZipGrip® GPE 100 All Purpose MV - 1 oz. bottle	1	10	1.30	\$48.55
72161	PX	PERMATEX® ZipGrip® TE 1000 Gap Filling - 1 lb. bottle	1	1	1.25	\$556.56
72250	PX	PERMATEX® ZipGrip® TE 2400 Gap Filling - High Temp - 1 oz. bottle	1	10	1.30	\$61.38
72261	PX	PERMATEX® ZipGrip® TE 2400 Gap Filling - High Temp - 1 lb. bottle	1	1	1.25	\$546.15
77124	PX	PERMATEX® #771 Nickel Anti-Seize (Maximum Temperature) - 8 oz. brush top bottle	1	12	7.57	\$53.67
77164	PX	PERMATEX® #771 Nickel Anti-Seize (Maximum Temperature) - 1 lb. brush top bottle	1	10	11.70	\$102.50
80003	PX	PERMATEX® FORM-A-GASKET® #1 Sealant - 11 oz. tube, boxed	1	12	10.03	\$24.49
80011	PX	PERMATEX® FORM-A-GASKET® #2 Sealant - 11 oz. tube, boxed	1	12	9.87	\$24.02
80015	PX	PERMATEX® FORM-A-GASKET® #2 Sealant - 1.5 oz. tube, carded	1	12	1.82	\$9.29

Stock No.	Brand	Product Description	Stock Class*	Items Per Case	Gross. Wt. Per Case (lbs)	AGI LIST Price (each)
80016	PX	PERMATEX® FORM-A-GASKET® #2 Sealant - 3 oz. tube, carded	1	12	3.10	\$11.15
80017	PX	PERMATEX® Aviation FORM-A-GASKET® #3 Sealant - 16 fl. oz. bottle	1	12	15.36	\$30.71
80022	PX	PERMATEX® #6 Sensor Safe Blue LO RTV Silicone Gasket Maker - 3 oz. tube, carded	1	12	3.25	\$12.99
80045	PX	PERMATEX® #51 Pipe Joint Compound (N/A in California) - 16 oz. bottle	1	12	18.41	\$23.91
80050	PX	PERMATEX® #66 Clear Silicone Adhesive Sealant - 3 oz. tube, carded	1	12	3.25	\$13.09
80071	PX	PERMATEX® #133 Anti-Seize Lubricant - 4 oz. brush top bottle	1	12	4.57	\$18.26
80078	PX	PERMATEX® #133 Anti-Seize Lubricant - 8 oz. brush top bottle	1	12	9.33	\$32.82
80208	PX	PERMATEX® #767 Anti-Seize Lubricant - 1 lb. brush top bottle	1	12	14.19	\$55.47
80628	PX	PERMATEX® #6 Sensor Safe Blue LO RTV Silicone Gasket Maker - 12.9 oz. cartridge	1	12	11.48	\$42.17
80632	PX	PERMATEX® #14 Thread Sealant with TEFLON® - 4 oz. bottle	1	12	4.30	\$16.93
80633	PX	PERMATEX® #14 Thread Sealant with TEFLON® - 16 oz. bottle	1	12	15.43	\$38.74
80855	PX	PERMATEX® #66 Clear Silicone Adhesive Sealant - 11 oz. cartridge	1	12	10.01	\$40.19
81160	PX	PERMATEX® #26 High-Temp RTV Silicone Gasket Maker - 3 oz. tube, carded	1	12	3.25	\$16.94
81173	PX	PERMATEX® #16 Black LO Silicone Adhesive Sealant - 12.9 oz. cartridge	1	12	11.48	\$40.60
81409	PX	PERMATEX® #26 High-Temp RTV Silicone Gasket Maker - 11 oz. cartridge	1	12	9.92	\$45.91
81724	PX	PERMATEX® #77 ULTRA BLUE® Multi-Purpose Gasket Maker - 3.35 oz. tube, carded	1	12	3.50	\$18.48
81725	PX	PERMATEX® #77 ULTRA BLUE® Multi-Purpose Gasket Maker - 13 oz. cartridge	1	12	11.51	\$55.24
81860	PX	PERMATEX® #6 Sensor Safe Blue LO RTV Silicone Gasket Maker - 7.25 oz. net wt. pressurized can	1	6	4.31	\$42.48
81878	PX	PERMATEX® #101 ULTRA COPPER® Maximum Temperature Gasket Maker - 3 oz. tube, carded	1	12	3.26	\$17.80
81913	PX	PERMATEX® #66 Clear Silicone Adhesive Sealant - 7.25 oz. net wt. pressurized can	1	12	8.49	\$42.91
81915	PX	PERMATEX® #26 High-Temp RTV Silicone Gasket Maker - 7.25 oz. net wt. pressurized can	1	12	8.58	\$46.78
82080	PX	PERMATEX® ULTRA BLACK® Max Oil Resistance Gasket Maker - 8.75 oz. net wt. pressurized can	1	6	4.82	\$58.57
82180	PX	PERMATEX® ULTRA BLACK® Max Oil Resistance Gasket Maker - 3.35 oz. tube, carded	1	12	5.15	\$18.84
82194	PX	PERMATEX® #599 ULTRA GREY® Rigid Assembly Gasket Maker - 3.5 oz. tube, carded	1	12	3.59	\$19.56
82195	PX	PERMATEX® #599 ULTRA GREY® Rigid Assembly Gasket Maker - 13 oz. cartridge	1	6	5.90	\$57.78
59713	PX	PERMATEX® #101 ULTRA COPPER® Maximum Temperature Gasket Maker - 300 ml cartridge	1	6	6.00	\$59.04
85080	PX	PERMATEX® ULTRA BLACK® Max Oil Resistance Gasket Maker - 9.5 oz net wt. PowerBead™ can	1	6	5.39	\$67.31
85224	PX	PERMATEX® THE RIGHT STUFF™ Instant Rubber Gasket maker - 7.5 oz net wt. PowerBead™ can	1	6	4.63	\$72.20
85519	PX	PERMATEX® #77 ULTRA BLUE® Multi-Purpose Gasket Maker - 9.5 oz net wt. PowerBead™ can	1	6	5.32	\$62.80
85913	PX	PERMATEX® #66 Clear Silicone Adhesive Sealant - 7.25 oz net wt. PowerBead™ can	1	6	4.46	\$46.32
85915	PX	PERMATEX® #26 High-Temp RTV Silicone Gasket Maker - 7.25 oz net wt. PowerBead™ can	1	6	4.47	\$51.24
11301	EQ	DEVCON® DFense Blok™ Power Mixer with Paddle	1	1	80.50	\$7,573.83
14280	EQ	DEVCON® Mark V™ Gun (1-1 and 10-1 ratio) - use with 50ml - Applicator Gun	1	1	1.00	\$233.70
14285	EQ	DEVCON® Mark V™ 1-1 Mix Nozzle for 50ml - Mix Nozzle	1	12	1.00	\$6.11
14287	EQ	DEVCON® Mix Nozzle - use with manual dispensing gun 490ml systems .374" (10:1 ratio)	1	12	1.00	\$6.11
14409	EQ	DEVCON® Manual Gun (10-1 Co-Axial) - use with 380ml - Applicator Gun	1	1	5.00	\$633.87
14410	EQ	DEVCON® Manual Gun (1-1 ratio) - use with 400ml - Applicator Gun	1	1	4.00	\$1,133.23
15043	EQ	DEVCON® Manual Gun (4-1 ratio) - Applicator gun	1	1	4.00	\$1,314.26
15047	EQ	DEVCON® Mix Nozzle - use with 15049, 15050 - .394" dia/ 24 element	1	20	1.00	\$9.37

Discontinued Items (or available while supplies last)

Stock No.	Brand	Product Description	Suggested Replacement	
			Stock No	Description
14291	EQ	DEVCON® Mix Nozzle (400ml cart.) - use with pneumatic gun (1-1 only) - .25" diameter / 18 element	3333	PLEXUS® Static Mix Nozzles- 380ml 10:1 Mix
14292	EQ	DEVCON® Mix Nozzle (400ml cart.) - use with manual gun (1-1 only) - .394" diameter / 18 element	3333	PLEXUS® Static Mix Nozzles- 380ml 10:1 Mix
14293	EQ	DEVCON® Mix Nozzle (400ml cart.) - use with 380ml - .31" diameter/ 32 element	3333	PLEXUS® Static Mix Nozzles- 380ml 10:1 Mix

All trademarks, except where noted are the property of Illinois Tool Works, Inc. ITW Polymers Adhesives, North America, U.S.A. © Copyright 2015. All rights reserved.



SECTION 9

FLO CONTROL® / NDS®

FITTINGS, VALVES, DRAINAGE




PRODUCT LINE	PAGE
Ball Valves	14
Catch Basins & Grates	17-32
Channel Drains	33-38
Check Valves	7-13
Compression Fittings - PVC, CPVC	1-3
Diverter Valves	12
Flo-Lock Fittings	4-5
Flo-Well Leaching Systems	15-16
Repair Couplings, Wrenches	6
Unions	12






PVC Compression Fittings - IPS

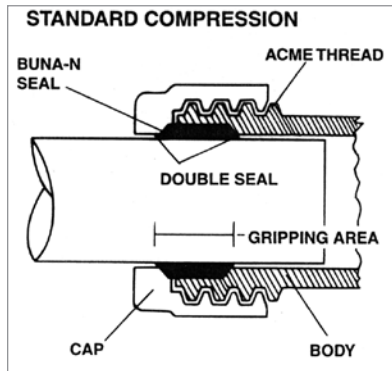


PVC Compression Fitting Features:

- Iron pipe size
- For use with cold water only.
- Buna-N gasket seals
- ACME compression cap threads
- Rated at 200 PSI.

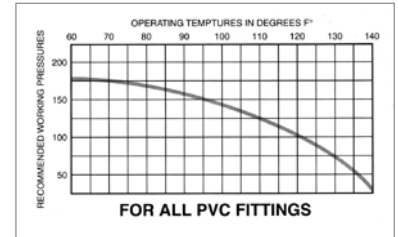

CPC Series IPS

NSF61 Annex G
UPC



CPT-T Series IPS

NSF61 Annex G




CPT-S Series IPS

NSF61 Annex G
UPC


NEW Part Number	OLD Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC IPS Compression Couplings, comp x comp					
CPC0500	110-05	1/2"	4"	28	\$ 5.10
CPC0750	110-07	3/4"	4-1/4"	24	6.68
CPC1000	110-10	1"	4-1/2"	15	8.67
CPC1250	110-12	1-1/4"	5"	10	13.30
CPC1500	110-15	1-1/2"	5-1/2"	16	13.74
CPC2000	110-20	2"	6"	12	17.86
CPC2500	110-25	2-1/2"	8"	3	33.61
CPC3000	110-30	3"	9"	3	43.98
CPC4000	110-40	4"	10"	3	72.33
CPC6000	110-60	6"	10"	1	168.03
PVC IPS Threaded Tee, comp x comp x fipt					
CPT0500T	120-05	1/2"	4"	24	7.78
CPT0750T	120-07	3/4"	4-1/4"	20	10.13
CPT1000T	120-10	1"	4-1/2"	15	13.39
CPT1250T	120-12	1-1/4"	5"	15	16.94
CPT1500T	120-15	1-1/2"	5-1/2"	12	19.44
CPT2000T	120-20	2"	6"	10	27.70
PVC IPS Slip Tees, comp x comp x slip					
CPT0500S	121-05	1/2"	4"	24	7.78
CPT0750S	121-07	3/4"	4-1/4"	20	10.13
CPT1000S	121-10	1"	4-1/2"	15	13.39
CPT1250S	121-12	1-1/4"	5"	15	16.94
CPT1500S	121-15	1-1/2"	5-1/2"	12	19.44
CPT2000S	121-20	2"	6"	10	27.70

PVC Compression Fittings - IPS, CTS

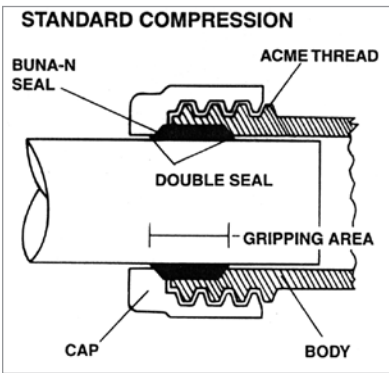

PVC Compression Fitting Features:

- Iron pipe size
- For use with cold water only.
- Buna-N gasket seals
- ACME compression cap threads
- Rated at 200 PSI.

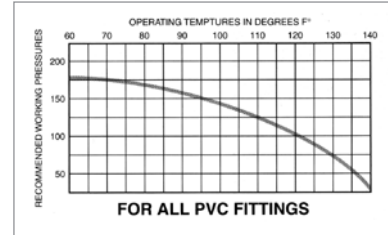

NSF61
Annex G

UPC

CPA Series IPS

NEW Part Number	Previous Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC IPS Male Adapter, comp x mipt					
CPA0750	130-07	3/4"	2 7/8"	20	\$ 5.70
CPA1000	130-10	1"	3 1/8"	30	6.64
CPA1250	130-12	1-1/4"	3 5/16"	20	7.81
CPA1500	130-15	1-1/2"	3 1/2"	16	9.29
CPA2000	130-20	2"	3 3/4"	12	12.96



NSF61
Annex G

UPC

CCC Series CTS

NEW Part Number	Previous Part Number	CTS Size	Body Length	Ctn Qty	List Price
PVC CTS Compression Coupling, comp x comp					
CCC0500	210-05	1/2"	4"	25	\$ 10.50
CCC0750	210-07	3/4"	4"	28	11.77
CCC1000	210-10	1"	4-1/4"	24	12.38
CCC1500	210-15	1 1/2"	5"	10	23.50
CCC2000	210-20	2"	6"	12	33.28




NSF61
Annex G

CCT Series CTS

PVC CTS Threaded Tee, comp x comp x fipt					
CCT0500	220-05	1/2"	4"	36	10.96
CCT0750	220-07	3/4"	4"	24	12.22
CCT1000	220-10	1"	4-1/4"	18	14.05
CCT1250	220-12	1 1/4"	4-1/2"	12	18.45
CCT1500	220-15	1 1/2"	5"	15	35.01
CCT2000	220-20	2"	6"	10	25.16



CPVC Compression Fittings - IPS & CTS

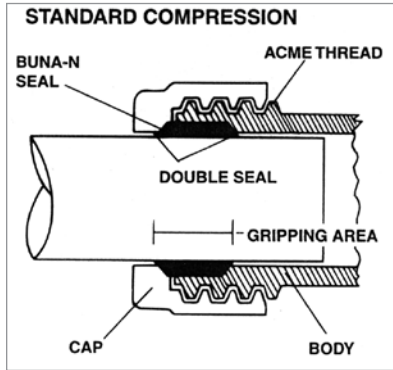

CPVC Compression Fitting Features:

- Iron pipe size & copper tube size
- For hot water use.
- Not to exceed 100 psi at 180 °F
- Buna-N gasket seals
- ACME compression cap threads
- Rated at 200 PSI.



410 Series CTS



420 Series CTS

Part Number	Size	Description	Body Length	Ctn Qty	List Price
CPVC CTS Compression Couplings, comp x comp					
410-05	1/2"	1/2" cts x 1/2" cts	4"	25	\$ 8.05
410-07	3/4"	3/4" cts x 3/4" cts	4"	28	10.66
410-10	1"	1" cts x 1" cts	4-1/2"	24	15.52
CPVC CTS Threaded Tees, comp x comp x fipt					
420-05	1/2"	1/2 cts x 1/2 cts x 1/2 fipt	4"	36	10.82

TECHNICAL DATA FOR ALL FLO CONTROL FITTINGS & VALVES

- PVC MATERIAL SPECIFICATION:** PVC Type I, Grade I, Cell class 12454-B meeting requirements of ASTM D-1784-75 is used in the manufacturing of all fittings recommended for use of potable cold water (see temperature vs. pressure chart). Not recommended for use on systems exceeding 100 psi @ 120 °F.
- CPVC MATERIAL SPECIFICATION:** CPVC Type IV, Grade I, cell Class 23447-B meeting requirements of ASTM D-1784-75 is used in the manufacturing of all fittings recommended for use on potable hot water systems in accordance with ASTM D-2846-73. Not recommended for use on systems that will exceed 100 psi @ 180 °F.
- BUNA-N SEALS:** The gasket seal material is made of high quality Buna-N elastomeric compound which meets the requirements of ASTM D-2000. It is generally resistant to many hydrocarbons, fats, oils, greases, hydraulic fluids and chemicals. It is generally attacked by Ozone, Ketones, Esters, Aldehydes, chlorinated and nitro hydrocarbons. Reference chemical resistance under NBR (Nitrile) elastomers for specific listings.
- EPDM O-RINGS:** The o-ring material is made of high quality EPDM (Ethylene Polyene Copolymer) which meets the requirements of ASTM D-2000. EPDM has exceptionally good weather aging and ozone resistance, excellent water and chemical resistance and excellent aging resistance for most applications. EPDM is a polymer where oil and solvent resistance is poor. However, it is fairly good in ketones and alcohols. Reference chemical resistance under EPDM, EPT or EPR Elastomers for specific listings.
- DOUBLE SEAL** of standard compression fittings. A compressive action is created as the cap is tightened squeezing the Buna-N seals into the tapered

- recessed areas of the cap and body. This process creates a highly concentrated pressure at the two "double seal" points, thus providing positive protection against leakage.
- ACME THREAD:** General purpose 10 pitch Acme thread on compression cap section, eliminates the possibility of cross threading. This smooth running design prevents binding or galling as is often experienced in standard tapered threads.
 - COMPRESSION CONNECTIONS:** Compression cap should be drawn up hand tight to insure proper alignment and seating of gasket, then tighten 3/4 to 1 turn with a Flo Spanner Wrench or strap wrench. Average torque should be approximately 25 foot pounds on 1/2" through 2" IPS and 35 foot pounds on 2 1/2" and larger. Compression fittings are not recommended for use on compressed air lines or natural gas lines.
 - THREAD CONNECTIONS:** Use PTFE thread seal tape on all IPS thread connections. IPS thread connections should be made hand tight plus 1/2 to 3/4 turn with a wrench.
 - THRUST BLOCKING:** When installing the standard compression seal fittings the pipe line must be restrained from lateral movement by thorough soil compaction on straight runs and thrust blocking at change of direction or reduction in size. Not recommended for use on pipe lines suspended on hangers.
 - FLO LOCK COMPRESSION ADAPTERS:** Recommended for use on PVC pipe with wall thickness of SDR-26, Class 160 or greater and copper tubing. Not recommended for use on galvanized pipe unless surface is sanded smooth. The gripper ring is made of stainless steel.
 - ALL SPRINGS** made of Series 300 stainless steel.




In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

Flo-Lock Fittings - PVC & CPVC

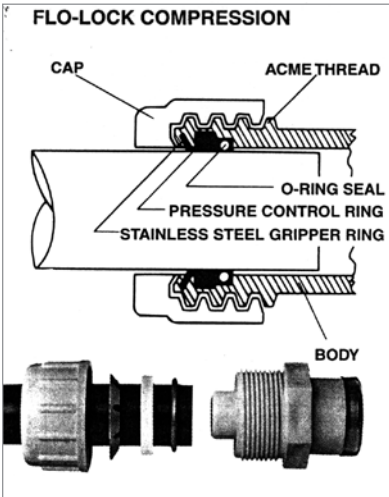

PVC/CPVC Flo-Lock Fitting Features:

- Iron pipe and copper tube size
- For cold (PVC) or hot (CPVC) water use.
- Built in stiffener to insure grip.
- EPDM o-ring seal
- PVC ring for controlling o-ring pressure.
- Stainless steel gripping ring prevents pull-out.
- Rated at 160 psi @ 72 °F.



NSF61 Annex G
UPC

135 Series IPS



NSF61 Annex G

136 Series IPS



NSF61 Annex G
UPC

235 Series CTS




435 Series CTS

Part Number	IPS Size	IPS Connection	Ctn Qty	List Price
PVC IPS Male Adapter with Flo-Lock, flo lock x mipt				
135-05	1/2"	1/2" mipt	25	\$ 10.67
135-07	3/4"	3/4" mipt	20	12.71
135-10	1"	1" mipt	30	15.14
135-12	1-1/4"	1-1/4" mipt	20	20.38
135-15	1-1/2"	1-1/2" mipt	16	24.49
135-20	2"	2" mipt	12	31.77
PVC IPS Female Adapter with Flo-Lock, flo lock x fipt				
136-05	1/2"	1/2" fipt	25	13.06
136-07	3/4"	3/4" fipt	20	15.23
136-10	1"	1" fipt	14	17.73
136-12	1-1/4"	1-1/4" fipt	18	23.18
136-15	1-1/2"	1-1/2" fipt	16	26.48
136-20	2"	2" fipt	10	38.50

Part Number	CTS Size	IPS Connection	Ctn Qty	List Price
PVC CTS Male Adapter with Flo-Lock, flo lock x mipt				
235-05	1/2"	1/2" mipt	50	\$ 12.18
235-07	3/4"	3/4" mipt	25	12.45
235-10	1"	1" mipt	18	13.21
235-12	1-1/4"	1-1/4" mipt	24	17.90
235-20	2"	2" mipt	12	27.49
CPVC CTS Male Adapter with Flo-Lock, flo lock x mipt				
435-05	1/2"	1/2" cts x 1/2" mipt	50	11.31
435-07	3/4"	3/4" cts x 3/4" mipt	25	14.89



PVC Flo-Lock Fittings - SDR9 polyethylene pipe

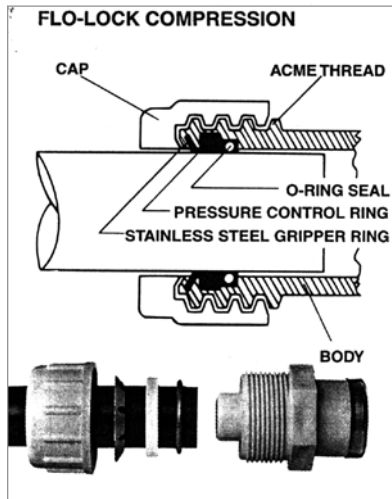

PVC Flo-Lock Series 700 Features:

- For water service line installations.
- Use on polyethylene pipe - tube size SDR-9-160 and 200, ASTM D2737.
- Reliable connections for polyethylene or copper tube.
- PVC type I material - 160 psi at 72 °F.
- Dry pull test exceeds 400 psi.
- Quick burst test exceeds 600 psi.
- Stainless steel band to reinforce female thread.
- Not for use with compressed air or natural gas lines.



IAPMO LISTED: Listed by the International Association of Plumbing and Mechanical Officials Research Committee as meeting the requirements set forth by the Uniform Plumbing Code for potable water systems. * Female threaded fittings are no longer IAPMO approved.

Series 700 Fittings for:
Polyethylene tubing SDR-9 CTS - OD - ASTM-2666 & ASTM-2737 dimensions.

Tubing Size	Nominal OD	Nominal ID	Pressure Rating - PSI
3/4"	0.875	0.675	160
1"	1.125	0.865	160
1 1/4"	1.375	1.059	160
1 1/2"	1.625	1.253	160
2"	2.125	1.629	160



NSF LISTED SE-14: ALL
Compression fittings are listed by the National Sanitation Foundation as acceptable for use with potable water.



710 Series


NSF61 Annex G

UPC



730 Series

UPC



731 Series

NSF61 Annex G



733 Series

NSF61 Annex G

UPC

©Insert stiffener supplied must be used with this fitting

Part Number	Tube Size	Description	Length	Ctn Qty	List Price
PVC Couplings, ts x ts					
710-07	3/4"	3/4" x 3/4"	4"	35	\$ 25.40
710-10	1"	1" x 1"	4"	24	30.03
710-17	1"	SDR9 x 3/4" SDR11	4"	36	36.96
710-12	1 1/4"	1 1/4" x 1 1/4"	4 1/2"	15	47.24
710-15	1 1/2"	1 1/2" x 1 1/2"	5"	15	53.78
710-20 ☺	2"	2" x 2"	5"	12	72.17
PVC Male Adapters, mipt x ts					
730-07	3/4"	3/4" x 3/4"	2 5/8"	25	16.01
730-10	1"	1" x 1"	2 7/8"	18	19.50
730-15	1 1/2"	1 1/2" x 1 1/2"	3 1/2"	18	35.64
730-20	2"	2" x 2"	3 1/2"	12	57.12
730-71	3/4" x 1"	3/4" x 1"	2 7/8"	18	19.69
PVC Female Adapters, fipt x ts					
731-07	3/4"	3/4" x 3/4"	2 5/8"	25	17.73
731-10	1"	1" x 1"	2 7/8"	15	26.68
731-12	1 1/4"	1 1/4" x 1 1/4"	2 7/8"	12	34.98
731-15	1 1/2"	1 1/2" x 1 1/2"	3 1/2"	18	40.93
731-20 ☺	2"	2" x 2"	4"	12	60.47
731-71	3/4" x 1"	3/4" x 1"	2 7/8"	15	25.64
PVC Spigot Adapters, ips spigot x ts, (For use with Sch 40 PVC tees, ells)					
733-07	3/4"	3/4" x 3/4"	2 7/8"	18	15.28
733-10	1"	1" x 1"	2 7/8"	18	15.95
733-12	1 1/4"	1 1/4" x 1 1/4"	2 7/8"	12	29.42
733-15	1 1/2"	1 1/2" x 1 1/2"	3 1/2"	18	34.03
733-20 ☺	2"	2" x 2"	3 1/2"	12	54.50
733-71	3/4" x 1"	3/4" x 1"	3 1/2"	18	15.28



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016



118 Series



Flo Span Expandable Repair Coupling Features:

- Double EPDM o-ring seal gives more protection from possible leakage due to deflection of piston in the extended position.
- EPDM o-ring seal also protects against contamination on the cylinder wall.
- Solvent cement trap located in cap to capture excess solvent cement.
- Made from PVC type I grade I material meeting ASTM D-1784
- 118 Series does not have union end.

NEW				
Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Flo-Span Expansion Couplings - NO UNION S x SPG				
118-05	1/2"	7 1/2"	28	\$ 6.68
118-07	3/4"	7 3/4"	24	7.40
118-10	1"	9 1/2"	15	8.57
118-12	1-1/4"	10 3/4"	10	16.12
118-15	1-1/2"	12 3/4"	16	17.67
118-20	2"	13 1/2"	12	27.02
118-25	2-1/2"	18 3/4"	3	41.98
118-30	3"	21"	3	52.45
118-40	4"	22 3/4"	3	91.68
QF-6000	6" S x S	26 1/4"	1	425.40



SW Series

Part Number	For Use with Coupling Sizes	Ctn Qty	List Price
Adjustable Strap Wrench			
SW400	1/2" through 4"	60	\$ 19.47
SW600	1/2" through 6"	60	23.18




Check Valves - Flo Control



PVC Spring Check Valve Features:

- To stop backflow and syphoning.
- All water applications.
- Maintenance free operation.
- Tapered valve body design & enlarged valve chamber reduces chatter & turbulence.
- Raised radius valve seat, EPDM Seal for positive seal.
- Stainless steel spring load of 1/2 lb. or 2 lb.
- Solvent weld or male and female thread connections.
- 200 P.S.I. static pressure rating @ 72° F.
- Excess solvent cement trap - Designed to help prevent excess cement or softened material from entering into the body and sealing area during installation.
- NSF61 Annex G approved.

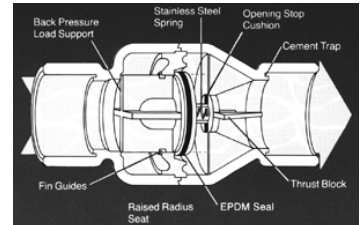


1001, 1011, 1012 Series

NSF61 Annex G



1011C Series

NSF61 Annex G



1800 Series

NSF61 Annex G


Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Spring Check Valves (fipt x fipt)			Spring Tension 1/2 lb	
1001-05	1/2"	4-1/8"	20	\$ 19.07
1001-07	3/4"	4-1/8"	20	19.74
1001-10	1"	5-1/4"	20	28.61
1001-12	1-1/4"	6-3/16"	15	38.15
1001-15	1-1/2"	6-3/16"	15	40.65
1001-20	2"	7"	10	58.48
PVC Spring Check Valves (slip x slip)			Spring Tension 1/2 lb	
1011-05	1/2"	4-1/8"	20	19.07
1011-07	3/4"	4-1/8"	20	19.74
1011-10	1"	5-1/4"	20	28.61
1011-12	1-1/4"	6-3/16"	15	38.15
1011-15	1-1/2"	6-3/16"	15	40.65
1011-20	2"	7"	10	58.48
1011-25	2 1/2"		8	89.81
1011-30	3"		8	105.30
Clear				
1011C-15	1-1/2"	6-3/16"	10	52.51
1011C-20	2"	7"	10	68.25
PVC Spring Check Valve, (slip x slip)			Spring Tension 2 lbs.	
1012-10	1"		20	29.54
1012-12	1-1/4"		15	39.39
1012-15	1-1/2"		15	41.97
1012-20	2"		10	60.39
Foot Valve Screen				
1800-07	3/4"	2-2/5"	1	3.29
1800-10	1"	2-4/5"	1	3.83
1800-12	1-1/4"	3"	1	5.48
1800-15	1-1/2"	3-2/5"	1	6.61
1800-20	2"	3-4/5"	1	7.67

Check Valves - Flo Control




PVC True Union Spring Check Valve Features:

- Designed for easy body removal.
- Tail pieces remain in place.
- 1/2 lb. psi spring tension. 2 lb. spring tension available by special order.
- EPDM seal and o-rings.
- 200 P.S.I. static pressure rating @ 72° F.
- Stainless steel spring.
- Excess solvent cement trap.
- NSF approved.



1700 Series




1790 Series



1700 Series



1700C Series



1790 Series



1790C Series

NSF61 Annex G

Part Number	Description	Body Length	Ctn Qty	List Price
True Union Spring Check Valves - WHITE				1/2# Spring Tension
1700-15	1 1/2" spring check	8.345"	12	\$ 48.06
1700-20	2" spring check	9.735"	12	67.42
True Union Spring Check Valves - CLEAR				1/2# Spring Tension
1700C-15	1 1/2" spring check	8.345"	12	58.59
1700C-20	2" spring check	9.735"	12	80.21
Compact True Union Spring Check Valves - WHITE				1/2# Spring Tension
1790-15	1 1/2" compact valve	6.54"	15	47.45
1790-20	2" compact valve	7.35"	10	59.89
Compact True Union Spring Check Valves - CLEAR				1/2# Spring Tension
1790C-15	1 1/2" compact valve	6.54"	15	51.64
1790C-20	2" compact valve	7.35"	10	70.33





Check Valves - Flo Control



PVC Adjustable Spring Check Valve Features:

- Use to restrain pressure in elevated pipelines.
- Ideal for preventing syphoning.
- Male or female threaded connection.
- 200 psi static pressure rating @ 72 °F.
- Adjustable from 5 lb to 15 lb spring tension to retain a column of water 12 to 36 foot head.
- EPDM seal.
- NSF61 Annex G approved.



1205 Series

NSF61
Annex G




1235 Series

NSF61
Annex G

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Adjustable Spring Check Valves (fipt x fipt)				Spring Tension 5 lb
1205-05	1/2"	4-1/8"	20	\$ 21.91
1205-07	3/4"	4-1/8"	20	23.07
1205-10	1"	5-1/4"	20	30.41
1205-12	1-1/4"	6-3/16"	15	38.96
1205-15	1-1/2"	6-3/16"	15	41.49
PVC Adjustable Spring Check Valves (fipt x mipt)				Spring Tension 5 lb
1235-05	1/2"	4-1/8"	20	22.58
1235-07	3/4"	4-1/8"	20	23.07
1235-10	1"	5-1/4"	20	30.41

PVC SUMP CHECK Valve Features:

- Positive seal with long lasting EPDM weighted flapper and Buna-N gaskets.
- Easy installation and removal with compression seal connections. No hose clamps, cementing or threading necessary
- Allows 1 3/4" vertical movement of discharge pipe for easy removal of pump.
- Unitized body construction using spin welded process with permanent interlock of Buna-N flapper.
- Valve fits either 1 1/4" or 1 1/2" IPS size. Gaskets for both provided with each valve.
- Sump pumps with larger volume output use 1500 or 1520 series swing check. (see next page)
- Rated at 125 psi @ 72 °F.



SUMP CHECK

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Sump Check Valve				
BUNA-N gaskets are included for both the 1 1/4" and 1 1/2" applications				
SUMP CHECK	1-1/4"-1-1/2"	5 1/4"	12	\$ 32.23




Check Valves - Flo Control



PVC Swing Check Valve Features:

- No metallic parts, corrosion resistant..
- Full flow design.
- Angle seat and weighted flapper designed for low pressure seal.
- PVC weighted and shielded flapper will retain backpressure up to 125 psi.
- Iron pipe sized 1/2" - 4".
- Compression style for IPS sized plastic or metal pipe 1 1/4" - 3"
- Ideal for close working areas, easy pipe alignment.
- Compression ends can be used as union connections.
- Designed for both horizontal and vertical use.
- Pressure rated 125 psi @ 72° F.
- NSF approved.

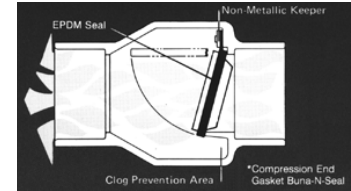

NSF61
Annex G

1500 Series



NSF61
Annex G

1520 Series



1520C Series



1720 Series



1720C Series

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Swing Check Valve - WHITE comp x comp				
1500-12	1-1/4"	7-1/2"	12	\$ 42.20
1500-15	1-1/2"	7-1/2"	12	47.15
1500-20	2"	9-3/4"	12	66.35
1500-30	3"	14"	2	169.85
PVC Swing Check Valve - CLEAR comp x comp				
1500C-15	1-1/2"	7-1/2"	5	54.97
1500C-20	2"	9-3/4"	8	81.49
PVC Swing Check Valve - WHITE slip x slip				
1520-05	1/2"	4-1/2"	25	27.20
1520-07	3/4"	4-1/2"	25	27.70
1520-10	1"	5-1/8"	25	28.68
1520-12	1-1/4"	5-1/4"	12	30.51
1520-15	1-1/2"	5-3/4"	12	31.48
1520-20	2"	6"	12	48.12
1520-30	3"	9"	4	85.78
1520-40	4"	9-1/2"	4	121.20
PVC Swing Check Valve - CLEAR slip x slip				
1520C-10	1"	5-1/8"	1	39.63
1520C-12	1-1/4"	5 1/4"	1	42.03
1520C-15	1-1/2"	5 3/4"	12	45.15
1520C-20	2"	6"	12	65.09
True Union Swing Check Valves - WHITE slip x slip				
1720-15	1 1/2"		12	34.47
1720-20	2"		12	50.35
True Union Swing Check Valves - CLEAR BODY, WHITE NUTS/TAILS slip x slip				
1720C-10	1"		20	39.08
1720C-15	1 1/2"		12	49.63
1720C-20	2"		12	67.63
1720C-30	3"		20	134.13




Check Valves - Flo Control



2200 Series


2200 Series Checkmate Features:

- One piece ball/check valve combination.
- Save time, labor and hassle to applications requiring in-line ball valves and check valves.
- True union or compression design allows for removal of check valve for cleaning or repairs.
- Rates at 125 psi. May be installed in vertical or horizontal position.
- Made of PVC type 1 grade 1 material meeting ASTM-D1784.

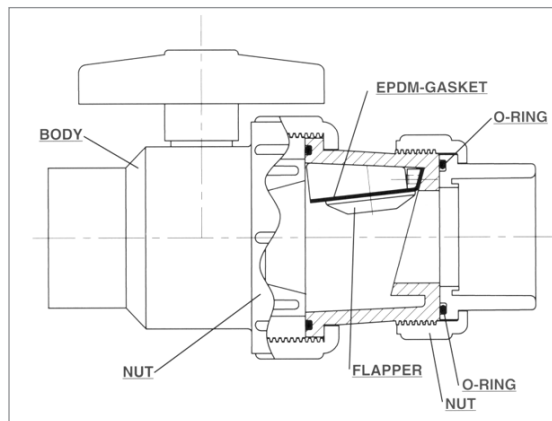

Part Number	Description	Ctn Qty	List Price
2200-15	1 1/2" Union x Slip	12	\$ 55.26
2200-20	2" Union x Slip	12	83.61
2200-15TU	1 1/2" Union x Union	12	73.20
2200-20TU	2" Union x Union	12	97.08
2200-15UC	1 1/2" Compression x Compression	12	66.84
2200-20UC	2" Compression x Compression	12	89.36


Diverter Valves, Sch 40 White Unions

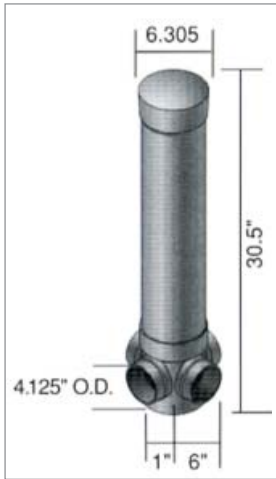


575 Series

Diverter Valve Features:

- For septic tank leach fields.
- Made of tough molded plastic that will not shatter, bend, rust or corrode.
- Light in weight, easier to handle and less expensive to ship.
- Stem flow may be controlled to individual or up to 3 fields in any combination. With a 3-way stem, flow may be diverted to any two outlets. To allow flow through all outlets, the valve stem may be removed from the assembly.
- ABS is IAPMO listed.

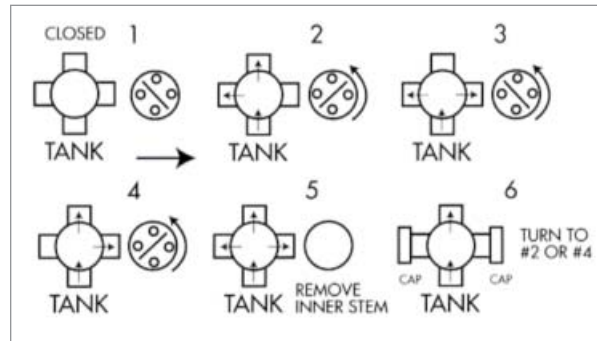

Part Number	Description	Ctn Qty	List Price
575	4" ABS Diverter Valve, Black	4	\$ 239.68
575P	4" PVC Diverter Valve, White	4	237.10



1600 Series



Part Number	IPS Size	Ctn Qty	List Price
SCHEDULE 40 - MADE IN USA			
SLIP X SLIP			
1600-15	1 1/2" Socket both ends, 2" spigot one end	24	\$ 18.12
1600-20	2" Socket both ends, 2 1/2" spigot one end	20	25.06





Check Valves - PVC Spa, By-Pass




1050 Series




PVC Spa Air Valve Features:

- Drip proof seal at low pressure.
- 1 1/2" IPS deep socket connection with 2" IPS OD spigot
- Excess solvent cement trap at base of socket to help prevent solvents from entering sealing area.
- Minimum restriction of air flow, using 1/4 lb. spring resulting in less burden on blower motor.
- Domed shaped seat for even air flow.
- EPDM seal.
- Stainless steel spring.
- NSF approved.





1095 Series



PVC In-Line By-Pass Check Valve Features:


- In-line shape takes less space.
- Raised valve seat prevents excess cement of solvent from affecting the seal area.
- Poppet is equipped with EPDM seal.
- Body is made of Type 1 PVC.
- All metal parts are stainless steel.
- Valve stem is reinforced w/ full length stainless steel shaft.
- Static pressure tested: 150 psi @ 72 °F. Back pressure tested at 150 psi.
- Quick burst test proves in excess of 500 psi
- 2" iron pipe size
- Valve can be used on 1-1 1/2" pipe by use of a PVC Sch 40 bushing.
- Begins to open 5 lbs - Fully open 17 lbs.
- NSF61 Annex G approved.



1901/1903 Series

CPVC 90° Spring Check Valve Features:

- Use in pool, spa applications.
- CPVC body with corrosion proof poppet.
- Spring made of 302 stainless.
- Available with 1 lb. or 3 lb. spring tension.
- NSF approved.



Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Spa Air Valve - 1-1/2" ips socket / 2" ips o.d. spigot				
1050-20	2"	5-1/8"	12	\$ 31.48
PVC In Line By-Pass Check Valve				
1095-20	2" w/ 5# spring	5"	12	39.64
CPVC 90° Spring Check Valve, w/ stainless steel poppet				
1901-15	1 1/2" check valve, 1 lb. tension		12	98.11
1903-15	1 1/2" check valve, 3 lb. tension		12	98.11
1901-20	2" socket x 2 1/2" spigot valve, 1 lb. tension		12	98.11
1903-20	1" socket x 2 1/2" spigot valve, 3 lb. tension		12	98.11



Valves - PVC Single Union, 3-way CPVC



1350 Series




PVC Single Union Ball Valve Features:

- PVC Type 1 construction for compatibility in joining rigid PVC and flex vinyl pipes.
- **Buna "N" O-Ring seal; HDPE seats.**
- 1-1/4 deep sockets on both ends for extra cementing surface area.
- Acme thread on assembly nut prevents cross threading.
- Tee handle for quarter turn on/off with stops.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Threaded or socket.
- Made in USA.



Part Number	Threaded/Socket	Size	Ctn Qty	List Price
1350-15	Socket	1-1/2"	12	\$ 36.85
1350-20	Socket	2"	6	59.47
1351-15	Threaded	1-1/2"	12	41.69



1930 Series

CPVC Three-Way Valve Features:


- For pool & spa applications.
- Made of CPVC plastic
- Diverts water anywhere diversion is required.
- Positive seal diverter prevents reverse flow.
- Diverter seals are made of a special lubricated EPDM material
- Available 1 1/2" - 2" slip with 2" and 2 1/2" spigot.
- Rated at 160° F, 125 PSI



Part Number	Description	Ctn Qty	List Price
1930-15	1 1/2" slip x 2" spigot	12	\$ 92.72
1930-20	2" slip x 2 1/2" spigot	12	92.72



Flo-Well® Storm Water Leaching System



Flo-Well Storm Water Leaching System


- Discharge water into the subsoil rapidly and easily.
- No need for piping systems to transport stormwater to a far-off point, large heavy equipment, considerable excavation of current landscape areas or large labor costs that those systems incur.

Materials:


- Structural foam polyolefin with UV inhibitors.

Applications:


Flo-Well systems should be placed at least 10 feet from a structure or foundation.




For gutters & downspouts



For sump pumps




For low grade areas




For pool backwash tanks


Options

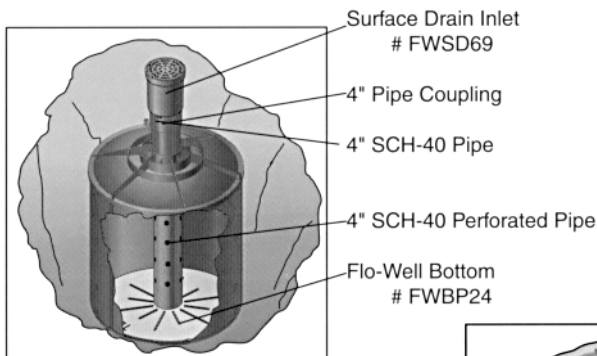

For additional support



Can be connected




Can be stacked



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016


Flo-Well® Storm Water Leaching System



Flo-Well Storm water leaching system

- Includes 3 side panels, 1 top component
- 18 - 1 1/2" knockout leaching ports and 3 - 4 1/2" knockout inlet/outlet ports per panel.
- 49 gal capacity
- Fits 4" Sch 40 pipe and 4" DWV pipe


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWAS24	24 x 28 3/4" round system	Black	25.15	1	\$ 289.97



Flo-Well Cover

- Fits FWAS24 and FWSPS3


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWAS24C	24" dia cover	Black	8.0	2	108.59



Flo-Well Side Panels/ Extension Only

- Includes 3 side panels, 24" high, with 3/4" lip for stacking.
- Fits FWSA24
- 18 - 1 1/2" knockout leaching ports and 3 - 4 1/2" knockout inlet/outlet ports per panel.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWSPS3	side panels	Black	5.0	1	259.96



Flo-Well Bottom

- Six 1 1/2" leaching ports
- Fits FWAS24


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWBP24	24" dia bottom	Black	3.5	5	87.97



Flo-Well Surface Drain Inlet with Grate

- 6" grate with 4" inlet.
- Fits FWAS24 and FFWAS24C, PVC Sch 40 fittings

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWSD69	4" Sch 40 Inlet	Black	1.85	8	98.56



Porus Filter Fabric Wrap for FloWell

- 7' long x 2' wide to surround drywell system
- Non woven fabric
- Weight 1 oz. Mullen burst 175 psi, 200 gpm flow through.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
FWFF67	7' x 2' Porus Filter Fabric Wrap	Black	0.35	20	24.54



Catch Basins & Grates





Catch Basin & Grate Features:

- Eliminates standing water and flooding on paved areas and lawns.
- Easy to install, sized to fit your project with catch basins from 6" to 24" and grates from 2" to 24".
- Prohibits structural damage to building foundations.
- Choose from a wide variety of products to fit every need.

Materials and Standards:


- Ultraviolet-resistant one piece injection-molded structural foam polyolefin for maximum strength.
- Installed properly, some plastic grates are suitable for light vehicular traffic. Standards vary per product. See individual product section for details.

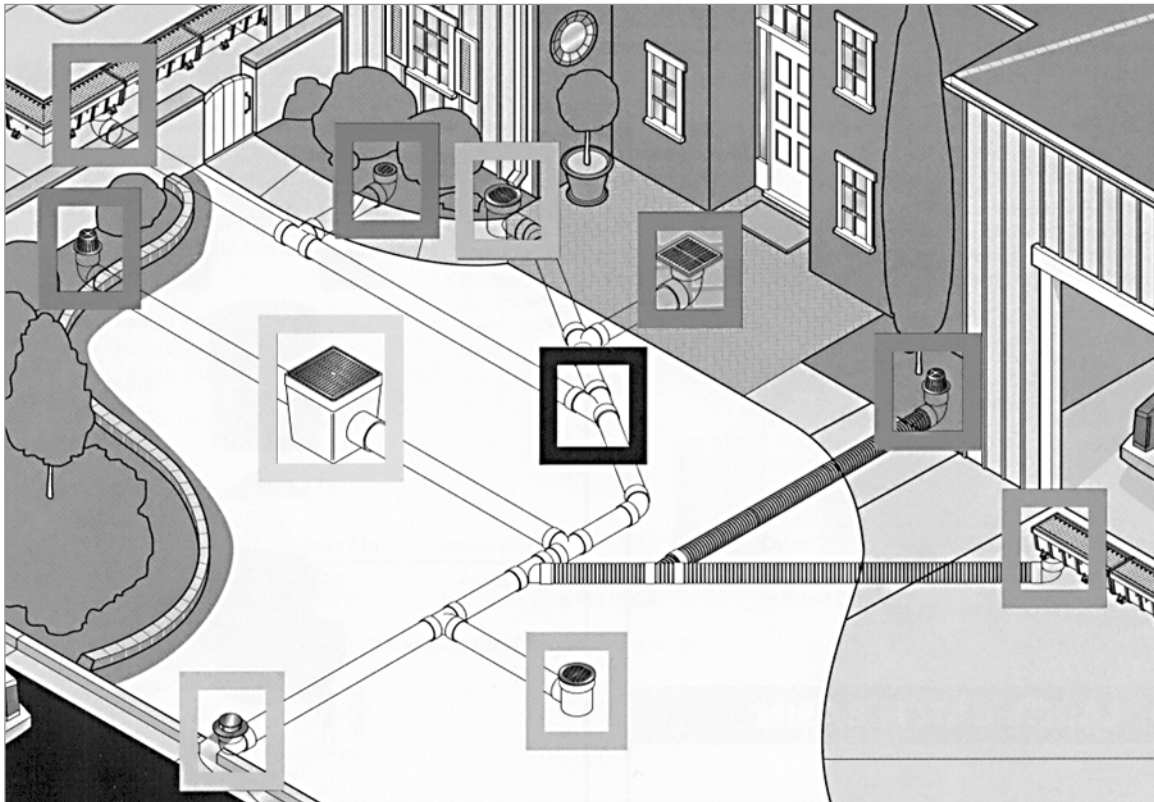

Sewer & Drain Fittings
for piping systems and downspouts.



Channel Drains
for driveways, pools, spas, patios, sidewalks and wash-down areas.




Large Catch Basins
for large lawn or landscape areas, residential driveways and garages.



Small Catch Basins
for lawn and landscape areas.



Small Grates
for small lawn and landscape areas, patios and atriums.





Pop-up Emitters
for discharging water on the surface.

Catch Basins & Grates



Flexible by Design

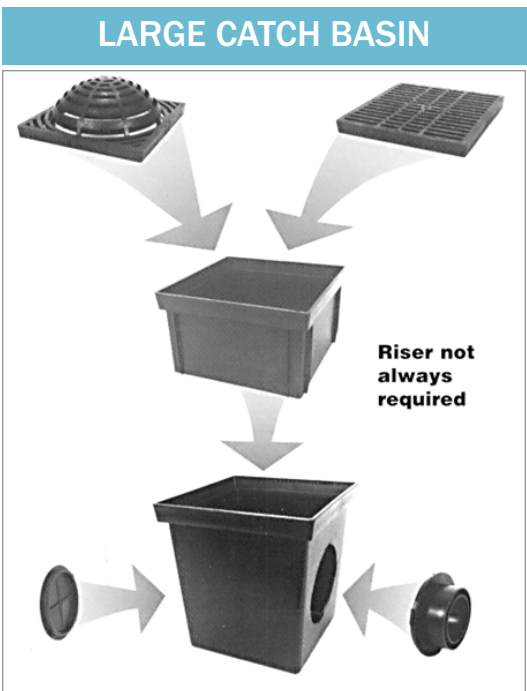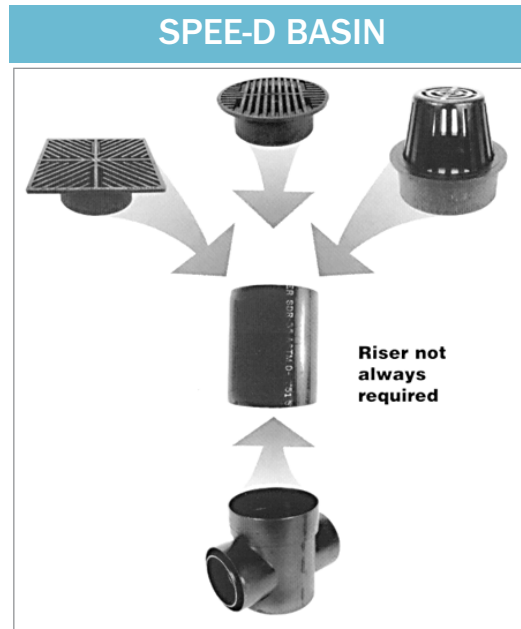

Load Recommendations:



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.




Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 mph.




Spee-D Basins / Round Grates




6" Spee-D Basin with 3" and 4" Locking Outlet

- Locking outlet snaps on to most 3" and 4" corrugated pipe.
- Outlets fit 3" or 4" sewer & drain pipe, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
101	1 - 3" and 4" locking outlet	Black	1.60	10	\$ 28.63
201	2 - 3" and 4" locking outlets	Black	1.90	10	28.63




3" Round Grate

- 3" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 2.6 sq. in.. 3.41 gpm
- 3/16" grate opening.
- Fits 3" sewer and drain pipe and fittings, corrugated pipe and triple wall pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
14	3" round grate	Black	0.15	40	\$ 5.68
15	3" round grate	Gray	0.15	40	5.68
16	3" round grate	Green	0.15	40	5.68




4" Round Grate

- 4" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 3.85 sq. in.. 5.04 gpm
- 1/4" grate opening.
- Fits 4" sewer and drain pipe and fittings, corrugated pipe and triple wall pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
11	4" round grate	Black	0.20	25	\$ 6.04
12	4" round grate	Gray	0.20	25	6.04
13	4" round grate	Green	0.20	25	6.04



6" Round Grate

- 6" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 9.10 sq. in.. 11.92 gpm
- 1/4" grate opening.
- Fits Spee-D basin, 6" sewer and drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
40	6" round grate	Black	0.80	10	\$ 16.79
50	6" round grate	Green	0.80	10	16.79
60	6" round grate	Gray	0.80	10	16.79

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

9.19

Round Grates




8" Round Grate

- 8" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 11.50 sq. in.. 15.07 gpm
- 5/16" grate opening.
- Fits Spee-D basin, 6" sewer and drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
10	8" round grate	Black	0.80	10	\$ 20.84
20	8" round grate	Green	0.80	10	20.84
30	8" round grate	Gray	0.80	10	20.84




10" Round Grate

- 10" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 17.46 sq. in.. 22.87 gpm
- 5/16" grate opening.
- Fits 8" sewer and drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1040	10" round grate	Black	1.50	10	\$ 33.24
1050	10" round grate	Green	1.50	10	33.24
1060 ☺	10" round grate	Gray	1.50	10	33.24




12" Round Grate

- 12" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 46.00 sq. in.. 60.26 gpm
- 9/16" grate opening.
- Fits 12" sewer and drain pipe, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1240	12" round grate	Black	3.35	6	\$ 103.91
1250	12" round grate	Green	3.35	6	103.91



15" Round Grate


- 15" round structural foam polyolefin grate with UV inhibitor.
- Open surface area 85.60 sq. in.. 112.14 gpm
- 1 1/4" grate opening.
- Fits 15" sewer and drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1511	15" round grate	Black	6.15	1	\$ 200.41
1512	15" round grate	Green	6.15	1	200.41

☺ Non-stock item, available on a special order basis.


AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.



3" Atrium Grate

- 3" Flat top structural foam polyolefin atrium grate with UV inhibitor.
- Open surface area 9.5 sq. in.. 12.45 gpm
- 1/4" grate opening.
- Fits 3" sewer and drain pipe and fittings, corrugated pipe and triple wall pipe.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
70	3" atrium grate	Green	0.25	20	\$ 13.31
72 ☺	3" atrium grate	Gray	0.25	20	13.31
74	3" atrium grate	Black	0.25	20	13.31



4" Atrium Grate

- 4" Flat top structural foam polyolefin atrium grate with UV inhibitor.
- Open surface area 14.5 sq. in.. 19.0 gpm
- 1/4" grate opening.
- Fits 4" sewer and drain pipe and fittings, corrugated pipe and triple wall pipe.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
75	4" atrium grate	Green	0.30	20	\$ 20.05
76 ☺	4" atrium grate	Gray	0.30	20	20.05
78	4" atrium grate	Black	0.30	20	20.05



6" Atrium Grate

- 6" Flat top structural foam polyolefin atrium grate with UV inhibitor.
- Open surface area 25.5 sq. in.. 33.41 gpm
- 1/4" grate opening.
- Fits Spee-D basin, 6" sewer and drain pipe and fittings, corrugated pipe.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
80	6" atrium grate	Green	0.70	10	\$ 26.87
81 ☺	6" atrium grate	Gray	0.70	10	26.87
90	6" atrium grate	Black	0.70	10	26.87

☺ Non-stock item, available on a special order basis.

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.



Square Grates




4" Square Grate

- 4" square structural foam polyolefin grate with diagonally converging pattern with UV inhibitor.
- Open surface area 3.45 sq. in.. 4.52 gpm
- 3/16" grate opening.
- Fits 3" sewer & drain pipe and fittings, corrugated pipe and triple wall pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
01	4" square grate	Green	0.11	40	\$ 7.54
02	4" square grate	Black	0.11	40	7.54




5" Square Grate

- 5" square structural foam polyolefin grate with diagonally converging pattern with UV inhibitor.
- Open surface area 4.25 sq. in.. 5.57 gpm
- 3/16" grate opening.
- Fits 4" sewer & drain pipe and fittings, corrugated pipe and triple wall pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
07	5" square grate	Green	0.20	25	\$ 8.29
08	5" square grate	Black	0.20	25	8.29




6" Square Grate

- 6" square structural foam polyolefin grate with diagonally converging pattern with UV inhibitor.
- Open surface area 10.40 sq. in.. 13.62 gpm
- 1/4" grate opening.
- Fits 3" or 4" sewer & drain pipe, corrugated pipe and triple wall pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
04	6" square grate	Black	0.40	10	\$ 11.97
05	6" square grate	Green	0.40	10	11.97



6" x 6" x 4" Square Grate and Adapter

- 6" x 6" low profile adapter and structural foam polyolefin removable grate with UV inhibitor & stainless steel screws.
- Open surface area 13.61 sq. in.. 17.83 gpm
- 1/4" grate opening.
- Fits 3" or 4" sewer & drain pipe and fittings, corrugated pipe and triple wall pipe.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
640	6" x 6" x 4" square grate & adapter	Black	0.88	8	\$ 39.79
641	6" x 6" x 4" square grate & adapter	Green	0.88	8	39.79

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.



Square Grates




6" x 6" x 6" Square Grate and Adapter

- 6" x 6" low profile adapter and structural foam polyolefin removable grate with UV inhibitor & stainless steel screws.
- Open surface area 13.61 sq. in.. 17.83 gpm
- 1/4" grate opening.
- Fits Spee-D basin, 6" sewer & drain pipe and fittings.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
637	6" x 6" x 6" square grate & adapter	Black	0.88	8	\$ 39.79
639	6" x 6" x 6" square grate & adapter	Gray	0.88	8	39.79




7" Square Grate

- 7" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 13.60 sq. in.. 17.83 gpm
- 1/4" grate opening.
- Fits Spee-D basin, 6" sewer & drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
771	7" square grate	Black	0.70	10	\$ 19.07
772	7" square grate	Green	0.70	10	19.07
773	7" square grate	Gray	0.70	10	19.07




8" Square Grate

- 8" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 17.16 sq. in.. 22.48 gpm
- 1/4" grate opening.
- Fits Spee-D basin, 6" sewer & drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
881	8" square grate	Black	0.80	10	\$ 19.93
882	8" square grate	Green	0.80	10	19.93



9" Square Grate

- 9" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 28.40 sq. in.. 37.20 gpm
- 5/16" grate opening.
- Fits Spee-D basin, 6" sewer & drain pipe and fittings, corrugated pipe.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
950	9" square grate	Green	1.90	10	\$ 30.26
960	9" square grate	Gray	1.90	10	30.26

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




www.americangranby.com

FALL 2016

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

9.23


9" Catch Basin Series



9" Catch Basin Atrium Grate

- 9" structural foam polyolefin dome atrium grate with UV inhibitor.
- Open surface area 30.28 sq in.. 39.67 gpm.
- 3/8" grate opening.
- Use with 9" x 9" catch basin series.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
981	9" x 9" atrium grate	Black	0.87	6	\$ 60.90
991	9" x 9" atrium grate	Green	0.87	6	60.90




9" Catch Basin Square Grate

- 9" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 39.50 sq in.. 51.75 gpm.
- 7/16" grate opening.
- Use with 9" x 9" catch basin series.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
980	9" x 9" square grate	Black	1.50	8	\$ 51.22
990	9" x 9" square grate	Green	1.50	8	51.22
999	9" x 9" square grate	Gray	1.50	8	51.22



9" x 9" Tapered Catch Basin

- Requires universal outlet (1206, 1242, 1243, 1245, 1266 or 1889) for each opening.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
900	9" x 9" catch basin 2-opening	Black	3.00	4	\$ 39.62
900-4	9" x 9" catch basin 4-opening	Black	2.00	4	47.32



6" Riser for 9" x 9" Catch Basin

- Bottomless
- Use with 9" x 9" catch basin series

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
916	9" x 9" catch basin riser	Black	1.75	4	\$ 39.77



9" x 9" Low Profile Adapter


- Bayonet bottom outlet.
- Requires universal outlet (1243, 1245, 1266, 1889).
- Fits corrugated, sewer and drain pipe.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
930	9" x 9" low profile adapter	Black	0.75	8	\$ 36.75

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




12" Catch Basin Series



12" x 12" Atrium Grate

- 12" structural foam polyolefin dome atrium grate with UV inhibitor.
- Open surface area 60.00 sq. in.. 78.60 gpm.
- 3/8" grate opening.
- Use with 12" x 12" catch basin series.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1280	12" x 12" atrium grate	Green	2.00	8	\$ 89.45
1290	12" x 12" atrium grate	Black	2.00	8	89.45




12" x 12" Square Grate

- 12" square structural foam polyolefin grate with UV inhibitor or heavy duty cast iron.
- Open surface area 50.76 sq. in. 66.50 gpm.
- Cast Iron open surface area 59.5 sq. in.. 77.95 gpm.
- 3/8" grate opening.
- Use with 12" x 12" catch basin series.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1210	12" x 12" square grate	Gray	2.00	8	\$ 76.00
1211	12" x 12" square grate	Black	2.00	8	76.00
1212	12" x 12" square grate	Green	2.00	8	76.00
1213	12" x 12" Cast Iron square grate	Black	7.00	1	\$ 223.59



1200NGB

Next Generation Catch Basin

- Adjustable height inlet and outlets; just snap off slide tabs.
- Kit includes catch basin with 2 open slides.
- Faster and easier to install.

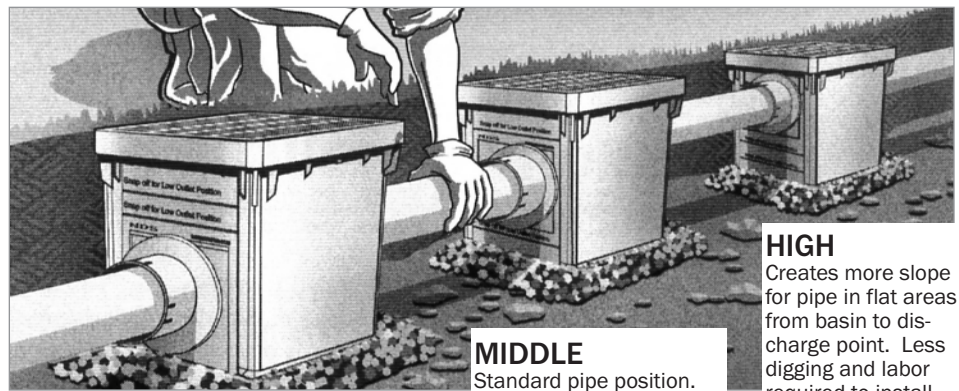

LOW


Reduces standing water in the bottom of the basin, especially in clay soils where water won't drain out of the bottom.

MIDDLE


Standard pipe position. Pipe inlet/outlet connects to the middle of the basin.

HIGH

Creates more slope for pipe in flat areas from basin to discharge point. Less digging and labor required to install pipe.



1207




1208

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1200NGBKIT	12" catch basin kit w/ 2 slides	Black	4.65	4	\$ 88.96
1200NGB	12" catch basin	Black	3.45	4	77.13
1207	Open Slide for 1200NGB	Black	.60	8	6.95
1208	Plug Slide for 1200NGB	Black	.76	8	6.95




12" Catch Basin Series



12" x 12" Tapered Catch Basin

- Requires universal outlet (1206, 1242, 1243, 1245, 1266, or 1889) for each opening.
- Use bottom cutout for additional outlet.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1200	12" x 12" catch basin 2-opening	Black	4.25	4	\$ 67.69
1203	12" x 12" catch basin 3-opening	Black	3.75	4	89.69
1204	12" x 12" catch basin 4-opening	Black	3.75	4	94.55



6" Riser for 12" x 12" Catch Basin

- Bottomless
- Use with 12" x 12" catch basin series


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1216	12" x 12" catch basin riser	Black	2.75	8	\$ 40.79



12" x 12" Low Profile Adapter

- Bayonet bottom outlet
- Requires universal outlet for connection to 3", 4" or 6" sewer and drain or corrugated pipe.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1230	12" x 12" low profile adapter	Black	1.25	5	\$ 49.12



12" x 12" Square Low Profile Adapter


- Fits 8" sewer and drain pipe
- Use with #1222 spigot adapter to adapt to 8" corrugated pipe.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1221	12" x 12" low profile adapter	Black	1.92	12	\$ 61.95
1222	12" x 12" low profile spigot adapter	Black	1.92	12	61.95

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




18" Catch Basin Series



18" x 18" Atrium Grate

- 18" structural foam polyolefin dome atrium grate with UV inhibitor.
- Open surface area 64.51 sq. in.. 84.51 gpm.
- 1/2" grate opening.
- Use with 18" x 18" catch basin series.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1881	18" x 18" atrium grate	Black	3.50	4	\$ 176.70
1891	18" x 18" atrium grate	Green	3.50	4	176.70




18" x 18" Square Grate

- 18" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 104.00 sq. in.. 136.24 gpm.
- 7/16" grate opening.
- Use with 18" x 18" catch basin series.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1810	18" x 18" square grate	Gray	5.50	4	\$ 246.53
1811	18" x 18" square grate	Black	5.50	4	246.53
1812	18" x 18" square grate	Green	5.50	4	246.53



18" x 18" One Piece Tapered Catch Basin

- Requires universal outlet for each opening.
- Includes 2 or 4 #1890 reducing rings.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1882	18" 1 piece catch basin 2-openings	Black	10.00	4	\$ 371.64
1884	18" 1 piece catch basin 4-openings	Black	9.50	4	390.11



8" Riser for 18" x 18" Catch Basin

- Use with 18" one piece or expandable catch basins.
- 7 7/8" nesting height.
- Assembly required. Includes 4 riser sides.
- **NOTE:** Use roof tar or silicone to seal joints.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1816	8" catch basin riser	Black	6.00	1	\$ 178.00



18" x 18" Low Profile Adapter

- Bayonet bottom outlet.
- Includes #1890 reducer ring.
- Requires universal outlet (1243, 1245, 1266, or 1888).
- Fits corrugated pipe and sewer and drain pipe.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1830	18" x 18" low profile adapter	Black	4.75	4	\$ 148.00

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

9.27

24" Catch Basin Series




24" x 24" Square Grate

- 24" square structural foam polyolefin grate with UV inhibitor.
- Open surface area 231.69 sq. in.. 303.51 gpm.
- 7/8" grate opening.
- Use with 24" x 24" catch basin series.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2411	24" x 24" square grate	Black	9.00	4	\$ 643.95
2412	24" x 24" square grate	Green	9.00	4	643.95



24" x 24" One Piece Tapered Catch Basin

- Requires 2 or 4 #2410 universal outlets.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2400	24" 1 piece catch basin 2-opening	Black	18.00	4	\$ 680.74
2404	24" 1 piece catch basin 4-opening	Black	15.00	4	783.94



8" Extension for 24" x 24" Catch Basin


- Bottomless
- Use with 24" x 24" catch basin series

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2418	24"x 24" catch basin extension	Black	14.00	10	\$ 450.47

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




Catch Basin Universal Outlets



3" and 4" Universal Locking Outlet

- New locking outlet snaps on to most 3" and 4" corrugated pipe.
- Fits 3" & 4" corrugated pipe and sewer & drain pipe and triple wall pipe, 4" sch 40 pipe.
- Use with 9", 12", 18" and 24" (with #2410) catch basin series and adapters.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1243	3" & 4" universal locking outlet	Black	0.70	20	\$ 10.34



3" and 4" Offset Universal Outlet

- Fits 3" & 4" corrugated pipe and sewer & drain pipe, 4" sch 40 pipe and triple wall pipe.
- Allows for adjustable inlet height.
- Use with 9", 12", 18" and 24" (with #2410) catch basin series.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1245	3" & 4" offset universal outlet	Black	0.55	20	\$ 11.07



6" Universal Locking Outlet

- New locking outlet snaps on to most 3" and 4" corrugated pipe.
- Fits 6" corrugated pipe and sewer & drain pipe.
- Use with 9", 12", 18" and 24" (with #2410) catch basin series and adapters.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1266	6" universal locking outlet	Black	0.75	20	\$ 12.41



6" Universal Plug Adapter

- Use with 9", 12", 18" and 24" (with #2410) catch basin series.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1206	6" universal plug adapter	Black	0.35	20	\$ 8.29



8" Universal Outlet

- Fits 8" corrugated pipe and sewer & drain pipe.
- Use with 18" and 24" (with #2410) catch basin series.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1888	8" universal outlet	Black	1.25	8	\$ 25.80


AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016


9.29



8" Offset Universal Adapter

- Fits 8" corrugated pipe and sewer & drain pipe.
- Use with 12" catch basin series.
- Use with #1890 reducer ring for 18" catch basin series.
- Reducer ring required on #1821 basin side, 18" catch basin series to adapt to universal outlets (#1206, 1243, 1245, 1266 or 1889.)

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
1889	8" offset universal outlet	Black	0.80	10	\$ 29.16
1890	Universal outlet reducer ring	Black	0.50	8	14.11



10" and 12" Universal Adapter

- Includes universal outlet reducer ring (#1890).
- Fits 10" and 12" corrugated pipe and sewer & drain pipe.
- Fits 3", 4", 6" and 8" corrugated, sewer & drain pipe, 4" Sch. 40 pipe by using corresponding adapter.
- Use with 24" catch basins.


Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2410	10" and 12" universal adapter	Black	5.50	2	\$ 73.60



4PVAF


Swivel Fit® Variable Angle Fitting

- Multiple fittings in one. Can be set and locked in place to any angle from 0° to 90°.
- Convenient for misaligned pipes and routing around corners and obstacles.
- Patent pending design.
- Installs in 3 easy steps.
- Fits 4" drain pipe SDR-35, Triple wall and ASTM-D2729.
- Not for sewer use.

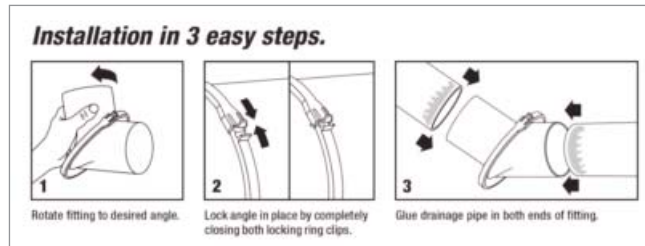

Part Number	Description	Ctn Qty	List Price
4PVAF	Swivel Fit Fitting	12	\$ 71.43


Drainage Emitter

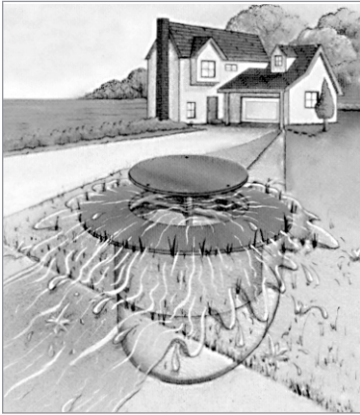

The Pop-Up Drainage Emitter is an easy, safe & efficient solution.

It allows water to be diverted and released to water-safe areas away from structures, erosion-prone landscapes and poor drainage areas.


- It allows water captured by grates, catch basins, channel drains, downspouts and roof gutter systems to flow through the drainage pipe and away from structural foundations to safe or useful areas. For example, water can be routed from a low area next to a foundation to a water safe area such as a curb-side drainage system.
- It is opened by the hydrostatic pressure of water flowing through the drain pipe. As flow diminishes the emitter closes again. The special patented design allows the emitter to open with a negligible amount of pressure. Since the emitter is closed during dry weather, debris and rodents cannot enter the drain pipes.
- It does not rise high enough to interfere with mowers.
- It blends into the surrounding landscapes.

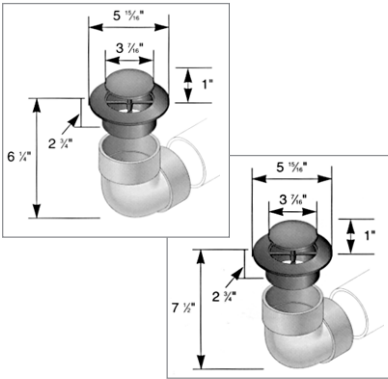

3" and 4" Emitter

- 3" and 4" PVC pop-up drainage emitter.
- Center drive pop-up with UV inhibitor.
- PVC 90° elbow with 1/4" drain hole.

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
321	3" emitter with elbow	Green	0.60	25	\$ 37.41
421	4" emitter with elbow	Green	0.85	20	43.69

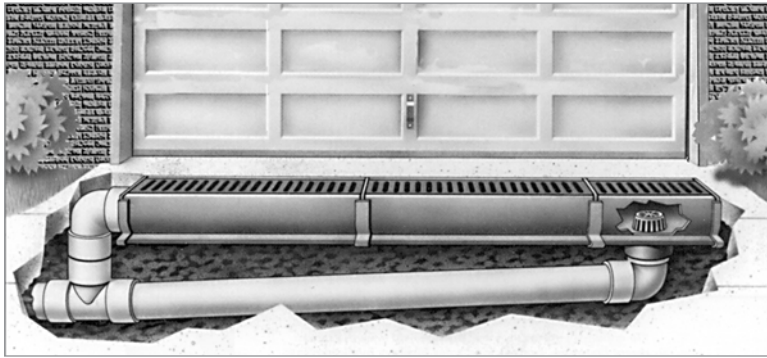

Durable

Designed for maximum durability and drainage, NDS channel drains are a proven alternative to traditional concrete drains. UV inhibitors in the grates, channels and component parts prevent fading and cracking from the sun. All plastic grate and channel components are chemically resistant, rust proof and maintenance free.

Simple

NDS channel is light-weight and easy to install. Grates are removable for easy clean-out and replacement. Channel grates may be held in place with NDS screws or hold down clips. A complete line of accessories is available for each channel.

NDS channel systems operate on the same principle as a roof gutter. All NDS channel easily connects to sewer and drain pipe and fittings or Sch 40 pipe and fittings.

Versatile

To blend with surrounding surfaces, channel grates are available in six colors. The channel system also offers a choice of outlets. Water can be evacuated from the bottom of the channel or from the end or sides of the channel.

Efficient


Channel drain eliminates the need for grading a deck surface to a low area. Instead, the deck is gradually sloped in one direction or plane, and the channel drain acts as a perimeter drain at the edge of the slope. Most hardscapes experience more runoff than landscapes due to the lack of water absorption. Channel drain systems provide more overall surface area than conventional area grates.

Non-Sloped Channel System Advantages

NDS offers non-sloped channel system advantages; less expensive, simplifies inventory, eliminates need to stock various sloping channel sections. Multiple outlets provide safety through redundancy, should any individual outlet become clogged. Proper flow is assured by use of sloped drain pipe.

Recommended Applications

- Driveways
- Parking Lots
- Warehouses
- Swimming pools & spas
- Washdown areas
- Tennis Courts
- Sidewalks
- Patios
- Sports Facilities
- Nurseries & greenhouses

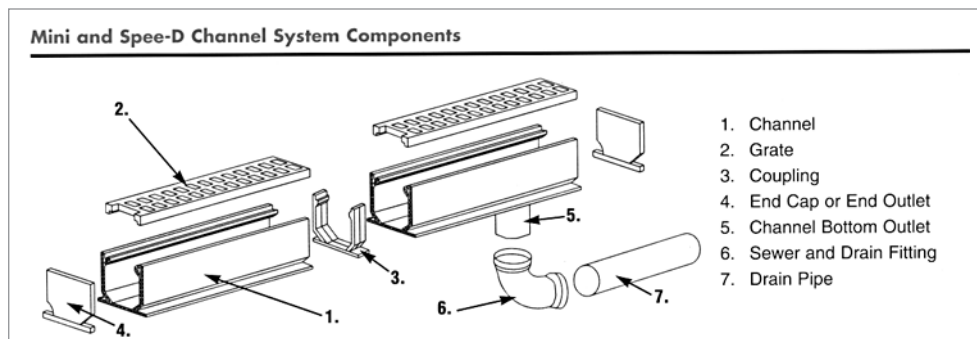



Installation:

1. Standard Installation

Excavate a trench to accommodate the channel and bedding concrete. Erect a string line at each end of the drain run as a guide for laying the channels to the required level. Begin channel installation at the evacuation or discharge end of the run where the outlet or outlets are located.

Install channel end-to-end PVC cementing sections together. Design bottom or end outlets into the channel run in the appropriate location and glue to the drain pipe or fittings. PVC cement end caps where appropriate.

Using either NDS stakes, 1/2" or 5/8" rebar or wood stakes, anchor channel to the trench bed every 24" on each side of channel. Backfill with either concrete, sand or soil depending on the application. Pour slab to grade and finish concrete.

Figure 1A illustrates a light vehicular installation in which a concrete base may not be required. Compacted soil and a 1" sand base may be used in place of concrete.

Figure 1B illustrates a concrete base underneath the channel recommended for heavy load applications or freeze/thaw zones where heaving may be a problem.

2. Suspended Installation





Suspended installation is ideal for retrofit installations with an existing concrete slab or new construction where forms can be used to suspend the channels. Prepare the trench excavation. Using 2" x 4" boards, span the width of the trench and bolt the channel grates to the boards. Pour and compact concrete under and around the channels. Finish to the proper grade. Figure 2.

3. Slurry Installation

This installation may be used in lieu of the standard installation. Prepare the trench excavation and pull a stringline to the proper elevation. Pour a slurry of concrete in the trench to a depth that will insure at least 4" of concrete underneath the channels. Lay the channels in the bedding slurry. Check the channel alignment and grade again. After the slurry sets, concrete can be poured around the channel and finished to the proper grade. Figure 3.

Notes:

1. Grate must be installed prior to pouring concrete or backfill.
2. Grate should be recessed 1/8" below finish grade in non traffic applications. Grate should be recessed 1/4" in traffic applications.
3. In asphalt or hot mastic applications, the channels must be encased in concrete for strength and to prevent distortion of the channel.
4. Grates should be taped prior to pouring concrete to prevent debris from entering channel during installation.
5. Refer to load classification chart for proper application.
6. Expansion joints must be provided parallel, but not immediately adjacent to each side of the drain run and crack control joints utilized at right angles to the channel for installation in concrete.
7. PVC primer and medium body fast set PVC solvent cement must be used to cement all components.
8. Grate must be installed on channel at all times except for cleaning.

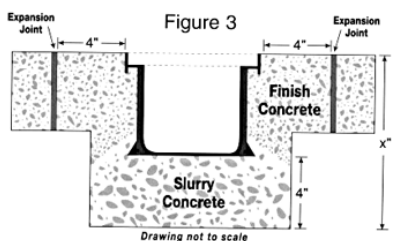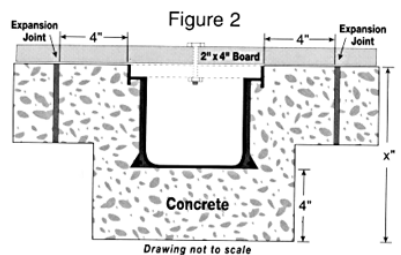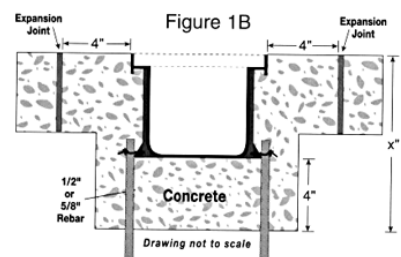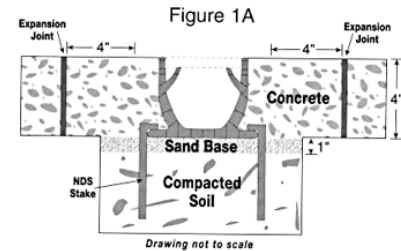




Mini Channel™ Drains



Mini Channel™ Drain Features:

- Patented
- Low-cost alternative to Spee-D Channel.
- Excellent for light duty applications including residential pools, patios, spas and tennis courts.




3' Channel Grate

- Structural foam polyolefin channel grate with UV inhibitors.
- Open surface area 11.3 sq. in.. 14.8 gpm per foot.
- 1/4" x 5/16" grate opening.
- Requires 4 screws per grate.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
541	3' channel grate	Gray	0.688	48 ft	\$ 30.20
542	3' channel grate	Green	0.688	48 ft	30.20
543	3' channel grate	Black	0.688	48 ft	30.20
544	3' channel grate	Sand	0.688	48 ft	30.20
551	3' channel grate	Brick Red	0.688	48 ft	30.20




6' Mini Channel Drain

- 6' PVC Mini channel drain with inverse flying buttress design, bottom flange, patented honeycomb reinforced walls and UV inhibitor.
- Grates should be recessed 1/8" below finish grade in non traffic applications. Grate should be recessed 1/4" in traffic applications.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
500-6	6' Mini Channel Drain	Gray	4.00	48 ft	\$ 91.56

Mini Channel™ Drain Accessories:

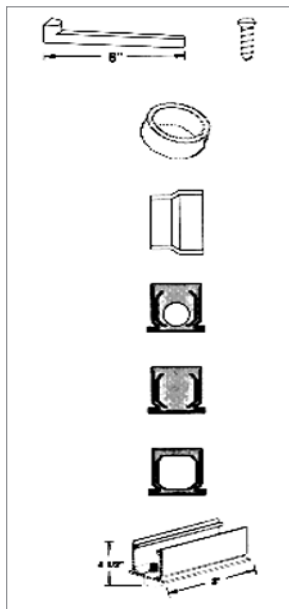

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
529	Stainless Steel Screws type FH-#4 x 3/8"	Steel	0.10	64	\$ 0.56
230	6" channel installation stake	Gray	0.40	24	2.04
532	2" Sch 40 hub to 3" S&D spigot adapter	White	0.20	20	41.75
533	2" Sch 40 hub to 4" S&D spigot adapter	White	0.35	20	38.04
546	Spigot end outlet for 2" Sch. 40 pipe	Gray	0.30	10	15.99
547	3" Channel end cap	Gray	0.15	20	12.65
548	3" Channel Coupling	Gray	0.20	20	13.19
550	3' channel w/ 2" Sch 40 spg bottom outlet	Gray	2.17	6	61.61

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016


9.35

Mini Channel™ Drains




Fabricated 45° Elbow with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
5300	Fabricated 45° elbow w/ grate	Gray	0.40	1	\$ 50.71
5301 ☺	Fabricated 45° elbow w/ grate	Green	0.40	1	50.71
5302 ☺	Fabricated 45° elbow w/ grate	Black	0.40	1	50.71
5303 ☺	Fabricated 45° elbow w/ grate	Sand	0.40	1	50.71
5304 ☺	Fabricated 45° elbow w/ grate	Brick Red	0.40	1	50.71



Fabricated Tee with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
5370	Fabricated tee w/ grate	Gray	0.50	1	\$ 49.27
5371 ☺	Fabricated tee w/ grate	Green	0.50	1	49.27
5372 ☺	Fabricated tee w/ grate	Black	0.50	1	49.27
5374 ☺	Fabricated tee w/ grate	Brick Red	0.50	1	49.27



Fabricated 90° Elbow with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
5380	Fabricated 90° elbow w/ grate	Gray	0.40	1	\$ 52.43
5383 ☺	Fabricated 90° elbow w/ grate	Sand	0.40	1	52.43
5384 ☺	Fabricated 90° elbow w/ grate	Brick Red	0.40	1	52.43

☺ Non-stock item, available on a special order basis.

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




Spee-D Channel™ Drains



Spee-D Channel™ Drain Features:

- Patented.
- Ideal for commercial as well as residential applications.
- Effective in everything from patios to light vehicular traffic areas.




2' Channel Grate

- 2' Structural foam polyolefin secured channel grate with UV inhibitors.
- Open surface area 19.3 sq. in..
- 3/8" x 3 1/4" grate opening.
- Requires 4 screws per grate.




Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
241	2' channel grate	Gray	1.42	24 ft	\$ 43.06
242	2' channel grate	Green	1.42	24 ft	43.06
243	2' channel grate	Black	1.42	24 ft	43.06
244	2' channel grate	Sand	1.42	24 ft	43.06
251	2' channel grate	Brick Red	1.42	24 ft	43.06




4' Channel Drain

- 4' PVC Spee-D channel drain with inverse flying buttress design, bottom flange, patented honeycomb reinforced walls and UV inhibitor.
- Grate should be recessed 1/8" below finish grade in non traffic applications. Grate should be recessed 1/4" in traffic applications.
- 10' Length ships via truck only.



Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
400	4' Channel Drain	Gray	4.83	24 ft	\$ 60.63
400-10	10' Channel Drain *	Gray	1.10	60 ft	153.31

Spee-D Channel™ Drain Accessories:

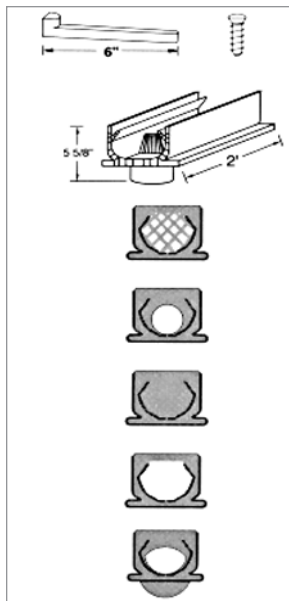

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
229	Stainless Steel Screws	Steel	0.06	48	\$ 0.78
230	6" channel installation stake	Gray	0.40	24	2.04
234	2' fabricated 3" & 4" spigot bottom outlet w/ strainer. Fits 3" or 4" S&D ftg. Grate not included	Gray	2.67	1	66.87
245	Channel strainer coupling	Gray	0.35	20	16.49
246	2" Sch. 40 spigot end outlet	Gray	0.40	10	15.51
247	Channel end cap	Gray	0.40	10	12.53
248	Channel Coupling	Gray	0.40	20	12.65
249	3" & 4" offset end outlet Connects to 3" S&D pipe, 4" S&D fittings	Gray	0.50	10	14.80

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.




www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016


9.37

Spee-D Channel™ Drains




Fabricated 45° Elbow with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2301	Fabricated 45° elbow w/ grate	Gray	2.0	1	\$ 97.63
2302 ☺	Fabricated 45° elbow w/ grate	Green	2.0	1	97.63
2303 ☺	Fabricated 45° elbow w/ grate	Black	2.0	1	97.63
2305 ☺	Fabricated 45° elbow w/ grate	Brick Red	2.0	1	97.63




Fabricated Cross with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2361	Fabricated cross w/ grate	Gray	3.0	1	\$ 139.38
2362 ☺	Fabricated cross w/ grate	Green	3.0	1	139.38
2364 ☺	Fabricated cross w/ grate	Sand	3.0	1	139.38
2365 ☺	Fabricated cross w/ grate	Brick Red	3.0	1	139.38



Fabricated Tee with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2371	Fabricated tee w/ grate	Gray	3.0	1	\$ 103.26
2372 ☺	Fabricated tee w/ grate	Green	3.0	1	103.26



Fabricated 90° Elbow with Grate

Part Number	Description	Color	Weight lbs.	Ctn Qty	List Price
2381	Fabricated 90° elbow w/ grate	Gray	3.0	1	\$ 82.59
2382 ☺	Fabricated 90° elbow w/ grate	Green	3.0	1	82.59
2385 ☺	Fabricated 90° elbow w/ grate	Brick Red	3.0	1	82.59

☺ Non-stock item, available on a special order basis.

AGI has access to the complete line of NDS drainage products. Contact customer sales for more information and pricing.



SECTION 10 TURF IRRIGATION



PRODUCT LINE	PAGE
Electrical Installation Accessories	45-46
Funny Pipe, Marlex Fittings	41
Direct Bury Splice Connectors	43-44
Irrigation Installation Accessories	32-36
K-Rain Controllers	20-24
K-Rain Indexing Valves	29-30
K-Rain Rotors, Sprays, Nozzles	1-16
K-Rain Sensors	27-28
K-Rain Solenoid Valves	17-19
Pinch Clamps	55
Pump Start Relay	25, 47-48
Repair Fittings	53-54
Saddle Tees	37-40
Solenoid Valves	31
Swing Joint Assemblies, Poly Swing Pipe	42
Utility & Trash Pumps	56
Valve Boxes	49-51



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204





RPS75

RPS75™ Rotor

The RPS75™ gear drive is designed for basic residential and light commercial applications and is a direct replacement for Hunter® PGP® rotors. The reversing mechanism, a K-Rain patented feature, is the same mechanism used in the Hunter PGP (K-Rain currently licenses this patent to Hunter.) With K-Rain's wide selection of standard and low angle nozzles, the RPS75 provides even water distribution.



Features:

- Direct Replacement for Hunter® PGP®.
- Right Position Start - Rotor rotates counterclockwise from fixed right start position.
- Riser Fits in Existing Hunter PGP Cans - Simply unscrew the existing riser from the PGP can and replace with the RPS75 riser.
- Top Adjustment - No training necessary, the RPS75 has the same adjustment procedure as the Hunter PGP.
- Full and Part Circle Rotation - Provides a full range of adjustment from 40° to 360°
- Non-Flushing Wiper Seal - Reduces leaks caused by debris trapped under seal.
- 3/4" Inlet - Replaces all standard rotors.
- Ideal for Low Flow Applications.
- Universal Adjustment Tool - Compatible with existing Hunter products.
- Rubber Cover - Seals out dirt and increases product durability.
- Wide Selection of Nozzles - Including standard and low angle, provides flexibility in system design.
- **Key and check disc also included in master cases.**
- **FULL 5 YEAR WARRANTY.** Subject to all standard warranty conditions that apply to all K-Rain rotors.



ARC selection 40° - 360°. Adjusts from RIGHT start.



Find performance data on following page.

Specifications:

- Inlet 3/4" female threaded NPT
- Arc Adjustment Range: 40° to 360°
- Flow range: 0.75 - 8.2 GPM
- Pressure Rating: 30-70 PSI
- Precipitation Rate: 0.12 to 1.16 inches/hour
- Overall height popped down : 7 3/8"
- Recommended spacing: 25' to 45'
- Radius: 22' to 51'
- Nozzle trajectory: 25° standard or 11° low angle
- 8 standard and 4 low angle nozzles included
- Riser Height: 4"

Part Number	Description	Ctn Qty	List Price
RPS75	RPS Standard Rotor	20	\$ 18.54

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

K-Rain® Rotors



RPS75™ Rotor Performance Data



STANDARD ANGLE

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM
#0.75	30	29	0.7
	40	30	0.8
	50	30	0.9
	60	31	1.0
#1	30	30	0.9
	40	31	1.0
	50	31	1.2
#1.5	30	32	1.2
	40	33	1.4
	50	34	1.6
	60	34	1.8
#2	30	34	1.6
	40	36	1.8
	50	38	2.0
	60	38	2.2
#3 preinstalled	30	36	2.0
	40	38	2.4
	50	40	2.7
	60	40	2.9
#4	30	36	2.6
	40	40	3.0
	50	42	3.4
	60	42	3.7
#6	30	38	4.2
	40	43	4.9
	50	46	5.5
	60	47	6.0
#8	40	45	6.0
	50	48	6.8
	60	49	7.6
	70	51	8.2

LOW ANGLE

#1	30	22	1.2
	40	24	1.7
	50	26	1.8
	60	28	2.0
#3	30	29	3.0
	40	32	3.1
	50	35	3.5
	60	37	3.8
#4	30	31	3.4
	40	34	3.9
	50	37	4.4
	60	38	4.7
#6	40	38	6.5
	50	40	7.3
	60	42	8.0
	70	44	8.6

Data represents test results in zero wind.

Adjust for local conditions.

Radius may be reduced with nozzle retention screw.

K-Rain products are not available for sale in NC, SC, TN, or MA.



13003

MiniPro™ Rotor

Perfect for small lawn and landscape areas and for replacing fixed sprays.
Direct replacement for the Toro Mini8.



Features:

- Gear driven, rotary type sprinkler capable of covering an area of 17' to 30'.
- Revolutionary patented easy arc set is easily adjusted from the top with a flat blade screwdriver. Stainless steel radius adjustment screw.
- Adjustable rotation provides a full range of adjustments from 40° to 360°. Patented arc set degree markings clearly indicate current watering pattern and simplifies adjustment
- Adjustable in all phases of installation - before, after while static or while in operation.
- Time proven patented reversing mechanism assures continuous reverse and return.
- Ratcheting riser easily adjusts your left start position by turning the riser.
- Supplied with 5 numerically coded interchangeable nozzles. Wide selection of nozzles provides flexibility in system design to achieve matched precipitation.
- Heavy duty rubber cover seals out dirt and increases durability.
- **FULL 5 YEAR WARRANTY. Subject to all standard warranty conditions that apply to all K-Rain rotors.**



Specifications:

- Inlet 1/2" NPT
- Arc adjustment range 40° to 360°
- Flow range: 0.75 - 3.3 GPM
- Pressure Rating: 20-70 PSI
- Precipitation Rate: 0.22 to 0.41 inches/hour (depending on spacing and nozzle used)
- Overall height popped down : 6"
- Recommended spacing: 17' to 28'
- Radius: 17' to 30'
- Nozzle trajectory: 26°
- Riser Height: 4", 6" or 12".



Find performance data on following page.



ARC selection 40° - 360°. Adjusts from LEFT start.

Part Number	Description	Ctn Qty	List Price
13003	MiniPro short range rotor 4"	25	\$ 16.50
13006	MiniPro short range rotor 6"	20	23.46
13012	MiniPro short range rotor 12"	12	40.71

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016



MiniPro™ Rotor Performance Data

STANDARD ANGLE

Red Nozzle

Performance Data:			
Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM
#0.75	30	17'	.75
	40	17'	.8
	50	18'	.9
#1	30	20'	.9
	40	21'	1.2
	50	21'	1.3
#1.5 preinstalled	30	23'	1.4
	40	24'	1.7
	50	24'	1.9
#2	30	25'	1.8
	40	27'	2.1
	50	27'	2.4
#3	30	28'	2.7
	40	30'	3.0
	50	30'	3.3

K-Rain products are not available for sale in NC, SC, TN, or MA.



11003

ProPlus™ 11003 Rotor

Appropriate for medium to large landscape areas with high level risers and shrubs.

Direct replacement for the Toro Super800.

Features:

- Gear driven, rotary type sprinkler capable of covering an area of 22' to 50'.
- Revolutionary patented easy arc set is easily adjusted from the top with a flat blade screwdriver. Stainless steel radius adjustment screw.
- 2N1 adjustable or continuous rotation provides a full range of adjustments from 40° to a full 360°. Patented arc set degree markings show the degree of adjustment with the point of an arrow on the top cover.
- Arc memory clutch returns rotor to its preset position automatically even after being tampered with. Time proven patented reversing mechanism assures continuous reverse and return.
- Ratcheting riser easily adjusts your left start position by turning the riser.
- Supplied with 9 numerically coded interchangeable nozzles including 4 low angle nozzles. Wide selection of nozzles provides flexibility in system design to achieve matched precipitation.
- Heavy duty rubber cover seals our dirt and increases durability.
- **FULL 5 YEAR WARRANTY. Subject to all standard warranty conditions that apply to all K-Rain rotors.**



Specifications:

- Inlet 3/4" threaded NPT
- Arc Adjustment Range: 40° to continuous 360°
- Flow range: 0.5 - 10.0 GPM
- Pressure Rating: 20-70 PSI
- Precipitation Rate: 0.06 to 0.50 inches/hour (depending on spacing and nozzle used)
- Overall height popped down : 7 1/2" 17" for High pop
- Recommended spacing: 28' to 44'
- Radius: 22' to 50'
- Nozzle trajectory: 26° standard or 12° low angle
- Riser Height: 5"



ARC selection 40° to continuous 360°. Adjusts from LEFT start.

Find performance data on following page.

Part Number	Description	Ctn Qty	List Price
11003	ProPlus mid-range rotor	20	\$ 22.09
11003-SH	ProPlus shrub head	20	23.54

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016



ProPlus™ 11003 Rotor Performance Data

STANDARD ANGLE

Red Nozzle

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM	
#0.5	30	28	0.5	
	40	29	0.6	
	50	29	0.7	
	60	30	0.8	
#0.75	30	29	0.7	
	40	30	0.8	
	50	31	0.9	
	60	32	1.0	
#1	30	32	1.3	
	40	33	1.5	
	50	34	1.6	
	60	35	1.8	
#2	30	37	2.4	
	40	40	2.5	
	50	42	3.0	
	60	43	3.3	
#2.5	30	38	2.5	
	preinstalled	40	39	2.8
	50	40	3.2	
	60	41	3.5	
#3	30	38	3.6	
	40	39	4.2	
	50	41	4.6	
	60	42	5.0	
#4	30	43	4.4	
	40	44	5.1	
	50	46	5.6	
	60	49	5.9	
#6	40	45	5.9	
	50	46	6.0	
	60	48	6.3	
	70	49	6.7	
#8	40	42	8.0	
	50	45	8.5	
	60	49	9.5	
	70	50	10.0	

LOW ANGLE

Green Nozzle

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM
#1	30	22	1.2
	40	24	1.7
	50	26	1.8
	60	28	2.0
#3	30	29	3.0
	40	32	3.1
	50	35	3.5
	60	37	3.8
#4	30	31	3.4
	40	34	3.9
	50	37	4.4
	60	38	4.7
#6	40	38	6.5
	50	40	7.3
	60	42	8.0
	70	44	8.6

K-Rain products are not available for sale in NC, SC, TN, or MA.



10003

SuperPro™ 10003 Rotor

With flow control, appropriate for residential or light commercial.
Direct replacement for the Toro Super 800.



Features:

- Riser fits in existing Toro Super800 cans.
- Gear driven, rotary type sprinkler capable of covering an area of 26' to 49'.
- Patented flow control valve inside the rotor allows individual head to be turned off or be partially closed to reduce the distance by up to 75%. Additionally it simultaneously reduces the flow rate creating an added water savings.
- Revolutionary patented easy arc set is easily adjusted from the top with a flat blade screwdriver. Stainless steel radius adjustment screw.
- 2N1 adjustable or continuous rotation provides a full range of adjustments from 40° to continuous 360°. Patented arc set degree markings show the degree of adjustment with the point of an arrow on the top cover.
- Arc memory clutch returns rotor to its preset position automatically even after being tampered with. Time proven patented reversing mechanism assures continuous reverse and return.
- Ratcheting riser easily adjusts your left start position by turning the riser.
- Supplied with 9 numerically coded interchangeable nozzles including 4 low angle nozzles.
- Heavy duty rubber cover seals out dirt and increases durability.
- 5 year limited warranty.



Specifications:

- Inlet 3/4" threaded NPT
- Arc Adjustment Range: 40° to continuous 360°
- Flow range: 0.5 - 10.0 GPM
- Pressure Rating: 20-70 PSI
- Precipitation Rate: 0.05 to 0.74 inches/hour (depending on spacing and nozzle used)
- Overall height popped down : 7 1/2"
- Recommended spacing: 28' to 44'
- Radius: 26' to 49'
- Nozzle trajectory: 26° standard or 12° low angle
- Riser Height: 5"

Part Number	Description	Ctn Qty	List Price
10003	SuperPro rotor	20	\$ 23.10



ARC selection 40° to continuous 360°. Adjusts from LEFT start.

Find performance data on following page.

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016



SuperPro™ 10003 Rotor Performance Data

STANDARD ANGLE

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM	
#0.5	30	30	0.45	
	40	29	0.5	
	50	26	0.6	
	60	26	0.7	
#0.75	30	32	0.7	
	40	32	0.8	
	50	33	0.9	
	60	33	1.0	
#1	30	30	1.1	
	40	32	1.3	
	50	33	1.5	
	60	33	1.6	
#2	30	38	2.3	
	40	38	2.5	
	50	40	2.7	
	60	42	3.0	
#2.5	30	35	2.5	
	preinstalled	40	36	2.8
	50	37	3.2	
	60	38	3.6	
#3	30	35	3.4	
	40	36	3.8	
	50	38	4.2	
	60	39	4.8	
#4	30	42	4.1	
	40	44	4.6	
	50	45	5.1	
	60	46	5.7	
#6	40	46	5.8	
	50	48	6.4	
	60	49	7.0	
	70	49	7.5	
#8	40	42	7.5	
	50	45	8.2	
	60	48	9.0	
	70	48	9.5	

LOW ANGLE

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM
#1	30	26	1.3
	40	27	1.5
	50	27	1.7
	60	28	1.9
	#3	30	29
#3	40	30	3.3
	50	31	3.4
	60	33	4.0
	#4	30	28
#4	40	31	4.7
	50	34	5.0
	60	36	6.0
	#6	40	30
#6	50	34	7.0
	60	37	7.8
	70	38	8.2

K-Rain products are not available for sale in NC, SC, TN, or MA.



K Spray Series

K-Spray Series Spray Bodies

Ideal for watering smaller areas, ground cover and shrub areas.

Features:

- Available in 3", 4" 6" and 12" models which provide flexibility in design.
- Accepts **MALE threaded nozzles.**
- Stainless steel retraction spring provides reliable retraction of the riser in all soil conditions.
- Ratchet riser allows for easy pattern alignment by turning the riser.
- Heavy duty wiper seal ensures leak free, full pop-up operation even under low pressure situations.



Specifications:

- Inlet 1/2" NPT female thread
- Flow range: 0.5 - 4.6 GPM
- Pressure Rating: 20-50 PSI
- Precipitation Rate: 0.4 to 1.91 inches/hour

Part Number	Description	Ctn Qty	List Price
73001	3" Pop-up Spray body (less nozzles)	100	\$ 3.68
74001	4" Pop-up Spray body (less nozzles)	50	3.79
76001	6" Pop-up Spray body (less nozzles)	50	7.14
71201	12" Pop-up Spray body (less nozzles)	25	19.82

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016



PRO-S Spray

Pro-S Pop-Up Sprays

A rugged, contractor friendly spray line designed to be compatible with ALL standard female threaded nozzles.
Direct replacement for RainBird® 1800 Series sprays.

Features:

- Available in 2", 3", 4" 6" and 12" models which provide flexibility in design.
- **Accepts FEMALE threaded nozzles.**
- Co-Molded wiper seal ensures a leak free, full pop up operation under low pressure situations. Cartridge design allows for easy removal and cleaning. Treated with UV inhibitors for long life. Seal is microbe resistant to reduce degradation and stick ups.
- Ratcheting riser allows for easy pattern alignment by turning the riser.
- Heavy duty retraction spring for positive retraction in all soil conditions.
- Side and bottom inlet on 6" and 12" models.
- Pre-installed flush cap.
- 5 year Limited Warranty.



Specifications:

- Inlet 1/2" NPT Female Thread
- Flo range: 0 @ 8 psi, 0.10 gpm
- Pressure Rating: 20-70 psi
- Precipitation Rate: 0.4-4 inches/hour
- Overall Body Height: 2" pop up - 4"
3" pop up - 4 7/8"
4" pop up - 6"
6" pop up - 9 3/8"
12" pop up - 16"



Co-molded wiper seal

Part Number	Description	Ctn Qty	List Price
78002	2" Pop up spray	50	\$ 3.50
78003	3" Pop up spray	50	3.54
78004	4" Pop up spray	50	3.18
78004-PR	4" Pop up spray w/ pressure regulator	50	9.85
78006	6" Pop up spray	50	7.61
78006-PR	6" Pop up spray w/ pressure regulator	50	14.14
78012	12" Pop up spray	25	14.79
78012-PR	12" Pop up spray w/ pressure regulator	50	23.64
P53428	ProS Spray Check Disk	25	1.89

K-Rain products are not available for sale in NC, SC, TN, or MA.



RN Rotary Nozzle

Fixed Pattern Rotary Nozzle

Provides increased uniform coverage over conventional fixed spray nozzles while delivering matched precipitation.

Features:

- Perfect for upgrading old irrigation systems by solving low pressure and coverage problems.
- Matched precipitation across various radii and patterns.
- Low precipitation rate reduces run off.
- Low flow rate means less material and fewer zones.
- 25% radius reduction for patented flow control, no tools required.
- Unique speed control maintains the speed of rotation over varying pressure ranges.
- Any pattern can be combined in the same zone with matched precipitation.
- Larger filter prolongs product life.
- 2 year Limited Warranty.



Specifications:




- Spacing: 13-17 ft
- Pressure Rating: 20-45 psi
- Precipitation Rate: 0.67 - 0.99 inches/hour depending on head spacing.



Part Number	Description	Color	Ctn Qty	List Price
RN100-ADJ	Rotary Nozzle - Adjustable 80-360° 10-17'		10	15.00
RN200-ADJ	Rotary Nozzle - Adjustable 80-360° 17-21'		10	15.00
RN300-ADJ	Rotary Nozzle - Adjustable 80-360° 21-26'		10	15.00



FIXED PATTERN ROTARY NOZZLES - PERFORMANCE SPECS

Part Number	Nozzle Pattern	Pressure PSI	Radius Ft.	Flow Rate GPM	Flow GPH	Precip	Precip
RN200-90		25	13	0.38		0.99	0.86
		30	14	0.41		0.93	0.81
		35	15	0.45		0.89	0.77
		40	16	0.48		0.84	0.72
		45	17	0.51		0.78	0.68
RN200-180		25	13	0.74		0.97	0.84
		30	14	0.81		0.92	0.80
		35	15	0.90		0.89	0.77
		40	16	0.96		0.83	0.72
		45	17	1.00		0.77	0.67
RN200-360		25	13	1.50		0.99	0.85
		30	14	1.70		0.96	0.83
		35	15	1.80		0.89	0.77
		40	16	2.00		0.87	0.75
		45	17	2.10		0.81	0.70

K-Rain products are not available for sale in NC, SC, TN, or MA.



KV Nozzles

KV Variable Arc Nozzles

KV adjustable nozzles have a MALE thread configuration to fit K-Spray bodies.

Features:

- Superior spray pattern ensures proper precipitation rates throughout the adjustment.
- Color coded by distance.
- Extra long filters provide longer time between cleaning.



Find performance data on following page.

Part Number	Description	Color	Ctn Qty	List Price
KV8	8' Variable arc nozzle male thread	Green	25	\$ 1.74
KV10	10' Variable arc nozzle male thread	Blue	25	1.74
KV12	12' Variable arc nozzle male thread	Brown	25	1.74
KV15	15' Variable arc nozzle male thread	Black	25	1.74
KV17	17' Variable arc nozzle male thread	Gray	25	1.74



KVF Nozzles

KVF Variable Arc Nozzles

KVF adjustable nozzles have a FEMALE thread configuration to fit RPS and PRO-S spray bodies.

Features:

- Superior spray pattern ensures proper precipitation rates throughout the adjustment.
- Color coded by distance.
- Extra long filters provide longer time between cleaning.

Find performance data on following page.

Part Number	Description	Color	Ctn Qty	List Price
KVF8	8' Variable arc nozzle female thread	Green	25	\$ 1.74
KVF10	10' Variable arc nozzle female thread	Blue	25	1.74
KVF12	12' Variable arc nozzle female thread	Brown	25	1.74
KVF15	15' Variable arc nozzle female thread	Black	25	1.74

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Nozzles



VARIABLE ARC NOZZLES - PERFORMANCE SPECS FOR KV NOZZLES



Arc	Pressure PSI	8' GREEN Radius Ft.	Flow GPM	10' BLUE Radius Ft.	Flow GPM	12' BROWN Radius Ft.	Flow GPM	15' BLACK Radius Ft.	Flow GPM	17' GRAY Radius Ft.	Flow GPM
90°	20	9	0.7	12	0.7	12	1.1	15	1.3	18	1.7
	30	9	1.1	12	1.1	13	1.3	17	1.6	18	1.8
	40	10	1.4	13	1.4	14	1.5	18	1.8	19	2.0
	50	11	1.5	14	1.5	15	1.7	19	2.0	20	2.2
180°	20	8	1.4	11	1.4	11	1.6	14	1.8	17	1.9
	30	8	1.6	11	1.6	12	1.8	15	2.3	18	2.4
	40	9	1.8	12	1.8	13	2.2	16	2.6	19	2.6
	50	10	2.0	13	2.0	14	2.4	18	2.8	19	2.6
270°	20	8	1.7	10	1.7	11	1.9	14	2.7	16	2.9
	30	8	2.0	10	2.0	12	2.4	15	3.2	17	3.4
	40	8	2.3	11	2.3	12	2.6	16	3.6	18	4.0
	50	9	2.6	12	2.6	13	3.0	16	4.0	18	4.0
360°	20	8	2.2	10	2.2	11	2.8	13	3.4	15	3.5
	30	8	2.7	10	2.7	12	3.1	15	4.2	17	4.4
	40	8	3.0	11	3.0	12	3.5	15	4.7	17	4.9
	50	8	3.5	12	3.5	13	3.9	16	5.3	18	5.4

VARIABLE ARC NOZZLES - PERFORMANCE SPECS FOR KVF NOZZLES



Arc	Pressure PSI	8' GREEN Radius Ft.	Flow GPM	10' BLUE Radius Ft.	Flow GPM	12' BROWN Radius Ft.	Flow GPM	15' BLACK Radius Ft.	Flow GPM	17' GRAY Radius Ft.	Flow GPM
90°	20	9	0.40	9	0.40	10	0.45	13	0.55	17	0.80
	25	9	0.42	9	0.42	11	0.52	14	0.63	18	0.94
	30	10	0.45	10	0.45	12	0.55	15	0.70	19	1.05
	40	10	0.50	10	0.50	12	0.60	16	0.80	19	1.30
180°	20	9	1.00	9	1.00	9	1.10	13	1.30	17	1.70
	25	9	1.10	9	1.10	10	1.21	14	1.49	17	1.92
	30	10	1.20	10	1.20	10	1.35	15	1.65	19	2.15
	40	10	1.25	10	1.25	11	1.53	16	2.00	19	2.50
270°	20	9	1.40	9	1.40	9	1.60	13	1.90	16	2.40
	25	10	1.59	10	1.59	10	1.74	15	2.15	16	2.82
	30	10	1.75	10	1.75	10	1.95	15	2.35	17	3.00
	40	10	2.05	10	2.05	11	2.05	16	2.70	18	3.50
360°	20	9	2.30	9	2.30	9	2.40	13	2.80	16	2.90
	25	10	2.51	10	2.51	10	2.61	14	3.26	17	3.40
	30	10	2.65	10	2.65	11	2.78	15	3.60	17	3.80
	40	11	2.75	11	2.75	12	3.03	15	4.10	17	4.40

K-Rain products are not available for sale in NC, SC, TN, or MI.



Fixed Nozzles

Fixed Pattern Female Nozzles

Matched precipitation female nozzles are compatible with ALL available male threaded bodies.

Features:


- Color coded for easy identification.
- Four distances plus eight fixed patterns provides an array of configurations.
- Matched precipitation allows for even water distribution.



Series Number	Description	Color	Ctn Qty	List Price
FN8 *	8' Fixed pattern female nozzle	Green	25	\$ 1.74
FN10 *	10' Fixed pattern female nozzle	Blue	25	1.74
FN12 *	12' Fixed pattern female nozzle	Brown	25	1.74
FN15 *	15' Fixed pattern female nozzle	Black	25	1.74

* Add nozzle pattern reference letter to complete part number.

Fixed Pattern FEMALE THREADED Nozzles Performance & Pricing

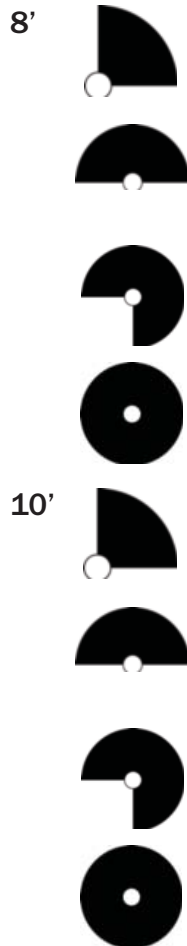

Pattern Letter*	Nozzle Pattern	Pressure PSI	Radius Ft.	Flow Rate GPM	Ctn Qty	Part Number	List Price
Q	90°	15	5	0.18	25	FN8Q	\$ 1.74
		20	6	0.21			
		25	7	0.24			
		30	8	0.26			
H	180°	15	5	0.37	25	FN8H	1.74
		20	6	0.41			
		25	7	0.47			
		30	8	0.52			
TQ	270°	15	5	0.55	25	FN8TQ	1.74
		20	6	0.63			
		25	7	0.71			
		30	8	0.78			
F	360°	15	5	0.74	25	FN8F	1.74
		20	6	0.86			
		25	7	0.95			
		30	8	1.05			
Q	90°	15	7	0.29	25	FN10Q	1.74
		20	8	0.33			
		25	9	0.36			
		30	10	0.39			
H	180°	15	7	0.58	25	FN10H	1.74
		20	8	0.65			
		25	9	0.72			
		30	10	0.79			
TQ	270°	15	7	0.87	25	FN10TQ	1.74
		20	8	0.98			
		25	9	1.08			
		30	10	1.18			
F	360°	15	7	1.16	25	FN10F	1.74
		20	8	1.30			
		25	9	1.44			
		30	10	1.58			

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.15

K-Rain® Nozzles



Fixed Pattern THREADED Nozzles Performance & Pricing

	Pattern Letter*	Nozzle Pattern	MALE (P)			FEMALE (FN)			Ctn Qty	MALE/FEMALE Part No	List Price
			Pressure PSI	Radius Ft.	Flow Rate GPM	Pressure PSI	Radius Ft.	Flow Rate GPM			
12'	Q	90°	20	11	0.5	15	9	0.45	25	P12Q	\$ 1.78
			25	12	0.7	20	10	0.53		FN12Q	1.74
			40	13	0.8	25	11	0.60			
			50	14	0.9	30	12	0.65			
	H	180°	20	11	0.9	15	9	0.90	25	P12H	1.78
			25	12	1.1	20	10	1.05		FN12H	1.74
			40	13	1.4	25	11	1.20			
			50	14	1.5	30	12	1.30			
	TQ	270°	20	12	1.2	15	9	1.35	25	P12TQ	1.78
			25	12	1.4	20	10	1.58		FN12TQ	1.74
			40	14	1.7	25	11	1.80			
			50	15	2.0	30	12	1.95			
F	360°	20	10	1.6	15	9	1.80	25	P12F	1.78	
		25	12	1.8	20	10	2.10		FN12F	1.74	
		40	13	2.1	25	11	2.40				
		50	14	2.4	30	12	2.60				
15'	Q	90°	20	15	0.7	15	11	0.65	25	P15Q	1.78
			30	16	0.9	20	12	0.75		FN15Q	1.74
			40	17	1.1	25	14	0.82			
			50	18	1.2	30	15	0.92			
	H	180°	20	14	1.4	15	11	1.30	25	P15H	1.78
			30	15	1.7	20	12	1.50		FN15H	1.74
			40	16	2.0	25	14	1.65			
			50	17	2.2	30	15	1.85			
	TQ	270°	20	13	2.0	15	11	1.95	25	P15TQ	1.78
			30	15	2.5	20	12	2.25		FN15TQ	1.74
			40	16	2.9	25	14	2.48			
			50	16	3.2	30	15	2.78			
F	360°	20	13	2.9	15	11	2.60	25	P15F	1.78	
		30	15	3.6	20	12	3.00		FN15F	1.74	
		40	16	4.1	25	14	3.30				
		50	17	4.6	30	15	3.70				

Part Number	Description	Ctn Qty	List Price
PFRM	Filter for Fixed Nozzle	25	\$ 0.68

Special Pattern Nozzles Performance & Pricing

Pattern Letter*	Nozzle Pattern	Pressure PSI	Radius Ft.	Flow Rate GPM	Ctn Qty	MALE	FEMALE	List Price
						Part No	Part No.	
CS	CENTER	20	4' X 24'	0.8	25	P15CS		\$ 1.78
	STRIP	30	4' X 30'	1.0			FN15CS	
ES	END	20	4' X 12'	0.4	25	P15ES		1.78
	STRIP	30	4' X 15'	0.5			FN15ES	
SS	SIDE	20	4' X 28'	1.1	25	P15SS		1.78
	STRIP	30	4' X 32'	1.3			FN15SS	
HL	HIGH	20	H 14' X L4'X28'	2.5	25	P15HL		1.78
	LOW	30	H 15' X L5'X32'	3.0			FN15HL	

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Solenoid Valves



7001 Series



7001-NFC Series



7001-MXB Series

Designed for polyethylene piping systems, requires fewer fittings and can be installed quickly.



Flow Through

Self Cleaning Screen

Pro Series 100 Solenoid Valves

A contemporary tilt diaphragm makes this the perfect choice for residential, light commercial and dirty water applications.



Features:

- Heavy duty, corrosion & UV resistant PVC construction increases the life of the valve.
- Combination 1" and 1 1/4" connections provide the option to increase the pipe size to the valve increasing the flow rate.
- Tilted diaphragm/piston assembly allows for a straight flow path of the water increasing the flow rate while reducing the friction loss.
- Debris tolerant design provides flexibility for use in potable or dirty water applications.
- Manual external bleed through bleed screw allows for manual operation in system start-up.
- Manual internal bleed through solenoid allows for manual operation without leaking water.
- Flow control with removable handle allows for precise flow adjustment, manual shut-off and allows you to remove the handle to prevent tampering.
- Captured plunger solenoid allows for the solenoid to be removed without losing the plunger.
- Self cleaning metering screen is in the turbulent flow of water allowing self cleaning action during operation.
- 5 year Limited Warranty.

Specifications:

- Dimensions: 4" H x 3" W x 5 1/4" L
- Flow range: 0.75-35 GPM
- Pressure Rating: 20-150 PSI
- Pressure Loss @ 30 gpm - 5 psi
- Solenoid: 24 VAC 60 cycle
- Inrush Current: 0.43 Amps
- Holding Current: 0.25 Amps

Part Number	Description	Ctn Qty	List Price
7001	1" Female thread or 1 1/4" Male slip	12	\$ 34.14
7001-SL	1" Female slip or 1 1/4" Male slip	12	34.14
7001-NFC	1" Female th or 1 1/4" Male sl NO FLOW CONTROL	12	33.19
7001-SL-NFC	1" Female sl or 1 1/4" Male sl NO FLOW CONTROL	12	33.19
7001-MXB	1" Male x Barb	12	34.14
7001-MXB-NFC	1" Male x Barb NO FLOW CONTROL	12	33.19

K-Rain products are not available for sale in NC, SC, TN, or MA.



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

10.17

K-Rain® Solenoid Valves



7101 and 7101-J Series

Pro Series 150 1" Solenoid Valves

Offer the professional a wide array of features and benefits. Use for residential, light commercial, dirty water applications.



Features:


- Heavy duty, corrosion & UV resistant PVC construction increases the life of the valve.
- External bleed screw with removable metering pin allows for cleaning of the pin without disassembling the valve.
- **Threaded jar top** allows for quick removal of the cap for easy servicing. The glass filled nylon screw cap increases durability.
- **7101-J Series is direct replacement for Irritrol 2400.**
- Manual external bleed screw allows for manual operation in system start-up.
- Manual internal bleed through solenoid allows for manual operation without leaking water.
- Captured plunger solenoid allows for the solenoid to be removed without losing the plunger.
- 5 year Limited Warranty.



No tools needed with Jar Top

Specifications:

- Dimensions: 5 1/4" H x 3 1/8" W x 5" (without jar top)
5 1/4" H x 3" W x 4 3/8" Jar Top
- Flow range: 0.25-30 GPM
- Pressure Rating: 10-150 PSI
- Solenoid: 24 VAC 60 cycle
- Inrush Current: 0.4 Amps
- Holding Current: 0.2 Amps

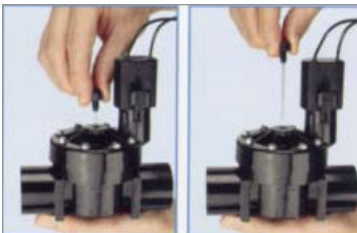

Manual External Bleed Screw

Performance Data:

GPM	5	10	15	20	30
ProSeries 150 1" valve					
PSI LOSS	2.9	2.1	1.8	3.0	5.0
ProSeries 150 1" valve with jar top					
PSI LOSS	3.3	3.9	2.9	3.2	6.1

Part Number	Description	Ctn Qty	List Price
7101	1" Female thread NPT	12	\$ 30.64
7101-SL	1" Female Slip	12	30.64
7101-J	1" Female Thread Jar Top, NPT	12	30.64
7101-J-SL	1" Female Slip Jar Top	12	30.64

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Solenoid Valves



7102 and 7115 Series

Pro Series 150 1 1/2" and 2" Solenoid Valves


Feature a removable inlet cap to easily modify the configuration from globe to angle style.

Alternate to Irritrol 216b and 217b.



Features:

- Heavy duty, corrosion & UV resistant PVC construction increases the life of the valve.
- External bleed screw with removable metering pin allows for cleaning of the pin without disassembling the valve.
- Manual external bleed screw allows for manual operation in system start-up.
- Manual internal bleed through solenoid allows for manual operation without leaking water.
- Removable inlet cap allows for easy conversion from globe to angle style valve.
- Flow control allows for precise flow adjustment and manual shutoff.
- Captured plunger solenoid allows for the solenoid to be removed without losing the plunger.
- Heavy duty santoprene diaphragm design improves durability.
- 5 year Limited Warranty.

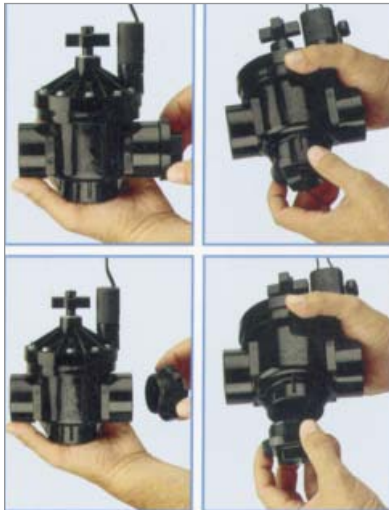

System Flexibility

Specifications:

- Dimensions: 1 1/2" valve: 8" H x 4 1/4" W x 5 1/2" L
2" valve: 8 7/8" H x 4 7/8" W x 6 1/3" L
- Flow range: 5-120 GPM
- Pressure Rating: 20-150 PSI
- Solenoid: 24 VAC 60 cycle
- Inrush Current: 0.4 Amps
- Holding Current: 0.2 Amps

Performance Data:

GPM		20	30	40	50	60	80	100	120
ProSeries 150 1 1/2" valve									
PSI LOSS	globe	3.0	2.6	2.3	2.9	4.1	5.5		
	angle	2.7	2.2	1.9	2.2	3.0	4.4		
ProSeries 150 2" valve									
PSI LOSS	globe	2.0	1.9	1.7	1.5	1.6	2.9	4.8	6.2
	angle	1.9	1.9	1.7	1.5	1.5	2.1	3.2	4.6

Part Number	Description	Ctn Qty	List Price
7115	1 1/2" Female Thread, NPT	6	\$ 94.89
7102	2" Female Thread, NPT	6	127.89

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.19

K-Rain® Controllers



RPS46 Series



RPS46 Controller

Designed for residential applications the RPS46 has four individual programs to allow for efficient watering on separate programs.

Features:

- 4 and 6 station models for residential lawns.
- 4 fully independent programs allowing up to 4 starts per program, maximum of 16 starts per day.
- Indoor models with external transformer and plug.
- Seasonal adjustment allows adjustment of watering durations from 25% to 150%.
- Rain sensor ready - accepts rain sensor signal and is controlled by a bypass switch.
- Flexible manual operations to run a program, station or test.
- Battery back-up holds programs during power outages.
- 2 year Limited Warranty.

Specifications:

- Dimensions: 5.7" H x 4.5" W x 1.7" D
- Station run times: 1 min - 12 hours 59 min.
- Programs: 4
- Start Times: 4 per program
- Water Schedules:
 - 7 day calendar w/ individual day selection
 - Odd/Even day or interval watering.
- Rain sensor ready inhibits automatic watering when wet conditions are detected by a rain sensor.
- Master valve / pump start signal.
- Automatic, semi-automatic and single station manual operation.

Electrical Specifications:

- Electrical Power Supply: 110-120 VAC/ 60 Hz/ 230 VAC 50 Hz.
- Electrical Outputs: 24 Volt AC, 0.85 amp.
- To Solenoid Valves: 24 VAC 50/60 Hz 0.5 amp max.
- Total output load must not be exceeded by the valves and pump requirements.
- Overload protection: Standard 20mm 1 amp fuse.
- Power failure: 9 volt standard alkaline battery maintains clock and programs for up to 2 weeks.
- Wiring: The output circuits should be installed and protected in accordance with wiring rules.

Part Number	Description	Ctn Qty	List Price
3504	4 station, 110 volt external transformer	1	\$ 112.71
3504-220	4 station, 220 volt external transformer	1	112.71
3506	6 station, 110 volt external transformer	1	115.71
3506-220	6 station, 220 volt external transformer	1	115.71

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Controllers



RPS469 Series

RPS469 Mid-Sized Controller

Designed for residential and light commercial applications the RPS469 has six individual programs to allow for efficient watering on separate programs.



Features:

- 4, 6 and 9 station models for residential and light commercial lawns.
- 6 fully independent programs allowing up to 6 starts per program, maximum of 36 starts per day.
- Indoor/Outdoor.
- Water conservation allows for quick adjustment of watering durations in 10% increments, from 10% to 200.
- Rain sensor ready - accepts rain sensors and allows individual stations to be set and controlled by the sensor.
- Flexible manual operations to run a program, station or test.
- System test allows for a full system check for valve operation.
- Battery back-up holds programs during power outages.
- Weatherproof enclosure ensures long product life.
- 2 year Limited Warranty.

Specifications:

- Dimensions: 8.8" H x 7.9" W x 2.9" D
- Station run times: 1 min - 12 hours 59 min.
- Programs: 6
- Start Times: 6 per program
- Water Schedules:
 - 7 day calendar w/ individual day selection or 1-15 day interval watering, or 365 day calendar for Odd/Even day watering.
- Rain sensor ready inhibits automatic watering when wet conditions are detected by a rain sensor.
- Master valve / pump can be enabled or disabled by station or program.
- Automatic, semi-automatic and single station manual operation.
- Capable of programming remotely using a standard 9 volt battery. Permanent memory saves all programs during power outages.

Electrical Specifications:

- Electrical Power Supply: 110-120 VAC/ 60 Hz/ 230 VAC 50 Hz.
- Electrical Outputs: 24 VOLT AC, 1 amp.
- To Solenoid Valve: 24 VAC 50/60 Hz 0.75 amp max.
- Total output load must not be exceeded by the valves and pump requirements.
- Overload protection: Standard 20mm 1 amp fuse.
- Power failure: 9 volt standard alkaline battery permanently maintains clock and programs. Has permanent memory so the data is always backed up during power outages.
- Wiring: The output circuits should be installed and protected in accordance with wiring rules.

Part Number	Description	Ctn Qty	List Price
3604	4 station, 110 volt internal transformer	1	\$ 158.54
3604-220	4 station, 220 volt internal transformer	1	158.54
3606	6 station, 110 volt internal transformer	1	175.61
3606-220	6 station, 220 volt internal transformer	1	175.61
3609	9 station, 110 volt internal transformer	1	194.07
3609-220	9 station, 220 volt internal transformer	1	194.07

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.21

K-Rain® Controllers



PRO EX Series

PRO EX Modular Controller

Modular irrigation controller with easy expansion.



Features:

- Hot swappable 4 station modules allow controller upgrades from 4 to 16 station while in operation.
- 3 fully independent programs with up to 4 starts per program.
- Dual voltage transformer enables either 120VAC or 240 VAC.
- Program display on a large backlit LCD screen with watering days, number of start times, stations and AM/PM or 24 hr time format options.
- Flexible manual operations - automatic, semi-automatic and single station with manual start at the push of a button.
- System test allows for a full system check for valve operation.
- Permanent memory saves programs during power outages.
- Remote programming using 9V battery and wireless module connector features.
- Wire management is made easy with verticle station terminal strips.
- Diagnostic circuit breaker to identify wiring problems with visual and/or audible alerts for errors.
- Locate feature aids in locating buried valves.
- Station delay/overlap permits additional time between stations to allow for everyday hydraulic issues.
- Rain sensor ready - accepts rain sensors and allows programming of individual stations to be controlled by the sensor.
- Sensor bypass switch for global override.
- Master valve/pump start relay permits individual station programming.
- Dedicated Sensor and VT Valve Test Terminal enables direct sensor installation and matches field wires with station.
- Default programming saves and recalls programs.
- Permanent day off watering feature.
- Seasonal adjust water conservation allows for quick adjustment of watering times from 10-200%.

Specifications:

- Dimensions: 7.875" H x 11.5" W x 5.25" D
- Station run times: 1 sec - 6 hours for all stations
- Programs: 3
- Automatic Start Times: 4 per program
- Program Water Schedule:
 - Custom (day of the week)
 - Interval (1-31 days)
 - Odd or Even (calendar days)

Electrical Specifications:

- Power Input: 120 VAC +/- 10% 60 Hz
230 VAC +/- 10% 50 Hz
- Power Output: 24 VAC, 1.25 amp.
- Power Backup: Lithium coin-cell batters maintains time and date during primary power outages while the 9V battery allows remote programming and LCD viewing.
- Multi-Valve Operation: Up to three 24VAC, 7VA solenoid valves.

Limited Quantites. Available while supplies last.

Part Number	Description	Ctn Qty	List Price
3200	Base 4 Station Controller 120/240 VAC internal transformer	1	\$ 280.71
3204	4 Station Expansion Module	1	59.57

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Controllers



RPS1224 Series

RPS1224 Controller

Designed for residential and light commercial applications the RPS1224 covers all your needs regardless of the size or complexity of the project.



Features:

- 12, 18 and 24 station models for residential and light commercial applications.
- 8 fully independent programs allowing up to 8 starts per program, maximum of 64 starts per day.
- Indoor/Outdoor.
- Water conservation allows for quick adjustment of watering durations in 10% increments, from 10% to 200.
- Rain sensor ready - accepts rain sensors and allows individual stations to be set and controlled by the sensor.
- Flexible manual operations - automatic, semi-automatic and single station manual.
- System test allows for a full system check for valve operation.
- Permanent memory saves programs during power outages.
- Weatherproof enclosure ensures long product life.
- 2 year Limited Warranty.

Specifications:

- Dimensions: 9 3/8" H x 10 1/4" W x 4 1/8" D
- Station run times: 1 min - 12 hours 59 min.
- Programs: 8
- Start Times: 8 per program
- Water Schedule:
 - 7 day calendar w/ individual day selection or 1-15 day interval watering, or 365 day calendar for Odd/Even day watering.
- Rain sensor ready inhibits automatic watering when wet conditions are detected by a rain sensor.
- Two master valve / pump can be enabled or disabled by station or program.
- Automatic, semi-automatic and single station manual operation.
- Capable of programming remotely using a standard 9 volt battery. Permanent memory saves all programs during power outages.

Electrical Specifications:

- Electrical Power Supply: 110-120 VAC/ 60 Hz/ 230 VAC 50 Hz.
- Electrical Outputs: 24 Volt AC, 1.25 amp.
- To Solenoid Valve: 24 VAC 50/60 Hz 0.75 amp max.
- Total output load must not be exceeded by the valves and pump requirements.
- Overload protection: Standard 20mm 1 amp fuse.
- Power failure: 9 volt standard alkaline battery permanently maintains clock and programs. Has permanent memory so the data is always backed up during power outages.
- Wiring: The output circuits should be installed and protected in accordance with wiring rules.

Part Number	Description	Ctn Qty	List Price
3712	12 station, 110 volt internal transformer	1	\$ 372.39
3718	18 station, 110 volt internal transformer	1	444.39
3724	24 station, 110 volt internal transformer	1	489.36

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.23

K-Rain® Controllers



2000 Series

2000 Series Single Station Controller

Single station controllers stay safe with rain-tight enclosures.



Features:

- 24 hour programmable time dial with multiple start times and a wide variety of timing periods including skip-a-day 14 day program.
- UL approved components.
- Perfect for nursery or mist applications.
- 2200 models have 10 minute programmable dial with a wide variety of timing periods in multiples of 1.5, 3 and 6 seconds and multiple start times.
- 2500 models are prewired for easy connection of a rainswitch and allows manual override of rainswitch from controller face.
- 2520 model allows operation of 24 volt rainswitch and 2 hp 220 volt pump with same controller.
- 2 year Limited Warranty.

Part Number	Voltage Input	Voltage Output	Rating	Ctn Qty	List Price
2100 Single Station Controllers					
2110	110 VAC, 60 Hz	110 VAC, 60 Hz	Single Pole, up to 1 HP	6	\$ 176.21
2112	110 VAC, 60 Hz	110 VAC, 60 Hz	Double Pole, up to 2 HP	6	204.25
2114	110 VAC, 60 Hz	24 VAC, 30 VA	Built in Transformer	6	200.21
2120	220 VAC, 60 Hz	220 VAC, 60 Hz	Double Pole, up to 2 HP	6	204.25
2200 Short Duration Single Station Controllers					
2210	110 VAC, 60 Hz	110 VAC, 60 Hz	up to 1 HP	6	230.57
2214	110 VAC, 60 Hz	24 VAC, 30 VA	Built in transformer	6	235.57
2500 Rainswitch Ready Controllers					
2510	110 VAC, 60 Hz	110 VAC, 60 Hz	Double Pole, up to 2 HP	6	230.07
2514	110 VAC, 60 Hz	24 VAC, 30 VA	Built in transformer	6	307.36
2520	220 VAC, 60 Hz	220 VAC, 60 Hz	Double Pole, up to 2 HP	6	265.50

K-Rain products are not available for sale in NC, SC, TN, or MA.



K-Rain® Pump Start Relays



1500 Series

1500 Series Pump Start Relays

Features:

- Industrial, rain tight, secure, rustproof industrial grade enclosure ensures long product life and deters tampering. UV resistant and shockproof.
- UL approved components.
- Large easy access enclosure provides easy accessibility during wiring.
- Enclosure has 8 recessed knock-outs to provide easy connections from any direction.
- 24 or 110 VAC coils for applications up to 10 hp.
- 4 plastic inset cover screws provide extra system security reduces liability and deters tampering.
- 2 year Limited Warranty.



Specifications:

- Dimensions: 7" H x 5" W x 4 5/8" D
- 24 VAC, 60 Hz or 110 VAC, 60 Hz
- Double pole, single throw

	Model #1522	Model #1521	Model #1552	Model #1551
• Inrush:	35 VA	42 VA	60 VA	77 VA
• Sealed:	7.0 VA, 3 watts	8.5 VA, 3.6 watts	7 VA, 2.3 watts	10 VA, 4 watts
• Resistance (+10%):	11 ohms	210 ohms	5.61 ohms	89.5 ohms
• Inductive:	20 amp	20 amp	40 amp	40 amp
• Resistive:	30 amp	30 amp	50 amp	50 amp
• Input 120 V:	up to 3 hp	up to 3 hp	up to 3 hp	up to 3 hp
• Input 240 V:	up to 3 hp	up to 3 hp	up to 5 hp	up to 5 hp



Part Number	Description	Volts	Ctn Qty	List Price
1522	3 hp pump start relay	24 VAC	8	\$ 109.21
1521	3 hp pump start relay	110 VAC	8	170.82
1552	5 hp pump start relay	24 VAC	8	169.25
1551	5 hp pump start relay	110 VAC	8	169.25

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.25





R200

R200 Rain Sensor Features:

- Sensor provides conservation, convenience and flexibility to a fully automatic watering system.
- After a set amount of rain has fallen, sensor engages switch to prevent the controller from watering. Once the sensor has dried, the controller returns to normal sprinkler operation.
- Works in a variety of climates.
- Gutter and surface mount options.
- Compatible with all K-Rain controllers.



Part Number	Description	Ctn Qty	List Price
R200	Rain Sensor	5	\$ 35.79

Installation Instructions:


MOUNTING

Mount the rain sensor where it will be exposed to direct, unobstructed rainfall, but away from sprinkler spray. The switch-housing portion must be upright. 2 mounting options:

1. Rain Gutter
2. Flat Surface

Hints:

- Mount as close as possible to the timer. This will cause the wire run to be shorter, which minimizes the possibility of wire breaks.
- Mount in the highest possible position where rain can fall directly upon the rain sensor.
- As described in the "Adjustment and Operation" section, "reset rate" refers to the amount of time it takes the rain sensor to dry out sufficiently for the sprinkler system to be allowed to come back on. The mounting location will affect this rate and should be taken into consideration should extreme conditions exist. For example, mounting the rain sensor on a very sunny, southeastern end of a building may cause the rain sensor to dry out sooner than desired. Similarly, mounting on the northern end of a building with constant shade may keep the rain sensor from drying soon enough. Some experimentation and use of the vent ring will usually yield satisfactory results.




Once the rain sensor is mounted, run the wire to the controller using wire clips every few feet to fasten. If an extension to the wire provided is needed, use the following table to determine the minimum wire gauge needed:

Extension needed:	25-50 ft	50-100 ft	100 ft or more
then use:	20 AWG	18 AWG	16 AWG

WIRING

IMPORTANT: The rain sensor is sold and designed for 24-VAC irrigation controllers only. All wiring must conform to applicable local codes. The two most common wiring situations are detailed below for controllers that do not have direct rain sensor & pump start relay wiring capabilities. For non-standard wiring situations please consult your distributor.

A. 24-VAC Solenoid Valves only - NO pump start relay (Figure 2) With the two wires from the rain sensor at the controller, locate the "common ground" wire of the solenoid valves. If it is connected to the common terminal on the controller, disconnect it. Attach one wire of the rain sensor to the "common" terminal (usually marked COM) on the controller. Attach the other wire of the rain sensor to the common wire leading to the valves. Note: The common wire to the valves does not have to be interrupted at the controller. The rain sensor may be wired anywhere along the common wire line.

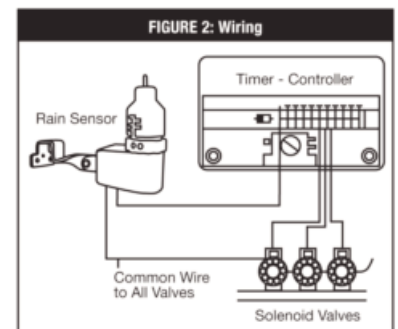




B. 24-VAC Solenoid Valve WITH Pump Start Relay (Figure 3)
Locate the common wire to the solenoid valves and the common wire lead to the coil of the relay that starts the pump. If these two wires are connected to the “common” terminal on the controller, disconnect both of them. Twist these two wires together along with one wire from the rain sensor and secure with a wire nut. Attach the other wire of the rain sensor to the “common” terminal on the controller.


Check to verify correct wiring:

Turn on one zone of the sprinkler system that is visible while you are in reach of the rain sensor. Manually depress the spindle at the top of the rain sensor until you hear the switch click off. The sprinkler zone should stop instantly. If it does not, check wiring for correct installation.

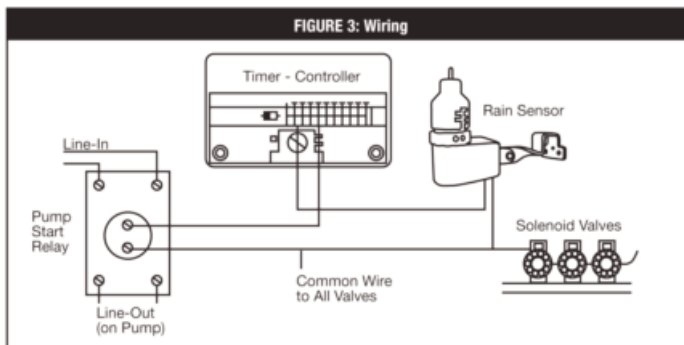

ADJUSTMENTS and OPERATION

The rain sensor can keep the irrigation system from starting or continuing after rainfall quantities of 1/8", 1/4" 1/2", 3/4" or 1". To adjust it to the desired quantity of rainfall, rotate the cap on the switch housing so that the pins are located in the proper slots. (Figure 4) Do not forcibly twist the cap as this might break the pins. The time that it takes the rain sensor to reset for normal sprinkler operation after the rain has stopped is determined by weather conditions (wind, sunlight, humidity). These conditions will determine how fast the hygroscopic discs will dry out, and since the landscape will also be experiencing the same conditions, the irrelative drying rates will roughly parallel each other. Note that there is an adjustment capability on the rain sensor that will slow down the reset rate. By turning the “vent ring” to completely or partially cover the ventilation holes, the hygroscopic discs will dry more slowly. This adjustment can compensate for an overly sunny installation location or peculiar soil conditions. Experimenting with the vent ring will best determine the ideal vent setting.

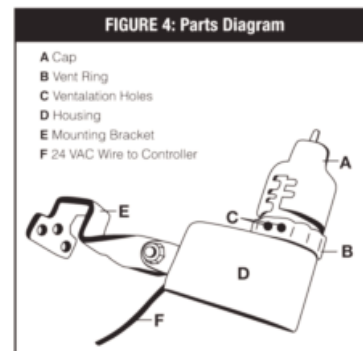

BYPASSING THE SENSOR

Should you desire to bypass the operation of rain sensor for any reason there is an easy way to do this. Simply go to the rain sensor and raise the quantity “cap” setting higher, or completely remove it altogether. This takes the pressure off the switch button, which allows the valve circuit to close again.

MAINTENANCE

There is no required maintenance for the unit. The rain sensor does not have to be removed or covered for winterizing purposes.

TROUBLESHOOTING

Follow these simple checks before replacing your rain sensor.

System does not come on at all:

- Check to see that the rain sensor discs are dry and the switch clicks on and off freely by pressing the top of the spindle.
- Look for breaks in the wire leading to the rain sensor and check all wire junctions.
- If the rain sensor is dry and the wire leading to it is good, check the rain sensor switch by nicking the insulation of the two outer wires near the unit to expose copper. Turn one sprinkler zone on, and apply a jumper wire across the two exposed wires. If the sprinkler now comes on, the switch is bad. Wrap all nicked wires with electrical tape.
- The rain sensor is wired to function with most controllers (normally closed). If you are unable to make the sensor work with the suggestions above you may have a unique controller (normally open).

System will not shut off even after heavy rainfall:

- Check wiring for correct installation.
- Check sensitivity on rain sensor, and move the cap to a more sensitive setting. The rain sensor is an accurate rain gauge and can be verified by setting up a “tube” type rain gauge in the same vicinity and making periodic readings.
- Check for obstructions to rainfall such as overhangs, trees or walls.



K-Rain® Indexing Valves



4000 Series



4000 Series Indexing Valves

Features:

- Automates multiple zoned residential and small commercial irrigations systems.
- Ideally suited for both city water and pump applications.
- ABS Polymer body construction is high strength, non-corrosive for long product life.
- Available in 4 and 6 outlet models to easily change from two to six watering zones.
- Operates at low 10 gpm at pressures of 25-75 psi.
- Simplicity of design and few moving parts ensures easy maintenance and long life.
- 2 year Limited Warranty.

Specifications:

- ABS polymer construction
- Dimensions: 5 3/4" H x 5 3/4" W
- Flow Range: 10-40 gpm
- Pressure rating: 25-75 psi
- Pressure Loss

4 outlet valve	Flow gpm	10	20	30	40
	PSI loss	2.0	3.0	4.5	6.4
6 outlet valve	Flow gpm	10	20	30	
	PSI loss	2.5	4.5	7.5	

Part Number	Description	Zones	Ctn Qty	List Price
4400	4 outlet index valve	NO cam	8	\$ 96.86
4402	4 outlet index valve	2 zones	8	108.68
4403	4 outlet index valve	3 zones	8	108.68
4404	4 outlet index valve	4 zones	8	108.68
P6107042	2 zone cam only		5	17.04
P6107043	3 zone cam only		5	17.04
P6107044	4 zone cam only		5	17.04
4600	6 outlet index valve	NO cam	8	96.86
4602	6 outlet index valve	2 zones	8	108.68
4603	6 outlet index valve	3 zones	8	108.68
4604	6 outlet index valve	4 zones	8	108.68
4605	6 outlet index valve	5 zones	8	124.98
4606	6 outlet index valve	6 zones	8	108.68
P6107063	3 zone cam only		5	17.04
P6107064	4 zone cam only		5	17.04
P6107065	5 zone cam only		5	17.04
P6107066	6 zone cam only		5	17.04
P6200400	Cam screws - set of 2 per bag		5	2.43

K-Rain products are not available for sale in NC, SC, TN, or MA.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.29

K-Rain® Indexing Valves



KR6000 Series

KR6000 Series Indexing Valves

Features:

- Automates multiple zoned residential and small commercial irrigations systems with high pressure.
- Recommended for pump fed or high-flow city water systems.
- Metal die-cast body is durable, long lasting and capable of high pressure applications.
- Available in 4 and 6 outlet models to easily change from two to six watering zones.
- Operates at 15 gpm at pressures of 25-150 psi.
- Built-in atmospheric vacuum breaker releases any vacuum created between the pump and valve on shut down.
- 2 year Limited Warranty.



Specifications:

- Die-cast metal valve top/housing, ABS polymer outlets.
- Dimensions: 7" H x 8" W
- Inlet: 1 1/2" threaded NPT connection
- Outlet: Slip and glue connections to 1 1/2" PVC pipe
- Flow Range: 15-150 gpm
- Pressure rating: 25-150 psi
- Pressure Loss

4 outlet valve	Flow gpm	20	40	60	80	100
	PSI loss	2.5	3.5	5.0	7.5	10.0
6 outlet valve	Flow gpm	20	40	60	80	100
	PSI loss	3.0	4.0	6.0	9.0	11.0

Part Number	Description	Zones	Ctn Qty	List Price
KR6402	4 outlet index valve	2 zones	4	\$ 251.25
KR6403	4 outlet index valve	3 zones	4	251.25
KR6404	4 outlet index valve	4 zones	4	251.25
KR6605	6 outlet index valve	5 zones	4	251.25
KR6606	6 outlet index valve	6 zones	4	251.25

K-Rain products are not available for sale in NC, SC, TN, or MA.



Irrigation Solenoid Valves




TFV Series

TFV Irrigation Solenoid Valve Features:


- Rugged glass-reinforced nylon construction.
- For residential, commercial and agricultural irrigation systems only.
- High strength, long life natural rubber diaphragm.
- In line globe design.
- Normally closed valve provides slow and smooth opening and closing.
- Quarter turn downstream bleed lever allows manual operation without external water spills.
- High flow rate with low head loss.
- Flow control available for exact water flow adjustment.
- Accurate operation over a wide range of pressure flows.
- In line maintenance - No need to remove valve from line for service.
- Standard and flow control models available.
- Available with standard 24 volt or optional 110 volt solenoid.
- Normally open valves are also available on a special order basis. Call for special pricing.

**** NO RETURNS on special order N/O valves.**

TFV Series irrigation solenoid valves are designed and intended for use in turf irrigation applications only. While these valves may operate in applications other than they are intended, the AGI warranty will not apply for those uses.



Flow Chart For Fully Open Valves



Specifications:

Voltage24 Volts AC 3 Watts
 CurrentInrush .48 AMPS;
Holding .24 AMPS
 Max. Working Temp180°F
 Max. Operating Pressure150 PSI
 Min. Operating Pressure10 PSI
 Recommended minimum
 pressure differential7 PSI
 Valve BodyGlass reinforced Nylon
 Inner Plastic PartsAcetal
 DiaphragmNatural rubber
 SealsBuna-N
 Metal Parts and ScrewsStainless Steel 303


Part Number	Size (FPT)	Volts	Flow Control	Weight	Dimensions			Width	Ctn Qty	List Price
					L	H	R			
TFV100T	1"	24	No	12.5 oz	4 5/16	2 1/2	7/8	3 1/16	20	\$ 81.60
TFV100T110V	1"	110	No	12.5 oz	4 5/16	2 1/2	7/8	3 1/16	20	91.55
TFV100TF	1"	24	Yes	12.5 oz.	4 5/16	4 1/2	7/8	3 1/16	20	88.79
TFV100TF110V	1"	110	Yes	12.5 oz.	4 5/16	4 1/2	7/8	3 1/16	20	101.52
TFV150TF	1 1/2"	24	Yes	2.2 lbs.	6 5/16	7 3/16	15/16	5	5	247.80
TFV150TF110V	1 1/2"	110	Yes	2.2 lbs.	6 5/16	7 3/16	15/16	5	5	255.20
TFV200TF	2"	24	Yes	2.2 lbs.,	6 3/4	7 3/8	1 1/2	5	5	333.32
TFV200TF110V	2"	110	Yes	2.2 lbs.,	6 3/4	7 3/8	1 1/2	5	5	331.49
Replacement Solenoid Assemblies										
H701-24	24 volt									32.35
H701-110	110 volt									51.99



94-11

Irrigation Valve Manifold Tee Features:


- Uniformly spaced installation of manifolds for 1" irrigation valves.
- Designed to be mounted horizontally for electric globe valves or installed with the threaded outlet upright to accommodate angle valves.
- Schedule 40 PVC.



1376-010

94-11, 1376 Series Manifold Tees:

- Aligns valves with integral notch and key design on 1376-010.
- Preset spacing of valves.
- Sch 40 wall thickness.
- Full flow 1" main line with 1" mpt (94-11) or 1" fpt (1376-010).
- Pressure rated at 315 psi, tested to over 1000 psi.



HMT70-1G

HMT70-1G Manifold Tee:

- 1" IPS threads compatible with all 1" valves.
- Hand tight assembly in series for a uniformly spaced sprinkler manifold.
- Riser always positions correctly, self aligning when tightened until threads no longer show.
- Schedule 40 PVC with Buna N o-ring seal.



91-11

91 Series PVC Cross Tee Manifold:

- Uniformly spaced side by side installation.
- 1" mpt connections.
- Schedule 40 PVC.

Part Number	Description	Ctn Qty	List Price
94-11	1" soc x 1" slip x 1" mpt	50	\$ 3.91
1376-010	1" soc x 1" slip x 1" fpt	6	7.06
HMT70-1G	1" fpt x 1" mpt x 1" mpt	12	4.49
91-11	1" soc x 1" mpt x 1" slip x 1" mpt	8	6.78



HMRA1/2x3/4

HMRA Adapter Features:

- 1/2" x 3/4" mipt Reducing Adapter

Part Number	Description	Ctn Qty	List Price
HMRA 1/2 x 3/4	1/2" x 3/4" MIPT Reducing Adapter	50	\$ 1.53



Irrigation Installation Accessories

P73 Cut-off Nipples Features:

- Patented design 4 in 1 nipple allows choice of length, excess becomes additional useable nipples.
- 100 PSI (max) and 201 °F max temperature.
- Green

Poly Cut-off Nipple, Riser Extension and Poly Nipple Features:

- Black poly

SW500 Nipple Extractor Features:

- For 1/2" or 3/4" plastic nipples.
- Easy to remove broken plastic riser from sprinkler pipe and fittings.
- Insert tip and turn.



P-73 Series



PCO Series



RE Series



RECO Series




PN Series



SW500C

Part Number	Description	Ctn Qty	List Price
Cut-off Nipples			
P73-1/2	1/2" MIPT X 1/2" MIPT X 6"	50	\$ 1.14
P73-3/4	3/4" mipt x 3/4" mipt x 6"	25	2.73
P73-3/4x1/2	Reducing, 3/4" mipt x 1/2" mipt, 6"	40	2.15
Poly Cut-off Nipples			
PCO1/2X4	1/2" x 4" MPT X MPT	500	0.45
PCO1/2X6	1/2" x 6" mpt x mpt	500	0.53
PCO1/2X3/4X4	1/2" x 3/4" x 4" mpt x mpt	500	0.69
PCO1/2X3/4X6	1/2" x 3/4" x 6" mpt x mpt	400	0.82
PCO3/4X4	3/4" x 4" mpt x mpt	400	0.64
PCO3/4X6	3/4" x 6" mpt x mpt	400	1.00
Riser Extensions			
RE1/2X1	1/2" x 1" fpt x mpt	1000	0.30
RE1/2X1 1/2	1/2" x 1 1/2" fpt x mpt	1000	0.32
REC01/2X4	1/2" x 4" fpt x mpt	500	0.67
REC03/4XSHORT	3/4" x Short fpt x mpt	500	0.78
REC03/4X4	3/4" x 4" fpt x mpt	400	0.89
Poly Nipples			
PN1/2XCLOSE	1/2" x close	1000	0.23
PN1/2X3/4XCLOSE	1/2" x 3/4" x close	1000	0.32
PN3/4XCLOSE	3/4" x close	1000	0.35
PN1/2X2	1/2" x 2"	1000	0.24
PN1/2X3	1/2" x 3"	500	0.30
PN1/2X4	1/2" x 4"	500	0.34
PN1/2X5	1/2" x 5"	500	0.45
PN1/2X6	1/2" x 6"	500	0.53
PN1/2X8	1/2" x 8"	50	1.58
PN1/2X10	1/2" x 10"	50	1.82
PN1/2X12	1/2" x 12"	50	2.05
PN1/2X18	1/2" x 18"	50	2.86
PN1/2X24	1/2" x 24"	50	3.72
Nipple Extractors			
SW500C	Stub Wrench	50	6.79






HP2000



OD2



SD1000

Drain and Adapter Features:

- Freeze protection.
- Easy installation without tools.
- Dirt stopper screen keeps sand, dirt and sediment out of system.
- Hammer slug for easy installation on reducing elbows.
- Recessed wicking pad.



SD1000 Siphon Drain Features:

- Freeze protection. Protects mainlines, sprinkler heads, pipe, low spots, and end lines.
- New or existing irrigation systems. 3 sec. installation, no tools necessary.
- One drain for 1/2" thru 1" polyethylene and PVC pipe.

Part Number	Description	Use For	Ctn Qty	List Price
Drains				
HP2000	1/2" MPT Drain	Lateral line	25/500	\$ 4.80
HP3000	3/4" MPT Drain	Lateral line	25/400	5.03
HP4000	1/2" MPT Drain	Main line	25/500	5.31
SD1000	Fits 1/2" thru 1" pipe	Siphon Drain	25/200	9.61
Reducing Elbows				
OD2	1 x many fitting and OD1 drain	Poly end of line	200	6.71



500



Mini Trol® Water Hammer Arrestor Features:



- Mini Trol takes the bang out of water lines.
- Effectively intercepts surges in water lines.
- Prevents damage and shock waves by quick closing valves.
- Designed with pre-pressurized, permanent air chamber separated from water by a sealed-in heavy duty diaphragm.
- Chamber is polypropylene lined. Water never touches steel.
- Guaranteed not to waterlog or lose air.
- Manufactured for AGI in a ISO9001 facility.

Max. Supply Pressure:	90 psi
Max. Working Pressure:	150 psi
Max. Water Temperature:	200 °F


Part Number	Description	Ctn Qty	List Price
500	Mini-Trol 4 1/2" H x 3 3/8" W x 1/2" MPT	24	\$ 69.76



Irrigation Installation Accessories


Garden Hose Thread Fittings

- Material: PVC Type I White, or brass

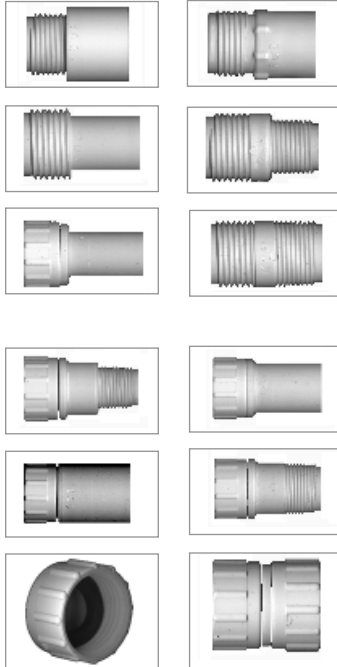

Part Number	Size	Connections	Ctn Qty	List Price
Garden Hose Thread Fittings - MALE				
MHT-101	3/4" x 1/2"	MHT x Slip	25/200	\$ 1.10
MHT-102	3/4" x 1/2"	MHT x FIPT	25/200	1.10
MHT-103	3/4"	MHT x Slip	25/200	1.10
MHT-104	3/4" x 1/2"	MHT x MIPT	25/200	1.10
MHT-105	3/4" x 1/2"	MHT x Spigot	25/200	1.10
MHT-106	3/4"	MHT x MIPT	25/200	1.10
Garden Hose Thread Fittings - FEMALE				
FHT-201	3/4" x 1/2"	FHT x Spigot	25/200	1.70
FHT-202	3/4" x 1/2"	FHT x Slip	25/200	1.70
FHT-203	3/4" x 1/2"	FHT x MIPT	25/200	1.70
FHT-204	3/4"	FHT x MIPT	25/200	1.70
FHT-205	3/4"	FHT x Slip	25/200	1.70
FHT-206	3/4"	FHT x FIPT Swivel	25/200	1.70
BFHT-206	3/4"	FHT x FIPT Swivel BRASS	5/60	29.81
FHT-207	3/4"	FHT x FHT swivel	20/500	1.70
FHT-301	3/4"	FHT CAP	25/200	0.73

Irrigation Installation Accessories

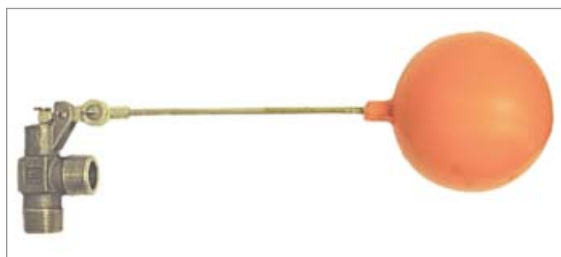

NO LEAD Bronze Float Valve Features:

- NO LEAD bronze body
- Buna-N Disc
- Heavy Duty
- Tapped for 1/4"-20SAE rod
- Threaded outlet
- Rated at 125 psi
- Third party certified to NSF/ANSI 372.



BFV Series

Part Number	Size	Inlet	Outlet	Tapped	Ctn Qty	List Price
BFVNL1/2	1/2"	1/2" mpt	1/2" mpt	1/4"-20SAE	10/100	\$ 42.69
BFVNL3/4	3/4"	3/4" mpt	3/4" mpt	1/4"-20SAE	10/80	44.14
BFVNL1	1"	1" mpt	1" mpt	1/4"-20SAE	10/40	68.65



BFVR Series

Stainless Steel Rods Features:

- Stainless Steel SAE
- Male thread both ends
- Third party certified to NSF/ANSI 372.



Part Number	Length	Thread	Fits Valve Size	Ctn Qty	List Price
BFVR8	8"	1/4"-20SAE	1/2" - 1"	50/400	\$ 6.62
BFVR10	10"	1/4"-20SAE	1/2" - 1"	50/300	7.67
BFVR12	12"	1/4"-20SAE	1/2" - 1"	50/300	8.59



BFVFP Series

Plastic Float Features:

- PVC, Corrosion resistant.
- Lightweight
- Up to 175 °F
- For open tank service only
- Bronze or NO LEAD bronze threaded connection.
- Third party certified to NSF/ANSI 372.



Part Number	Float Diam.	Buoyancy	Female Connection	Ctn Qty	List Price
BFVFPNL5	5"	2.17 lbs.	1/4"-20SAE	100	\$ 21.23
BFVFPNL6	6"	3.8 lbs.	1/4"-20SAE	100	25.00
BFVFPNL8	8"	9.87 lbs.	1/4"-20SAE	20	31.08



Saddle Tees - Bronze, Plastic for Poly Pipe



DST Saddle Tee

HARVARD CONTRACTOR'S Plastic Saddle Tees for Polyethylene Pipe:

- Heavy duty PVC saddle tee bodies with glass-reinforced nylon T-bolts and nuts.
- Molded barb seal for superior sealing to poly pipe. Barb seals deeper and tighter as the poly pipe pressurizes. No o-rings or gaskets needed.
- Withstands over 400 psi without leaking.
- 2 1/2" length protects seal area if pipe is kinked or damaged near saddle tee.
- **NO FLOW RESTRICTION**
- **NOT for use on RIGID PVC Pipe.**



Part Number	Pipe Size	Color	Outlet FPT	Bag/Ctn Qty	List Price
HARVARD CONTRACTOR'S Plastic Saddle Tees					
DST3/4x1/2	3/4"	Gray	1/2"	10/250	\$ 2.70
DST3/4x3/4	3/4"	Gray	3/4"	10/250	2.82
DST1x1/2	1"	White	1/2"	10/250	2.87
DST1x3/4	1"	White	3/4"	10/250	3.06
DST11/4x1/2	1-1/4"	White	1/2"	10/250	4.34
DST11/4x3/4	1-1/4"	White	3/4"	10/200	4.54



ND Series

HARVARD CONTRACTOR'S Plastic Saddle Tee Installation Tool Features:

ND Series Nut Driver:

- Glass-reinforced nylon for durability and strength.

HC Series Coring Tool:

- Spring-loaded self-retracting blade.
- Cuts a clean, burr-free, sawdust-free hole in seconds.



HC Series

Part Number	Description	Ctn Qty	List Price
Coring Tools/Nut Driver (for DST Series)			
ND375	9/16" Nut Driver	1	\$ 4.19
HC45	Coring Tool for DST Saddle Tees w/1/2" fipt outlet	1	19.22
HC55	Coring Tool for DST Saddle Tees w/3/4" fipt outlet	1	19.22



HBST Saddle Tee

HARVARD BRONZE Saddle Tees for Polyethylene Pipe:

- Bronze (81% copper) body to prevent material breakdown when buried.
- Stainless steel slotted screws.
- Leakproof, rubber gasket seal.
- **NOT for use on RIGID PVC pipe.**




Part Number	Pipe Size	Color	Outlet FPT	Bag/Ctn Qty	List Price
HARVARD Bronze Saddle Tees					
HBST 3/4x1/2	3/4"		1/2"	200	\$ 8.96
HBST 3/4x3/4	3/4"		3/4"	200	9.35
HBST 1x1/2	1"		1/2"	200	9.91
HBST 1x3/4	1"		3/4"	200	10.21
HBST 11/4x1/2	1-1/4"		1/2"	120	14.96
HBST 11/4x3/4	1-1/4"		3/4"	100	15.64
HBST 11/2x1/2	1-1/2"		1/2"	100	19.03
HBST 11/2x3/4	1-1/2"		3/4"	100	19.49
HBST 11/2x1	1-1/2"		1"	72	22.14
HBST 2x1/2	2"		1/2"	80	24.44
HBST 2x3/4	2"		3/4"	60	27.68



Saddle Tees - Plastic Self-Tap for Poly Pipe



BS Saddle Tees



BS Series Blazing Saddle Manufactured by TOM KING HARMONY PRODUCTS



- Less flow restriction than an insert fitting.
- **BS Series for use on Polyethylene Pipe**
- **BS-PVC Series for use on PVC Pipe**
- Labor savings. No tools required. 10 sec installation w/ minimal digging.
- Withstands over 400 psi without leaking. Tested over 700,000 cycles at 60 psi.
- All plastic construction, no gaskets, seals, moving parts or clamps.
- Slip over pipe, apply pressure to top to lock in place, thread spike into saddle until locked.

Part Number	Pipe Size	Outlet FPT	Ctn Qty	List Price
Blazing Saddle				
BS4000	3/4"	Swing Pipe Barb	25/250	\$ 4.80
BS5000	3/4"	1/2"	25/250	4.54
BS6000	3/4"	3/4"	25/250	4.54
BS7000	1"	1/2"	25/250	4.42
BS8000	1"	3/4"	25/250	4.42
BS9000	1"	Swing Pipe Barb	25/250	4.63
BS5PVC	3/4"	1/2"	25/250	4.46
BS6PVC	3/4"	3/4"	25/250	4.46
BS7PVC	1"	1/2"	25/250	4.59
BS8PVC	1"	3/4"	25/250	4.59



Saddle Tees - PVC for Rigid Plastic Pipe



Clamp-It™ PVC Saddle Tees for Rigid Pipe Features:

- Use for turf and irrigation systems, golf courses, athletic fields.
- Use for water service lines, mines, landfills.
- Provides full and equal support around the entire circumference of the pipe.
- Easy to install hinge and clamping wedge eliminates need for metal screws.
- Made of high impact type II PVC.
- EPDM O-ring seal.
- Rated at 200 PSI at 72 °F.
- For use on cold water lines only, 2" - 8" PVC.



Clamp-It™ PVC Saddle Tee



1. Place saddle on desired location and mark. Drill hole according to Drill Chart and deburr.



2. Place saddle over hole and attach easy clamping hinge around pipe.



3. Apply wedge half way by hand and finish off with a slight tap of a rubber mallet. Ideal for new installations or additions.



4. Saddle should be pressure tested prior to burial to assure system integrity. Long lasting EPDM o-ring seal assures a leak free installation. Note: wedge does not need to be flush with saddle body to seal.

Saddle Drill Sizes:

Outlet size	Drill Size
over 2 1/2" pipe	
3/4" IPS Slip & Fipt	3/4"
1" IPS Slip & Fipt	1"
1 1/4" IPS Slip & Fipt	1 1/4"
1 1/2" IPS Slip & Fipt	1 3/8"

* For 2 1/2" IPS saddle with a 2" outlet - Drill size must be 1 3/4" due to pipe restriction.

Part Number	IPS Pipe Size	Tap Size	Ctn Qty	List Price
Clamp-It™ PVC Saddle Tees				
421507	1 1/2	3/4 fipt	5	\$ 45.68
421510	1 1/2	1 fpt	5	45.68
422007	2	3/4 fipt	5	52.91
422010	2	1 fipt	5	54.64
422012	2	1-1/4 fipt	5	54.64
422015	2	1-1/2 fipt	5	54.64
432010	2	1 slip	5	48.89
432012	2	1-1/4 slip	5	48.89
432015	2	1-1/2 slip	5	48.89
422507	2-1/2	3/4 fipt	5	62.51
422515	2-1/2	1-1/2 fipt	5	62.51
422520	2-1/2	2 fipt	5	62.51
432510	2-1/2	1 slip	5	66.28
432515	2-1/2	1-1/2 slip	5	66.28
432520	2-1/2	2 slip	5	66.28

See next page for 3" - 8" CLAMP IT Saddle Tees.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

10.39

Saddle Tees - PVC for Rigid Plastic Pipe



Part Number	IPS Pipe Size	Tap Size	Ctn Qty	List Price
453007	3	3/4 slip	5	\$ 66.28
453010	3	1 slip	5	66.28
453012	3	1-1/4 slip	5	66.28
453015	3	1-1/2 slip	5	66.28
453020	3	2 slip	5	66.28
443007	3	3/4 fipt	5	74.70
443010	3	1 fipt	5	74.70
443012	3	1-1/4 fipt	5	74.70
443015	3	1-1/2 fipt	5	74.70
443020	3	2 fipt	5	74.70
454007	4	3/4 slip	5	84.93
454010	4	1 slip	5	84.93
454015	4	1-1/2 slip	5	84.93
454020	4	2 slip	5	84.93
444007	4	3/4 fipt	5	91.12
444010	4	1 fipt	5	94.07
444012	4	1-1/4 fipt	5	94.07
444015	4	1-1/2 fipt	5	94.07
444020	4	2 fipt	5	94.07
456007	6	3/4 slip	5	137.11
456010	6	1 slip	5	137.11
456015	6	1-1/2 slip	5	137.11
456020	6	2 slip	5	132.83
446007	6	3/4 fipt	5	137.11
446010	6	1 fipt	5	137.11
446012	6	1-1/4 fipt	5	137.11
446015	6	1-1/2 fipt	5	137.11
446020	6	2 fipt	5	132.32
458010	8	1slip	5	166.40
458015	8	1-1/2 slip	5	166.40
458020	8	2 slip	5	161.20
448007	8	3/4 fipt	5	166.40
448010	8	1 fipt	5	166.40
448020	8	2 fipt	5	161.20



Clamp-It™ PVC
Saddle Tee



Part Number	Description	Ctn Qty	List Price
WEDGE 225	Wedge, Fits 2" and 2-1/2" Saddles	1	\$ 7.71
WEDGE 380	Wedge, Fits 3" and 4" Saddles	1	8.46
WEDGE 480	Wedge, Fits 6" and 8" Saddles	1	8.27

Replacement O-rings available for all size PVC Saddle Tees.
Contact your customer service representative for sizing and pricing.



Funny Pipe, MARLEX™ Fittings



Swing Riser Fittings for Funny Pipe

- For use with Funny Pipe and other thick walled 1/2" ID tubing.
- Use in drip irrigation, home sprinkler systems & other residential irr. applications.
- Spiral barb design allows quicker twist-on installation.
- Made of Celcon® plastic resin providing long term durability.



Part Number	Size	Connections	Ctn Qty	List Price
90° Elbow				
SRE1/2	1/2" x 1/2"	MIPT x funny pipe barb (FPB)	100/1500	\$ 0.35
SRE3/4	3/4" x 1/2"	MIPT x FPB	50/1000	0.35
Male Adapter				
SRMA1/2	1/2" x 1/2"	MIPT x FPB	100/500	0.35
SRMA3/4	3/4" x 1/2"	MIPT x FPB	50/500	0.35
Coupling				
SRC1/2	1/2" x 1/2"	FPB x FPB	50/500	0.35
Tee				
SRT1/2	1/2" x 1/2"	FPB x FPB x FPB	50/250	0.95

Lasco Swing Riser Fittings for Funny Pipe with Double Helix design

Part Number	Size	Connections	Ctn Qty	List Price
90° Elbow				
3300-005	1/2" x 1/2"	MIPT x funny pipe barb	500	\$ 0.71
3300-007	3/4" x 1/2"	MIPT x funny pipe barb	500	0.71
Male Adapter				
3400-005	1/2" x 1/2"	MIPT x funny pipe barb	100	0.76
3400-007	3/4" x 1/2"	MIPT x funny pipe barb	100	0.76



TRANSITION FITTINGS MARLEX™ STREET ELBOWS

- Ideal for use in swing joints.
- More than 27% heavier than other elbows, providing added strength & durability.

Part Number	Size	Connection	Ctn Qty	List Price
MSE1/2	1/2" x 1/2"	mipt x fipt	50/500	\$ 0.36
MSE3/4	3/4" x 3/4"	mipt x fipt	25/350	0.66
MSE1	1" x 1"	mipt x fipt	25/100	1.02



Transition Fittings for Irrigation Applications

- Save money on material and labor cost.
- Faster, easier installation.
- Retaining spikes to prevent movement on Dawn fittings.
- Double helix design on LASCO fittings.



LASCO Double Helix SW Series

LASCO Double Helix / KWIKADAPT SW Series Fitting Features:

- One piece design to go from Poly to swing/funny pipe.
- Use instead of a combo insert tee and a swing elbow.
- Available in 3/4" and 1".
- LASCO double helix fitting pipe connection.

Part Number	Description	Ctn Qty	List Price
LASCO - Poly to Swing/Funny Pipe Double Helix Design			
1429-099	3/4" Insert x Swing /Funny Pipe Coupling	10	\$ 1.81
1429-129	1" Insert x Swing /Funny Pipe Coupling	10	1.89
1401-099	3/4" Insert x Swing/Funny Pipe Tee	10	1.97
1401-129	1" Insert x Swing/Funny Pipe Tee	10	2.13



Swing Joint Assemblies, Poly Swing Pipe



SWING JOINT ASSEMBLIES

- Fully assembled swing assemblies with funny pipe.
- Includes marlex elbow.
- Available in additional lengths or without marlex elbow by special order.

Part Number	Size x Length	Connection	Ctn Qty	List Price
SA125050	1/2" x 1/2" x 12"	mipt x mipt (marlex ell)	50	\$ 2.73
SA125075	1/2" x 3/4" x 12"	mipt x mipt (marlex ell)	50	3.17
SA127575	3/4" x 3/4" x 12"	mipt x mipt (marlex ell)	50	3.27



POLY SWING PIPE

- Highly flexible.
- Use with swing riser fittings for a flexible swing joint assembly.
- LLDPE for increased flexibility.
- Up to 100 psi working pressure at 72°F.
- Shrink wrapped coils.



Part Number	Size	Ctn Qty	List Price
PSP50-100	1/2" x 100' roll	1	\$ 60.54



Direct Bury Splice Connectors

3M® DBO/B-6 and DBR/Y-6 Direct Burial Splice Connector Features:



ISO 9002



HDBR/Y-6 Splice Tube and Connector



Specifications:

Maximum voltage rating:
600 volts.

UL Listed, File No. E102356

UL Listed 98U1

UL Standard 486D

Application temperature:
32 °F to 120 °F

Operating temperature:
-40 °F to 221 °F.

Construction:

Tube: Impact and UV

Resistant Polypropylene

Grease: 711B (DBO) Mineral Oil Based, EG3 (DBR)

O/B+ or R/Y+ Connector: Steel Spring, Flame Retardant Insulator

UL Listed for Direct Burial, Rated for 600V.

Replaces existing 3M DBY, DBR, DBY6, DBR6, DBR/Y.


- Electrically connects two or more pre-stripped copper wires
- Provides moisture seal of the connections for the direct burial.
- Ideal for splicing wires and cables in irrigation and low voltage lighting systems.
- For residential, commercial, golf and other green industry applications.
- Smaller profile DBO/B-6 Series connectors are used when a larger size range of wires is not needed.
- May be installed above or below ground, inside a valve box or buried next to a valve-in-head sprinkler or light fixture.
- Not recommended for submersible applications.
- Each kit includes a 3M Performance Plus quick biting wire connector O/B+ or R/Y+ and a high impact, UV resistant polypropylene tube prefilled with moisture-resistant grease.
- The gel filled tube includes a lid that compresses the wire insulation when closed. This applies pressure, known as "strain relief" that keeps the connection inside the tube when the wires are pulled-upon. The connector tube includes channels for three sets of wires.
- 3M Electrical products are manufactured for AGI in an ISO 9002 facility.

Common AWG Wire Combinations - CV only

DBO		DBR	
2-3 #16 sol/str	1 #18 to 1-2 #14 sol/str	2 - 7 #18	1-3 #12 w/ 1 #18
2-3 #14 sol/str	1 #18 to 1-2 #12 sol/str	2 - 6 #16	1-2 #10 w/ 1 #18
2 #12 sol/str	1 #16 to 1-2 #14 sol/str	2 - 4 #14	1-3 #12 w/ 1 #16
1 #14 to 1 #12 sol/str	1 #16 to 1-2 #12 sol/str	2 - 4 #12	1-2 #10 w/ 1 #12
		2 - 3 #10	1-2 #14 w/ 1 #18

See complete chart of combinations on reverse.

Installation:

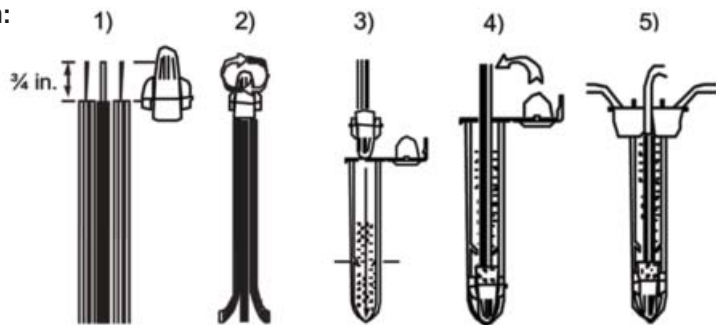

Part Number	Description	Ctn Qty	Pallet Qty	List Price
CHDBO/B-6	3M® Direct Bury Splice Kit, Bulk	100		\$ 3.13
HDBO/B2-6	3M® Direct Bury Splice Kit, 2 per package	25		7.54
CHDBR/Y-6	3M® Direct Bury Splice Kit, Bulk	100	7500	3.40
HDBR/Y2-6	3M® Direct Bury Splice Kit, 2 per package	25	-	8.16



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204


www.americangranby.com

FALL 2016

10.43



Electrical Installation Accessories



SSP314



3M® SSP Series Insulation Displacement Connector

Features:

- Used to electrically connect two or three wire ends & insulate the connection.
- #22-#14 AWG range on SSP314. SSP314 is UL and CSA listed.
- #22-#16 AWG range on SSP316.
- Also used for pigtail 2- and 3-wire splicing.
- Connector provides a moisture-resistant seal and is flame retardant.



LV9000

Tom King Harmony Snaplock Wire Connector Features:

- Gel-filled 100% waterproof.
- Double o-ring, double-latch locking system.
- For low voltage connections.



Part Number	Description	Ctn Qty	List Price
SSP314	3M® Insulation Displacement Connectors #22-#14 AWG	1000	\$ 1.98
SSP316	3M® Insulation Displacement Connectors #22-#16 AWG	300	1.85
Snaplock Gel-filled Wire Connector			
LV9000	Small- fits two #24 - seven #18 AWG	24/720	1.80
LV9500	Large - Fits two #18 - three #10 & one #18 AWG	12/432	2.34



82-A

Scotchcast™ 82-A Series Inline Resin Splice Kit Features:

- Insulate and seal single conductor, unshielded cable splices & multiple conductor cables.
- Connector is not included.

Part Number	Conductor	Cable OD	Conn OD	Ctn Qty	List Price
82-A2	2-3/0 AWG	1"	0.625"	10	\$ 154.21



VL1

CLICK-IT™ Valve Locator Features:

- Water resistant.
- Compact design.
- For location of solenoid valve quickly and easily.
- Practical and cost effective.

Part Number	Description	Ctn Qty	List Price
VL1	Click-It Valve Locator	10	\$ 142.11






PTC163-6 Series



PTC143-6RA220

HARVARD CONTRACTOR'S Power Cord Features:

- Three prong right angle (115V, 220V) molded plugs.
- 16 gauge, 3 conductor, 13 amp, 125 Volt rating.
- 14 gauge, 3 conductor, 15 amp, 250 Volt rating.
- Six foot cord length.
- Free end is split, stripped 3/8".
- UL and CSA listed in US and Canada.



Part Number	Description	Wire Gauge	Volt Rating	Ctn Qty	List Price
PTC163-6ST	Straight plug cord	16	125 V	50	\$ 10.89
PTC163-6RA	Right angle plug cord	16	125 V	50	10.89
PTC143-6RA220	Right angle plug cord	14	250 V	50	14.11



HARVARD CONTRACTOR'S Anchor Kit Features:

- Anchor kits complete with 100 plastic anchors, 100 screws and 1/4" masonry drill bit in a plastic case.
- Plastic gray ribbed anchors with lip design for electronic timer, pump start relay installations. Use with concrete block, brick and wallboard.
- Anchors have internal ribs for better centering of screws, locking lugs against pull and twist. Exterior design prevents fall out in overhead holes.
- Kit available with combination slotted/phillips head or tri-combination, slotted/phillips/hex head #10 x 1" screws.
- Kits complete with 1/4" x 4" masonry drill bit.
- Clear, unbreakable plastic case with molded-in hanging tab.




Combo Head

Tri Combo Head




Part Number	Description	Ctn Qty	List Price
AK10CSPR	Ribbed Combo Head	36	\$ 16.23
AK10TCR	Ribbed Tri Combo Head	36	16.65

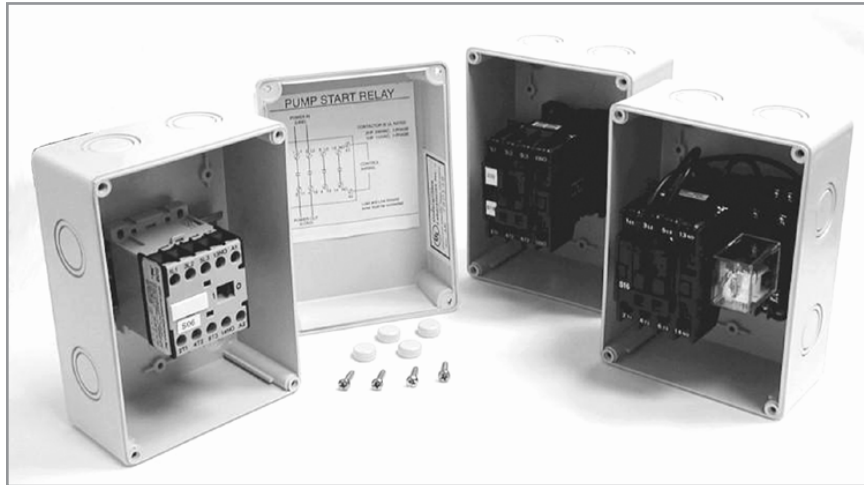

Pump Start Relay Features:

- Contactors are UL and UL Canada rated.
- Wide coil operating range, +10% to -30% of rated 60 hz coil voltage.
Contactors will start on low voltage as follows:
Single phase: 24 VAC coil will pull in at 17 volts.
120 VAC coil will pull in at 84 volts.
230 VAC coil will pull in at 161 volts.
- Finger safe design.
- One normally open auxiliary contact for powering a pilot light or alarm.
- Pressure screw terminals accept 18 through 10 AWG wire.
- Interposing relay units accept 24 through 10 AWG wire.
- Mechanical life up to 10 million operations.
- Long electrical life.
- PSR567 Series with interposing relay designed for low voltage and low controller output.




Industrial Non-metallic Enclosure Features:

- Gray enclosures are UL, CSA listed.
- Rated NEMA 4X for indoor or outdoor use.
- To maintain 4X enclosure rating use required 4X connectors.
- Watertight, dust tight, oil tight and rain tight.
- High impact, durable insulated Noryl thermoplastic.
- Neoprene gasketed cover.
- Resistant to shock, corrosion, chemicals and atmospheric agents.
- 8 conduit knockouts (1/2", 3/4" NPT combination.)
- Service temperature -40° to 260° F.
- Stainless steel cover screws (max tightening torque: 7 in-lbs.)
- Sealing plugs provided to waterproof mounting screws.
- 5.9" H x 4.3" W x 3.9" D



Pump Start Relays

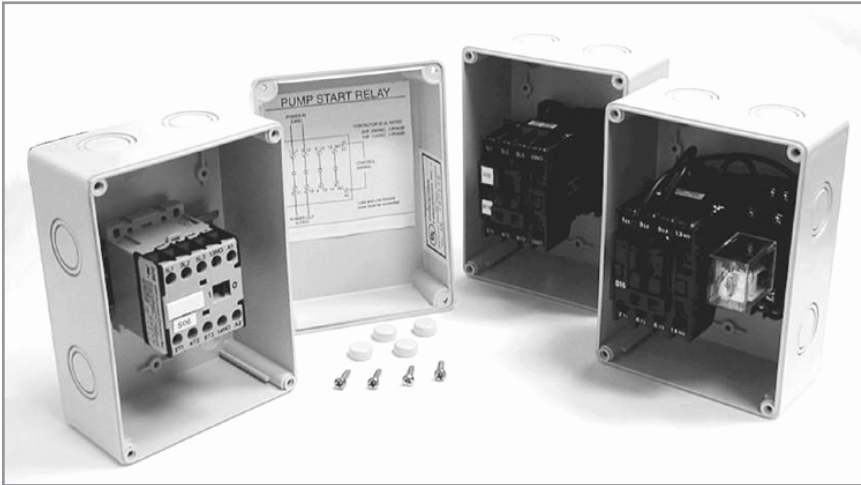


Part Number	INPUT- PUMP START RELAY			CONTACTOR Coil Voltage	PUMP MOTOR HP (MAX)				LIST PRICE
	Volts VAC	Req'd Close	Coil Power Hold		Single Phase* 120 v	230 v	Three Phase ** 200/230v	460 v	
Direct Control Style Contactor									
PSR123-24	24	26 VA	4.2 VA	24	1 HP	2 HP	3 HP	5 HP	\$ 132.03
PSR123-120	120	26 VA	4.2 VA	120	1 HP	2 HP	3 HP	5 HP	132.03
PSR123-230	230	26 VA	4.2 VA	230	1 HP	2 HP	3 HP	5 HP	132.03
Direct Control Style Contactor									
PSR575-24	24	70 VA	12 VA	24	2 HP	5 HP	7.5 HP	15 HP	183.26
PSR575-120	120	70 VA	12 VA	120	2 HP	5 HP	7.5 HP	15 HP	183.26
PSR575-230	230	70 VA	12 VA	230	2 HP	5 HP	7.5 HP	15 HP	183.26
Interposing Relay Style Contactor for low voltage/controller output applications.									
PSR576-230-24	24	1.2 VA	1.2 VA	260	-	5 HP	7.5 HP	-	334.26

Notes:

1. Direct Control Style: The **input volts** must match the controller output voltage.
The **contactor coil voltage** must match the controller voltage.
2. Interposing Relay Style: The **input volts** must match the controller output voltage.
The **contactor coil voltage** must match the controller voltage.
3. VA=Volt Amps. To determine the operating amperage needed by the coil, divide the VA by the controller output voltage.


* Single Phase systems require **motor overload protection** within the motor.

** Three phase systems: May require **motor overload protection** within the motor. For proper **overload protection** consult the NEC (National Electrical Code) and local building codes before installation.

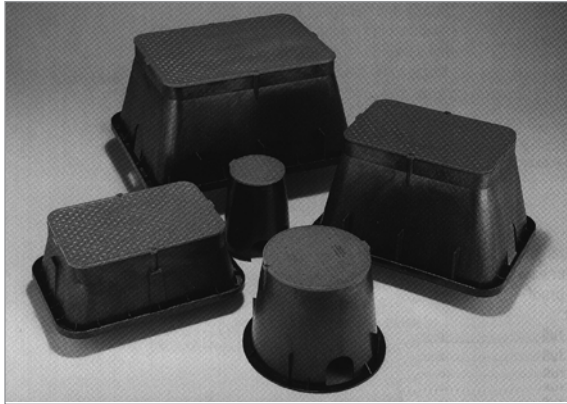


Valve Box Features:


- Bodies made from structural polyolefin.
- Covers made with UV inhibitors to prevent discoloration and deterioration.
- Nestable for easy storage.
- 10" round and all rectangular boxes include brass insert so bolts may be added for easy lock down.
- ICV cover design, green covers for water applications.



6" Round Economy




6" Round

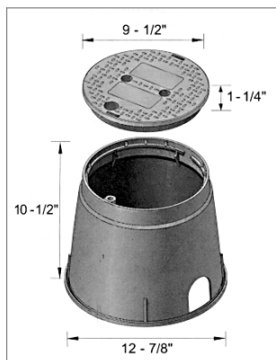

10" Round Box

Part Number	Description	Pallet Qty	List Price
6" Round Economy Box with overlapping lip snap-on green cover			
D109-G	Box w/ cover	600	\$ 6.93
D109GL	Cover only	1	3.42
6" Round Box with overlapping lip snap-on green cover			
107BCH	Box w/ cover	250	7.82
107CH	Cover only	1	4.20
107BCS	Box w/ sewer cover	250	8.86
107BC	ICV Box w/ cover	250	7.31
107C	ICV cover only	800	3.24
10" Round Box with bayonet twist-on overlapping lip green cover			
111BC	Box w/ cover	180	19.42
111C	Cover Only	1	9.36
111BCS	Box w/ sewer cover	180	23.57

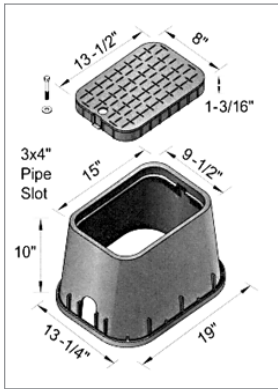


10" Standard Rectangular Box

10" x 15" Standard Rectangular Valve Box

- Standard drop-in green cover



Part Number	Description	Pallet Qty	List Price
10" x 15" Rectangular Valve Box			
D1000-SG	10" x 15" Box w/ Cover	96	\$ 33.71
D1000-SGL	Cover Only	1	12.82

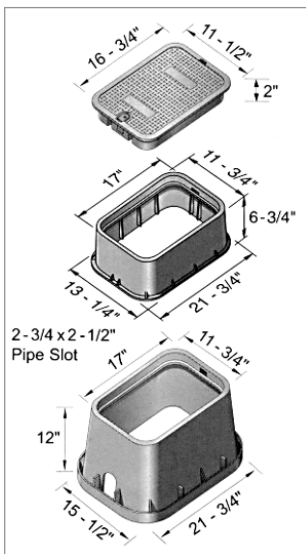

12" x 17" Standard Rectangular Valve Box

- Overlapping lip snap-on green cover

Part Number	Description	Pallet Qty	List Price
12" x 17" Standard Rectangular Valve Box			
113BC	12" x 17" Box w/ cover	78	\$ 41.77
113C	Cover Only	1	25.70
113-6	Extension - no cover	49	30.18




6" Tapered Box

12" x 17" x 6" Tapered Low Profile Rectangular Valve Box

- Overlapping lip snap-on green cover


Part Number	Description	Pallet Qty	List Price
12" x 17" x 6" Tapered (Low Profile) Rectangular Box			
115TBC	12" x 17" x 6" Tapered Box w/ cover	96	\$ 40.19
115	12" x 17" x 6" Tapered Extension w/ cover	49	38.75

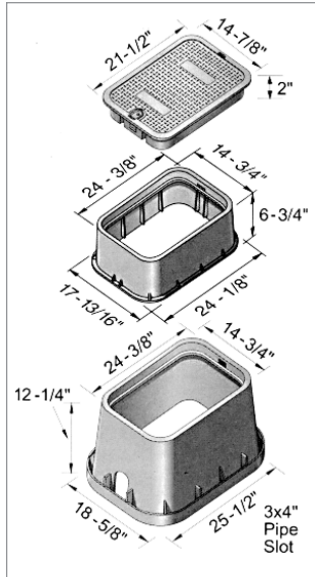

12" x 20" Jumbo Rectangular Valve Box


- Overlapping lip snap-on green cover
- "Water Meter" labeled cover available.

Part Number	Description	Pallet Qty	List Price
12" x 20" Jumbo Rectangular Valve Box			
117BC	12" x 20" Jumbo Box w/ cover	56	\$ 79.39
217C	Jumbo cover only	1	48.35
117CW	Jumbo Black "WATER METER" cover only	1	61.69
117B	12" x 20" Jumbo Box only	56	66.73
117-6	Jumbo Extension - no cover	32	60.57




12" x 20" x 6" Tapered Low Profile Jumbo Valve Box

- Overlapping lip snap-on green cover

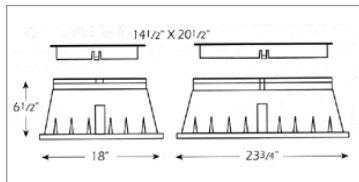

Part Number	Description	Pallet Qty	List Price
12" x 20" x 6" Tapered Low Profile Jumbo Valve Box			
119TBC	12" x 20" x 6" Tapered Jumbo Box w/ cover	56	\$ 69.44
119	12" x 20" x 6" Tapered Jumbo Extension w/ cover	32	104.25

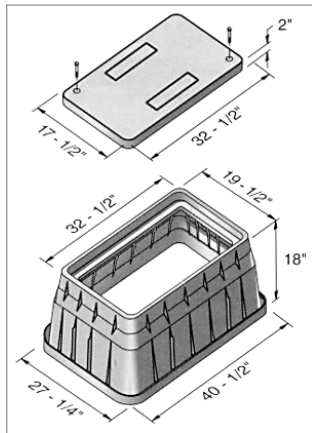

17" x 30" x 18" Jumbo Rectangular Valve Box

- Overlapping lip green cover
- Locking stainless steel bolt

Part Number	Description	Pallet Qty	List Price
17" x 30" x 18" Jumbo Rectangular Box			
126BCB	17" x 30" x 18" Jumbo Box w/ cover	10	\$ 611.82





Expandable Repair Couplings



118 Series



Flo Span Expandable Repair Coupling Features:

- Double EPDM o-ring seal gives more protection from possible leakage due to deflection of piston in the extended position.
- EPDM o-ring seal also protects against contamination on the cylinder wall.
- Solvent cement trap located in cap to capture excess solvent cement.
- Made from PVC type I grade I material meeting ASTM D-1784
- 118 Series does not have union end.

NEW Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Flo-Span Expansion Couplings - NO UNION S x SPG				
118-05	1/2"	7 1/2"	28	\$ 6.68
118-07	3/4"	7 3/4"	24	7.40
118-10	1"	9 1/2"	15	8.57
118-12	1-1/4"	10 3/4"	10	16.12
118-15	1-1/2"	12 3/4"	16	17.67
118-20	2"	13 1/2"	12	27.02
118-25	2-1/2"	18 3/4"	3	41.98
118-30	3"	21"	3	52.45
118-40	4"	22 3/4"	3	91.68
QF-6000	6" S x S	26 1/4"	1	425.40



PSC Series




Poly-Stretch Repair Coupling Features:

- For repair of polyethylene irrigation pipe.
- Avoid extra digging and buckled pipe.
- Couplings are made of ABS
- O-ring seal is made of Buna 70
- Pressure rated at 160 psi.
- Designed for irrigation operation pressures of polyethylene pipe and more.

Instructions for Installation:

- Cut out approximately 4" of pipe where repair is needed.
- Place clamps over ends of pipe
- Insert end marked with "END FIRST" arrow by pushing and turning at same time.
- Insert other end by pushing & turning.
- Place clamps over ribbed ends & tighten.

Dimensions:



	A	B	C	D	E
3/4"	4.0	.575	.820	1.50	5.625
1"	4.0	.770	1.075	1.50	5.625
1 1/4"	5.0	1.109	1.415	1.755	6.70
1 1/2"	5.0	1.310	1.63	1.755	6.70
2"	5.0	1.825	2.125	1.755	6.70

Part Number	Description	Ctn Qty	List Price
PSC07	3/4" Poly-stretch coupling	50	\$ 11.99
PSC10	1" Poly-stretch coupling	50	12.54
PSC12	1 1/4" Poly-stretch coupling	25	18.78
PSC15	1 1/2" Poly-stretch coupling	25	21.72
PSC20	2" Poly-stretch coupling	20	33.91



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

10.53



Repair Fittings for Sch 40 Pipe



PEX Series



PIC Series



Pipe Extender and Inside Connector Repair Fitting Features:

- For Sch 40 pipe.
- Saves labor.
- Invisible after installation.
- Permanent repair.
- Insignificant flow restriction.
- PVC Construction.
- PIC Series connects two pieces of Sch 40 pipe with flush joint.

Part Number	Description	IPS Size	Ctn Qty	List Price
Pipe Extender Repair Fitting				
PEX50	Pipe Extender	1/2"	48	\$ 2.21
PEX75	Pipe Extender	3/4"	48	2.82
PEX100	Pipe Extender	1"	48	3.58
PEX125	Pipe Extender	1 1/4"	48	4.20
PEX150	Pipe Extender	1 1/2"	48	5.01
PEX200	Pipe Extender	2"	48	5.59
PEX250	Pipe Extender	2 1/2"	96	7.59
PEX300	Pipe Extender	3"	96	10.97
PEX400	Pipe Extender	4"	48	12.94
Inside Connector Repair Fitting				
PIC100	Inside Connector	1"	48	3.58
PIC150	Inside Connector	1 1/2"	48	5.01
PIC200	Inside Connector	2"	48	5.59



Pinch Clamps



Single ear pinch clamp Features and Benefits:

- 300 series stainless steel material for excellent corrosion resistance.
- Welded construction provides superior strength.
- Quick, easy installation provides a uniform 360° seal.
- Permanent seal is tamper proof.
- Ideal 61-0 series clamps are compatible with most clinching tools.
- Fits most popular polyethylene and polybutylene water service lines.
- Perfect for irrigation applications.



61001-51

Part Number	Nominal Size	Open Diameter	Closed Diameter	Bag Qty	Ctn Qty	List Price per 100
61198	3/4"	0.779	0.669	100	2000	\$ 54.59
61210	13/16"	0.827	0.716	100	2000	55.62
61256	1"	1.008	0.898	250	2500	55.62
61271	1 1/16"	1.067	0.945	250	2500	55.62
61316	1 1/4"	1.244	1.122	250	2500	55.62
61331	1 5/16"	1.303	1.181	250	2500	56.16
61410	1 5/8"	1.614	1.492	100	2000	64.89
61425	1 11/16"	1.673	1.551	100	2000	69.01
61485	1 7/8"	1.909	1.787	100	2000	81.34
61001-51	Pinch tool for all size pinch clamps (EACH)				15	71.55

To identify proper clamp size:

Measure actual OD of the hose on the fitting. Select the nominal size clamp nearest but always larger than the OD of the hose on the fitting.

Quantities:

Bag quantities required.

Drop Ship Programs:

Minimum 5000 piece assorted pinch clamps required if ordered in combination with a 5000 piece worm drive clamp drop ship order. Minimum 25,000 piece assorted pinch clamps required if ordered separately. Standard customer pricing on pinch clamps applies.

Freight & Terms:

Standard AGI freight, terms and conditions apply.



Utility Pumps



91025 & 91330

Submersible Utility Pump Features:

- 1/5 & 1/3 HP motors, 120 v, 60 Hz
- Corrosion resistant construction.
- 8' waterproof power cord.
- Clog resistant open type impeller.
- Capacities of 26 & 40 gpm.
- 1 year limited warranty.

Specifications:

Discharge: 1 1/4" MNPT
or 3/4" GHT

Housing & Base: Glass reinforced ABS

Impeller: Non-clogging open type

Bearing: Permanently lubricating

Motors: Permanent split capacitor,
continuous duty, thermally protected



Model No.	HP	Gallons per minute at discharge height in feet						Max. Head	Min. Amps	List Price
		0'	5'	10'	15'	20'	25'			
SP91025	1/5	26	21	14	10	7	1	25'	3.6	\$ 186.69
SP91330	1/3	40	34	28	22	12	2	25'	4.1	234.58

NOTE: Use of smaller diameter pipe, or long runs of pipe, will result in lower flow rates than those shown.



SECTION 11

HAND TOOLS & ACCESSORIES



PRODUCT LINE	PAGE
Anchor Kits6
Cutters & Saws for Pipe and Hose1-4
Hand Tools7-11
Including: Flagging tape / Hand Saws / Mallets / Measures	
Nut Drivers / Pliers / Pullers & Bars / Screwdrivers / Snips	
Utility Knives / Wire Cutter,Crimper,Stripper / Wrenches	
Power Tool Accessories12
Including: Drill Bits / Hole Saws / Saw Blades / Wheels	
Work Gloves5





Pipe & Hose Cutters



T Series

HARVARD CONTRACTOR'S Plastic Pipe & Hose Cutter Features:

- Heavy duty, glass reinforced nylon handles.
- Handles designed with matted surface and finger indentation for firm gripping in any weather conditions.
- Handle "bridge" support structure designed to eliminate deflection, bending or breaking while cutting for straighter, truer cut every time.
- "100" and "135" available in black or yellow. "200" available in black.
- Available with either PTFE coated hardened tool steel or polished high-carbon stainless steel blades specially honed to maintain their edge longer than competitive blades.
- Cutter blades individually laser etched with "100", "135" or "200" for easy identification. Replacement blades are blister packed with knock out pin.
- All Harvard Plastic Pipe and Hose cutters are blister packed with an attractive hang-up card.



The unique cutting action of the Harvard Contractor's cutter is produced by slightly rotating or rocking the cutter on the pipe while squeezing lightly on the handles. After just a few cuts, anyone can make fast, clean, straight cuts. The rotating action is not necessary for rubber hose or soft tubing (except when cutting 2" or larger hose with the SS200).



Part Number	Color	Blade Material	Cuts	Ctn Qty	List Price
HARVARD CONTRACTOR Pipe & Hose Cutters					
T100	Black	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	\$ 21.53
YT100	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	21.53
T100SS	Black	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
YT100SS	Yellow	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1"	50	22.48
T135	Black	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
YT135	Yellow	PTFE Coated Hardened Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	24.15
T135SS	Black	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
YT135SS	Yellow	Stainless Steel	PE, Rubber hose through 1 1/2" Class PVC through 1 1/4"	50	25.10
SS200	Black	Stainless Steel	Rubber hose through 2" PE through 1 1/2" & Class PVC through 1 1/4"	50	26.61
HARVARD CONTRACTOR Replacement Blades (includes one knock out pin) DP is DOUBLE PACK					
BT100	PTFE Coated Hardened Steel Blade	T100, YT100	100	8.20	
BT100SS	Stainless Steel Blade	T100SS, YT100SS	100	9.16	
BT135	PTFE Coated Hardened Steel Blade	T135, YT135	100	8.98	
BT135DP	PTFE Coated Hardened Steel Blades (2)	T135, YT135	100	17.42	
BT135SS	Stainless Steel Blade	T135SS, YT135SS	100	9.91	
BT135DPSS	Stainless Steel Blades (2)	T135SS, YT135SS	100	19.29	
SSB200	Stainless Steel Blade	SS200	50	10.20	



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

11.1

Pipe & Hose Cutters & Cable Saws



APC100SS

HARVARD CONTRACTOR'S Plastic Pipe & Hose Cutter with Spring Action Features:

- Heavy duty, cast metal handles.
- Handles designed with matted surface and finger indentation for firm gripping in any weather conditions.
- Spring action for easy use.
- Latch handle for carrying in closed position.
- **Reversible**, replaceable polished high carbon stainless steel blades honed to maintain thin edge longer than competitive blades.
- Cuts PE, Rubber hose & PVC (Class & Sch 40) through 1" ID (max diameter 1 3/8")
- Blister packed with an attractive hang-up card.



The unique cutting action of the Harvard Contractor's cutter is produced by slightly rotating or rocking the cutter on the pipe while squeezing lightly on the handles. After just a few cuts, anyone can make fast, clean, straight cuts. The rotating action is not necessary for rubber hose or soft tubing.



Part Number	Color	Blade Material	Cuts	Ctn Qty	List Price
HARVARD CONTRACTOR Pipe & Hose Cutters					
APC100SS	Red	Stainless Steel	PE, Rubber hose & PVC (Class & Sch 40) through 1" ID (max diameter 1 3/8")	50	\$ 17.31
HARVARD CONTRACTOR Replacement, Reversible Blade					
APC100SSB		Stainless Steel reversible blade		1	8.93



CS24L



CS36T

HARVARD CONTRACTOR'S PVC Cable Saw Features:

- Multi-purpose cable saw cuts PVC pipe.
- Available in two lengths and two handle styles



Part Number	Description	Ctn Qty	List Price
Cable Saws			
CS24L	Cable saw, 24" length, Loop handle	50/500	6.00
CS36L	Cable saw, 36" length, Loop handle	5/200	8.72
CS36T	Cable saw, 36" length, T handle	50	11.43



PVC Pipe Cutters - Ratchet



HRPC42



HRPC50

HARVARD CONTRACTOR'S PVC Ratchet Pipe Cutter


Features:

- For use up to 1 1/4" or 2" diameter pipe.
- All stainless steel cutting blade and ratchet teeth.
- All metal body construction with latching handle for safe storage.
- 1 1/4" cutter has quick release thumb lever for easy blade opening.
- 1 1/4" cutter packaged in blister card for easy display.
- 2" two hand cutter has rubber handle grips.
- 2" two hand cutter packaged with wrap around card for easy display.
- Replacement stainless steel blades and spring sets are available.

Part Number	Description	Ctn Qty	List Price
Cutters - with stainless steel blade			
HRPC42	PVC Pipe Cutter, 1 1/4"	50	\$ 28.39
HRPC50	PVC Pipe Cutter, 2"	10	142.68
Replacement Blades - stainless steel			
HRPC42B	Blade for HRPC42	1	9.47
HRPC50B	Blade for HRPC50	1	71.25
Replacement Spring Sets			
HRPC42SP	Spring Set for HRPC42	1	1.55
HRPC50SP	Spring Set for HRPC50	1	1.55




HS25

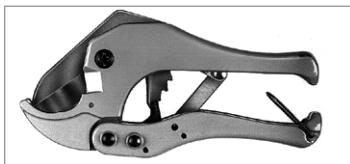

HM42



HL48



HL50

PVC Ratchet Pipe Cutter Features:

- For use on plastic pipes up to 1", 1 1/4", 1 3/8", 1 1/2" or 2" diameter.
- **Blade and ratchet teeth made of molybdenum vanadium stainless steel. Stays sharp longer than plated steel blades.**
- All metal construction insures long life; locking clip provides safe storage.
- Holds pipe as it cuts, creating smooth, even ends.
- One hand operation (except on HL50).

Part Number	Description	Ctn Qty	List Price
Cutters - With molybdenum vanadium stainless steel blades			
HS25	PVC Pipe Cutter, 1"	60	\$ 53.39
HM42	PVC Pipe Cutter, 1-1/4"	60	56.97
HL42A	PVC Pipe Cutter, 1 3/8"	60	69.82
HL48	PVC Pipe Cutter, 1 1/2"	40	114.55
HL50	PVC Pipe Cutter, 2"	20	218.32
Replacement Blades - Molybdenum vanadium stainless steel			
HS25B	Blade for HS25	1	32.70
HM42B	Blade for HM42	1	33.85
HL42AB	Blade for HL42A	1	38.06
HL48B	Blade for HL48	1	59.59
HL50B	Blade for HL50	1	106.63
Replacement Spring Sets			
HS25SP	Spring Set for HS25	1	4.91
HM42SP	Spring Set for HM42	1	6.69
HL42ASP	Spring Set for HL42A	1	6.88
HL48SP	Spring Set for HL48	1	11.08
HL50SP	Spring Set for HL50	1	7.43



PVC & ABS Saws and Hacksaws



TBS300

14" PVC/ABS Tool Box Saw Features:

- 14" saw for use with PVC or ABS.
- One saw for all applications.
- Cuts wood, aluminum and drain pipe.
- Durable ABS handle.
- Tempered steel blade.
- 15 teeth, 16 points.
- Cuts in both directions.



PVCSW

PVC/ABS Saw Features:

- 12" or 18" saw blade lengths.
- Aluminum die cast handle for sure grip.
- Cuts large diameter PVC or ABS pipe.
- Cuts drywall, paneling, plywood or plaster board.
- Precision milled teeth for faster, cleaner cuts.
- Induction hardened teeth for longer life.
- Cuts in both directions.
- Quick change design allows for changing blades without tools.
- Replacement blades available.

Part Number	Description	Ctn Qty	List Price
TBS300	Tool Box Saw, 14" length, 15 teeth, 16 pt.	4/48	\$ 24.82
PVCSW12	PVC Saw, 12" aluminum handle	12	26.80
PVCSW18	PVC Saw, 18" aluminum handle	12	29.35
PVCSW12B	PVC Saw 12" BLADE ONLY	12	13.04
PVCSW18B	PVC Saw 18" BLADE ONLY	12	15.89



T22466

TASK HIGH TENSION HACKSAWS

Task Contractor's High Tension Hacksaw Features:

- Aluminum handle and end piece.
- Square tube frame prevents frame twisting.
- Multiple tension adjustment setting.
- 3 blade positions for 90°, 45° and use as a minisaw.
- Extra blade storage in frame.
- Unconditional warranty.



T22464

Task Professional Plus High Tension Hacksaw Features:

- Patented quick change blade feature.
- Soft touch, non-slip grip.
- Square tube frame design prevents frame twisting.
- Multiple tension adjustment settings.
- 3 blade positions for 90°, 45° and use as a mini hacksaw.
- Extra blade storage in frame.
- Unconditional warranty.
- Patented.

Part Number	Description	Ctn Qty	List Price
T22466	Contractors Hacksaw	6	\$ 31.88
T22464	Professional Plus Hacksaw	6	51.38



Work Gloves - Cotton, Leather & Rubber Coated



AGWG205L

Heavy Duty LEATHER Work Glove Features:

- Gunn pattern; leather extends around the front of each finger, leaving no exposed seams or cloth in the palm “wear” area.
- Leather palm, fabric back.
- Generously sized to provide a comfortable fit.
- Winged thumb, 2 1/2” safety cuff.

Part Number	Description	Bundle Qty	Ctn Qty	List Price
AGWG205L	Heavy Duty Leather glove	12 pairs	120 pair	\$ 7.65/pair



AGWG6600 Series

ARMOR Rubber Coated Work Glove Features:

- Textured, blue natural rubber coating over seamless, breathable knit liner.
- Ideal for grabbing anything under wet conditions.
- Excellent for any abrasive or slippery application - pump & well, pool & spa, irrigation, plumbing & heating.
- Contoured fingers reduce hand fatigue.

Part Number	Description	Bundle Qty	Ctn Qty	List Price
AGWG6600L	Rubber coated knit glove, Large	12 pairs	144 pair	\$6.68/pair
AGWG6600XL	Rubber coated knit glove, XLarge	12 pairs	144 pair	\$6.68/pair



AGWG7114

PVC Coated Work Glove Features:

- PVC coated and etched for “sandy” finish for easy and secure grip.
- 14” length fully lined with cotton jersey.
- Suitable for working with corrosive chemicals.

Part Number	Description	Bundle Qty	Ctn Qty	List Price
AGWG7114	PVC Coated work glove, 14”	Bulk	48 pair	\$ 10.83/pair



HARVARD CONTRACTOR'S

Anchor Kit Features:

- Anchor kits complete with 100 plastic anchors, 100 screws and 1/4" masonry drill bit in a plastic case.
- Plastic gray ribbed anchors with lip design for electronic timer, pump start relay installations. Use with concrete block, brick and wallboard.
- Anchors have internal ribs for better centering of screws, locking lugs against pull and twist. Exterior design prevents fall out in overhead holes.
- Kit available with combination slotted/phillips head or tri-combination, slotted/phillips/hex head #10 x 1" screws.
- Kits complete with 1/4" x 4" masonry drill bit.
- Clear, unbreakable plastic case with molded-in hanging tab.



Combo Head

Tri Combo Head



Part Number	Description	Ctn Qty	List Price
AK10CSPR	Ribbed Combo Head	36	\$14.11
AK10TCR	Ribbed Tri Combo Head	36	15.00



WCS1022

HARVARD CONTRACTOR'S WCS1022 Wire Cutter/Strippers Features:

- Combination wire cutter and stripper.
- Strips wire sizes 22-10 AWG.
- Heavy duty scissor opening spring.
- Cushioned plastic grips.
- Easy locking thumb lock.

Part Number	Description	Ctn Qty	List Price
WCS1022	Wire Cutter/Stripper	100	\$ 19.53



SW Series

Adjustable Strap Wrench:

Part Number	For Use with Coupling Sizes	Ctn Qty	List Price
SW400	1/2" through 4"	60	\$ 19.47
SW600	1/2" through 6"	60	23.18



SW500C


SW500 Nipple Extractor Features:

- For 1/2" or 3/4" plastic nipples.
- Easy to remove broken plastic riser from sprinkler pipe and fittings.
- Insert tip and turn.

Part Number	Description	Ctn Qty	List Price
SW500C	Stub Wrench	25	6.43



HGD10

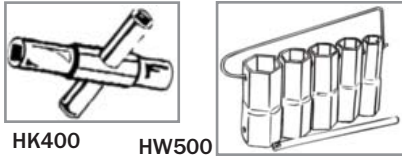


HK400

HW500




HR




HP400




HI




HAS300



HPO400



HS200



HS500



HK50

Garbage Disposal Wrench Features:

- Fits standard units.

4-Way Key Features:

- For use on square stem 1/4", 9/32", 5/16", 11/32".

Tub and Shower Valve Socket Wrench Set Features:

- Set includes sockets, handle and wire.

Radiator Spud Wrench Features:

- For use when spud wrench or key is required.
- Plated.

4 Way Countersunk Plug Wrench Features:

- Steel construction.

Internal Pipe Wrench Features:

- Available in sizes 3/8", 1/2", 3/4" and 1".

Adjustable Strainer and Spud Wrench Features:

- Use for Basket Strainers and Closet Spud.
- Minimum 1" to Maximum 3".
- Plated.

4-Way P.O. Plug Wrench Features:

- Plated.
- Use when installing or removing tub drains, P.O. plugs & basket strainers.

Strainer Wrench

- Plated steel.
- For use on basket strainers and tub drains with crossbars.
- Long handle for leverage.

Spanner and Strainer Wrench Features:

- Plated, malleable iron.
- For use on basket strainer jam nuts.

Part Number	Description	Ctn Qty	List Price
HGD10	Garbage disposal wrench	1	\$ 7.11
HK400	Four way key	6	6.48
HW500	Complete wrench set	1	18.56
HR	Radiator spud wrench	5	22.37
HP400	4 way plug wrench	1	25.86
HI380	3/8" internal pipe wrench	5	4.40
HI500	1/2" internal pipe wrench	5	5.48
HI750	3/4" internal pipe wrench	5	5.72
HI100	1" internal pipe wrench	5	10.50
HK50	Utility knife w/extra blade	12	7.40
HAS300	Adjustable strainer wrench	10	17.32
HPO400	4-Way plug wrench	10	7.04
HS200	Strainer wrench	10	8.64
HS500	Spanner/strainer wrench	10	8.47



PLIERS - WRENCHES - SCREWDRIVERS - NUT DRIVERS



T25343



T25381



T25312



T7910



T25432



T50232



07292



T23106



T23100

Part Number	Description	Ctn Qty	List Price
PLIERS - STANDARD TYPE			
T25343	10" Groove joint plier	5	\$ 21.89
T25344	12" Groove joint plier	5	26.04
T25347B	16" Groove joint plier - bulk packed	5	93.36
T25351	6" Slip joint plier	5	10.56
T25353	10" Slip joint plier	5	16.86
T25361	6" Diagonal Cutter	5	12.00
T25381	6 1/2" Long nose plier	5	12.18
PLIERS - SPECIALTY			
T25311	11" Long nose - straight	5	31.98
T25312	11" Long nose - offset neck	5	31.98
WRENCHES - ADJUSTABLE - BULK			
T7906	6" Adjustable wrench	6	11.12
T7910	10" Adjustable wrench	6	19.13
T7912	12" Adjustable wrench	6	27.84
T7915	15" Adjustable wrench	4	66.08
WRENCHES - PIPE			
T25432	10" Pipe wrench	6	21.39
T25436	14" Pipe wrench	6	29.12
T25438	18" Pipe wrench	2	38.73
T25446	24" Pipe wrench	1	64.77
T25460	10" Aluminum pipe wrench	6	42.38
T25462	12" Aluminum pipe wrench	6	49.19
T25464	14" Aluminum pipe wrench	6	53.12
T25468	18" Aluminum pipe wrench	2	80.59
T25474	24" Aluminum pipe wrench	2	127.64
T25486	36" Aluminum pipe wrench	1	251.54
SCREWDRIVERS - BULK			
T50232	#2 Phillips x 4"	5	8.40
T50233	#3 Phillips x 6"	5	10.80
4 in 1 SCREWDRIVERS			
07293	4 in 1 Driver - Soft Touch Handle Includes Phillips #1, #2, Sq Rec #2 & slotted 6-8	1	15.92
07292	4 in 1 Driver - Soft Touch Handle, DISPLAY BOX of 12	12	191.08
NUT DRIVERS - CARBON STEEL - SAE			
T23106	1/4" Nut driver	1	9.21
T23107	5/16" Nut driver	1	10.00
T23109	3/8" Nut driver	1	10.00
T23100	7 pc. Nut driver Set - SAE. Includes 3/16" - 1/2"	1	62.63

Hand Tools



PRY BARS - HACKSAWS - HAND SAWS - SNIPS - BOLT CUTTERS - UTILITY KNIVES



T71158



T47015



T22467



T88148

T7078



T22370

T22368

T25426



T00970

Part Number	Description	Ctn Qty	List Price
RUBBER MALLETS			
T71154	16 oz. Black head rubber mallet	10	\$ 9.64
T71158	32 oz. Black head rubber mallet	10	16.72
PRY BARS - FLAT			
T47015	14" (355 mm) Spring steel flat pry bar	25	35.70
HACKSAWS			
T22466	Contractor hacksaw	6	31.88
T22467	Home Owner Pro hacksaw	12	25.85
T7078	Handi cut mini hacksaw	5	13.48
HACKSAW BLADES - BI-METAL - BULK			
T22552B	10" x 24T Bi-metal hacksaw blade	10	4.55
T22555B	12" x 24T Bi-metal hacksaw blade	10	4.79
HANDSAWS - BARRUCUDA			
T88148	9 1/2" (240 mm) Barrucuda PVC saw	6	49.54
T88149	9 1/2" Replacement blade for Barrucuda PVC saw	5	34.61
T88152	12" Barrucuda PVC saw	1	28.40
SNIPS - AVIATION			
T22370	Aviation snips - straight cut, yellow handle	6	34.25
T22371	Aviation snips - right hand cut, green handle	6	34.25
T22372	Aviation snips - left hand cut, red handle	6	34.25
SNIPS - OFFSET AVIATION			
T22368	Offset aviation snips - right hand cut	6	42.79
BOLT CUTTERS			
T25426	24" Bolt cutter	1	95.94
T25428	30" Bolt cutter	1	136.73
UTILITY KNIVES and BLADES, GLASS SCRAPERS			
T00971	Lg plastic utility knife, soft touch hdl & autolock-Yellow	1	7.68
T00970	Large plastic utility knife w/ soft touch handle & autolock	36	276.49
	DISPLAY BOX of 36 - 9 each yellow, red, green, purple		
T00988	Utility knife replacement blades for T00980's - 50 pk	6	36.78



MEASURING - GENERAL USE



Part Number	Description	Ctn Qty	List Price
TAPE MEASURES			
01160	1" X 25' Orange Tape Measure - Rubber Jacket	12	\$ 13.30
01176	1" x 25' Orange Tape Measure - Rubber Jacket	12	159.56
DISPLAY BOX of 12			
TS730	100' (30m) Fiberglass Open Reel Long Tape	6	52.64
TS731	200' (60m) Fiberglass Open Reel Long Tape	6	99.51
TS732	300' (92m) Fiberglass Open Reel Long Tape	6	142.75
WIRE BRUSHES			
T22640	Long Hdl 3 x 19 Carbon Wire Fill Scratch Brush	24	\$ 8.06
FLAGGING TAPE			
T59301	3" x 300' DANGER Flagging Tape	27	17.65
T59302	3" x 300' CAUTION Flagging Tape	27	17.65
KNEE PADS - NON-LEATHER			
T77129	Accordion Knee Pads	1	64.27

Power Tool Accessories



DRILL BITS - HOLE SAWS - SAW BLADES - WHEELS



T90013



T90013



T75037



T75049



T21719



T22048



T22178



T22113



T22216-5



32454B

Part Number	Description	Ctn Qty	List Price
DRILL BITS - TITANIUM SETS - with 135 Degree Split Point - in Visidex Metal Box			
T90013	13 pc Titanium Drill Bit Set - 1/16" - 1/4"	5	\$ 69.36
DRILL BITS - SDS-PLUS - HAMMER/ROTARY - MASONRY - CARBIDE TIPPED - 4 FLUTES			
T75037	1/2" x 12" Overall SDS - Useable 10"	3	57.82
DRILL BITS - SDS-PLUS - HAMMER/ROTARY - MASONRY - CARBIDE TIPPED - SINGLE FLUTE			
T75049	3/4" x 8" Overall SDS - Useable 6"	3	93.00
HOLE SAWS - TWO PIECE BI-METAL - 1-3/8" DEEP CUT - M3 STEEL			
T21719	1-7/8" Two Piece Bi-Metal Hole Saw	6	31.43
T21725	2-1/4" Two Piece Bi-Metal Hole Saw	6	35.95
HOLE SAWS - MANDRELS & REPLACEMENT PILOT DRILL BITS			
T22048	H.D. H.S.S. Mdrl 7/16 Hex Shank-fits 1-5/16"-6"	5	58.60
T22050	H.D. H.S.S. Mdrl for Bi-Metal-3/8 Hex Shank-fits 1-5/16"-6"	5	56.93
T22081	H.S.S. Repl. Pilot Drill 1/4" x 4-1/4"(T22048)	10	13.67
RECIPROCATING SAW BLADES - 1/2" UNIVERSAL SHANK - 1 PER PACK			
T22178	H.S.S. Cuts Metal 1/8" to 3/16" 18TPI x 6.01"	10	5.82
RECIPROCATING SAW BLADES - BI-METAL - 1/2" UNIVERSAL SHANK - 1 PER PACK			
T22208	Fast Cut Nailed Wood & Plastic 6TPI x 6.01"	10	8.98
T22209	Nailed Wood & Non-Ferrous Mtls 10TPI x 6.01"	10	7.60
T22210	Fast Cut Wood/Nailed Wood 6TPI x 12.02"	10	17.35
T22212	Heavy Metal 1/8" & up 10TPI x 4"	10	5.88
T22214	Metal Cutting 1/8" to 3/16" 18TPI x 4"	10	5.76
T22217	Mtl Contours/Tubing 1/8"-3/16" 18TPIx6.01"	10	7.67
RECIPROCATING SAW BLADES - BI-METAL - 1/2" UNIVERSAL SHANK - 5 PER POUCH			
T22214-5	Metal Cutting 1/8" to 3/16" 18TPI x 4"	1	25.91
T22216-5	Mtl Contours/Tubing 1/8"-1/4" 14TPI x 6.01"	1	34.82
T22218-5	Mtl Contours/Tubing up to 1/8" 24TPIx6.01"	1	35.00
RECIPROCATING BLADES - DEMOLITION - BI-METAL - 1/2" UNIVERSAL SHANK			
T23201	9" x 6TPI Wood & Nail Demolition Blade- Bulk	10	19.08
T23206	6" x 9TPI Metal & Pipe Demolition Blade - Bulk	10	14.63
WHEELS - DEPRESSED CENTRE - ABRASIVE CUTTING - BULK			
32454B	4-1/2" x 1/4" Metal Depressed Centre Wheel	25	5.09



SECTION 12

IDEAL CLAMPS, FITTINGS & NIPPLES



PRODUCT LINE	PAGE
Compression Couplings - Imported, PVC/CPVC	19
Compression Fittings, Galvanized	20
CPVC Plastic Fittings & Valves	17-18
Flexible & No-Hub Couplings	22
Ideal Clamps	Loose
Insert Fittings	
NL Cast Bronze Insert Fittings	4-6
NL Red Brass Insert Fittings	13-14
NL Yellow Brass Insert Fittings, Imported	11
Nylon Insert Fittings	3
PVC Insert Fittings	Loose
Schedule 40 Insert Fittings	Loose
Schedule 80 Insert Fittings	Loose
Stainless Steel Insert Fittings	9-10
Steel, Zinc Plated Insert Fittings	7-8
Malleable Iron Fittings, Domestic	43-49
Malleable Iron Fittings, Imported	35-41
Merchant Couplings	29
NL Threaded Bronze Fittings	31-33
Nipples	
Black Steel Nipples	53
Galvanized Steel Nipples	54
NL Red Brass Nipples	52
Sch 80 PVC/CPVC Nipples	51
Stainless Steel Nipples	52
Push Connect Fittings	1-2
Pipe Repair Clamps	21
Single Wall Corrugated Fittings	27-28
Sewer & Drain Fittings	23-26
Unions, PVC White	15-16



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



NO LEAD Brass Push Fittings

HARVARD NO LEAD Brass Push Fitting Features:

- Use for above ground potable water, hydronic heating and other plumbing systems.
- No soldering, clamps, unions or glue needed.
- For use with copper, CPVC, PEX and PERT tubing in any combination.
- Integral tube liner (stiffener) for PEX/PERT installation.
- Easy disconnect with special removal tool.
- Lead free, forged brass body construction.
- Full fluid flow without PEX/PERT stiffeners.
- Fittings can be rotated 360° after assembly for easier installation.
- Max working pressure at max working temperature: 200 psi at 200°F water. (Caution: may exceed the max service pressure/temperature of PEX/PERT or CPVC tubing.)
- Not suitable for steam service.
- Tested, certified and listed in accordance with ASSE1061-2006.
- cUPC listed.
- Certified lead free to NSF/ANSI 372.



MATERIAL SPECIFICATIONS

Body	Forged NL Brass
O-ring	EPDM
Gripper Ring	SS304
Push Ring	Acetal
Locking Ring	Acetal
Seat Ring	Acetal
Stiffener	Polysulfone



BPCNL



BPRCNL



BPMANL



BPRMANL



BPFANL



BPRFANL



BPENL



BPRENL

Part Number	Description & Size	Ctn Qty	List Price
Couplings			
BPC1/2NL	BRS PUSH CPL NL FITXFIT 1/21/2	50/200	\$5.89
BPC3/4NL	BRS PUSH CPL NL FITXFIT 3/4X3/4	30/120	8.75
BPC1NL	BRS PUSH CPL NL FITXFIT 1X1	15/60	16.25
Reducing Coupling			
BPRC3/4X1/2NL	BRS PUSH CPL NL FITXFIT 3/4X1/2	35/140	7.82
BPRC1X3/4NL	BRS PUSH CPL NL FITXFIT 1X3/4	20/80	15.18
Male Adapters			
BPMA1/2NL	BRS PUSH M/A NL FITXMPT 1/2X1/2	60/240	5.57
BPMA3/4NL	BRS PUSH M/A NL FITXMPT 3/4X3/4	40/160	8.39
BPMA1NL	BRS PUSH M/A NL FITXMPT 1X1	20/80	16.25
Reducing Male Adapter			
BPRMA1/2X3/4NL	BRS PUSH M/A NL FITXMT 1/2X3/4	50/200	8.39
BPRMA3/4X1/2NL	BRS PUSH M/A NL FITXMT 3/4X1/2	40/160	8.39
Female Adapters			
BPFA1/2NL	BRS PUSH F/A NL FITXFPT 1/2X1/2	60/240	5.71
BPFA3/4NL	BRS PUSH F/A NL FITXFPT 3/4X3/4	40/160	8.93
BPFA1NL	BRS PUSH F/A NL FITXFPT 1X1	20/80	14.54
Reducing Female Adapter			
BPRFA1/2X3/4NL	BRS PUSH F/A NL FITXFPT 1/2X3/4	40/160	8.75
BPRFA3/4X1/2NL	BRS PUSH F/A NL FITXFPT 3/4X1/2	40/160	8.75
BPRFA3/4X1NL	BRS PUSH F/A NL FITXFPT 3/4X1	25/100	13.21
BPRFA1X3/4NL	BRS PUSH F/A NL FITXFPT 1X3/4	25/100	13.21
Elbows			
BPE1/2NL	BRS PUSH ELL NL FITXFIT 1/2X1/2	40/160	8.50
BPE3/4NL	BRS PUSH ELL NL FITXFIT 3/4X3/4	20/80	11.89
BPE1NL	BRS PUSH ELL NL FITXFIT 1X1	12/48	25.18
Reducing Elbows			
BPRE3/4X1/2NL	BRS PUSH ELL NL FITXFIT 3/4X1/2	25/100	11.96
BPRE3/4X1NL	BRS PUSH ELL NL FITXFIT 3/4X1	15/60	21.17

CAUTION: FAILURE TO PROPERLY CHAMFER TUBING OD WILL RESULT IN A DAMAGED O-RING AND A LEAK. FAILURE TO PROPERLY CHAMFER THE TUBE VOIDS FITTING WARRANTY.



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

NO LEAD Brass Push Fittings



BPFE1/2NL



BPME1/2NL



BPT1/2NL



BPT3/4NL



BPFT1/2NL



BPMT1/2NL



BPDE1/2NL



BPWPE1/2NL



BPECA1NL



BPSRC1NL



BPBV1/2NL



BPTOOL1NL



BPSTIFF1NL

Part Number	Description & Size	Ctn Qty	List Price
Female Elbow			
BPFE1/2NL	BRS PUSH FEM ELBOW NL FITXFPT 1/2	40/160	9.11
BPFE3/4NL	BRS PUSH FEM ELBOW NL FITXFPT 3/4	20/80	12.82
BPFE1NL	BRS PUSH FEM ELBOW NL FITXFPT 1	13/52	17.68
Male Elbow			
BPME1/2NL	BRS PUSH MALE ELBOW NL FITXMPT 1/2X1/2	40/160	9.11
BPME3/4NL	BRS PUSH MALE ELBOW NL FITXMPT 3/4X3/4	20/80	13.39
BPME1NL	BRS PUSH MALE ELBOW NL FITXMPT 1X1	13/52	19.50
Tees			
BPT1/2NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X1/2	30/120	12.54
BPT3/4NL	BRS PUSH TEE NL FITXFIT 3/4X3/4X3/4	15/60	18.68
BPT1NL	BRS PUSH TEE NL FITXFIT 1X1X1	7/28	35.54
Reducing Tee			
BPRT1/2X1/2X3/4NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X3/4	20/80	18.46
BPRT1/2X1/2X1NL	BRS PUSH TEE NL FITXFIT 1/2X1/2X1	15/60	23.75
BPRT1/2X3/4X3/4NL	BRS PUSH TEE NL FITXFIT 1/2X3/4X3/4	15/60	20.56
BPRT3/4X1/2X1/2NL	BRS PUSH TEE NL FITXFIT 3/4X1/2X1/2	20/80	16.25
BPRT3/4X3/4X1/2NL	BRS PUSH TEE NL FITXFIT 3/4X3/4X1/2	15/60	17.32
BPRT1X1X3/4NL	BRS PUSH TEE NL FITXFIT 1X1X3/4	8/32	29.46
Female Tee			
BPFT1/2NL	BRS PUSH FEM TEE NL FITXFITXFPT 1/2X1/2X1/2	30/120	14.13
BPFT3/4NL	BRS PUSH FEM TEE NL FITXFITXFPT 3/4X3/4X3/4	15/60	20.88
Male Tee			
BPMT1/2NL	BRS PUSH MALE TEE NL FITXFIT 1/2X1/2X1/2	30/120	14.13
BPMT3/4NL	BRS PUSH MALE TEE NL FITXFIT 3/4X3/4X3/4	15/60	20.88
Drop Elbow			
BPDE1/2NL	BRS PUSH DROP ELBOW NL FITXFPT 1/2X1/2	30/120	11.25
Wall Plate Elbow			
BPWPE1/2NL	BRS PUSH WALL PLATE EL NL FITXFPT 1/2X1/2	30/120	12.11
End Cap			
BPECA1/2NL	BRS PUSH END CAP NL FIT 1/2	100/400	3.54
BPECA3/4NL	BRS PUSH END CAP NL FIT 3/4	60/240	5.93
BPECA1NL	BRS PUSH END CAP NL FIT 1	30/120	9.82
Slip Repair Coupling			
BPSRC1/2NL	BRS PUSH REPAIR CPL NL FITXFIT 1/2X1/2	20/80	12.11
BPSRC3/4NL	BRS PUSH REPAIR CPL NL FITXFIT 3/4X3/4	15/60	18.32
BPSRC1NL	BRS PUSH REPAIR CPL NL FITXFIT 1X1	10/40	28.02
Ball Valve			
BPBV1/2NL	BRS PUSH BALL VALVE NL FITXFIT 1/2X1/2	10/40	18.90
BPBV3/4NL	BRS PUSH BALL VALVE NL FITXFIT 3/4X3/4	7/28	25.32
BPBV1NL	BRS PUSH BALL VALVE NL FITXFIT 1X1	5/20	40.75
Removal Tool			
BPTOOL1/2NL	BRS PUSH REMOVAL TOOL NL 1/2	150/600	0.15
BPTOOL3/4NL	BRS PUSH REMOVAL TOOL NL 3/4	100/400	0.26
BPTOOL1NL	BRS PUSH REMOVAL TOOL NL 1	50/200	0.33
Stiffener for PEX			
BPSTIFF1/2NL	BRS PUSH PEX STIFFENER NL 1/2	400/1600	0.28
BPSTIFF3/4NL	BRS PUSH PEX STIFFENER NL 3/4	200/800	0.40
BPSTIFF1NL	BRS PUSH PEX STIFFENER NL 1	150/600	0.56



Insert Fittings - Nylon

Nylon Insert Fitting Features:

- White nylon insert fittings
- Meets ASTM-2609
- NSF for potable water
- **DO NOT USE NYLON INSERT FITTINGS FOR COMPRESSED AIR OR GASES.**
- **DO NOT TEST PIPING SYSTEMS WITH NYLON INSERT FITTING WITH COMPRESSED AIR OR GASES.**
- **DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY MANUFACTURER.**
- **MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.**

Insert Diameter Dimensions

SIZE	MAXIMUM DIAMETERS		
	C	E	F
1/2"	.605	.445	.665
3/4"	.800	.630	.865
1"	1.005	.805	1.095
1 1/4"	1.325	1.105	1.425
1 1/2"	1.565	1.345	1.665
2"	2.020	1.800	2.125

Recommended Installation Procedures:

- Sizes 1/2, 3/4 and 1" - one clamp directly over barbs.
- Sizes 1 1/4" and greater - one clamp directly over barbs PLUS one clamp behind barbs.



N401 Series



N406 Series



N413 Series



N429 Series



N436 Series

Part Number	Description	Inner/Master Ctn Qty	List Price
N401-005	NYLON INS X INS TEE 1/2"	10/180	\$ 2.23
N401-007	NYLON INS X INS TEE 3/4"	10/100	2.64
N401-010	NYLON INS X INS TEE 1"	10/60	4.23
N401-012	NYLON INS X INS TEE 1 1/4"	5/40	7.22
N401-015	NYLON INS X INS TEE 1 1/2"	5/30	10.21
N401-020	NYLON INS X INS TEE 2"	5/15	13.80
N406-005	NYLON INS X INS 90 ELBOW 1/2"	10/300	1.91
N406-007	NYLON INS X INS 90 ELBOW 3/4"	10/180	2.18
N406-010	NYLON INS X INS 90 ELBOW 1"	10/100	2.64
N406-012	NYLON INS X INS 90 ELBOW 1 1/4"	5/60	4.47
N406-015	NYLON INS X INS 90 ELBOW 1 1/2"	5/40	6.79
N406-020	NYLON INS X INS 90 ELBOW 2"	5/25	9.08
N413-005	NYLON INS X MIPT 90 ELL 1/2"	10/300	3.33
N413-007	NYLON INS X MIPT 90 ELL 3/4"	10/200	4.64
N413-010	NYLON INS X MIPT 90 ELL 1"	10/100	6.53
N413-012	NYLON INS X MIPT 90 ELL 1 1/4"	5/60	8.59
N413-015	NYLON INS X MIPT 90 ELL 1 1/2"	5/50	12.76
N429-005	NYLON INS X INS COUPLING 1/2"	10/400	1.14
N429-007	NYLON INS X INS COUPLING 3/4"	10/250	1.34
N429-010	NYLON INS X INS COUPLING 1"	10/160	1.79
N429-012	NYLON INS X INS COUPLING 1 1/4"	10/80	3.22
N429-015	NYLON INS X INS COUPLING 1 1/2"	5/60	4.35
N429-020	NYLON INS X INS COUPLING 2"	5/40	5.51
N436-005	NYLON INS X MIPT M/A 1/2"	10/400	1.14
N436-007	NYLON INS X MIPT M/A 3/4"	10/250	1.40
N436-010	NYLON INS X MIPT M/A 1"	10/160	1.79
N436-012	NYLON INS X MIPT M/A 1 1/4"	10/80	2.87
N436-015	NYLON INS X MIPT M/A 1 1/2"	5/60	4.12
N436-020	NYLON INS X MIPT M/A 2"	5/40	6.47



Insert Fittings - Economy NO LEAD Cast Bronze



Features:

- **Light pattern, NO LEAD** cast bronze insert fittings for use with flexible plastic pipe.
- “E” Series **light pattern, NO LEAD** fittings compete with Merrill.
- **Third party certified to NSF/ANSI 372.**



ERBMANL



EXLRBMANL



ERBCNL



ERBTNL




ERBENL

Part Number	Size	Style	# Barbs	Ctn/CaseQty	List Price
NO LEAD Cast Bronze Male Insert Adapters (INS x MIP) (Merrill CRBMANL Series)					
ERBMA1/2NL	1/2" x 1/2"	Hex	6	10/200	\$ 6.25
ERBMA3/4NL	3/4" x 3/4"	Hex	6	10/100	6.75
ERBMA1NL	1" x 1"	Hex	7	10/100	12.50
ERBMA1X3/4NL	1" x 3/4"	Hex	5	10/100	9.64
ERBMA11/4NL	1 1/4" x 1 1/4"	Hex	6	10/100	15.46
ERBMA11/4X1NL	1 1/4" x 1"	Hex	7	10/100	16.75
ERBMA1X11/4NL	1" x 1 1/4"	Hex	6	10/100	15.82
ERBMA11/2NL	1 1/2" x 1 1/2"	Hex	6	5/50	21.61
ERBMA2NL	2" x 2"	Hex	7	5/50	31.61
NO LEAD Cast Bronze Extra Long Male Adapters (INS x MIP) (Merrill RBMANLXL Series)					
EXLRBMA1NL	1" x 1"	Hex	13	10/100	22.50
EXLRBMA11/4NL	1 1/4" x 1 1/4"	Hex	13	10/100	30.17
NO LEAD Cast Bronze Couplings (INS x INS) (Merrill RBCPNL Series)					
ERBC1/2NL	1/2" x 1/2"	Hex	4	10/200	7.32
ERBC3/4NL	3/4" x 3/4"	Hex	4	10/200	9.04
ERBC1NL	1" x 1"	Hex	5	12/120	14.11
ERBC11/4NL	1 1/4" x 1 1/4"	Hex	6	12/72	21.46
ERBC11/2NL	1 1/2" x 1 1/2"	Hex	4	5/50	24.82
ERBC2NL	2" x 2"	Hex	4	5050	33.39
NO LEAD Cast Bronze Tees (INS x INS) (Merrill RBHTNL Series)					
ERBT3/4NL	3/4" x 3/4"		5	10/100	15.88
ERBT1NL	1" x 1"		5	10/100	23.04
ERBT11/4NL	1 1/4" x 1 1/4"		6	5/50	47.45
NO LEAD Cast Bronze Elbows (INS x INS) (Merrill RBHENL Series)					
ERBE3/4NL	3/4" x 3/4"		5	10/100	12.24
ERBE1NL	1" x 1"		5	10/100	17.79
ERBE11/4NL	1 1/4" x 1 1/4"		6	10/50	39.48



Insert Fittings - NO LEAD Cast Bronze

- For use with flexible plastic pipe
- Heavy Pattern, contractor grade NO LEAD cast bronze.
- 20% to 30% heavier fittings than some competitors.
- Third party certified to NSF/ANSI 372.



NLRBMA



NLLRBMA




NLXLRBMA




NLRBRA



NLRBMUA



NLRBFA




NLRBC

Part Number	Size	Style	Number of Barbs	Ctn/Case Qty	List Price
No Lead Cast Bronze Male Insert Adapters (INS x MIP)					
NLRBMA1/2	1/2" x 1/2"	Hex	5	10/200	\$ 6.77
NLRBMA3/4	3/4" x 3/4"	Hex	5	10/200	8.82
NLRBMA3/4X1	3/4" x 1"	Hex	6	10/100	12.32
NLRBMA1	1" x 1"	Hex	7	10/100	14.46
NLRBMA1X3/4	1" x 3/4"	Hex	5	10/100	10.36
NLRBMA1X11/4	1" x 1 1/4"	Hex	6	10/100	16.07
NLRBMA11/4	1 1/4" x 1 1/4"	Hex	6	10/100	17.89
NLRBMA11/4X1	1 1/4" x 1"	Hex	7	10/100	18.29
NLRBMA11/2	1 1/2" x 1 1/2"	Hex	6	5/50	21.68
NLRBMA11/2X11/4	1 1/2" x 1 1/4"	Hex	6	10/100	25.20
NLRBMA2	2" x 2"	Hex	7	5/50	39.14
No Lead Cast Bronze Long Male Adapters (INS x MIP)					
NLLRBMA1	1" x 1"	Hex	9	10/100	21.43
NLLRBMA1x11/4	1" x 1 1/4"	Hex	9	10/100	23.64
No Lead Cast Bronze Extra Long Male Adapters (INS x MIP)					
NLXLRBMA1	1" x 1"	Hex	12	10/100	19.46
NLXLRBMA1x11/4	1" x 1 1/4"	Hex	12	10/100	21.96
NLXLRBMA11/4	1 1/4" x 1 1/4"	Hex	12	10/100	28.21
NLXLRBMA2	2" x 2"	Hex	12	5/50	51.25
No Lead Cast Bronze Male Union Adapters (INS x MIP)					
NLRBMUA1	1" x 1"	Hex	6	10/80	29.75
NLRBMUA11/4	1 1/4" x 1 1/4"	Hex	6	10/40	54.46
No Lead Cast Bronze Rope Adapter (INS x MIP)					
NLRBRA1	1" x 1"	Round w/ rope eye	7	10/100	20.00
NLRBRA1X11/4	1" x 1 1/4"	Round w/ rope eye	6	10/100	22.36
NLRBRA11/4	1 1/4" x 1 1/4"	Round w/ rope eye	6	10/100	25.07
No Lead Cast Bronze Female Adapters (INS x FIP)					
NLRBFA1/2	1/2" x 1/2"	Round	5	10/200	10.75
NLRBFA3/4	3/4" x 3/4"	Round	5	10/100	11.54
NLRBFA1	1" x 1"	Round	5	10/100	16.75
NLRBFA11/4	1 1/4" x 1 1/4"	Round	7	10/100	22.61
NLRBFA11/2	1 1/2" x 1 1/2"	Round	6	5/50	24.43
NLRBFA2	2" x 2"	Round	7	5/50	39.79
No Lead Cast Bronze Couplings (INS x INS)					
NLRBC1/2	1/2" x 1/2"	Hex	4	10/200	6.86
NLRBC3/4	3/4" x 3/4"	Hex	4	10/200	8.93
NLRBC3/4X1	3/4" x 1"	Hex	5 x 6	10/100	14.14
NLRBC1	1" x 1"	Hex	5	10/100	13.75
NLRBC1X11/4	1" x 1 1/4"	Hex	6	10/100	22.07
NLRBC11/4	1 1/4" x 1 1/4"	Hex	6	10/100	20.14
NLRBC11/2	1 1/2" x 1 1/2"	Hex	4	5/50	21.82
NLRBC2	2" x 2"	Hex	5	5/50	29.25

Insert Fittings - NO LEAD Cast Bronze



- For use with flexible plastic pipe
- **Heavy Pattern**, contractor grade **NO LEAD** cast bronze.
- Third party certified to NSF/ANSI 372.




NLXLRBC




NLRBHE




NLRBFE



NLRBE



NLRBHT



NLRBT



NLRBFT

Part Number	Size	Number of Barbs	Ctn/Case Qty	List Price
No Lead Cast Bronze Extra Long Couplings (INS x INS)				
NLXLRBC1	1" x 1"Hex	12	10/100	\$ 25.86
NLXLRBC11/4	1 1/4" x 1 1/4"Hex	12	5/50	40.82
NLXLRBC2	2" x 2"Hex	12	5/25	57.21
No Lead Cast Bronze Hydrant Elbow (INS x MIP)				
NLRBHE3/4	3/4" x 3/4"	5	10/100	12.96
NLRBHE1x3/4	1" x 3/4"	5	10/100	15.82
NLRBHE1	1" x 1"	5	10/100	18.04
NLRBHE11/4X1	1 1/4" x 1"	6	5/50	33.57
NLRBHE11/4	1 1/4" x 1 1/4"	6	5/50	33.82
No Lead Cast Bronze Extra Long Hydrant Elbows (INS x MIP)				
NLXLRBHE1	1" x 1"	8	10/100	22.57
NLXLRBHE1X3/4	1" x 3/4"	10	10/100	22.46
No Lead Cast Bronze Combination Elbows (INS x FIP)				
NLRBFE1	1" x 1"	8	5/50	24.57
NLRBFE1x11/4	1" x 1 1/4"	8	5/50	33.43
NLRBFE11/4	1 1/4" x 1 1/4"	6	5/50	29.11
No Lead Cast Bronze Elbows (INS x INS)				
NLRBE3/4	3/4" x 3/4"	5	10/200	11.68
NLRBE1	1" x 1"	6	10/100	17.39
NLRBE1X11/4	1" x 1 1/4"	6	10/50	32.75
NLRBE11/4	1 1/4" x 1 1/4"	6	10/50	32.36
No Lead Cast Bronze Hydrant Tees (INS x MIP)				
NLRBHT3/4	3/4" x 3/4"	4	10/100	18.04
NLRBHT1X3/4	1" x 3/4"	6	10/100	23.25
NLRBHT1	1" x 1"	4	10/100	25.61
No Lead Cast Bronze Tees (INS x INS)				
NLRBT3/4	3/4" x 3/4"	5	10/100	17.14
NLRBT1	1" x 1"	6	10/100	24.89
NLRBT11/4	1 1/4" x 1 1/4"	6	5/50	37.71
No Lead Cast Brass Combination Tees (INS x FPT)				
NLRBFT3/4	3/4" x 3/4"	6	10/100	25.93
NLRBFT1	1" x 1"	6	6/60	32.66
NLRBFT1X1X3/4	1" x 1" x 3/4"	6	6/60	30.13
NLRBFT11/4	1 1/4" x 1 1/4"	6	4/40	52.50



Insert Fittings - Steel, Zinc Plated


☺ Limited Quantities Available

- For use with flexible poly pipe
- Made in North America.
- IMAS Imported
- Made from Sch 40 C.W. steel pipe, zinc plated.




S12, IMAS


* NO wrench-grip shoulder




XS12, IMAS-XL



S38



S74, IMAS



S86


Part Number	Size	Ctn/Case Qty	List Price
Male Adapter, mipt x ins			
S12-1/2	1/2"	25	\$ 5.32
S12-3/4	3/4"	25	5.49
S12-1	1"	20	7.10
S12-11/4	1-1/4"	20	9.07
S12-11/2	1-1/2"	10	11.24
S12-2	2"	10	16.23
S12-21/2 *	2-1/2"	BULK	43.31
S12-3 *	3"	BULK	58.93
S12-4 *	4"	BULK	94.63
Male Adapter, mipt x ins IMPORTED			
IMAS50	1/2"	50/300	1.65
IMAS75	3/4"	50/200	2.14
IMAS100	1"	25/200	2.95
IMAS125	1 1/4"	12/108	4.39
IMAS150	1 1/2"	6/90	5.64
IMAS200	2"	5/60	8.29
IMAS250	2 1/2"	2/10	21.95
IMAS300	3"	2/10	29.60
IMAS400	4"	2/10	48.01
Extra Long Male Adapter, mipt x ins			
XS12-1	1"	25	13.65
XS12-11/4	1-1/4"	25	17.55
XS12-11/2	1-1/2"	25	16.83 ☺
Extra Long Male Adapter, mipt x ins IMPORTED			
IMAS100XL	1"	10/120	4.25
IMAS125XL	1 1/4"	10/80	7.14
Reducing Male Adapter, mipt x ins			
S38-3/4X1/2	3/4" x 1/2"	25	17.57 ☺
S38-1X3/4	1" x 3/4"	25	18.95 ☺
S38-11/4X1	1-1/4" x 1"	25	21.79 ☺
S38-11/2X11/4	1-1/2" x 1-1/4"	25	27.47 ☺
Reducing Male Adapter, ins x mipt			
S74-1X3/4	1" x 3/4"	25	14.31
S74-11/2X11/4	1-1/2" x 1-1/4"	25	18.55 ☺
Reducing Male Adapter, ins x mipt IMPORTED			
IMAS7550	3/4" x 1/2"	250	4.47
IMAS1075	1" x 3/4"	250	4.85
Venturi Adapter, mipt x ins			
S86-3/4X6	3/4" x 6"	25	15.80 ☺
S86-3/4X12	3/4" x 12"	25	25.02
S86-1X6	1" x 6"	25	15.36
S86-1X8	1" x 8"	25	19.04
S86-1X10	1" x 10"	25	16.26 ☺
S86-1X12	1" x 12"	25	18.58 ☺
S86-11/4X8	1-1/4" x 8"	25	18.38 ☺
S86-11/4X10	1-1/4" x 10"	25	22.17 ☺

Insert Fittings - Steel, Zinc Plated




☺ Limited Quantities Available

- For use with flexible poly pipe
- Made in North America.
- ISVMA, ISWSE, IFAS, ICS - Imported
- Made from Sch 40 C.W. steel pipe, zinc plated.



ISVMA




ISWSE



S10, ICS



XS10, ICS-XL



S90, IFAS


Part Number	Size	Ctn/Case Qty	List Price
Venturi Adapter, mipt x ins IMPORTED			
ISVMA1X6	1" x 6"	60	\$ 5.68
ISVMA1X8	1" x 8"	50	6.43
ISVMA1X10	1" x 10"	40	9.74
ISVMA11/4X6	1-1/4" x 6"	50	7.21
ISVMA11/4X8	1-1/4" x 8"	40	8.36
ISVMA11/4X10	1-1/4" x 10"	30	12.52
Well Seal Elbow, ins x ins IMPORTED			
ISWSE100	1"	BULK	14.82
ISWSE125	1-1/4"	BULK	21.54
Coupling, ins x ins			
S10-1/2	1/2"	25	3.71 ☺
S10-3/4	3/4"	25	5.69
S10-1	1"	20	7.64
S10-11/4	1-1/4"	20	10.46
S10-11/2	1-1/2"	10	12.24
S10-2	2"	10	22.34
Coupling, ins x ins IMPORTED			
ICS50	1/2"	50/300	1.54
ICS75	3/4"	50/200	1.93
ICS100	1"	25/200	2.80
ICS125	1 1/4"	20/120	5.05
ICS150	1 1/2"	10/60	6.39
ICS200	2"	10/60	8.54
ICS250	2 1/2"	2/10	21.99
ICS300	3"	2/10	25.92
ICS400	4"	2/10	32.35
Extra Long Coupling, ins x ins			
XS10-11/4	1-1/4"	25	28.08 ☺
Extra Long Coupling, ins x ins IMPORTED			
ICS100XL	1"	10/120	3.93
ICS125XL	1-1/4"	10/80	8.91
Female Adapter, fipt x ins			
S90-1/2	1/2"	25/300	11.71 ☺
S90-1	1"	20/160	18.90 ☺
S90-11/4	1-1/4"	20/120	23.57 ☺
Female Adapter, fipt x ins IMPORTED			
IFAS50	1/2"	25/200	2.57
IFAS75	3/4"	25/150	3.59
IFAS100	1"	125	5.32
IFAS125	1 1/4"	100	11.11
IFAS150	1 1/2"	10/60	11.25
IFAS200	2"	4/20	17.92



Insert Fittings - Cast Stainless Steel

Stainless Steel Insert Fittings Features:

- Cast from Grade 304 Stainless Steel.
- For use with flexible poly pipe.



SSMA Series



XLSSMA Series



SSC Series



SST



SSE Series



SSHE Series



SSHT Series

Part Number	Size	# Barbs	Ctn/Case Qty	List Price
Cast 304 Stainless Steel Male Adapters (MIP x INS)				
SSMA1/2	1/2"	7	10/200	\$ 8.18
SSMA3/4	3/4"	7	10/200	12.21
SSMA3/4X1	3/4" X 1"	6	10/200	13.50
SSMA1	1"	7	10/100	16.79
SSMA11/4	1 1/4"	7	10/100	21.25
SSMA11/4X1	1 1/4" x 1"	7	10/100	18.39
SSMA11/2	1 1/2"	7	5/80	29.32
SSMA2	2"	7	5/40	43.93
Cast 304 Stainless Steel Heavy Pattern Extra Long Male Adapters (MIP x INS)				
XLSSMA1	1" x 1"	13	10/100	24.46
XLSSMA11/4X1	1 1/4" x 1"	13	5/60	25.89
XLSSMA11/4	1 1/4" x 1 1/4"	13	5/50	25.54
Cast 304 Stainless Steel Coupling (INS x INS)				
SSC1/2	1/2" x 1/2"	6	10/200	9.27
SSC3/4	3/4" x 3/4"	6	10/200	10.60
SSC1	1" x 1"	5	10/100	14.57
SSC11/4	1 1/4" x 1 1/4"	5	10/100	22.04
SSC11/2	1 1/2" x 1 1/2"	8	10/50	29.13
SSC2	2" x 2"	8	5/50	39.24
Cast 304 Stainless Steel Tee (INS x INS x INS)				
SST3/4	3/4" x 3/4"	5	5/50	17.14
SST1	1" x 1"	5	10/100	26.50
SST11/4	1 1/4" x 1 1/4"	5	10/100	37.50
Cast 304 Stainless Steel Elbow (INSxINS)				
SSE1	1" x 1"	5	10/100	24.82
SSE11/4	1 1/4" x 1 1/4"	7	5/50	33.75
Cast 304 Stainless Steel Hydrant Elbow (INSxMIP)				
SSHE3/4	3/4" x 3/4"	5	10/100	16.75
SSHE1X3/4	1" x 3/4"	5	10/100	19.11
SSHE1	1" x 1"	5	10/100	23.39
SSHE11/4	1 1/4" x 1 1/4"	5	10/50	32.86
Cast 304 Stainless Steel Hydrant Tee (INS x MIP)				
SSHT3/4	3/4" x 3/4"	4	10/100	20.00
SSHT1x3/4	1" x 3/4"	6	10/100	24.34
SSHT1	1" x 1"	4	10/100	28.50

Insert Fittings - Swaged Stainless Steel



Swaged Stainless Steel Insert Fittings

Features:


- For use with flexible poly pipe.
- Third party certified to NSF/ANSI 372



☺ Limited Quantities Available



IMASS Series



SS12 Series



SS38 Series

Part Number	Size	Style	# Barbs	Ctn/Case Qty	List Price
Swaged 304 Stainless Steel Male Adapter (MIP x INS)					
IMASS50	1/2"	Round	6	25/200	\$ 6.75
IMASS75	3/4"	Round	6	25/150	6.96
IMASS100	1"	Round	7	20/120	11.25
IMASS125	1 1/4"	Round	7	20/80	13.07
IMASS125100	1 1/4 X 1"	Round	7	20/80	14.54
IMASS150	1 1/2"	Round	9	10/60	19.11
IMASS200	2"	Round	9	10/40	27.14
Swaged 316 Stainless Steel Male Insert Adapters (MIPxINS) Made in USA					
SS12-1/2	1/2"	Hex	6	25/300	\$ 8.40
SS12-3/4	3/4"	Hex	7	25/200	9.94
SS12-1	1"	Hex	7	20/160	11.92
SS12-11/4	1-1/4"	Hex	6	20/120	25.34
SS12-11/2	1-1/2"	Hex	6	10/60	30.88
SS12-2	2"	Hex	7	10/40	56.35 ☺
Swaged 316 Stainless Steel Male Reducing Adapter (MIP x INS) Made in USA					
SS38-11/4x1	1-1/4 x 1"	Round	7	25/100	23.83
Swaged 316 Stainless Steel Extra Long Male Adapter (MIP x INS) Made in USA					
XSS12-1	1"	Round	14	25	24.12
XSS12-11/4	1 1/4"	Round	14	25	31.98



ICSS Series



SS10 Series

Part Number	Size	Style	# Barbs	Ctn/Case Qty	List Price
Swaged 304 Stainless Steel Coupling (INS x INS)					
ICSS50	1/2"	Round	6	25/200	\$ 5.46
ICSS75	3/4"	Round	6	25/150	5.82
ICSS100	1"	Round	7	20/120	11.68
ICSS125	1 1/4"	Round	7	20/80	13.50
ICSS150	1 1/2"	Round	9	10/60	20.89
ICSS200	2"	Round	9	10/40	31.07
Swaged 316 Stainless Steel Coupling (INS x INS) Made in USA					
SS10-1	1"	Round	7	20	17.33
SS10-11/4	1 1/4"	Round	7	20	23.32
Swaged 316 Stainless Steel Extra Long Coupling (INS x INS) Made in USA					
XSS10-1	1"	Round	14	25	52.42



Insert Fittings - NO LEAD Yellow Brass



YB00NL

No Lead Yellow Brass Solder Adapter

Features:

- For use with flexible poly pipe
- Third party certified to NSF/ANSI 372.



Part Number	Size	Ctn/Case Qty	List Price
NO LEAD Yellow Brass Solder Adapters, ins x solder			
YB00NL3/4	3/4"	10/200	7.32
YB00NL1 *	1"	10/200	10.39

* Use as 1" male or 3/4" female sweat fitting.





Insert Fittings - Red Brass

- For use with flexible poly pipe
- Made in North America
- B and XB Series ANSI/NSF61
- IMAB Imported
- Made from 85% copper alloy seamless brass pipe with 0.05% lead.



ANSI/NSF Standard 61
Drinking Water System Components



☺ Limited Quantities Available



B12, IMAB

* NO wrench-grip shoulder




Male Adapter, mipt x ins

Part Number	Size	Ctn/Case Qty	List Price
B12-1/2	1/2"	25/300	\$ 12.16
B12-3/4	3/4"	25/200	15.06
B12-1	1"	20/160	19.05
B12-11/4	1-1/4"	20/120	34.61
B12-11/2	1-1/2"	10/60	42.19
B12-2	2"	10/40	55.86
B12-3 ☺	3"	10	166.56 ☺

Male Adapter, mipt x ins IMPORTED

IMAB50	1/2"	50/300	8.61
IMAB75	3/4"	50/200	11.61
IMAB100	1"	25/100	12.00
IMAB125	1 1/4"	20/80	28.43
IMAB150	1 1/2"	10/60	41.47
IMAB200	2"	10/60	50.86
IMAB250	2 1/2"	2/10	128.66
IMAB300	3"	2/10	163.98
IMAB400	4"	2/10	309.14



XB12, IMAB-XL




Extra Long Adapter, mipt x ins

XB12-1	1"	25/100	35.25
XB12-11/4	1-1/4"	25/50	52.68
XB12-11/2	1-1/2"	25/50	67.47

Extra Long Adapter, mipt x ins IMPORTED

IMAB100XL	1"	10/120	26.98
IMAB125XL	1-1/4"	10/80	41.22




B38



Reducing Male Adapter, mipt x ins

B38-1X3/4	1" x 3/4"	25/150	55.19 ☺
B38-11/4X1	1-1/4" x 1"	25/100	73.50
B38-11/2X11/4	1-1/2" x 1-1/4"	25/50	84.58 ☺




B74



Reducing Male Adapter, ins x red. mipt

B74-1X3/4	1" x 3/4"	25/200	28.44
B74-11/4X1	1-1/4" x 1"	25/100	34.21



B86



Venturi Adapter, ins x mipt

B86-1X6	1" x 6"	25/100	41.70
B86-1X8	1" x 8"	25/100	51.28 ☺
B86-11/4X8	1-1/4" x 8"	25/100	75.91 ☺



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

12.13

Insert Fittings - Red Brass




- For use with flexible plastic pipe
- Made in North America
- B and XB Series ANSI/NSF61
- IMAB, ICB Imported
- Made from 85% copper alloy seamless brass pipe with 0.05% lead.



ANSI/NSF Standard 61
Drinking Water System Components



☺ Limited Quantities Available

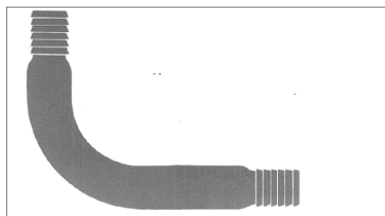


B99



B10, ICB



XB10, ICB-XL



B90



Part Number	Size	Ctn/Case Qty	List Price
Well Seal Elbow, ins x ins			
B99-1	1"	Bulk	\$ 84.08 ☺
B99-11/4	1-1/4"	Bulk	158.39 ☺
Coupling, ins x ins			
B10-1/2	1/2"	25/300	16.24
B10-3/4	3/4"	25/300	18.27
B10-1	1"	20/160	27.26
B10-11/4	1-1/4"	20/120	41.72
B10-11/2	1-1/2"	10/60	49.51
B10-2	2"	10/40	77.34
Coupling, ins x ins IMPORTED			
ICB50	1/2"	50/300	6.46
ICB75	3/4"	50/200	10.99
ICB100	1"	25/100	18.58
ICB125	1 1/4"	20/80	31.05
ICB150	1 1/2"	10/60	38.81
ICB200	2"	10/60	52.37
ICB250	2 1/2"	2/10	64.63
ICB300	3"	2/10	149.82
ICB400	4"	2/10	154.40
Extra Long Coupling, ins x ins			
XB10-1	1"	25/100	51.23
XB10-11/4	1-1/4"	25/50	67.51 ☺
Extra Long Coupling, ins x ins IMPORTED			
ICB100XL	1"	10/120	26.89
ICB125XL	1-1/4"	10/80	23.39
Female Adapter, fipt x ins			
B90-1/2	1/2"	25/300	24.51 ☺
B90-3/4	3/4"	25/200	31.43
B90-1	1"	20/160	37.73
B90-11/4	1-1/4"	20/120	55.22
B90-2	2"	10/40	80.88 ☺

PLASTIC THREAD INSTALLATION TIPS & QUICK REFERENCE GUIDE



Excerpts from LASCO Fittings, Inc. "Threads Installation Tips & Quick Reference Guide". For full text go to lascofittings.com

THE "DO'S AND DON'TS" OF ASSEMBLING THREADED PLASTIC FITTINGS

Today, there are millions of miles of plastic piping with threaded fittings, providing reliable, leak-free service. However, a tiny percentage of those threaded plastic fittings may leak or break. The reason for this is improper assembly of threaded joints.

Here are some of the Do's and Don'ts of PVC joint assembly:

- Don't over-tighten joints by giving them "one more turn to be sure. Do finger tighten plus one or two turns - No More.
- Don't wrap PTFE tape or PTFE paste or pipe dope to add bulk to or to lubricate the joint. Do use a sealant for threaded joints.
- Don't use "stronger" Schedule 80 threaded fittings on the assumption that they may solve the problem of splitting through over-tightening.
- Do use only Schedule 40 threaded fittings with Schedule 40 pipe and fittings.

On threaded male PVC fittings each successive thread is slightly larger in diameter than the one before it. Female threads get successively smaller. This is called taper and the amount of taper is specified (1¾ degrees) in the American National Standard B2.1. All pipe manufacturers voluntarily follow these standards to assure their customers they are receiving quality materials.

Because the threads are tapered, additional turns cause the female part to stretch or undergo "strain." This will split the female fitting just as a wedge, driven by a sledgehammer, will split a tree stump.

The amount of strain increases as the size of the pipe decreases. Therefore it is easier to split smaller diameter threaded joints than larger ones. It is also easier to over-torque smaller diameter fittings because their resistance to torque is less.

The right way to assemble a threaded PVC joint-Schedule 40 or 80 is finger tight plus one to two turns-no more.

LEAK-FREE JOINTS

Since sealant or tapes that contain PTFE reduce the friction, they will mask the loads and stress being applied during the tightening sequence. Because of the clearance between the root or valley and the peaks of the mating threads, there is a small spiral leak path that extends the length of the threaded connection. This leak path must be sealed, and this is the reason for thread sealant. The lubricating qualities of thread sealants can cloak the resistance the installer expects when tightening a joint. This leads to over tightening to get the "feel" of being leak free, while exerting the excessive stress of wedging the male and female components together.

The procedure to make leak free joints that will not cause split fittings is simple! Make-up the joint to finger-tight, not hand tight, then tighten 1 to 2 more turns. This method will provide a joint that is leak tight without causing excessive stress within the connection. It is important to realize that pipe thread sealant, especially those made with PTFE, lubricate the threads and mislead the installer to believe the joint is not tight.



DON'T USE PTFE TAPE, PTFE PASTE OR PIPE DOPE. DO USE A SEALANT.


PTFE tape, PTFE paste and pipe dope is intended for metal pipe and fittings. Metal to metal fitting joints are more difficult to tighten than plastic; the surfaces tend to gall without the aid of such lubricants as PTFE or pipe dope. Plastic fittings do not need this lubrication.

When PTFE tape is wrapped around plastic male threads it adds to the strain and tensile stress. The tendency of most installers is to incorrectly wrap several thicknesses of tape around the male threads, increasing stain and stress further.

PTFE paste and pipe dope, just like PTFE tape, make threaded joints slippery. Their use on PVC fittings can be an invitation to over-torque.

When working with threaded plastic fittings do use a proper sealant. The right sealant for threaded joints is non-hardening, compatible with plastic and does not add slipperiness.

A non-hardening compound is forced by water pressure into potential points of leakage, thereby performing a true sealing function. Tapes and hardening pastes permit a leak path to develop when a joint is backed off, mechanically flexed, or expands with rising temperatures.

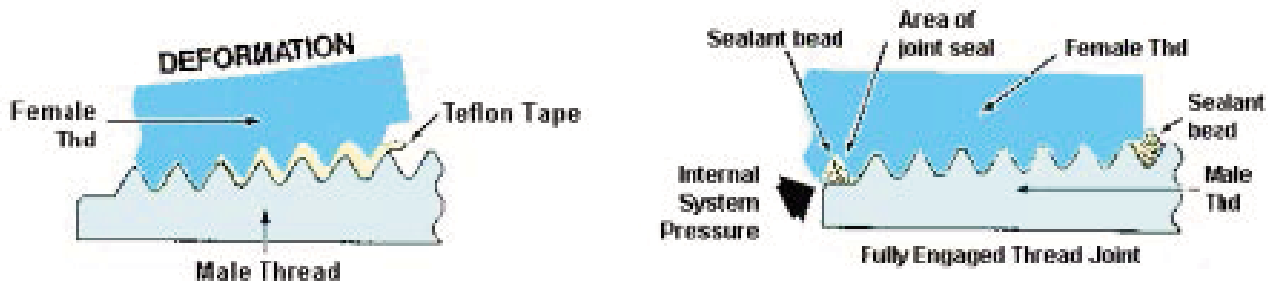

A sealing compound must be compatible to plastics. Many brands of pipe sealant contain oils, solvents or carriers that can damage plastic. A proper sealant must be certified by the manufacturer to be harmless to the fitting material and to not contaminate fluid in the pipe.

Finally, a sealing compound must not lubricate the joint to the point that over-tightening is encouraged. Several sealants on the market meet all these requirements.



Unions - PVC Sch 80



PV79, PV69 Series

PVC Sch 80 Union Features:

- Ideal for swimming pool, spa and plumbing installations.
- EPDM O-Ring seal.
- Working pressure: 150 PSI at 72°F, 100 PSI at 120°F.
- Meets ASTM standards for Schedule 80 construction.
- Manufactured for AGI in an ISO 9002 facility.
- NSF listed.
- Available white or gray.
- Imported.

DIMENSIONS (IN.)	SIZE	d3	D1	D2	L
	1/2"	.51	1.21	1.80	2.11
	3/4"	.71	1.45	2.15	2.42
	1"	.92	1.76	2.58	2.69
	1 1/4"	1.17	2.11	3.20	3.32
	1 1/2"	1.52	2.54	3.83	3.40
	2"	1.92	3.05	4.68	3.71
	3"	2.84	3.52	6.10	4.96
	4"	3.94	4.52	8.86	6.30

ISO 9002



MATERIAL SPECIFICATIONS

Body	PVC
End Connector	PVC
Union Nut	PVC
O-Ring	EPDM

Part Number	IPS Size	Ctn Qty	List Price			
SCHEDULE 80 - WHITE			PV797	PV798	PV799	
SLIP X SLIP	FIPT X FIPT	SLIP X FIPT	SXS	TXT	SXT	
PV797-1/2	PV798-1/2	1/2"	36	\$ 2.93	\$ 3.06	
PV797-3/4	PV798-3/4	3/4"	24/144	3.85	4.00	
PV797-1	PV798-1	1"	12/96	4.95	5.30	
PV797-11/4	PV798-11/4	1 1/4"	12/96	8.82	9.28	
PV797-11/2	PV798-11/2	PV799-11/2	1 1/2"	8/64	11.14	11.59
PV797-2	PV798-2	PV799-2	2"	4/48	15.50	16.30
SCHEDULE 80 - GRAY			PV697	PV698		
slip x slip	FIPT x FIPT		SxS	TXT		
PV697-1/2	PV698-1/2	1/2"	36/288	\$ 2.93	\$ 3.09	
PV697-3/4	PV698-3/4	3/4"	24/144	3.86	4.08	
PV697-1	PV698-1	1"	12/96	4.95	5.40	
PV697-11/4	PV698-11/4	1 1/4"	12/96	8.82	9.16	
PV697-11/2	PV698-11/2	1 1/2"	8/64	11.14	11.81	
PV697-2	PV698-2	2"	4/48	15.80	16.61	
PV697-3	PV698-3	3"	2/12	39.95	41.31	
PV697-4		4"	1/4	88.67		
Replacement O-Ring for PV797, PV798, PV799, PV697, PV698						
PV796-1/2	1/2"	1		\$ 0.35		
PV796-3/4	3/4"	1		0.35		
PV796-1	1"	1		0.42		
PV796-11/4	1 1/4"	1		0.42		
PV796-11/2	1 1/2"	1		0.70		
PV796-2	2"	1		0.70		




In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

12.15

Union, PVC Sch 40



1600 Series



SNR Series

Part Number	IPS Size	Ctn Qty	List Price
SCHEDULE 40 - MADE IN USA			
SLIP X SLIP			
1600-15	1 1/2" Socket both ends, 2" spigot one end	24	\$ 18.12
1600-20	2" Socket both ends, 2 1/2" spigot one end	20	25.06

Part Number	Description	Ctn Qty	List Price
UNION REPAIR SPLIT NUT			
SNR150	1 1/2" FBT Repair Split Nut w/ Screw	125	\$ 5.01
SNR200	2" FBT REpair Split Nut w/ Screw	100	5.51



CPVC Plastic Fittings - CTS

CPVC CTS Plastic Fitting Features:

- For CPVC copper tube size 1/2" and 3/4".
- For hot and cold water service.
- Meets ASTM-D-2846.
- NSF Approved.
- Rated 100 PSI at 180°F, 400 psi at 73°F.
- 14NSF Standard 61



2429 Series



2406 Series



2410 Series



2415 Series



2424 Series



2417 Series



2423 Series




2401 Series

Part Number	Size	Description	Ctn Qty	List Price
CPVC Coupling				
2429-005	1/2"	s x s	25/500	\$ 0.44
2429-007	3/4"	s x s	25/250	0.56
2429-010	1"	s x s	10/100	2.17
2429-101	3/4 x 1/2"	s x s	25/250	0.68
2429-131	1" x 3/4"	s x s	10/100	3.21
2413-007	3/4 x 3/4"	pvc slip x cpvc slip	25/250	2.09
2413-010	1" x 1"	pvc slip x cpvc slip	25/100	3.93
CPVC 90° Elbow				
2406-005	1/2"	s x s	50/500	0.40
2406-007	3/4"	s x s	25/250	0.86
2406-010	1"	s x s	10/100	2.55
2406-101	3/4 x 1/2"	s x s	25/250	1.35
CPVC 90° Street Elbow				
2410-005	1/2"	ms x fs	25/500	0.62
2410-007	3/4"	ms x fs	25/250	1.01
2410-010	1"	ms x fs	10/100	3.52
CPVC Drop Ear Elbow				
2415-005	1/2"	s x s	25/250	1.24
2424-005	1/2"	s x ft	25/250	2.43
CPVC 45° Elbow				
2417-005	1/2"	s x s	50/500	0.69
2417-007	3/4"	s x s	25/250	1.04
2417-010	1"	s x s	10/100	2.48
CPVC 45° Street Elbow				
2423-005	1/2"	s x s	25	1.02
2423-007	3/4"	s x s	25	1.33
2423-010	1"	s x s	10	3.41
CPVC Tee				
2401-005	1/2"	s x s x s	50/500	0.58
2401-007	3/4"	s x s x s	25/250	1.28
2401-010	1"	s x s x s	10/100	5.60
2401-094	3/4 x 1/2 x 1/2	s x s x s	25/250	1.33
2401-095	3/4 x 1/2 x 3/4	s x s x s	25/250	1.35
2401-101	3/4 x 3/4 x 1/2	s x s x s	25/250	1.35
2401-125	1" x 3/4" x 3/4"	s x s x s	1/25	7.80
2401-126	1" x 3/4" x 1"	s x s x s	1/25	8.83
2401-131	1" x 1" x 3/4"	s x s x s	10/100	6.38



CPVC Plastic Fittings - CTS



2436 Series

2435 Series



2437 Series

2447 Series



2438 Series



2439 Series



2492 Series



2457 Series

Part Number	Size	Description	Ctn Qty	List Price
CPVC Male Adapter				
2436-005	1/2"	s x mipt	25/250	\$ 0.56
2436-007	3/4"	s x mipt	25/250	0.87
2436-010	1"	s x mipt	10/100	3.72
CPVC Female Adapter				
2435-005	1/2"	s x fipt	25/250	1.53
2435-007	3/4"	s x fipt	25/250	2.17
2435-010	1"	s x fipt	10/100	2.47
CPVC Reducing Bushing				
2437-101	3/4 x 1/2"	spigot x s	25/250	0.58
2437-130	1" x 1/2"	spigot x s	10/100	1.70
2437-131	1" x 3/4"	spigot x s	10/100	1.70
CPVC Cap				
2447-005	1/2"	slip	25/500	0.46
2447-007	3/4"	slip	25/250	0.62
2447-010	1"	slip	10/100	1.75
CPVC to Brass Transition Fittings				
2438-005	1/2 x 1/2"	cpvc x fipt	10/50	17.09
2439-005	1/2 x 1/2	cpvc x mipt	10/50	17.09
Tubing Straps				
2492-005	1/2"		100/1000	0.55
2492-007	3/4"		100/1000	0.55
CPVC Union				
2457-005	1/2"	slip	10/50	4.54
2457-007	3/4"	slip	10/50	6.06



Compression Couplings-Imported, PVC/CPVC



MATERIAL SPECIFICATIONS

#	Part	Material
1	Body	UPVC, CPVC
2	Compression Nut	UPVC, CPVC
3	Gasket - PVC	NR
	Gasket - CPVC	EPDM

PVC Compressing Coupling Features:

- Iron Pipe Size (PVC), Copper Tube Size (CPVC)
- For use with cold water (PVC) or hot water (CPVC-CTS)
- Natural rubber gasket seals
- Rated at 200 psi at 70 °F
- Imported

"PC" Series IPS DIMENSIONS (IN.)				
SIZE	D	d	d1	L
1/2"	1.85	.91	.83	5.24
3/4"	2.09	1.18	1.04	5.32
1"	2.40	1.42	1.31	5.75
1 1/4"	2.87	1.81	1.65	6.30
1 1/2"	3.15	2.05	1.89	6.89
2"	3.62	2.56	2.37	7.87
2 1/2"	4.53	2.52	2.87	9.92
3"	5.28	3.62	3.49	10.87
4"	6.34	4.65	4.49	11.93
6"	8.78	6.85	6.62	11.22

"HW" Series CTS DIMENSIONS (IN.)				
SIZE	D	d	d1	L
1/2"	1.30	.71	.63	4.49
3/4"	1.85	.95	.88	5.00

Part Number	Material	Size	Case Qty	List Price
PC10-1/2	PVC	1/2" IPS	100	\$ 2.56
PC10-3/4	PVC	3/4" IPS	90	2.97
PC10-1	PVC	1" IPS	60	3.84
PC10-11/4	PVC	1 1/4" IPS	40	4.62
PC10-11/2	PVC	1 1/2" IPS	30	6.37
PC10-2	PVC	2" IPS	20	8.87
PC10-21/2	PVC	2 1/2" IPS	10	20.26
PC10-3	PVC	3" IPS	4	28.67
PC10-4	PVC	4" IPS	2	37.83
PC10-6	PVC	6" IPS	2	91.00
HW10CTS1/2	CPVC	1/2" CTS	20/360	4.48
HW10CTS3/4	CPVC	3/4" CTS	20/240	5.42



SW Series

Part Number	For Use with Coupling Sizes	Ctn Qty	List Price
Adjustable Strap Wrench			
SW400	1/2" through 4"	10/60	\$ 19.47
SW600	1/2" through 6"	10/60	23.18



Compression Fittings, Galvanized



Galvanized Long Pattern Compression Fitting Features:

- Bodies made of steel tubing (GC10), malleable iron (GC10C)
- End nuts made of malleable iron.
- Galvanized finish
- Buna-N gaskets on domestic fittings.
- SBR gaskets on GC10C series.
- Maximum rated service temperature for gaskets: 212 °F (100° C).
- GC10C manufactured for AGI in an ISO9002 facility.

Recommended Maximum Pressure(PSI)		
Size	Torque Ft. Lbs	Anchored Piping
1/2"	150	150
3/4"	150	150
1"	225	100
1-1/4"	225	100
1-1/2"	225	100
2"	300	75

WARNING: Designer and/or contractor must provide suitable anchoring of piping to prevent pull-out from fittings when applications subject piping to external forces such as ground shift and temperature variations that cause linear pipe contraction.



GC10C Series



ISO 9002

Coupling GC10C - Long Pattern - Imported - Malleable Iron, 125 PSI, 120 ° F

Part Number	Size	Pipe O.D.	Ctn/Case Qty	List Price
GC10C1/2	1/2"	.840	30 / 60	\$ 11.77
GC10C3/4	3/4"	1.050	25 / 50	13.20
GC10C1	1"	1.315	15 / 30	15.49
GC10C11/4	1-1/4"	1.660	12 / 24	19.67
GC10C11/2	1-1/2"	1.900	9 / 18	23.31
GC10C2	2"	2.375	14	34.85



GC10 Series

Coupling GC10 - Made in U.S.A. - Steel Tube

Part Number	Size	Pipe O.D.	Ctn Qty	List Price
GC10-1/2	1/2"	.840	12	\$ 31.05
GC10-3/4	3/4"	1.050	12	33.86
GC10-1	1"	1.315	12	39.97
GC10-11/4	1-1/4"	1.660	6	53.38
GC10-11/2	1-1/2"	1.900	6	58.96
GC10-2	2"	2.375	6	74.10




GC12 Series

Adapters GC12 - Made in U.S.A. - Steel Tube

Part Number	Size	Pipe O.D.	Ctn Qty	List Price
GC12-1/2	1/2"	.840	12	\$ 43.73
GC12-3/4	3/4"	1.050	12	45.77
GC12-1	1"	1.315	12	46.35
GC12-11/4	1-1/4"	1.660	6	55.10
GC12-11/2	1-1/2"	1.900	6	76.62
GC12-2	2"	2.375	6	76.76




Pipe Repair Clamps

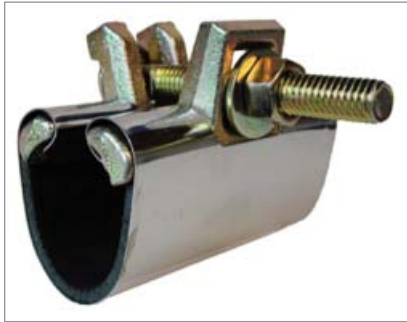


Repair Clamp Features:

- Pipe repair clamps eliminate the need for costly pipe replacement for simple leaks.
- Non-corrosive clamp band is made of annealed stainless steel.
- Nuts and bolts are cadmium plated with a chromate finish; heavy duty hex nut with washer.
- Lugs are made of annealed, malleable iron for maximum strength and permanence; iron phosphate finish.
- Neoprene gasket with maximum rated service temperature of 212° F (100°C).
- Imported







Straight through bolt pull on lugs gives more uniform pressure on the band, more pressure on pipe with less torque on nut.



Oval lug opening in band won't tear - no corners to rip out as with square hole.



Lugs above pipe level don't pull into pipe. Gives more tension on band - more sealing power yet won't crush pipe.



Band covers lead edge of lug. Equal pressure across entire band. No friction - no cutting into pipe surface by raw edge of band opening.

Part Number	Nominal Pipe Size	IPS Pipe O.D.	CTS Tube O.D.	Ctn Qty	List Price
3" Wide, 1 Bolt					
HRC3-3/8	3/8"	.675	.625	6/72	\$ 7.40
HRC3-1/2	1/2"	.840	.875	6/72	7.40
HRC3-3/4	3/4"	1.050	1.125	6/72	7.47
HRC3-1	1"	1.315	1.375	6/72	7.97
HRC3-1 1/4	1 1/4"	1.660	1.625	6/72	9.47
HRC3-1 1/2	1 1/2"	1.900		6/72	9.73
HRC3-2	2"	2.375		6/72	10.67
HRC3-2 1/2	2 1/2"	2.875		6/48	11.37
HRC3-3	3"	3.50		6/48	12.05
HRC3-4	4"	4.50		6/24	13.69
6" Wide, 2 Bolts					
HRC6-1/2	1/2"	.840	.875	6/56	13.60
HRC6-3/4	3/4"	1.050	1.125	6/56	13.99
HRC6-1	1"	1.315	1.375	6/56	14.50
HRC6-1 1/4	1 1/4"	1.660	1.625	6/56	15.68
HRC6-1 1/2	1 1/2"	1.900		6/56	17.62
HRC6-2	2"	2.375		6/56	19.77
HRC6-2 1/2	2 1/2"	2.875		6/24	21.28
HRC6-3	3"	3.50		6/24	22.44
HRC6-4	4"	4.50		6/24	22.92

Couplings, Caps - Flexible & No-Hub



Coupling, Cap Features:

- Flexible couplings for joining all types of sewer pipe, including transitions from one type to another.
- NO-HUB couplings for joining cast iron pipe sections
- End Caps for capping cast iron, steel, PVC and ABS pipe.
- 300 Series stainless steel clamps
- Meets IAPMO File #0317, BOCA ESI RR#90-68, SBCCI PST&ESI Report #9483B
- CSA Approved



C Series



MR Series



MRTC Series



07 Series

Part Number	Size	Connection	Ctn Qty	List Price
NO HUB COUPLINGS				
C150C	1 1/2 X 1 1/2	CI X CI	100	\$ 9.84
C200C	2 X 2	CI X CI	100	9.84
C300C	3 X 3	CI X CI	100	11.47
C400C	4 X 4	CI X CI	100	13.88
FLEXIBLE COUPLINGS				
MR0244	4 X 4	CLAY X CI/PL	18	15.16
MR56125	1 1/2" Tubing, Copper or 1 1/4" PL to Same		24	7.23
MR5615	1 1/2 x 1 1/2	CI/PL X CI/PL	24	7.68
MR5622/125	2 x 1 1/4	CI/PL x CI/PL	24	8.04
MR56215	2 X 1 1/2	CI/PL X CI/PL	24	8.75
MR5622	2 X 2	CI/PL X CI/PL	24	8.27
MR56315	3 x 1 1/2	CI/PL x CI/PL	24	14.63
MR5632	3 X 2	CI/PL X CI/PL	24	10.33
MR5633	3 X 3	CI/PL X CI/PL	18	11.17
MR5642	4 x 2	CI/PL x CI/PL	18	18.05
MR5643	4 X 3	CI/PL X CI/PL	18	15.07
MR5644	4 X 4	CI/PL X CI/PL	24	14.00
MR5655	5 X 5	CI/PL X CI/PL	14	21.92
MR5664	6 x 4	CI/PL x CI/PL	10	32.57
MR5666	6 X 6	CI/PL X CI/PL	12	29.94
DRAIN PIPING TO TUBULAR TRAP *				
MRTC150	1 1/4" x 1 1/2"		24	4.40
MRDTC150	1 1/4" or 1 1/2" x 1 1/4" or 1 1/2"		24	5.39
MRDTC215	2" x 1 1/4" or 1 1/2"		24	7.11
* Any combination of 1 1/4" or 1 1/2" tubular drain (plastic, tubular or copper)				
END CAPS				
0701-011	1 1/2"		24	4.28
0702-019	2"		24	5.04
0703-017	3"		24	6.37
0704-015	4"		24	8.15
0705-020	5"		20	16.29
0706-028	6"		12	16.77







Sewer & Drain Fittings



Sewer & Drain Fitting Features:


- All fittings are white, solvent weld.
- Manufactured from superior raw material in the USA to meet and/or exceed the following specifications:
High impact polystyrene fittings ASTM D2852.
PVC solvent weld sewer fittings ASTM D3034, SDR35.

☺ Limited Quantities Available




AGA1031

AGA2041



Long Turn



Short Turn

Part Number	Material	Size	Ctn Qty	List Price
COUPLINGS				
h x h				
AGA103 ☺	Styrene	3"	50	\$ 2.85
AGV103	PVC	3"	50	3.51
AGA104 ☺	Styrene	4"	50	3.51
AGV104	PVC	4"	50	4.26
AGV1043	PVC	4 x 3"	40	6.69
AGV106	PVC	6"	24	15.72
AGV1064	PVC	6 x 4"	24	21.13
COUPLINGS				
h x h pvc dwv x sch 40				
AGD104	PVC	4"	40	8.01
COUPLINGS				
h x h dwv x sewer				
AGV2043	PVC	3x4"	40	7.94
AGV2044	PVC	4x4"	25	10.50
AGV2046	PVC	4x6"	24	25.81
BUSHINGS				
s&d spg x h				
AGA1143 ☺	Styrene	4x3" Flush	25	6.47
AGV1143	PVC	4x3" Flush	25	8.01
AGV2064	PVC	6x4" Extended	24	20.83
BUSHINGS				
s & d x dwv spg x h / spg x fipt				
AGV1031	PVC	3 x 1-1/2" Flush	25	9.87
AGV1041	PVC	4 x 1 1/2" Flush	25	13.13
AGV1042	PVC	4 x 2" Flush	25	13.13
AGV2041	PVC	4 x 1-1/2" spg x fipt	25	13.13
BUSHINGS				
adapter sleeve dwv spg x fem s&d				
AGV3033	PVC	3 x 3"	25	8.23
AGV3044	PVC	4 x 4"	25	8.23
90° 1/4 BEND				
h x h				
AGV303	PVC	3" Long turn	25	6.88
AGA304 ☺	Stryene	4" Long turn	36	6.78
AGV304	PVC	4" Long turn	36	7.29
AGV3303	PVC	3" Short turn	25	5.56
AGV3304	PVC	4" Short turn	25	6.99
AGA306 ☺	Styrene	6" short turn	12	23.85
AGV306	PVC	6" short turn	12	23.67


Sewer & Drain Fittings



☺ Limited Quantities Available



Long Turn



Short Turn



AGV503




AGV603



AGV703




AGA713



AGV803



AGV903



AGV1103



AGV1204


Part Number	Material	Size	Ctn Qty	List Price
90° 1/4 BEND STREET ELL				
		h x spg		
AGA404 ☺	Styrene	4" long turn	36	\$ 7.41
AGV403	PVC	3" long turn	25	8.01
AGV404	PVC	4" long turn	36	9.02
AGV3403	PVC	3" short turn	25	8.75
AGV3404	PVC	4" short turn	25	9.31
AGV406	PVC	6" short turn	12	34.98
45° 1/8 BEND				
		h x h		
AGV503	PVC	3"	30	4.72
AGA504 ☺	Styrene	4"	60	4.75
AGV504	PVC	4"	60	4.91
AGV506	PVC	6"	18	24.08
45° 1/8 BEND STREET ELL				
		h x spg		
AGV603	PVC	3"	30	5.56
AGA604 ☺	Styrene	4"	60	5.26
AGV604	PVC	4"	60	5.73
AGV606	PVC	6"	18	26.70
22 1/2° 1/16 BEND				
		h x h		
AGV703	PVC	3"	25	6.57
AGA704 ☺	Stryene	4"	30	7.13
AGV704	PVC	4"	30	7.29
AGV706	PVC	6"	20	26.25
22 1/2° 1/16 BEND STREET ELL				
		h x spg		
AGV713	PVC	3"	25	7.29
AGV714	PVC	4"	30	7.74
AGV716	PVC	6"	20	29.15
TEE				
		h x h x h		
AGV803	PVC	3"	30	6.26
AGA804 ☺	Stryene	4"	30	7.23
AGV804	PVC	4"	30	8.33
AGV806	PVC	6"	8	34.98
AGV8064	PVC	6x4"	8	32.06
45° WYE				
		h x h x h		
AGV903	PVC	3"	25	10.07
AGA904 ☺	Styrene	4"	24	12.04
AGV904	PVC	4"	24	12.11
AGV906	PVC	6"	6	49.55
AGV9064	PVC	6x4"	8	40.79
SANITARY TEE				
		h x h x h		
AGV1103	PVC	3"	24	8.48
AGV1104	PVC	4"	25	11.53
AGV1106	PVC	6"	6	72.88
SADDLE TEE				
		pipe & hub		
AGV1204	PVC	4 x 1-1/2"	25	14.55




Sewer and Drain Fittings




☺ Limited Quantities Available




AGV1304




AGV1403




AGV1504



AGV1604




AGV1703




AGV1714




AGV1803




AGV1903




AGV2203



AGV2103



AGV8804




AGV2204

Part Number	Material	Size	Ctn Qty	List Price
CROSS				
		h x h x h x h		
AGV1304	PVC	4"	24	22.60
CAP				
		h		
AGV1403	PVC	3"	30	2.95
AGA1404 ☺	Styrene	4"	30	3.39
AGV1404	PVC	4"	30	3.39
AGV1406	PVC	6"	30	13.88
ADAPTER				
		h x clay pipe spg/ h x ci pipe spg		
AGV1504	PVC	4" h x clay pipe spg	24	20.40
AGV1604	PVC	4" h x c.i. pipe spg	24	20.40
DOWNSPOUT ADAPTER				
		ds x h		
AGV1703	PVC	2x3x3"	50	6.99
AGA1704 ☺	Styrene	2x3x4"	50	4.27
AGV1704	PVC	2x3x4"	50	6.57
AGV1705	PVC	3x4x4"	25	7.45
AGV1714	PVC	2x3x4 offset	25	6.57
AGV1715	PVC	3x4x4 offset	25	9.22
DRAIN GRATE				
		spg		
AGV1803	PVC	3"	50	4.07
AGV1804	PVC	4"	40	5.11
AGV1806	PVC	6"	30	22.60
FITTING CLEANOUT				
AGV1903	PVC	3"	40	6.57
AGV1904	PVC	4"	20	6.57
AGV1906	PVC	6"	24	32.06
THREADED PLUG				
AGV2003	PVC	3"	50	3.93
AGA2004 ☺	Styrene	4"	50	4.07
AGV2004	PVC	4"	50	4.07
AGV2006	PVC	6"	24	20.27
FEMALE ADAPTER				
AGV2103	PVC	3"	24	8.75
AGA2104 ☺	Styrene	4"	24	8.49
AGV2104	PVC	4"	24	8.49
AGV2106	PVC	6"	24	31.95
CLEANOUT TEE				
		h x t x h		
AGV8804	PVC	4"	30	20.40
TWO WAY CLEANOUT TEE				
AGV2204	PVC	4"	10	23.79



Drain Gate Features:

- High impact plastic gate and one way hinge allows water to flow out.
- Keeps pests and debris from clogging pipes.
- Fits 4" or 6" pipe.
- Easy to install.
- Fits sewer and drain pipe, corrugated pipe, DWV & Sch 40 pipe.
- Kit contains bracket arm, drain gate and stainless steel screw.
- Packed one per plastic bag with directions.
- Master packed in point of purchase counter display.

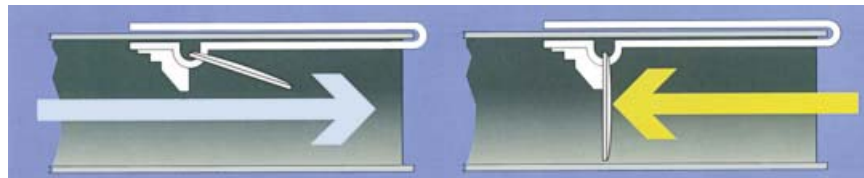

The "one-way" DrainGate swings open to allow the free flow of water.

The "one-way" design prevents gate from swinging in the opposite direction.



Part Number	Pipe Size	Display Ctn Qty	List Price
DG04	4"	20	\$ 12.14
DG06	6"	12	15.19



Single Wall Corrugated Fittings

Single Wall Corrugated Fitting Features:

- Black HDPE.
- Conforms to ASTM F405.



C104



C204



C1043



C44



C304



C804




C8064



C816



C8164



C904

Part Number	Size	Configuration	Ctn Qty	List Price
EXTERNAL SNAP COUPLING				
C103	3"	H x H	24	\$ 3.17
C104	4"	H X H	20	3.19
C106	6"	H X H	8	7.46
INTERNAL COUPLING				
C203	3"	Insert x Insert	30	4.05
C204	4"	Insert x Insert	25	4.21
C206	6"	Insert x Insert	8	8.37
REDUCER COUPLING-OFFSET				
C1043	4" x 3"	H X H	20	5.32
C1064	6" x 4"	H X H	8	8.50
CORRUGATED TO RIGID ADAPTER				
C33	3"	H x H	24	3.67
C44	4"	H X H	24	3.67
Corrugated hub x rigid SPG & insert adapts corrugated tube to rigid pipe or fitting.				
90° ELBOW - 1/4 BEND				
C303	3"	H x H	15	9.04
C304	4"	H X H	12	10.93
C306	6"	H x H	4	17.34
STRAIGHT TEE				
C803	3"	H X H X H	12	7.02
C804	4"	H X H X H	12	8.79
C806	6"	H X H X H	4	19.57
REDUCING TEE				
C8064	6" X 4"	H X H X H	3	20.11
Cut off 4" socket to make 5" socket.				
BLIND TEE (Serves as a 6" 90° elbow)				
C816	6"	H X H	3	19.57
REDUCING BLIND TEE (Serves as a 90° elbow)				
C8164	6" X 4"	H X H	3	28.74
Cut off 4" socket to make 5" socket.				
WYE				
C903	3"	H x H X H	10	10.13
C904	4"	H X H X H	8	14.93
C906	6"	H x H x H	4	22.82
REDUCING WYE				
C9064	6" X 4"	H x H X H	4	23.50



Single Wall Corrugated Fittings



Single Wall Corrugated Fitting Features:

- Black HDPE.
- Conforms to ASTM F405.



C1404



C1704

Part Number	Size	Configuration	Ctn Qty	List Price
CAP CORRUGATED HUB				
C1403	3"	H X H	20	2.76
C1404	4"	H X H	30	5.51
C1406	6"	H X H	10	10.45
DOWNSPOUT ADAPTER				
C1703	2" x 3" x 3"	DS X Corr Insert	15	5.37
C1704	2" x 3" x 4"	DS X Corr Insert	18	7.24
C1705	3" x 4" x 4"	DS X Corr Insert	15	7.24



Merchant Couplings - Steel



BSMC/GSMC Series

Merchant Coupling Features:

- Manufactured to American Iron and Steel Institute specifications.
- Manufactured in accordance with ASTM-A865.
- Deep chamfer permits easy assembly.
- Sizes thru 2" are straight tapped; sizes 2-1/2" thru 6" are taper tapped.
- Imported.
- Third party certified to NSF/ANSI 372.

Part Number	Pipe Size	Ctn Qty	List Price
Black Steel			
BSMC1/8	1/8"	100 / 1200	\$ 0.66
BSMC1/4	1/4"	100 / 800	0.84
BSMC3/8	3/8"	100 / 400	0.91
BSMC1/2	1/2"	50 / 200	0.98
BSMC3/4	3/4"	50 / 200	1.37
BSMC1	1"	48	2.03
BSMC11/4	1-1/4"	48	2.45
BSMC11/2	1-1/2"	20 / 80	4.65
BSMC2	2"	10 / 40	4.34
BSMC21/2	2-1/2"	30	12.18
BSMC3	3"	15	19.01
BSMC4	4"	10	25.83
BSMC6	6"	3	69.09
Galvanized Steel			
GSMC1/8	1/8"	100 / 1200	0.67
GSMC1/4	1/4"	100 / 800	0.88
GSMC3/8	3/8"	100 / 400	0.95
GSMC1/2	1/2"	50 / 200	1.05
GSMC3/4	3/4"	50 / 200	1.44
GSMC1	1"	48	2.14
GSMC11/4	1-1/4"	48	2.70
GSMC11/2	1-1/2"	20 / 80	3.47
GSMC2	2"	10 / 40	4.87
GSMC21/2	2-1/2"	30	13.86
GSMC3	3"	15	21.70
GSMC4	4"	10	29.44
GSMC6	6"	3	78.26












No Lead Threaded Bronze Fittings

No Lead Threaded Bronze 125 lb. CHINA

- Dimensions: ANSI B16.15 125S fittings, ANSI B16.24 150S flanges
- Threads: ANSI/ASME B1.20.1
- Material: ASTM B584(C84400)
- Material: ASTM B584(C89833 NO LEAD)



Size	CHINA - NO LEAD (Certified)		
	Part Number	Ctn Qty	List Price
90 ° Elbow, fipt x fipt			
 1/8"	NLB90L1/8	50/600	\$ 4.43
1/4"	NLB90L1/4	35/420	4.43
3/8"	NLB90L3/8	90/360	4.43
1/2"	NLB90L1/2	50/200	6.73
3/4"	NLB90L3/4	35/105	9.25
1"	NLB90L1	20/60	14.25
1 1/4"	NLB90L11/4	20/40	22.68
1 1/2"	NLB90L11/2	15/30	33.18
2"	NLB90L2	8/16	46.07
2 1/2"	NLB90L21/2	1/12	90.39
3"	NLB90L3	1/8	138.68
4"	NLB90L4	2	327.73
90 ° Elbow, Reducer fipt x fipt			
 1/2 x 3/8"	NLB90L1/2X3/8	60/240	7.28
3/4 x 1/2"	NLB90L3/4X1/2	40/160	9.91
1 x 1/2"	NLB90L1X1/2	50/100	17.39
1 x 3/4"	NLB90L1X3/4	50/100	17.39
1 1/4 x 1"	NLB90L11/4X1	10/40	27.17
45° Elbows, fipt x fipt			
 1/8"	NLB45L1/8	50/600	4.85
1/4"	NLB45L1/4	30/360	4.85
3/8"	NLB45L3/8	75/300	4.85
1/2"	NLB45L1/2	20/200	6.15
3/4"	NLB45L3/4	40/120	9.06
1"	NLB45L1	20/60	15.29
1 1/4"	NLB45L11/4	20/40	24.45
1 1/2"	NLB45L11/2	10/30	30.64
2"	NLB45L2	12/24	49.67
2 1/2"	NLB45L21/2	12	97.31
3"	NLB45L3	10	156.42
4"	NLB45L4	2/4	427.56
90 ° Street Elbow, fipt x mipt			
 1/8"	NLB90SL1/8	60/720	6.73
1/4"	NLB90SL1/4	35/420	6.73
3/8"	NLB90SL3/8	60/240	6.73
1/2"	NLB90SL1/2	60/180	8.35
3/4"	NLB90SL3/4	35/105	11.80
1"	NLB90SL1	45/90	19.51
1 1/4"	NLB90SL11/4	25/50	29.87
1 1/2"	NLB90SL11/2	9/27	38.91
2"	NLB90SL2	8/16	65.98
2 1/2"	NLB90SL21/2	5/10	104.30
3"	NLB90SL3	1/8	156.42
4"	NLB90SL4	4	561.19

Size	CHINA - NO LEAD (Certified)		
	Part Number	Ctn Qty	List Price
45° Street Elbows, fipt x mipt			
 1/8"	NLB45SL1/8	70/840	\$ 6.85
1/4"	NLB45SL1/4	40/480	6.85
3/8"	NLB45SL3/8	100/400	6.85
1/2"	NLB45SL1/2	75/225	8.35
3/4"	NLB45SL3/4	40/120	11.80
1"	NLB45SL1	25/75	19.51
1 1/4"	NLB45SL11/4	10/40	29.87
1 1/2"	NLB45SL11/2	10/30	40.11
2"	NLB45SL2	12/24	67.99
Tee, fipt x fipt x fipt			
 1/8"	NLBT1/8	120/480	6.15
1/4"	NLBT1/4	75/300	6.15
3/8"	NLBT3/8	45/180	6.15
1/2"	NLBT1/2	40/120	7.74
3/4"	NLBT3/4	35/70	11.36
1"	NLBT1	20/40	20.18
1 1/4"	NLBT11/4	14/28	28.32
1 1/2"	NLBT11/2	12/24	38.93
2"	NLBT2	8/16	63.82
2 1/2"	NLBT21/2	4/8	121.58
3"	NLBT3	6/6	185.93
4"	NLBT4	2	446.85
Tee, Reducer fipt x fipt x fipt			
 3/4x3/4x1/2	NLBT3/4X1/2	20/80	13.34
3/4x1/2x3/4	NLBT3/4X1/2X3/4	20/80	13.34
3/4x3/4x1/4	NLBT3/4X3/4X1/4	25/100	13.34
3/4x3/4x1"	NLBT3/4X1	40/80	26.55
1 x 1 x 1/4"	NLBT1X1/4	20/80	24.37
1 x 1 x 1/2"	NLBT1X1/2	15/60	24.37
1 x 1 x 3/4"	NLBT1X3/4	12/48	24.37
1 x 3/4 x 3/4	NLBT1X3/4X3/4	12/60	26.55
1 x 3/4 x 1"	NLBT1X3/4X1	30/60	26.55
1 1/4x1 1/4x3/4	NLBT11/4X3/4	20/40	34.31
1 1/4x1 1/4x1	NLBT11/4X1	20/40	34.31
1 1/2x1 1/2x3/4	NLBT11/2X3/4	15/30	47.26
1 1/2x1 1/2x1	NLBT11/2X1	10/30	47.26
1 1/2x1 1/2x1 1/4	NLBT11/2X11/4	12/24	47.26
2 x 2 x 3/4"	NLBT2X3/4	10/20	77.24
2 x 2 x 1"	NLBT2X1	10/20	77.24
2 x 2 x 1 1/4"	NLBT2X11/4	8/16	77.24
2 x 2 x 1 1/2"	NLBT2X11/2	8/16	77.24



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com

FALL 2016

12.31

No Lead Threaded Bronze Fittings



No Lead Threaded Bronze 125 lb. CHINA

- Dimensions: ANSI B16.15 125S fittings, ANSI B16.24 150S flanges
- Threads: ANSI/ASME B1.20.1
- Material: ASTM B584(C84400)
- Material: ASTM B584(C89833 NO LEAD)



Size	CHINA - NO LEAD (Certified)		
	Part Number	Ctn Qty	List Price



Cross, fipt			
1/8"	NLBCR1/8	30/360	10.27
1/4"	NLBCR1/4	60/240	10.27
3/8"	NLBCR3/8	50/150	10.27
1/2"	NLBCR1/2	30/90	12.49
3/4"	NLBCR3/4	20/60	18.04
1"	NLBCR1	15/30	28.60
1 1/4"	NLBCR11/4	10/20	44.77
1 1/2"	NLBCR11/2	8/16	57.22
2"	NLBCR2	5/10	119.23



Couplings, fipt x fipt			
1/8"	NLBC1/8	70/840	4.43
1/4"	NLBC1/4	40/480	4.43
3/8"	NLBC3/8	40/480	4.43
1/2"	NLBC1/2	60/240	5.55
3/4"	NLBC3/4	50/150	7.33
1"	NLBC1	25/100	11.36
1 1/4"	NLBC11/4	16/64	17.39
1 1/2"	NLBC11/2	18/36	23.64
2"	NLBC2	12/24	38.91
2 1/2"	NLBC21/2	8/16	64.41
3"	NLBC3	12	108.32
4"	NLBC4	3/6	171.34



Couplings, Reducer fipt x fipt			
1/4 x 1/8"	NLBC1/4X1/8	50/600	4.74
3/8 x 1/8"	NLBC3/8X1/8	35/420	4.74
3/8 x 1/4"	NLBC3/8X1/4	30/360	4.74
1/2 X 1/8"	NLBC1/2X1/8	75/300	6.85
1/2 x 1/4"	NLBC1/2X1/4	75/300	5.92
1/2 x 3/8"	NLBC1/2X3/8	60/240	5.92
3/4 x 1/4"	NLBC3/4X1/4	45/180	9.78
3/4" X 3/8"	NLBC3/4X3/8	45/180	8.81
3/4 x 1/2"	NLBC3/4X1/2	60/180	8.81
1 X 3/8"	NLBC1X3/8	30/120	16.51
1 x 1/2"	NLBC1X1/2	30/120	14.65
1 x 3/4"	NLBC1X3/4	25/100	14.65
1 1/4 x 1/2"	NLBC11/4X1/2	25/75	28.06
1 1/4 x 3/4"	NLBC11/4X3/4	25/75	23.64
1 1/4 x 1"	NLBC11/4X1	15/60	23.64
1 1/2 X 1/2"	NLBC11/2X1/2	20/60	33.64
1 1/2 x 3/4"	NLBC11/2X3/4	15/60	33.64
1 1/2 x 1"	NLBC11/2X1	25/50	29.87
1 1/2x1 1/4"	NLBC11/2X1 1/4	12/48	29.87
2 x 1/2"	NLBC2X1/2	12/36	50.02
2 x 3/4"	NLBC2X3/4	12/36	50.02
2 x 1"	NLBC2X1	12/36	50.02
2 x 1 1/4"	NLBC2X1 1/4	9/27	44.39
2 x 1 1/2"	NLBC2X1 1/2	9/27	44.39
3 x 2"	NLBC3X2	6/12	104.23

Case quantities required please for fittings through 2"

Size	CHINA - NO LEAD (Certified)		
	Part Number	Ctn Qty	List Price



Bushing, mipt x fipt			
1/4 x 1/8"	NLBB1/4X1/8	120/1440	3.51
3/8x 1/8"	NLBB3/8X1/8	75/900	3.51
3/8 x 1/4"	NLBB3/8X1/4	75/900	3.51
1/2 x 1/8"	NLBB1/2X1/8	150/600	4.18
1/2 x 1/4"	NLBB1/2X1/4	150/600	3.51
1/2 x 3/8"	NLBB1/2X3/8	150/600	3.51
3/4 x 1/8"	NLBB3/4X1/8	75/300	5.85
3/4 x 1/4"	NLBB3/4X1/4	75/300	5.85
3/4 x 3/8"	NLBB3/4X3/8	75/300	4.85
3/4 x 1/2"	NLBB3/4X1/2	75/300	4.85
1 x 1/4"	NLBB1X1/4	50/200	8.90
1 X 3/8"	NLBB1X3/8	50/200	8.90
1 x 1/2"	NLBB1X1/2	50/200	7.33
1 x 3/4"	NLBB1X3/4	50/200	7.33
1 1/4 x 1/4"	NLBB11/4X1/4	30/120	15.07
1 1/4 x 3/8"	NLBB11/4X3/8		
1 1/4 x 1/2"	NLBB11/4X1/2	30/120	15.07
1 1/4 x 3/4"	NLBB11/4X3/4	30/120	12.49
1 1/4 x 1"	NLBB11/4X1	30/120	12.49
1 1/2 x 1/2"	NLBB11/2X1/2	25/75	19.51
1 1/2 x 3/4"	NLBB11/2X3/4	25/75	19.51
1 1/2 x 1"	NLBB11/2X1	25/75	15.96
1 1/2x1 1/4"	NLBB11/2X1 1/4	25/75	15.96
2 X 1/2"	NLBB2X1/2	20/60	28.47
2 x 3/4"	NLBB2X3/4	20/60	28.47
2 x 1"	NLBB2X1	20/60	28.47
2 x 1-1/4"	NLBB2X1 1/4	20/30	23.64
2 x 1-1/2"	NLBB2X1 1/2	20/30	23.64
2 1/2 x 1	NLBB21/2X1	15/30	58.65
2 1/2 x 1 1/4"	NLBB21/2X1 1/4	15/30	58.65
2 1/2 x 1 1/2"	NLBB21/2X1 1/2	15/30	47.27
2 1/2 x 2"	NLBB21/2X2	15/30	47.27
3 x 1"	NLBB3X1	12/24	78.89
3 x 2"	NLBB3X2	12/24	71.49



Caps, fipt			
1/8"	NLBCP1/8	120/1440	3.32
1/4"	NLBCP1/4	80/960	3.32
3/8"	NLBCP3/8	60/720	3.32
1/2"	NLBCP1/2	75/300	4.43
3/4"	NLBCP3/4	40/160	5.85
1"	NLBCP1	25/100	9.51
1 1/4"	NLBCP11/4	20/80	13.93
1 1/2"	NLBCP11/2	18/54	18.80
2"	NLBCP2	12/36	31.91
2 1/2"	NLBCP21/2	20/40	60.79
3"	NLBCP3	24	96.91
4"	NLBCP4	12	186.30






No Lead Threaded Bronze Fittings

No Lead Threaded Bronze 125 lb. CHINA

- Dimensions: ANSI B16.15 125S fittings, ANSI B16.24 150S flanges
- Threads: ANSI/ASME B1.20.1
- Material: ASTM B584(C84400)
- Material: ASTM B584(C89833 NO LEAD)



Size	CHINA - NO LEAD (Certified)		
	Part Number	Ctn Qty	List Price
Lock Nut			
 1/8"	NLBLN1/8	250/3000	1.22
1/4"	NLBLN1/4	125/1500	2.20
3/8"	NLBLN3/8	125/1500	2.20
1/2"	NLBLN1/2	150/600	3.51
3/4"	NLBLN3/4	90/360	4.18
1"	NLBLN1	60/240	6.24
1 1/4"	NLBLN11/4	45/180	10.17
1 1/2"	NLBLN11/2	45/135	13.18
2"	NLBLN2	25/75	20.94
Square Head Plug, mipt			
 1/8"	NLBP1/8	300/3600	2.93
1/4"	NLBP1/4	150/1800	2.93
3/8"	NLBP3/8	100/1200	2.93
1/2"	NLBP1/2	50/600	4.64
3/4"	NLBP3/4	30/360	5.29
1"	NLBP1	20/240	6.98
1 1/4"	NLBP11/4	40/120	10.40
1 1/2"	NLBP11/2	30/90	13.26
2"	NLBP2	20/60	20.90
2 1/2"	NLBP21/2	16/32	35.79
3"	NLBP3	16/32	57.22
4"	NLBP4	12	111.75
Threaded Union, fipt x fipt			
 1/8"	NLBU1/8	60/240	15.69
1/4"	NLBU1/4	20/240	15.69
3/8"	NLBU3/8	40/160	15.69
1/2"	NLBU1/2	50/100	17.05
3/4"	NLBU3/4	35/70	23.64
1"	NLBU1	20/40	31.31
1 1/4"	NLBU11/4	15/30	45.86
1 1/2"	NLBU11/2	10/20	54.13
2"	NLBU2	6/12	83.31
2 1/2"	NLBU21/2	4/8	163.93
3"	NLBU3	4/8	253.28
4"	NLBU4	4	558.65





Malleable Iron Fittings - Imported

Imported Malleable Iron Fitting Features:

- Class 150 malleable iron pipe fittings
- Suitable for water, steam, air, gas and oil
- All fittings are air pressure tested
- Working pressure: Max: 300 psi @ -20 °F to 150 °F , Min 150 psi @ 350 °F
- Made in China
- Tensile Strength: Min 48000 psi (330 MPa)
- Elongation: Min 8%
- Hardness: Max HB150

Specifications:

Material: ANSI/ASTM A197
 Dimensions: ANSI B.16.3 fittings
 ASME/ANSI B.16.39 unions
 Threads: ASME/ANSI B.1.20.1

ISO 9002

All class 150 imported malleable iron pipe fittings are manufactured under a quality control program complying with CSA B-51 specifications.
Canadian Registration Number OA5312.5C
 Galvanized ONLY: **Third party certified to NSF/ANSI 372.**

BLACK



GALVANIZED



BIM90L/GIM90L Series



BIM90L/GIM90L Reducer Series

Size	Inner/Master Ctn Qty	List Price
90° ELBOW fiptxfipt		
BIM90L1/8	50/600	\$ 2.13
BIM90L1/4	35/420	2.03
BIM90L3/8	45/270	2.03
BIM90L1/2 UF	50/200	1.52
BIM90L3/4 UF	30/90	1.84
BIM90L1 UF	20/60	3.23
BIM90L11/4 UF	20/40	5.24
BIM90L11/2 UF	10/20	6.90
BIM90L2 UF	8/16	11.84
BIM90L21/2 UF	1/15	25.71
BIM90L3 UF	1/10	38.34
BIM90L4 UF	1/5	81.55
90° ELBOW REDUCER fiptxfipt		
BIM90L3/8X1/8	60/360	4.60
BIM90L3/8X1/4	60/360	2.93
BIM90L1/4X1/8	60/360	3.97
BIM90L1/2X1/8	40/240	2.85
BIM90L1/2X1/4 UF	40/240	2.85
BIM90L1/2x3/8 UF	50/200	2.78
BIM90L3/4x1/2	40/120	2.89
BIM90L3/4X1/4 UF	50/150	3.81
BIM90L3/4X3/8 UF	50/150	3.81
BIM90L1X1/4 UF	30/90	6.01
BIM90L1x1/2	30/90	3.69
BIM90L1X3/8 UF	30/90	6.01
BIM90L1X3/4 UF	30/90	3.69
BIM90L11/4X1/2 UF	30/60	7.96
BIM90L11/4x1 UF	20/40	6.00
BIM90L11/4X3/4 UF	30/60	6.81
BIM90L11/2x1 UF	20/40	9.84
BIM90L11/2x11/4 UF	15/30	9.84
BIM90L2x1 UF	14/28	14.19
BIM90L2x11/4 UF	10/20	14.19
BIM90L2x11/2 UF	10/20	12.48
BIM90L21/2X3/4 F	9/18	34.82
BIM90L21/2X1 F	1/16	34.82
BIM90L21/2X11/4 F	1/15	34.82
BIM90L21/2X11/2 UF	1/15	34.82
BIM90L21/2X2 UF	1/15	34.22
BIM90L3X2 UF	1/10	55.29

Size	Inner/Master Ctn Qty	List Price
90° ELBOW fiptxfipt		
GIM90L1/8	50/600	\$ 2.93
GIM90L1/4	35/420	2.79
GIM90L3/8	45/270	2.79
GIM90L1/2 UF	50/200	1.84
GIM90L3/4 UF	30/90	2.21
GIM90L1 UF	20/60	4.15
GIM90L11/4 UF	20/40	6.40
GIM90L11/2 UF	10/20	8.43
GIM90L2 UF	8/16	14.05
GIM90L21/2 UF	1/15	35.02
GIM90L3 UF	1/10	58.85
GIM90L4 UF	1/5	101.86
90° ELBOW REDUCER fiptxfipt		
GIM90L3/8X1/8	60/360	4.19
GIM90L3/8X1/4	60/360	4.19
GIM90L1/4X1/8	60/360	4.70
GIM90L1/2X1/8	40/240	3.44
GIM90L1/2X1/4 UF	40/240	3.44
GIM90L1/2 x 3/8 UF	50/200	3.23
GIM90L3/4 x 1/2 UF	40/120	3.75
GIM90L3/4X1/4 UF	50/150	4.97
GIM90L3/4X3/8 UF	50/150	4.97
GIM90L1X1/4 UF	30/90	4.79
GIM90L1X1/2	30/90	5.08
GIM90L1X3/8 UF	30/90	7.78
GIM90L1 x 3/4 UF	30/90	4.79
GIM90L11/4 x 1 UF	20/40	8.03
GIM90L11/2 x 1 UF	20/40	12.35
GIM90L11/2 x 11/4 UF	15/30	12.35
GIM90L2 x 1 UF	14/28	17.15
GIM90L2 x 11/4 UF	10/20	17.15
GIM90L2 x 11/2 UF	10/20	14.98
GIM90L21/2X3/4 F	9/18	54.84
GIM90L21/2X1 F	1/16	54.84
GIM90L21/2X11/4 F	1/15	54.84
GIM90L21/2X11/2 UF	1/15	54.84
GIM90L21/2X2 UF	1/15	54.84
GIM90L3X2 UF	1/10	77.11

U - UL Approval
 F - FM Approval



In the United States: Phone (800) 776-2266
 In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
 Fax (905) 629-3204

FALL 2016

12.35

Malleable Iron Fittings - Imported



BLACK




GALVANIZED



BIM45L/GIM45L Series



BIM90SL/GIM90SL Series



BIM45SL/GIM45SL Series



BIMT/GIMT Series

U - UL Approval
F - FM Approval

Size	Inner/Master Ctn Qty	List Price
45° ELBOW fiptxfipt		
BIM45L1/8	50/600	\$ 3.09
BIM45L1/4	35/420	3.15
BIM45L3/8	50/300	2.87
BIM45L1/2 UF	50/200	2.48
BIM45L3/4 UF	40/120	3.03
BIM45L1 UF	20/60	3.87
BIM45L11/4 UF	20/40	6.77
BIM45L11/2 UF	15/30	8.35
BIM45L2 UF	9/18	12.57
BIM45L21/2 UF	1/15	35.49
BIM45L3 UF	1/10	46.07
BIM45L4 UF	1/6	89.51
90° STREET ELBOW fiptxmpt		
BIM90SL1/8	50/600	3.08
BIM90SL1/4	35/420	3.08
BIM90SL3/8	40/240	3.08
BIM90SL1/2 UF	60/180	3.16
BIM90SL3/4 UF	30/90	3.08
BIM90SL1 UF	30/60	4.43
BIM90SL11/4 UF	20/40	6.77
BIM90SL11/2 UF	13/26	9.02
BIM90SL2 UF	7/14	14.63
BIM90SL21/2 UF	1/13	36.13
BIM90SL3 UF	1/8	55.13
45° STREET ELBOW fiptxmpt		
BIM45SL1/8	50/600	4.79
BIM45SL1/4	35/420	3.56
BIM45SL3/8	45/270	4.04
BIM45SL1/2 UF	100/200	3.25
BIM45SL3/4 UF	60/120	4.99
BIM45SL1 UF	30/60	5.80
BIM45SL11/4 UF	20/40	10.02
BIM45SL11/2 UF	15/30	12.45
TEE fiptxfiptxfipt		
BIMT1/8	75/450	3.26
BIMT1/4	50/300	3.08
BIMT3/8 UF	45/180	3.08
BIMT1/2 UF	40/120	1.99
BIMT3/4 UF	35/70	2.82
BIMT1 UF	20/40	4.96
BIMT11/4 UF	14/28	8.06
BIMT11/2 UF	11/22	10.03
BIMT2 UF	6/12	17.04
BIMT21/2 UF	1/10	35.05
BIMT3 UF	1/6	52.63
BIMT4 UF	1/4	123.56

Size	Inner/Master Ctn Qty	List Price
45° ELBOW fiptxfipt		
GIM45L1/8	50/600	\$ 4.20
GIM45L1/4	35/420	4.70
GIM45L3/8	50/300	3.73
GIM45L1/2 UF	50/200	4.14
GIM45L3/4 UF	40/120	4.01
GIM45L1 UF	20/60	4.59
GIM45L11/4 UF	20/40	8.39
GIM45L11/2 UF	15/30	10.00
GIM45L2 UF	9/18	14.92
GIM45L21/2 UF	1/15	50.57
GIM45L3 UF	1/10	73.52
GIM45L4 UF	1/6	123.21
90° STREET ELBOW fiptxmpt		
GIM90SL1/8	50/600	3.95
GIM90SL1/4	35/420	3.83
GIM90SL3/8	40/240	3.83
GIM90SL1/2 UF	60/180	3.95
GIM90SL3/4 UF	35/90	3.83
GIM90SL1 UF	30/60	5.22
GIM90SL11/4 UF	20/40	8.77
GIM90SL11/2 UF	13/26	10.79
GIM90SL2 UF	7/14	18.71
GIM90SL21/2 UF	1/13	50.74
GIM90SL3 UF	1/8	76.60
45° STREET ELBOW fiptxmpt		
GIM45SL1/8	50/600	5.48
GIM45SL1/4	35/420	4.70
GIM45SL3/8	45/270	5.36
GIM45SL1/2 UF	100/200	4.14
GIM45SL3/4 UF	60/120	6.70
GIM45SL1 UF	30/60	8.28
GIM45SL11/4 UF	20/40	12.41
GIM45SL11/2 UF	15/30	15.02
TEE fiptxfiptxfipt		
GIMT1/8	75/450	4.19
GIMT1/4	50/300	3.63
GIMT3/8	45/180	3.63
GIMT1/2 UF	40/120	2.24
GIMT3/4 UF	35/70	3.76
GIMT1 UF	20/40	6.14
GIMT11/4UF	14/28	9.71
GIMT11/2 UF	11/22	12.12
GIMT2 UF	6/12	20.23
GIMT21/2 UF	1/10	54.33
GIMT3 UF	1/6	63.70
GIMT4 UF	1/4	150.62

Carton Quantities subject to change. Contact Customer Service

FALL 2016

12.36



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com



Malleable Iron Fittings - Imported

BLACK



GALVANIZED



**BIMT/GIMT
Reducer Series**

Size	Inner/Master Ctn Qty	List Price
TEE REDUCER fiptxfiptxfipt		
BIMT1/2X1/2X3/8 UF	45/180	\$ 4.23
BIMT3/4x1/2x1/2 UF	45/90	4.50
BIMT3/4X1/2x3/4 UF	45/90	4.95
BIMT3/4X3/4X1/4 UF	50/100	4.77
BIMT3/4x3/4x1/2 UF	45/90	4.35
BIMT3/4X3/4X1 UF	25/50	6.29
BIMT1X1/2X1/2 UF	30/60	6.29
BIMT1X1/2X3/4 UF	25/50	7.33
BIMT1X1/2X1 UF	30/60	6.29
BIMT1X3/4X1/2 UF	25/50	6.23
BIMT1x3/4x3/4 UF	25/50	5.82
BIMT1x3/4x1 UF	25/50	6.29
BIMT1x1x1/2 UF	35/70	5.53
BIMT1x1x3/4 UF	30/60	5.53
BIMT1X1X11/4 UF	18/36	11.18
BIMT11/4X1/2X11/4 UF	10/40	11.46
BIMT11/4X3/4X3/4 UF	20/40	11.46
BIMT11/4X3/4X1 UF	18/36	10.69
BIMT11/4x3/4x11/4 UF	18/36	10.42
BIMT11/4X1X1/2 UF	18/36	10.67
BIMT11/4X1X3/4 UF	18/36	10.08
BIMT11/4X1X1 UF	20/40	10.08
BIMT11/4X11/4X1/2 UF	20/40	10.03
BIMT11/4x11/4x3/4 UF	18/36	8.79
BIMT11/4x11/4x1 UF	18/36	8.79
BIMT11/4x1x11/4 UF	18/36	11.68
BIMT11/2X1/2X11/2 UF	13/26	13.69
BIMT11/2X3/4X3/4 F	13/26	21.83
BIMT11/2X3/4X11/4 F	11/22	21.83
BIMT11/2X3/4X11/2 UF	13/26	13.69
BIMT11/2X1X3/4 F	18/36	13.69
BIMT11/2X1X1 UF	15/30	13.69
BIMT11/2X1X11/2 UF	13/26	13.69
BIMT11/2X11/4X3/4 UF	11/22	13.69
BIMT11/2X11/4X1 UF	11/22	11.74
BIMT11/2X11/4X11/4 UF	11/22	18.50
BIMT11/2X11/2X1/2 UF	20/40	11.74
BIMT11/2x11/2x3/4 UF	15/30	11.11
BIMT11/2x11/2x1 UF	13/26	11.11
BIMT11/2X11/2X11/4 UF	13/26	13.46
BIMT2X1/2X2 UF	10/20	21.39
BIMT2X3/4X3/4	9/18	20.96
BIMT2X3/4X2 UF	9/18	20.96
BIMT2X1X2 UF	9/18	21.39
BIMT2X11/2X11/4 UF	8/16	21.39
BIMT2X11/2X11/2 UF	8/16	20.96
BIMT2X11/2X2 UF	8/16	21.39
BIMT2X2X1/2 UF	10/20	17.40
BIMT2X2X1 UF	9/18	17.40
BIMT2X2X11/4 UF	9/18	18.39
BIMT2X2X11/2 UF	9/18	18.39

U - UL Approval
F - FM Approval

Size	Inner/Master Ctn Qty	List Price
TEE REDUCER fiptxfiptxfipt		
GIMT1/2X1/2X3/8	45/180	\$ 5.49
GIMT3/4x1/2x1/2 UF	45/90	5.93
GIMT3/4X3/4X1/4 UF	45/90	5.38
GIMT3/4x3/4x1/2 UF	50/100	5.18
GIMT3/4x1/2x3/4 UF	45/90	5.93
GIMT3/4X3/4X1 UF	25/50	8.77
GIMT1X1/2X3/4 UF	25/50	8.94
GIMT1X1/2X1 UF	30/60	8.77
GIMT1X3/4X1/2 UF	25/50	8.85
GIMT1x3/4x3/4 UF	25/50	8.77
GIMT1x3/4x1 UF	25/50	8.77
GIMT1x1x1/2 UF	35/70	7.28
GIMT1x1x3/4 UF	30/60	7.28
GIMT1X1X11/4 UF	18/36	13.70
GIMT11/4X1/2X11/4 UF	10/40	13.70
GIMT11/4X3/4X3/4 UF	20/40	14.99
GIMT11/4x3/4x1 UF	18/36	13.69
GIMT11/4x3/4x11/4 UF	18/36	12.95
GIMT11/4X1X1/2 UF	18/36	13.65
GIMT11/4X1X3/4 UF	18/36	13.69
GIMT11/4X1X1 UF	20/40	13.69
GIMT11/4x11/4x3/4 UF	18/36	11.26
GIMT11/4x11/4x1 UF	18/36	11.26
GIMT11/4x1x11/4 UF	18/36	13.94
GIMT11/2X1/2X11/2 UF	13/26	18.93
GIMT11/2X3/4X3/4 F	13/26	25.91
GIMT11/2X3/4X11/4 F	11/22	25.91
GIMT11/2X3/4X11/2 UF	13/26	17.24
GIMT11/2X1X3/4 F	18/36	17.24
GIMT11/2X1X1 UF	15/30	17.24
GIMT11/2X1X11/2 UF	13/26	17.24
GIMT11/2X11/4X3/4 UF	11/22	17.24
GIMT11/2X11/4X1 UF	11/22	16.91
GIMT11/2X11/4X11/4 UF	11/22	24.10
GIMT11/2X11/2X1/2 UF	20/40	14.73
GIMT11/2x11/2x3/4 UF	15/30	13.93
GIMT11/2x11/2x1 UF	13/26	13.93
GIMT11/2X11/2X11/4 UF	13/26	16.77
GIMT2X1/2X2 UF	10/20	24.38
GIMT2X3/4X3/4	9/18	23.92
GIMT2X3/4X2 UF	9/18	23.92
GIMT2X1X2 UF	9/18	24.38
GIMT2X11/2X11/4 UF	8/16	23.99
GIMT2X11/2X11/2 UF	8/16	23.64
GIMT2X11/2X2 UF	8/16	24.38
GIMT2X2X1 UF	9/18	20.32
GIMT2X2X11/4 UF	9/18	23.64
GIMT2X2X11/2 UF	9/18	23.64

www.americangranby.com

FALL 2016



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

Fax (800) 729-3299
Fax (905) 629-3204

12.37

Malleable Iron Fittings - Imported



BLACK



GALVANIZED




BIMT/GIMT
Reducer Series



BIMST/GIMST
Reducer Series



BIMCR/GIMCR Series



BIMRHC/GIMRHC
Series

Size	Inner/Master Ctn Qty	List Price
BIMT21/2X21/2X1 UF	1/10	\$45.59
BIMT21/2X21/2X11/2 UF	1/10	45.59
BIMT21/2X21/2X2 UF	1/10	45.59
BIMT3X3X3/4 UF	1/12	60.89
BIMT3X3X1 UF	1/12	60.89
BIMT3X3X11/4 UF	1/12	62.07
BIMT3X3X11/2 UF	1/12	60.89
BIMT3X3X2 UF	1/6	60.89
BIMT3X3X21/2 UF	1/6	69.65

STREET TEE fiptxmptxfipt

BIMST1/2 UF	25/150	7.13
BIMST3/4 UF	25/100	9.68
BIMST1 UF	20/60	12.78
BIMST11/4 UF	20/40	21.09

CROSS fipt

BIMCR1/8	60/180	7.35
BIMCR1/4	80/240	6.23
BIMCR3/8	60/120	6.35
BIMCR1/2 UF	45/90	7.23
BIMCR3/4 UF	30/60	8.83
BIMCR1 UF	16/32	10.86
BIMCR11/4 UF	9/18	17.64
BIMCR11/2 UF	8/16	21.85
BIMCR2 UF	5/10	36.16
BIMCR21/2 UF	1/6	63.75
BIMCR3 UF	1/4	95.09
BIMCR4 UF	1/2	194.07

Right Hand Coupling fiptxfipt

BIMRHC1/4	40/480	2.53
BIMRHC3/8	50/300	2.53
BIMRHC1/2 UF	60/240	2.06
BIMRHC3/4 UF	50/150	2.43
BIMRHC1 UF	25/75	3.69
BIMRHC11/4 UF	32/64	4.71
BIMRHC11/2 UF	18/36	6.31
BIMRHC2 UF	12/24	9.19
BIMRHC21/2 UF	1/16	25.02
BIMRHC3 UF	1/12	33.81
BIMRHC4 UF	1/7	67.45

Size	Inner/Master Ctn Qty	List Price
GIMT21/2X21/2X1 UF	1/10	\$64.85
GIMT21/2X21/2X11/2 UF	1/10	64.85
GIMT21/2X21/2X2 UF	1/10	64.85
GIMT3X3X3/4 UF	1/12	91.96
GIMT3X3X1 UF	1/12	88.00
GIMT3X3X11/4 UF	1/12	89.70
GIMT3X3X11/2 UF	1/12	88.00
GIMT3X3X2 UF	1/6	88.00
GIMT3X3X21/2 UF	1/6	98.79

STREET TEE fiptxmptxfipt

GIMST1/2 UF	25/150	10.83
GIMST3/4 UF	25/100	11.69
GIMST1 UF	20/60	18.49
GIMST11/4 UF	20/40	30.05

CROSS fipt

GIMCR1/8	60/180	9.31
GIMCR1/4	80/240	9.27
GIMCR3/8	60/120	9.27
GIMCR1/2 UF	45/90	9.29
GIMCR3/4 UF	30/60	11.33
GIMCR1 UF	16/32	15.64
GIMCR11/4 UF	9/18	22.63
GIMCR11/2 UF	8/16	27.47
GIMCR2 UF	5/10	52.38
GIMCR21/2 UF	1/6	99.99
GIMCR3 UF	1/4	116.90
GIMCR4 UF	1/2	272.07

Right Hand Coupling fiptxfipt

GIMRHC1/4	40/480	3.23
GIMRHC3/8	50/300	3.23
GIMRHC1/2 UF	60/240	2.60
GIMRHC3/4 UF	50/150	3.00
GIMRHC1 UF	25/75	4.95
GIMRHC11/4 UF	32/64	6.81
GIMRHC11/2 UF	18/36	7.76
GIMRHC2 UF	12/24	11.32
GIMRHC21/2 UF	1/16	34.57
GIMRHC3 UF	1/12	46.20
GIMRHC4 UF	1/7	98.12

U - UL Approval
F - FM Approval

FALL 2016

12.38



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com




Malleable Iron Fittings - Imported

BLACK



GALVANIZED



**BIMRC/GIMRC
Reducer Series**

Size	Inner/Master Ctn Qty	List Price
REDUCING COUPLING fiptxfipt		
BIMRC1/4 x 1/8	35/420	\$ 2.47
BIMRC3/8 x 1/4	30/360	2.47
BIMRC1/2 x 1/4 U	50/300	2.25
BIMRC1/2 x 3/8 UF	40/240	2.12
BIMRC3/4X1/4 U	30/180	2.79
BIMRC3/4 x 3/8 UF	30/180	2.79
BIMRC3/4 x 1/2 UF	60/180	2.43
BIMRC1X3/8 UF	40/120	4.39
BIMRC1 x 1/2 UF	25/100	3.77
BIMRC1 x 3/4 UF	25/100	3.77
BIMRC11/4 x 1/2 UF	25/75	5.44
BIMRC11/4 x 3/4 UF	25/75	4.71
BIMRC11/4 x 1 UF	20/60	4.71
BIMRC11/2 x 3/4 UF	30/60	7.79
BIMRC11/2 x 1 UF	25/50	6.91
BIMRC11/2 x 1 1/4 UF	24/48	5.96
BIMRC2 x 1/2 UF	21/42	11.26
BIMRC2 x 3/4 UF	21/42	9.91
BIMRC2 x 1 UF	21/42	9.37
BIMRC2 x 1 1/4 UF	18/36	9.91
BIMRC2 x 1 1/2 UF	18/36	8.67
BIMRC21/2X1 1/2 UF	1/16	26.03
BIMRC21/2X2 UF	1/20	22.11
BIMRC3X1	1/12	35.12
BIMRC3X1 1/4	1/12	35.12
BIMRC3X1 1/2 UF	1/12	34.47
BIMRC3X2 UF	1/12	28.58
BIMRC3X2 1/2 UF	1/12	34.47
BIMRC4X2 UF	1/9	69.11
BIMRC4X3 UF	1/8	69.11

HEX BUSHING miptxfipt

BIMHB1/4X1/8	100/1200	2.72
BIMHB3/8X1/4	100/600	2.72
BIMHB1/2x1/8 U	150/600	2.72
BIMHB1/2x1/4 UF	100/600	2.72
BIMHB1/2x3/8 UF	100/600	2.72
BIMHB3/4X1/8 U	50/300	2.66
BIMHB3/4x1/4 U	50/300	2.64
BIMHB3/4x3/8 UF	50/300	2.66
BIMHB3/4x1/2 UF	50/300	2.47
BIMHB1X1/8 U	50/200	3.09
BIMHB1X1/4 U	50/200	3.30
BIMHB1X3/8 U	50/200	3.40
BIMHB1x1/2 UF	50/200	2.54
BIMHB1x3/4 UF	50/200	2.54
BIMHB11/4X1/4 U	30/120	4.29
BIMHB11/4X3/8 U	30/120	3.81
BIMHB11/4x1/2 UF	30/120	3.64
BIMHB11/4x3/4 UF	30/120	3.28
BIMHB11/4x1 UF	30/120	3.28



BIMHB/GIMHB Series

Size	Inner/Master Ctn Qty	List Price
REDUCING COUPLING fiptxfipt		
GIMRC1/4 x 1/8	35/240	\$ 3.05
GIMRC3/8 x 1/4	30/360	3.05
GIMRC1/2 x 1/4 U	50/300	2.78
GIMRC1/2 x 3/8 UF	40/240	2.60
GIMRC3/4X1/4 U	30/180	3.44
GIMRC3/4 x 3/8 UF	30/180	3.44
GIMRC3/4 x 1/2 UF	60/180	3.03
GIMRC1X3/8 UF	40/120	6.22
GIMRC1 x 1/2 UF	25/100	5.07
GIMRC1 x 3/4 UF	25/100	4.70
GIMRC11/4 x 1/2 UF	25/75	7.97
GIMRC11/4 x 3/4 UF	25/75	6.44
GIMRC11/4 x 1 UF	20/60	6.44
GIMRC11/2 x 3/4 UF	30/60	8.29
GIMRC11/2 x 1 UF	25/50	8.29
GIMRC11/2 x 1 1/4 UF	24/48	7.84
GIMRC2 x 1/2 UF	21/42	13.54
GIMRC2 x 3/4 UF	21/42	13.54
GIMRC2 x 1 UF	21/42	11.32
GIMRC2 x 1 1/4 UF	18/36	11.96
GIMRC2 x 1 1/2 UF	18/36	11.32
GIMRC21/2X1 1/2 UF	1/16	35.68
GIMRC21/2X2 UF	1/20	35.01
GIMRC3X1	1/12	47.39
GIMRC3X1 1/4	1/12	47.39
GIMRC3X1 1/2 UF	1/12	46.49
GIMRC3X2 UF	1/12	43.95
GIMRC3X2 1/2 UF	1/12	46.49
GIMRC4X2 UF	1/9	100.63
GIMRC4X3 UF	1/8	100.63

HEX BUSHING miptxfipt

GIMHB1/4X1/8	100/1200	3.92
GIMHB3/8X1/4	100/600	3.92
GIMHB1/2x1/8 U	150/600	3.92
GIMHB1/2x1/4 UF	100/600	3.92
GIMHB1/2x3/8 UF	100/600	3.92
GIMHB3/4X1/8 U	50/300	3.92
GIMHB3/4x1/4 U	50/300	4.04
GIMHB3/4x3/8 UF	50/300	4.50
GIMHB3/4x1/2 UF	50/600	3.63
GIMHB1X1/8 U	50/200	4.26
GIMHB1X1/4 U	50/200	4.79
GIMHB1X3/8 U	50/200	7.50
GIMHB1x1/2 UF	50/200	4.35
GIMHB1x3/4 UF	50/200	4.10
GIMHB11/4X1/4 U	30/120	6.92
GIMHB11/4X3/8 U	30/120	6.92
GIMHB11/4x1/2	30/120	6.08
GIMHB11/4x3/4 UF	30/120	5.54
GIMHB11/4x1 UF	30/120	5.54

U - UL Approval
F - FM Approval



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

12.39

Malleable Iron Fittings - Imported



BLACK




GALVANIZED



BIMHB/GIMHB Series

Size	Inner/Master Ctn Qty	List Price
HEX BUSHING Cont. miptxfipt		
BIMHB11/2X1/4 U	25/75	\$ 5.03
BIMHB11/2x1/2 UF	25/75	4.15
BIMHB11/2x3/4 UF	25/75	4.15
BIMHB11/2x1 UF	25/75	3.64
BIMHB11/2x11/4 UF	25/75	4.16
BIMHB2X1/4 U	20/60	7.11
BIMHB2x1/2 UF	20/60	6.27
BIMHB2x3/4 UF	20/60	5.30
BIMHB2x1 UF	20/60	4.97
BIMHB2x11/4 UF	20/60	4.97
BIMHB2x11/2 UF	20/60	5.54
BIMHB21/2X3/4 UF	1/30	9.03
BIMHB21/2X1 UF	1/24	9.03
BIMHB21/2X11/4 UF	1/24	9.03
BIMHB21/2X11/2 UF	1/28	8.40
BIMHB21/2X2 UF	1/32	8.35
BIMHB3X3/4 UF	1/20	12.48
BIMHB3X1 UF	1/20	12.48
BIMHB3X11/4 UF	1/20	12.48
BIMHB3X11/2 UF	1/20	12.24
BIMHB3X2 UF	1/20	11.44
BIMHB3X21/2 UF	1/20	11.62
BIMHB31/2X3 UF	1/10	21.85
BIMHB4X3/4 F	1/10	23.96
BIMHB4X1 F	1/10	23.96
BIMHB4X11/4 UF	1/10	23.96
BIMHB4X11/2 UF	1/10	23.96
BIMHB4X2 F	1/10	22.67
BIMHB4X21/2 F	1/10	22.67
BIMHB4X3 UF	1/10	22.67
CAP fipt		
BIMCA3/8	50/600	1.66
BIMCA1/2 UF	50/300	1.53
BIMCA3/4 UF	40/240	2.06
BIMCA1 UF	35/140	2.48
BIMCA11/4 UF	25/100	3.26
BIMCA11/2 UF	25/75	4.43
BIMCA2 UF	18/54	5.79
BIMCA21/2 UF	1/30	14.38
BIMCA3 UF	1/20	21.39
BIMCA4 UF	1/14	33.37
BIMCA6 UF	1/2	133.30

Size	Inner/Master Ctn Qty	List Price
HEX BUSHING Cont. miptxfipt		
GIMHB11/2X1/4 U	25/75	\$ 8.79
GIMHB11/2x1/2 UF	25/75	8.03
GIMHB11/2x3/4 UF	25/75	8.03
GIMHB11/2x1 UF	25/75	7.24
GIMHB11/2X11/4 UF	25/75	6.68
GIMHB2X1/4 U	20/60	10.23
GIMHB2 x 1/2 UF	20/60	10.03
GIMHB2 x 3/4 UF	20/60	9.33
GIMHB2 x 1 F	20/60	8.83
GIMHB2 x 11/4 UF	20/60	8.83
GIMHB2 x 11/2 UF	20/60	7.74
GIMHB21/2X3/4 UF	1/30	14.52
GIMHB21/2X1 UF	1/24	14.52
GIMHB21/2X11/4 UF	1/24	14.52
GIMHB21/2X11/2 UF	1/28	14.24
GIMHB21/2X2 UF	1/32	12.63
GIMHB3X3/4 UF	1/20	19.17
GIMHB3X1 UF	1/20	19.17
GIMHB3X11/4 UF	1/20	19.17
GIMHB3X11/2 UF	1/20	18.80
GIMHB3X2 UF	1/20	17.04
GIMHB3X21/2 UF	1/20	18.03
GIMHB31/2X3 UF	1/10	57.23
GIMHB4X3/4 F	1/10	40.18
GIMHB4X1 F	1/10	40.19
GIMHB4X11/4 UF	1/10	40.19
GIMHB4X11/2 UF	1/10	40.19
GIMHB4X2 F	1/10	35.45
GIMHB4X21/2 F	1/10	40.18
GIMHB4X3 UF	1/10	37.53
CAP fipt		
GIMCA3/8	50/600	2.51
GIMCA1/2 UF	50/300	1.92
GIMCA3/4 UF	40/240	2.78
GIMCA1 UF	35/140	3.05
GIMCA11/4 UF	25/100	4.43
GIMCA11/2 UF	25/75	5.66
GIMCA2 UF	18/54	7.15
GIMCA21/2 UF	1/30	22.74
GIMCA3 UF	1/20	27.55
GIMCA4 UF	1/14	54.73
GIMCA6 UF	1/2	199.17



BIMCA/GIMCA Series

☺ Steel, Made in USA

Carton Quantities subject to change. Contact Customer Service

U - UL Approval
F - FM Approval

FALL 2016

12.40



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com



Malleable Iron Fittings - Imported

☺ Steel, Made in USA

BLACK



GALVANIZED



BIMP/GIMP Square Head Series



BIMP/GIMP Bar Head Series



BIMU/GIMU Series Iron to NL Brass Seat



BIMFF/GIMFF Series



BIMEP/GIMEP Series

U - UL Approval

F - FM Approval

Size	Inner/Master Ctn Qty	List Price
Square Head Plug mipt		
BIMP1/8 ☺	100	\$ 0.66
BIMP1/4 ☺	100	0.66
BIMP3/8 ☺	45/540	0.99
BIMP1/2 UF ☺	40/480	1.03
BIMP3/4 UF ☺	25/300	1.11
BIMP1 UF	40/160	1.75
BIMP11/4 UF	25/100	2.20
BIMP11/2 UF	24/72	3.06
BIMP2 UF	15/45	4.38
BIMP21/2 UF	1/40	7.97
BIMP3 UF	1/30	10.94
BIMP4 F	1/8	22.95
BIMP5 UF	1/4	49.25
BIMP5 BAR	5/10	49.25
BIMP6 UF	1/2	61.01
BIMP6 BAR	3/6	61.01

Size	Inner/Master Ctn Qty	List Price
Unions, 150 lbs UL Listed fiptxfipt		
BIMU150-1/8	30 /180	\$ 10.99
BIMU150-1/4	30/180	10.46
BIMU150-3/8	35/140	7.06
BIMU150-1/2 UF	30/120	6.74
BIMU150-3/4 UF	25/75	8.04
BIMU150-1 UF	20/40	10.50
BIMU150-11/4 UF	18/36	13.92
BIMU150-11/2 UF	12/24	17.01
BIMU150-2 UF	8/16	25.70
BIMU150-21/2 UF	1/10	61.93
BIMU150-3 UF	1/5	75.19

Size	Inner/Master Ctn Qty	List Price
FLOOR FLANGE fipt		
BIMFF1/4	30/180	5.54
BIMFF3/8	50/200	5.54
BIMFF1/2 F	25/100	5.54
BIMFF3/4 F	20/80	5.96
BIMFF1 F	20/60	7.73
BIMFF11/4 F	15/45	8.28
BIMFF11/2 F	12/36	9.02
BIMFF2 F	8/24	11.77

Size	Inner/Master Ctn Qty	List Price
EXTENSION PIECE		
BIMEP1/2 F	50/300	6.09
BIMEP3/4 F	60/180	8.98
BIMEP1 F	30/60	12.94
BIMEP11/4 F	30/60	14.80
BIMEP11/2 F	1/35	17.71
BIMEP2 F	15/30	20.71

Size	Inner/Master Ctn Qty	List Price
Square Head Plug mipt		
GIMP1/8 ☺	100	\$ 1.00
GIMP1/4 ☺	100	1.00
GIMP3/8 ☺	45/540	1.31
GIMP1/2 UF ☺	40/480	1.44
GIMP3/4 UF ☺	25/300	1.48
GIMP1 UF	40/160	2.93
GIMP11/4 UF	25/100	4.52
GIMP11/2 UF	24/72	6.09
GIMP2 UF	15/45	7.74
GIMP21/2 UF	1/40	15.09
GIMP3 UF	1/30	21.41
GIMP4 F	1/8	44.43
GIMP5 UF	1/4	77.02
GIMP5 BAR	5/10	77.02
GIMP6 UF	1/2	88.13
GIMP6 BAR	3/6	88.13

Size	Inner/Master Ctn Qty	List Price
Unions, 150 lbs UL Listed fiptxfipt		
GIMU150-1/8	30/180	\$ 12.98
GIMU150-1/4	30/180	12.54
GIMU150-3/8	35/140	8.34
GIMU150-1/2 UF	30/120	8.42
GIMU150-3/4 UF	25/75	10.00
GIMU150-1 UF	20/40	12.44
GIMU150-11/4 UF	18/36	16.91
GIMU150-11/2 UF	12/24	21.66
GIMU150-2 UF	8/16	28.92
GIMU150-21/2 UF	1/10	80.47
GIMU150-3 UF	1/5	114.34

Size	Inner/Master Ctn Qty	List Price
FLOOR FLANGE fipt		
GIMFF1/4	30/180	11.74
GIMFF3/8	50/200	11.74
GIMFF1/2 F	25/100	11.74
GIMFF3/4 F	20/80	13.10
GIMFF1 F	20/60	14.41
GIMFF11/4 F	15/45	16.41
GIMFF11/2 F	12/36	20.48
GIMFF2 F	8/24	26.97

Size	Inner/Master Ctn Qty	List Price
EXTENSION PIECE		
GIMEP1/2 F	50/300	9.63
GIMEP3/4 F	60/180	14.41
GIMEP1 F	30/60	15.90
GIMEP11/4 F	30/60	22.26
GIMEP11/2 F	1/35	27.02
GIMEP2 F	15/30	38.22



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

12.41





Malleable Iron Fittings - Domestic

Domestic Malleable Iron Fitting Features:

- Class 150 malleable iron pipe fittings
- Suitable for water, steam, air, gas and oil
- All fittings are air pressure tested
- Working pressure:
 - Max: 300 psi @ -20°F to 150°F
 - Min 150 psi @ 366°F
- Made in USA
- **Galvanized: Third party certified to NSF/ANSI 372.**

Malleable Iron Fitting Specifications:

Material: ASTM A197
 Dimensions: ANSI/ASME B16.3
 ANSI/ASME B1.20.1
 Pressure ratings: ANSI/ASME B16.3
 Coatings: ASTM A153, A165

BLACK



BM90L/GM90L Series

Size	Ctn Qty	List Price
90° ELBOW fipxfipt		
BM90L1/8	35/210	\$ 7.60
BM90L1/4	30/180	7.42
BM90L3/8	30/180	7.42
BM90L1/2	50/200	5.14
BM90L3/4	35/140	6.20
BM90L1	20/80	10.78
BM90L11/4	20/40	17.78
BM90L11/2	8/32	23.38
BM90L2	8/16	40.31
BM90L21/2	12	89.80
BM90L3	5	131.42
BM90L4	4	282.29



BM90L/GM90L Reducer Series

Size	Ctn Qty	List Price
90° ELBOW REDUCER fipxfipt		
BM90L3/8 x 1/4	25/150	10.43
BM90L1/2 x 1/4	30/180	10.08
BM90L1/2 x 3/8	50/200	9.79
BM90L3/4 x 3/8	30/180	14.08
BM90L3/4 x 1/2	30/120	10.08
BM90L1 x 1/2	25/100	13.97
BM90L1 x 3/4	20/80	12.95
BM90L11/4 x 3/4	15/60	24.27
BM90L11/4 x 1	10/40	21.76
BM90L11/2 x 1/2	12/48	33.79
BM90L11/2 x 3/4	12/48	35.13
BM90L11/2 x 1	10/40	30.71
BM90L11/2 x 11/4	15/30	30.71
BM90L2 x 1/2	10/40	42.47
BM90L2 x 3/4	15/30	53.59
BM90L2 x 1	12/24	50.55
BM90L2 x 11/4	10/20	50.55
BM90L2 x 11/2	10/20	44.48
BM90L21/2 x 11/2	12	129.27

GALVANIZED



Size	Ctn Qty	List Price
90° ELBOW fipxfipt		
GM90L1/8	35/210	\$ 11.78
GM90L1/4	30/180	10.75
GM90L3/8	30/180	10.75
GM90L1/2	50/200	6.92
GM90L3/4	35/140	8.50
GM90L1	20/80	15.74
GM90L11/4	20/40	24.88
GM90L11/2	8/32	32.47
GM90L2	8/16	53.19
GM90L21/2	12	139.19
GM90L3	5	229.48
GM90L4	4	404.74

Size	Ctn Qty	List Price
90° ELBOW REDUCER fipxfipt		
GM90L3/8 x 1/4	25/150	17.19
GM90L1/2 x 1/4	30/180	14.90
GM90L1/2 x 3/8	50/200	12.73
GM90L3/4 x 3/8	30/180	20.38
GM90L3/4 x 1/2	30/120	14.78
GM90L1 x 1/2	25/100	20.13
GM90L1 x 3/4	20/80	18.96
GM90L11/4 x 3/4	15/60	38.21
GM90L11/4 x 1	10/40	31.81
GM90L11/2 x 1/2	12/48	43.92
GM90L11/2 x 3/4	12/48	50.84
GM90L11/2 x 1	10/40	50.84
GM90L11/2 x 11/4	15/30	50.84
GM90L2 x 1/2	10/40	56.85
GM90L2 x 3/4	15/30	72.07
GM90L2 x 1	12/24	70.65
GM90L2 x 11/4	10/20	68.08
GM90L2 x 11/2	10/20	59.39
GM90L21/2 x 11/2	12	224.30
GM90L3 x 2	8	317.80

Case quantities required please for fittings through 2"



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

12.43

Malleable Iron Fittings - Domestic



BLACK




GALVANIZED




BM45L/GM45L Series



BM90SL/GM90SL Series



BM45SL/GM45SL Series



BMT/GMT Series

Size	Ctn Qty	List Price
45° ELBOW fipxfipt		
BM45L1/4	35/210	\$ 11.18
BM45L3/8	40/240	11.18
BM45L1/2	50/200	8.49
BM45L3/4	40/160	10.50
BM45L1	25/100	13.23
BM45L11/4	10/40	23.39
BM45L11/2	10/40	28.94
BM45L2	8/16	43.77
BM45L21/2	15	126.65
BM45L3	8	164.50
BM45L4	4	322.56
90° STREET ELBOW fipxfipt		
BM90SL1/8	40/240	10.96
BM90SL1/4	30/180	10.96
BM90SL3/8	30/180	10.96
BM90SL1/2	50/200	10.63
BM90SL3/4	35/140	10.63
BM90SL1	20/80	15.06
BM90SL11/4	15/30	23.39
BM90SL11/2	12/24	31.30
BM90SL11/2 x 11/4	16/32	56.85
BM90SL2	8/16	50.87
BM90SL21/2	8	128.95
BM90SL3	8	196.83
45° STREET ELBOW fipxfipt		
BM45SL1/8	30/180	17.25
BM45SL3/8	30/180	14.54
BM45SL1/2	50/200	11.87
BM45SL3/4	40/160	17.92
BM45SL1	25/100	20.88
BM45SL11/4	25/50	36.09
BM45SL11/2	15/30	46.54
BM45SL2	10/20	78.27
TEE fipxfiptxfipt		
BMT1/8	35/210	11.45
BMT1/4	35/210	10.78
BMT3/8	30/180	10.78
BMT1/2	30/120	6.88
BMT3/4	20/80	9.87
BMT1	12/48	16.90
BMT11/4	15/30	27.37
BMT11/2	10/20	34.03
BMT2	15	58.00
BMT21/2	8	125.06
BMT3	6	184.22
BMT4	3	445.23

Size	Ctn Qty	List Price
45° ELBOW fipxfipt		
GM45L1/4	35/210	\$ 14.66
GM45L3/8	40/240	16.38
GM45L1/2	50/200	10.95
GM45L3/4	40/160	15.74
GM45L1	25/100	17.78
GM45L11/4	10/40	33.21
GM45L11/2	10/40	39.01
GM45L2	8/16	57.72
GM45L21/2	15	200.83
GM45L3	8	292.08
GM45L4	4	489.66
90° STREET ELBOW fipxfipt		
GM90SL1/8	40/240	15.38
GM90SL1/4	30/180	14.89
GM90SL3/8	30/180	14.89
GM90SL1/2	50/200	15.21
GM90SL3/4	35/140	15.21
GM90SL1	20/80	20.34
GM90SL11/4	15/30	34.15
GM90SL11/2	12/24	42.88
GM90SL11/2 x 11/4	16/32	69.78
GM90SL2	8/16	72.29
GM90SL21/2	8	209.13
GM90SL3	8	304.35
45° STREET ELBOW fipxfipt		
GM45SL1/8	30/180	22.40
GM45SL3/8	30/180	22.08
GM45SL1/2	50/200	16.73
GM45SL3/4	40/160	26.54
GM45SL1	25/100	34.02
GM45SL11/4	25/50	51.04
GM45SL11/2	15/30	61.81
GM45SL2	10/20	101.79
TEE fipxfiptxfipt		
GMT1/8	35/210	16.65
GMT1/4	35/210	14.02
GMT3/8	30/180	14.02
GMT1/2	30/120	8.97
GMT3/4	20/80	14.78
GMT1	12/48	23.89
GMT11/4	15/30	37.93
GMT11/2	10/20	47.15
GMT2	15	76.63
GMT21/2	8	215.74
GMT3	6	253.00
GMT4	3	598.49



Malleable Iron Fittings - Domestic

BLACK



GALVANIZED



**BMT/GMT
Reducer Series**

Size	Ctn Qty	List Price
TEE Reducing fipxfipxfipt		
BMT1/2 x 1/2 x 1/4	25/100	\$ 11.70
BMT1/2 x 1/2 x 3/4	30/120	17.62
BMT3/4 x 1/2 x 1/2	30/120	15.68
BMT3/4 x 3/4 x 1/4	30/120	16.96
BMT3/4 x 3/4 x 3/8	30/120	18.74
BMT3/4 x 3/4 x 1/2	25/100	15.26
BMT3/4 x 1/2 x 3/4	20/80	17.62
BMT3/4 x 3/4 x 1	15/60	23.25
<hr/>		
BMT1 x 1/2 x 1/2	20/80	21.94
BMT1 x 1/2 x 3/4	20/80	26.17
BMT1 x 1/2 x 1	15/60	21.94
BMT1 x 3/4 x 1/2	20/40	22.06
BMT1 x 3/4 x 3/4	20/40	20.38
BMT1 x 3/4 x 1	20/40	22.37
BMT1 x 1 x 1/4	20/80	24.39
BMT1 x 1 x 1/2	15/60	19.26
BMT1 x 1 x 3/4	25/50	19.26
BMT1 x 1 x 1 1/4	15/30	42.64
BMT1 1/4 x 1/2 x 1 1/4	10/40	40.88
BMT1 1/4 x 3/4 x 3/4	10/40	40.88
BMT1 1/4 x 3/4 x 1	10/40	37.85
BMT1 1/4 x 3/4 x 1 1/4	15/30	37.05
BMT1 1/4 x 1 x 1	15/30	35.94
BMT1 1/4 x 1 1/4 x 1/2	15/30	35.11
BMT1 1/4 x 1 1/4 x 3/4	12/24	30.78
BMT1 1/4 x 1 1/4 x 1	14/28	33.36
BMT1 1/4 x 1 x 1 1/4	15/30	43.16
BMT1 1/2 x 1/2 x 1 1/2	10/20	48.86
BMT1 1/2 x 3/4 x 3/4	10/40	81.90
BMT1 1/2 x 3/4 x 1 1/2	10/20	48.86
BMT1 1/2 x 1 x 1 1/2	10/20	48.86
BMT1 1/2 x 1 1/4 x 3/4	10/20	48.86
BMT1 1/2 x 1 1/4 x 1	8/16	41.94
BMT1 1/2 x 1 1/4 x 1 1/4	10/20	65.54
BMT1 1/2 x 1 1/4 x 1 1/2	10/20	73.67
BMT1 1/2 x 1 1/2 x 1/2	8/32	41.13
BMT1 1/2 x 1 1/2 x 3/4	10/20	38.85
BMT1 1/2 x 1 1/2 x 1	10/20	38.85
BMT1 1/2 x 1 1/2 x 1 1/4	8/40	48.05
BMT2 x 1/2 x 2	8/16	76.17
BMT2 x 3/4 x 2	8/16	74.86
BMT2 x 1 x 2	8/16	76.17
BMT2 x 2 x 1/2	10/20	62.04
BMT2 x 2 x 3/4	10/20	60.89
BMT2 x 2 x 1	10/20	60.89
BMT2 x 2 x 1 1/4	8/16	65.54
BMT2 x 2 x 1 1/2	8/16	65.54
BMT2 x 1 1/4 x 1 1/4	8/16	76.17
BMT2 x 1 1/2 x 1 1/4	8/16	76.31
BMT2 x 1 1/2 x 1 1/2	8/16	74.86
BMT2 1/2 x 2 1/2 x 2	12	162.69

Size	Ctn Qty	List Price
TEE Reducing fipxfipxfipt		
GMT1/2 x 1/2 x 3/8	35/140	\$ 20.84
<hr/>		
GMT3/4 x 1/2 x 1/2	30/120	24.57
GMT3/4 x 3/4 x 1/4	30/120	21.95
<hr/>		
GMT3/4 x 3/4 x 1/2	25/100	20.55
GMT3/4 x 1/2 x 3/4	20/80	23.46
GMT3/4 x 3/4 x 1	15/60	35.38
GMT1 x 1/4 x 1	15/80	37.35
GMT1 x 1/2 x 1/2	20/80	36.05
<hr/>		
GMT1 x 1/2 x 1	15/60	36.05
GMT1 x 3/4 x 1/2	20/40	36.05
GMT1 x 3/4 x 3/4	20/40	34.78
GMT1 x 3/4 x 1	20/40	36.05
GMT1 x 1 x 1/2	15/60	28.86
GMT1 x 1 x 3/4	25/50	28.86
GMT1 x 1 x 1 1/4	15/30	58.33
GMT1 1/4 x 1/2 x 1 1/4	10/40	56.73
GMT1 1/4 x 3/4 x 3/4	10/40	61.72
GMT1 1/4 x 3/4 x 1	10/40	56.68
GMT1 1/4 x 3/4 x 1 1/4	15/30	53.21
GMT1 1/4 x 1 x 1	15/30	54.31
GMT1 1/4 x 1 1/4 x 1/2	15/30	47.31
GMT1 1/4 x 1 1/4 x 3/4	12/24	44.76
GMT1 1/4 x 1 1/4 x 1	14/28	44.76
GMT1 1/4 x 1 x 1 1/4	15/30	57.43
GMT1 1/2 x 1/2 x 1 1/2	10/20	78.01
GMT1 1/2 x 3/4 x 3/4	10/40	103.83
GMT1 1/2 x 3/4 x 1 1/2	10/20	71.14
GMT1 1/2 x 1 x 1 1/2	10/20	71.14
GMT1 1/2 x 1 1/4 x 3/4	10/20	71.14
GMT1 1/2 x 1 1/4 x 1	8/16	67.21
GMT1 1/2 x 1 1/4 x 1 1/4	10/20	98.60
GMT1 1/2 x 1 1/4 x 1 1/2	10/20	98.60
GMT1 1/2 x 1 1/2 x 1/2	8/32	58.44
GMT1 1/2 x 1 1/2 x 3/4	10/20	55.30
GMT1 1/2 x 1 1/2 x 1	10/20	55.30
GMT1 1/2 x 1 1/2 x 1 1/4	8/40	69.24
GMT2 x 1/2 x 2	8/16	100.56
GMT2 x 3/4 x 2	8/16	98.64
GMT2 x 1 x 2	8/16	100.56
GMT2 x 2 x 1/2	10/20	89.95
GMT2 x 2 x 3/4	10/20	80.73
GMT2 x 2 x 1	10/20	79.22
GMT2 x 2 x 1 1/4	8/16	95.05
GMT2 x 2 x 1 1/2	8/16	95.05
GMT2 x 1 1/4 x 1 1/4	8/16	100.56
GMT2 x 1 1/2 x 1 1/4	8/16	100.56
GMT2 x 1 1/2 x 1 1/2	8/16	98.64
GMT2 1/2 x 2 1/2 x 2	12	267.23



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

12.45

Malleable Iron Fittings - Domestic



BLACK



GALVANIZED




**BMT/GMT
Reducer Series**




BMST/GSMT Series



BMCR/GMCR Series



BMRHC/GMRHC Series



**BMRHC/GMRHC
Reducer Series**

Size	Ctn Qty	List Price
TEE Reducing, Cont. fipxfipxfipt		
BMT3 x 3 x 3/4	8	\$ 221.53
BMT3 x 3 x 1	8	218.34
BMT3 x 3 x 1 1/4	8	230.04
BMT3 x 3 x 1 1/2	8	225.90
BMT3 x 3 x 2	8	217.29
BMT3 x 3 x 2 1/2	8	258.12
STREET TEE fipxmiptxfipt		
BMST3/4	20/80	25.14
BMST1	12/24	33.23
BMST1 1/4	10/20	54.86
CROSS fipt		
BMCR1/2	30/120	26.00
BMCR3/4	15/60	31.46
BMCR1	15/30	38.76
BMCR1 1/4	12/24	62.91
BMCR1 1/2	8/16	77.96
BMCR2	8	128.19
Right Hand Coupling fipxfipt		
BMRHC1/4	35/210	9.22
BMRHC3/8	40/240	9.22
BMRHC1/2	40/240	7.11
BMRHC3/4	40/160	8.33
BMRHC1	25/100	12.48
BMRHC1 1/4	15/60	16.15
BMRHC1 1/2	10/40	21.83
BMRHC2	8/32	32.33
BMRHC2 1/2	8	89.24
BMRHC3	8	120.64
BMRHC4	4	242.96
REDUCING COUPLING fipxfipt		
BMRC1/4 x 1/8 ☺	25/150	9.72
BMRC3/8 x 1/4	25/150	9.72
BMRC1/2 x 1/4	25/150	8.83
BMRC1/2 x 3/8	30/180	8.35
BMRC3/4 x 1/4	35/210	11.15
BMRC3/4 x 3/8	35/210	11.15
BMRC3/4 x 1/2	50/200	9.34
BMRC1 x 3/8	30/120	18.32
BMRC1 x 1/2	30/120	14.89
BMRC1 x 3/4	25/100	14.54
BMRC1 1/4 x 1/2	15/60	21.94
BMRC1 1/4 x 3/4	15/60	18.71
BMRC1 1/4 x 1	15/60	18.71

☺ Steel

Size	Ctn Qty	List Price
TEE Reducing, Cont. fipxfipxfipt		
GMT3 x 3 x 3/4	8	\$ 487.84
GMT3 x 3 x 1	8	349.67
GMT3 x 3 x 1 1/4	8	369.81
GMT3 x 3 x 1 1/2	8	362.75
GMT3 x 3 x 2	8	349.67
GMT3 x 3 x 2 1/2	8	407.27
STREET TEE fipxmiptxfipt		
GMST3/4	20/80	32.16
GMST1	12/24	50.86
GMST1 1/4	10/20	84.82
CROSS fipt		
GMCR1/2	30/120	36.90
GMCR3/4	15/60	44.95
GMCR1	15/30	62.03
GMCR1 1/4	12/24	93.26
GMCR1 1/2	8/16	109.11
GMCR2	8	206.66
Right Hand Coupling fipxfipt		
GMRHC1/4	35/210	12.84
GMRHC3/8	40/240	13.27
GMRHC1/2	40/240	10.13
GMRHC3/4	40/160	11.68
GMRHC1	25/100	19.14
GMRHC1 1/4	15/60	27.01
GMRHC1 1/2	10/40	30.69
GMRHC2	8/32	44.86
GMRHC2 1/2	8	137.33
GMRHC3	8	183.55
GMRHC4	4	389.83
REDUCING COUPLING fipxfipt		
GMRC1/4 x 1/8 ☺	25/150	13.15
GMRC3/8 x 1/4	25/150	13.15
GMRC1/2 x 1/4	25/150	11.82
GMRC1/2 x 3/8	30/180	12.30
GMRC3/4 x 1/4	35/210	14.94
GMRC3/4 x 3/8	35/210	14.94
GMRC3/4 x 1/2	50/200	13.14
GMRC1 x 3/8	30/120	28.46
GMRC1 x 1/2	30/120	21.91
GMRC1 x 3/4	25/100	20.34
GMRC1 1/4 x 1/2	15/60	36.37
GMRC1 1/4 x 3/4	15/60	28.33
GMRC1 1/4 x 1	15/60	27.79




Malleable Iron Fittings - Domestic

BLACK



GALVANIZED



BMRHC/GMRHC
Reducer Series

Size	Ctn Qty	List Price
REDUCING COUPLING - con't fiptxfipt		
BMRC11/2 x 1/2	15/60	\$ 27.91
BMRC11/2 x 3/4	10/40	31.46
BMRC11/2 x 1	10/40	27.42
BMRC11/2 x 1 1/4	10/40	23.65
BMRC2 x 1/2	8/32	45.44
BMRC2 x 3/4	8/32	39.24
BMRC2 x 1	15/30	37.08
BMRC2 x 1 1/4	10/20	39.24
BMRC2 x 1 1/2	10/20	34.26
BMRC2 1/2 x 1 1/2	10	93.45
BMRC2 1/2 x 2	10	78.76
BMRC3 x 1	8	125.39
BMRC3x 1 1/4	8	127.72
BMRC3 x 1 1/2	8	123.11
BMRC3 x 2	8	101.95
BMRC3 x 2 1/2	8	119.05
BMRC4 x 2	4	246.77
BMRC4 x 3	4	246.77

Size	Ctn Qty	List Price
REDUCING COUPLING - con't fiptxfipt		
GMRC11/2 x 1/2	15/60	\$ 42.88
GMRC11/2 x 3/4	10/40	36.54
GMRC11/2 x 1	10/40	36.54
GMRC11/2 x 1 1/4	10/40	34.50
GMRC2 x 1/2	8/32	61.90
GMRC2 x 3/4	8/32	59.70
GMRC2 x 1	15/30	49.84
GMRC2 x 1 1/4	10/20	52.70
GMRC2 x 1 1/2	10/20	49.84
GMRC2 1/2 x 1 1/2	10	147.02
GMRC2 1/2 x 2	10	139.07
GMRC3 x 1	8	195.36
GMRC3 x 1 1/4	8	195.36
GMRC3 x 1 1/2	8	184.81
GMRC3 x 2	8	174.67
GMRC3 x 2 1/2	8	178.36
GMRC4 x 2	4	399.87
GMRC4 x 3	4	399.87



BMHB/GMHB Series

Size	Ctn Qty	List Price
HEX BUSHING miptxfipt		
BMHB1/4 x 1/8 ☺	25/150	10.67
BMHB3/8 x 1/8 ☺	25/150	10.67
BMHB3/8 x 1/4 ☺	25/150	10.67
BMHB1/2 x 1/8 ☺	25/150	10.67
BMHB1/2 x 1/4 ☺	25/150	10.67
BMHB1/2 x 3/8 ☺	25/150	10.67
BMHB3/4 x 1/8	25/150	9.53
BMHB3/4 x 1/4	25/150	9.04
BMHB3/4 x 3/8	25/150	9.29
BMHB3/4 x 1/2	25/150	8.35
BMHB1 x 1/8	25/150	13.56
BMHB1 x 1/4	25/150	11.70
BMHB1 x 3/8	25/150	12.03
BMHB1 x 1/2	25/150	8.90
BMHB1 x 3/4	25/150	8.78
BMHB1 1/4 x 1/8	25/150	16.31
BMHB1 1/4 x 1/4	25/150	16.82
BMHB1 1/4 x 1/2	25/150	13.03
BMHB1 1/4 x 3/4	25/150	11.45
BMHB1 1/4 x 1	25/150	11.45
BMHB1 1/2 x 1/4	15/150	19.60
BMHB1 1/2 x 1/2	30/120	14.90
BMHB1 1/2 x 3/4	30/120	14.90
BMHB1 1/2 x 1	30/120	13.08
BMHB1 1/2 x 1 1/4	30/120	14.54
BMHB2 x 1/4	20/80	21.14
BMHB2 x 1/2	20/80	23.67
BMHB2 x 3/4	20/80	18.72
BMHB2 x 1	20/80	17.89
BMHB2 x 1 1/4	20/80	17.89
BMHB2 x 1 1/2	20/80	18.31

Size	Ctn Qty	List Price
HEX BUSHING miptxfipt		
GMHB1/4 x 1/8 ☺	25/150	17.02
GMHB3/8 x 1/8 ☺	25/150	17.02
GMHB3/8 x 1/4 ☺	25/150	17.02
GMHB1/2 x 1/8 ☺	25/150	17.02
GMHB1/2 x 1/4 ☺	25/150	17.02
GMHB1/2 x 3/8 ☺	25/150	17.02
GMHB3/4 x 1/8	25/150	16.73
GMHB3/4 x 1/4	25/150	16.27
GMHB3/4 x 3/8	25/150	18.19
GMHB3/4 x 1/2	25/150	13.93
GMHB1 x 1/8	25/150	22.38
GMHB1 x 1/4	25/150	19.01
GMHB1 x 3/8	25/150	19.10
GMHB1 x 1/2	25/150	17.19
GMHB1 x 3/4	25/150	16.01
GMHB1 1/4 x 1/8	25/150	27.99
GMHB1 1/4 x 1/4	25/150	28.67
GMHB1 1/4 x 3/8	25/150	28.67
GMHB1 1/4 x 1/2	25/150	24.43
GMHB1 1/4 x 3/4	25/150	21.56
GMHB1 1/4 x 1	25/150	21.56
GMHB1 1/2 x 1/4	15/120	38.63
GMHB1 1/2 x 1/2	30/120	30.03
GMHB1 1/2 x 3/4	30/120	30.03
GMHB1 1/2 x 1	30/120	27.13
GMHB1 1/2 x 1 1/4	30/120	26.00
GMHB2 x 1/4	20/80	43.75
GMHB2 x 1/2	20/80	37.63
GMHB2 x 3/4	20/80	34.98
GMHB2 x 1	20/80	34.98
GMHB2 x 1 1/4	20/80	34.98
GMHB2 x 1 1/2	20/80	30.17

☺ Steel



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

12.47

Malleable Iron Fittings - Domestic



BLACK



GALVANIZED



BMHB/GMHB Series

Size	Ctn Qty	List Price
HEX BUSHING CONT. miptxfipt		
BMHB21/2 x 3/4	20	\$ 32.91
BMHB21/2 x 1	20	32.91
BMHB21/2 x 11/4	20	32.91
BMHB21/2 x 11/2	20	28.64
BMHB21/2 x 2	20	28.21
BMHB3 x 1/2	10/20	49.54
BMHB3 x 3/4	10/20	48.36
BMHB3 x 1	10/20	44.50
BMHB3 x 11/4	10/20	44.50
BMHB3 x 11/2	10/20	44.50
BMHB3 x 2	10/20	33.23
BMHB3 x 21/2	10	38.52
<hr/>		
BMHB4 x 1	10	100.85
BMHB4 x 11/4	10	100.85
BMHB4 x 11/2	10	92.87
BMHB4 x 2	10	74.95
BMHB4 x 21/2	10	90.70
BMHB4 x 3	10	74.95
<hr/>		
FLUSH BUSHING		
BMFB1 x 3/4	25/150	23.16
BMFB11/4 x 1	25/150	25.06
<hr/>		
DOUBLE TAP BUSHING		
BMDTB2X11/4	20	36.99
<hr/>		
CAP fipt		
BMCA1/4 ☺	40	7.56
BMCA3/8 ☺	40	6.36
BMCA1/2	50/300	5.19
BMCA3/4	40/240	7.04
BMCA1	25/150	8.51
BMCA11/4	25/100	11.23
BMCA11/2	20/80	15.42
BMCA2	10/40	22.50
BMCA21/2	6/12	51.26
BMCA3	6/12	76.17
BMCA4	5/10	130.60

Size	Ctn Qty	List Price
HEX BUSHING CONT. miptxfipt		
GMHB21/2 x 3/4	20	\$ 63.71
GMHB21/2 x 1	20	63.71
GMHB21/2 x 11/4	20	63.71
GMHB21/2 x 11/2	20	57.35
GMHB21/2 x 2	20	50.21
GMHB3x1/2	10/20	84.04
GMHB3 x 3/4	10/20	84.04
GMHB3 x 1	10/20	84.04
GMHB3 x 11/4	10/20	82.09
GMHB3 x 11/2	10/20	75.63
GMHB3 x 2	10/20	65.35
GMHB3 x 21/2	10	70.15
<hr/>		
GMHB4 x 1	10	176.12
GMHB4 x 11/4	10	176.12
GMHB4 x 11/2	10	176.12
GMHB4 x 2	10	137.21
GMHB4 x 21/2	10	176.12
GMHB4 x 3	10	137.21
<hr/>		
FLUSH BUSHING		
GMFB1 x 3/4	25/150	39.04
GMFB11/4 x 1	25/150	48.33
<hr/>		
DOUBLE TAP BUSHING		
GMDTB2X1X1	20	61.65
GMDTB2X11/4X11/4	20	61.65
<hr/>		
CAP fipt		
GMCA1/4 ☺	40	10.28
GMCA3/8 ☺	40	10.28
GMCA1/2	50/300	7.67
GMCA3/4	40/240	10.61
GMCA1	25/150	13.15
GMCA11/4	25/100	17.32
GMCA11/2	20/80	22.20
GMCA2	10/40	31.09
GMCA21/2	6/12	90.30
GMCA3	6/12	109.43
GMCA4	5/10	241.78



BMFB/GMFB Series



BMCA/GMCA Series

☺ Steel




Malleable Iron Fittings - Domestic

BLACK



GALVANIZED



BMLN/GMLN Series

Size	Ctn Qty	List Price
LOCK NUT		
BMLN1/8 ☺	100/600	\$ 6.35
BMLN1/4 ☺	100/600	5.84
BMLN3/8	50/300	8.58
BMLN1/2	50/300	7.35
BMLN3/4	50/300	8.01
BMLN1	40/160	15.37
BMLN11/4	40/160	12.62
BMLN11/2	40/160	17.74
BMLN2	25/100	29.44


Size	Ctn Qty	List Price
LOCK NUT		
GMLN1/8 ☺	100/600	\$ 7.64
GMLN1/4 ☺	100/600	6.19
GMLN3/8	50/300	10.75
GMLN1/2	50/300	8.69
GMLN3/4	50/300	10.19
GMLN1	40/160	18.53
GMLN11/4	40/160	17.78
GMLN11/2	40/160	23.08
GMLN2	25/100	40.63



BMP/GMP Series

Size	Ctn Qty	List Price
Square Head Plug mipt		
BMP1/8 ☺	100	\$ 1.02
BMP1/4 ☺	100	1.02
BMP3/8 ☺	100	1.02
BMP1/2 ☺	100	1.11
BMP3/4 ☺	100	1.23
BMP1	40/240	4.80
BMP11/4	40/160	7.65
BMP11/2	40/80	10.83
BMP2	25/50	12.65
BMP21/2	20/40	30.80
BMP3	10/20	35.68
BMP4	5/10	74.16
BMP5		138.14

Size	Ctn Qty	List Price
Square Head Plug mipt		
GMP1/8 ☺	100	\$ 1.52
GMP1/4 ☺	100	1.54
GMP3/8 ☺	100	1.54
GMP1/2 ☺	100	1.66
GMP3/4 ☺	100	1.79
GMP1	40/240	10.27
GMP11/4	40/160	17.13
GMP11/2	40/80	23.14
GMP2	40/50	28.74
GMP21/2	20/40	60.73
GMP3	10/20	77.76
GMP4	5/10	150.82
GMP5		299.84



BMU/GMU Series

Size	Ctn Qty	List Price
Unions, 150 lbs UL Listed		
BMU150-1/8	25/150	41.59
BMU150-1/4	35/210	38.50
BMU150-3/8	35/210	26.52
BMU150-1/2	40/160	24.02
BMU150-3/4	30/60	27.60
BMU150-1	25/50	35.98
BMU150-11/4	15/30	51.60
BMU150-11/2	12/24	64.34
BMU150-2	8/16	74.80
BMU150-21/2	8	222.90
BMU150-3	8	268.32
BMU150-4	1	662.28

Size	Ctn Qty	List Price
Unions, 150 lbs UL Listed		
GMU150-1/8	25/150	59.30
GMU150-1/4	35/210	52.22
GMU150-3/8	35/210	34.95
GMU150-1/2	40/160	31.87
GMU150-3/4	30/60	36.63
GMU150-1	25/50	47.98
GMU150-11/4	15/30	69.37
GMU150-11/2	12/24	84.04
GMU150-2	8/16	96.62
GMU150-21/2	8	335.62
GMU150-3	8	469.73
GMU150-4	1	951.68



BMFF/GMFF Series

Size	Ctn Qty	List Price
FLOOR FLANGE (diameter)		
BMFF1/4 2 3/8"	25/150	23.99
BMFF3/8 2 15/16"	25/150	23.99
BMFF1/2 3"	30/120	23.99
BMFF3/4 3 1/4"	30/120	23.99
BMFF1 3 7/8"	30/60	30.14
BMFF11/4 3 7/8"	30/60	30.14
BMFF11/2 4 1/2"	10/40	38.76
BMFF2 5 1/2"	15/30	46.63
BMFF21/2 5 13/16"	10	51.17
BMFF3 6 3/8"	10	64.61

Size	Ctn Qty	List Price
FLOOR FLANGE (diameter)		
GMFF1/4 2 3/8"	25/150	46.66
GMFF3/8 2 15/16"	25/150	46.66
GMFF1/2 3"	30/120	59.93
GMFF3/4 3 1/4"	30/120	59.93
GMFF1 3 7/8"	30/60	54.71
GMFF11/4 3 7/8"	30/60	72.71
GMFF11/2 4 1/2"	10/40	93.15
GMFF2 5 1/2"	15/30	118.31
GMFF21/2 5 13/16"	10	143.82
GMFF3 6 3/8"	10	140.38

☺ Steel



In the United States: Phone (800) 776-2266
In Canada: Phone (800) 268-7570

www.americangranby.com

Fax (800) 729-3299
Fax (905) 629-3204

FALL 2016

12.49





Nipples - Schedule 80 PVC, CPVC



Schedule 80 PVC and CPVC Nipple Features:

- Sturdy, Sch 80 PVC, CPVC
- Chemical Resistant.
- Gray or white (1/2" thru 2") in Sch 80 PVC.
- Threaded on both ends.
- Standard carton quantity of 50 (1/2" diam) or 25 (3/4" thru 2" diam).
- Threaded one end only (TOE) available upon request.



ORDER BY SIZE ONLY (DIAMETER X LENGTH)

EXAMPLES: **1/2x3** FOR GRAY PVC
1/2x3W FOR WHITE PVC
CPVC1xCLOSE FOR CPVC

PIPE DIA.	LENGTH CLOSE	SCHEDULE 80 PVC NIPPLE LIST PRICES-GRAY & WHITE (SHADED AREA INDICATES SIZES AVAILABLE IN WHITE PVC)										
		CLOSE	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
1/4"	7/8"	0.81		0.93		1.03	1.13					2.29
3/8"	1"	0.81		0.93						1.96		
1/2"	1 1/8"	0.67	0.70	0.70	0.75	0.82	0.89	1.08	1.17	1.36	1.59	1.71
3/4"	1 3/8"	0.70		0.75	0.82	0.84	1.01	1.20	1.42	1.64	1.96	2.10
1"	1 1/2"	1.01		1.10	1.20	1.25	1.46	1.81	1.99	2.35	2.82	3.13
1 1/4"	1 5/8"	1.49		1.58	1.74	1.91	2.25	2.64	2.90	3.53	4.09	4.58
1 1/2"	1 3/4"	1.85		1.91	2.11	2.31	2.67	3.09	3.53	4.19	4.84	5.20
2"	2"	2.45			2.67	2.90	3.37	3.96	4.43	5.41	6.42	7.35
3"		8.94				9.73	11.36		14.60	17.84	21.10	24.34
4"		14.67					15.22		19.11	23.20	27.56	31.79

PIPE DIA.	LENGTH	SCHEDULE 80 PVC NIPPLE LIST PRICES PRE-CUT PIPE THREADED BOTH ENDS				
		18"	24"	30"	36"	48"
1/2"		2.33	2.87	3.57	4.34	5.39
3/4"		2.80	3.56	4.45	5.51	7.38
1"		4.49	5.37		7.98	10.19
1 1/4"		6.72	8.64			16.24
1 1/2"			10.19		14.56	
2"			13.44	15.99	19.24	
3"		34.08	43.81			

SCHEDULE 80 CPVC PIPE NIPPLES			
PART NO.	SIZE	CTN QTY	LIST PRICE
CPVC1xCLOSE	1 X CLOSE	25	\$ 2.91
CPVC11/2xCLOSE	1 1/2 x CLOSE	25	4.23
CPVC11/2X6	1 1/2 X 6	25	12.18
CPVC11/2x8	1 1/2 x 8	25	15.55
CPVC11/2X12	1 1/2 X 12	25	23.08
CPVC2xCLOSE	2 X CLOSE	25	7.07
CPVC2X6	2 X 6	25	17.38
CPVC2x8	2 x 8	25	21.60
CPVC2X12	2 X 12	BULK	31.71
CPVC2x24	2 x 24	BULK	64.18



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

12.51

Nipples - Red Brass, Stainless Steel



Red Brass Nipple Features:

- Red Brass pipe conforms to ASTM B43-91 and ASTM B687-99 R-2011
- 85% copper, 15% zinc, no lead
- Third party certified to NSF/ANSI 372.



ORDER BY PART NUMBER B80 WITH SIZE (DIAMETER X LENGTH)
EXAMPLE: B80-1/2 x 3

RED BRASS PIPE NIPPLE LIST PRICES												
PIPE DIA.	LENGTH CLOSE	CLOSE	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"
1/8"	3/4"	\$1.90	2.14	2.30	2.61	2.82	3.04	3.42	3.86	4.18	4.52	4.84
1/4"	7/8"	2.22	2.57	2.91	3.15	3.70	4.11	4.73	5.25	5.71	6.18	6.96
3/8"	1"	2.30	2.72	3.31	3.64	4.38	4.82	5.75	6.11	6.71	7.29	7.89
1/2"	1 1/8"	3.07	3.55	4.17	4.96	5.82	6.65	7.62	8.27	9.11	10.00	11.09
3/4"	1 3/8"	4.42	4.71	5.57	6.46	7.45	8.36	9.71	10.57	11.66	12.74	14.19
1"	1 1/2"	6.52		8.04	9.38	10.80	12.51	14.07	15.69	17.35	19.00	20.71
1 1/4"	1 5/8"	9.84		11.23	12.70	15.03	17.59	19.80	21.92	24.18	26.45	28.95
1 1/2"	1 3/4"	12.79		13.76	16.48	18.94	21.75	24.67	27.73	30.68	33.56	36.45
2"	2"	19.47			21.03	24.26	27.93	31.75	35.39	39.24	43.05	46.87



304 Stainless Steel Nipple Features:

- 304 Stainless steel pipe conforms to ASTM A312/A312M
- Dimension conforms to ASTM A733
- Thread conforms to ANSI/ASME B1.20.1



ORDER BY PART NUMBER SS80 WITH SIZE (DIAMETER X LENGTH)
EXAMPLE: SS80-1/2 x 3

STAINLESS STEEL PIPE NIPPLE LIST PRICES												
PIPE DIA.	LENGTH CLOSE	CLOSE	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"
1/8"	3/4"	\$1.81	2.08	2.21	2.42	2.63	2.84	2.95	3.11	3.32	3.47	3.68
1/4"	7/8"	1.47	1.80	2.01	2.23	2.45	2.67	2.89	3.11	3.32	3.54	3.76
3/8"	1"	1.80	2.12	2.40	2.72	3.00	3.32	3.59	3.86	4.19	4.46	4.79
1/2"	1 1/8"	2.34	2.61	3.00	3.37	3.76	4.13	4.53	4.90	5.25	5.72	6.09
3/4"	1 3/8"	3.00	3.11	3.64	4.13	4.68	5.17	5.66	6.21	6.70	7.19	7.73
1"	1 1/2"	3.98		4.74	5.45	6.21	6.98	7.68	8.44	9.15	10.64	11.46
1 1/4"	1 5/8"	5.28		6.04	7.02	8.06	9.03	10.07	11.93	12.96	14.07	15.18
1 1/2"	1 3/4"	6.53		7.13	8.33	9.53	10.73	12.79	14.11	15.39	16.64	17.96
2"	2"	9.15			10.73	12.36	15.00	16.75	18.46	20.25	21.96	23.71



Nipples - Black Steel



Black Steel Nipple Features:

- Standard carton quantity is 25 pieces for all diameters up to 2" and all lengths up to 6".
- Carton quantities required for nipples through 2" diameter.
- Imported.

ORDER BY PART NUMBER BS80 WITH SIZE (DIAMETER X LENGTH)
EXAMPLE: BS80-1/2 x 3



BLACK STEEL PIPE NIPPLE LIST PRICES STANDARD WELDED																		
PIPE DIA.	LENGTH CLOSE	CLOSE	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"	7"	8"	9"	10"	11"	12"
1/8"	3/4"	0.89	1.10	1.10	1.28	1.28	1.54	1.54	2.94	2.94	3.22	3.26		4.43		5.06		5.18
1/4"	7/8"	1.08	1.14	1.14	1.46	1.46	1.69	1.69	2.59	2.59	3.05	3.05	4.69	4.69		5.51		6.07
3/8"	1"	1.10	1.24	1.24	1.61	1.61	1.88	1.88	2.73	2.73	3.03	3.03	5.32	5.32	5.97	5.97	6.79	6.79
1/2"	1 1/8"	0.92	0.92	0.92	1.10	1.10	1.32	1.32	1.54	1.54	1.73	1.73	3.11	3.11	3.74	3.74	4.46	4.46
3/4"	1 3/8"	1.05	1.14	1.14	1.30	1.30	1.61	1.61	2.00	2.00	2.27	2.27	3.81	3.81	4.42	4.42	4.91	4.91
1"	1 1/2"	1.54		1.69	1.78	1.78	2.22	2.22	2.64	2.64	3.11	3.11	5.08	5.08	5.96	5.96	6.83	6.83
1 1/4"	1 5/8"	1.96		2.21	2.35	2.35	2.78	2.78	3.77	3.77	3.97	3.97	6.39	6.39	7.68	7.68	8.69	8.69
1 1/2"	1 3/4"	2.43		2.63	2.94	2.94	3.30	3.30	4.03	4.03	5.18	5.18	7.33	7.33	8.57	8.57	9.88	9.88
2"	2"	3.31			3.81	3.81	4.61	4.61	5.30	5.30	6.33	6.33	10.43	10.43	12.24	12.24	14.10	14.10
2 1/2"	2 1/2"	10.37				10.66	12.55	1.55		13.75	14.36	14.36		18.27		20.54		22.84
3"	2 5/8"	12.33				13.40	15.88	15.88	17.52	17.52	19.04	19.04	25.70	25.70		28.86	32.02	32.02
4"	2 7/8"	18.60						21.51	24.56	24.56	26.26	26.26	30.32	30.32		34.51		40.46
6"	3 1/8"	43.75										76.38	88.77	99.98		122.74		145.53

BLACK STEEL PIPE NIPPLE LIST PRICES PRE-CUT PIPE THREADED BOTH ENDS								
PIPE DIA.	PACK QTY	18"	24"	30"	36"	48"	60"	72"
3/8"	5	\$ 9.59	11.97					
1/2"	5	6.92	9.03	10.59	12.50	15.80	18.94	23.29
3/4"	5	8.54	10.94	12.80	15.16	20.18	24.71	28.43
1"	3	10.98	14.38	16.57	20.00	26.13	32.90	38.85
1 1/4"	3	13.98	18.85	22.27	26.25	34.76	43.24	
1 1/2"	3	15.98	18.83	22.23	26.23	34.74	43.29	51.64
2"	3	22.27	29.49	33.90	39.93	53.18	67.1	
2 1/2"	3		45.71					
3"	3	57.76	64.07		96.13	128.17		
4"	3	69.05	78.02					

Black Steel Tank Leg Features:

- For use with standard steel tanks
- No cradle required
- Threaded one end x square cut

PART NO.	CTN QTY	LIST PRICE
BS80-11/4X10TOE	5/20	\$ 9.56
BS80-11/4X11TOE	5/20	10.84
BS80-11/4X12TOE	5/20	10.84
BS80-11/4X13TOE	5/20	12.91
BS80-11/4X14TOE	5/20	13.68



www.americangranby.com
 In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204

FALL 2016

12.53

Nipples - Galvanized Steel



Galvanized Steel Nipple Features:

- Standard carton quantity is 25 pieces for all diameters up to 2" and all lengths up to 6".
- Carton quantities required for nipples through 2" diameter.
- Imported.

ORDER BY PART NUMBER GS80 WITH SIZE (DIAMETER X LENGTH)
EXAMPLE: GS80-1/2 x 3



GALVANIZED STEEL PIPE NIPPLE LIST PRICES STANDARD WELDED																		
PIPE DIA.	LENGTH CLOSE	CLOSE	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"	7"	8"	9"	10"	11"	12"
1/8"	3/4"	1.12	1.56	1.56	2.06	2.06	2.43	2.43	4.10	4.10	4.61	4.61		5.98				
1/4"	7/8"	1.21	1.42	1.42	1.85	1.85	2.21	2.21	3.03	3.03	3.38	3.38	5.78	5.78	6.72	6.72		7.48
3/8"	1"	1.31	1.51	1.51	2.01	2.01	2.39	2.39	3.30	3.30	3.66	3.66		5.85		6.96		7.73
1/2"	1 1/8"	1.05	1.12	1.12	1.32	1.32	1.63	1.63	1.96	1.96	2.22	2.22	3.91	3.91	4.65	4.65	5.29	5.29
3/4"	1 3/8"	1.30	1.40	1.40	1.56	1.56	2.00	2.00	2.40	2.40	2.87	2.87	5.01	5.01	5.57	5.57	6.20	6.20
1"	1 1/2"	1.77		2.10	2.27	2.27	2.73	2.73	3.34	3.34	3.80	3.80	6.33	6.33	7.24	7.24	8.43	8.43
1 1/4"	1 5/8"	2.39		2.59	2.81	2.81	3.34	3.34	4.13	4.13	4.81	4.81	7.78	7.78	9.28	9.28	11.17	11.17
1 1/2"	1 3/4"	2.79		3.00	3.34	3.34	4.24	4.24	5.10	5.10	5.74	5.74	8.92	8.92	10.37	10.37		11.88
2"	2"	3.93			4.42	4.42	5.38	5.38	6.86	6.86	7.98	7.98	12.99	12.99	15.21	15.21	17.44	17.44
2 1/2"	2 1/2"	11.72				12.17	14.12	14.12	15.74	15.74	17.28	17.28	22.26	22.26		25.37	28.38	28.38
3"	2 5/8"	14.04				15.98	18.73	18.73	21.85	21.85	23.11	23.11	31.12	31.12		35.49	39.90	39.90
4"	2 7/8"	21.03						25.15	28.20	28.20	31.19	31.19	37.19	37.19		43.11	49.07	49.07
6"	3 1/8"	53.20						65.68				92.86		121.53		149.23		176.89

GALVANIZED STEEL PIPE NIPPLE LIST PRICES PRE-CUT PIPE THREADED BOTH ENDS								
PIPE DIA.	PACK QTY	18"	24"	30"	36"	48"	60"	72"
3/8"	5	11.10						
1/2"	5	8.49	10.94	12.94	14.93	19.17	23.62	27.88
3/4"	5	10.11	12.97	15.94	18.32	23.93	29.30	34.60
1"	3	13.05	17.32	20.24	23.14	30.67	38.58	
1 1/4"	3	17.19	23.02	27.20	31.37	41.57	51.70	
1 1/2"	3	19.51	26.12	31.52	36.93	49.09	62.23	
2"	3	26.60	35.19	41.43	47.64	61.93	77.38	
2 1/2"	3	50.76	56.82	76.15				
3"	3	71.00	79.84	106.5	123.92	159.67		
4"	3	86.25	98.20	147.27	196.39	245.49		

GALVANIZED STEEL REDUCING PIPE NIPPLES			
PART NO.	SIZE	CTN QTY	LIST PRICE
GSR80-3/4X1/2X23/4	3/4 X 1/2 X 2 3/4	25	\$ 10.44
GSR80-1 1/4x1x3 1/2	1 1/4 x 1 x 3 1/2	25	16.57
GSR80-1x3/4x3	1 x 3/4 x 3	25	15.47



INSERTS - PVC

Cold Water Only

List Prices

Effective:

March 26, 2015

Revised August 4, 2016

Inserts - PVC

KEY:

FPT.....Female Pipe Thread
 MPT.....Male Pipe Thread
 SLIP.....Solvent Cement Socket
 SP.....Spigot



Insert

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1401-005	½	50	05/B5	2.22
1401-007	¾	50	05/B5	2.41
1401-010	1	25	05/B5	3.14
1401-012	1¼	10	05/B5	4.88
1401-015	1½	10	05/B5	5.54
1401-020	2	10	05/B5	10.94
1401-030	3	5	05/B5	39.40



Insert x Insert x Bullhead Insert

Bullhead Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1401-074	½ x ½ x ¾	25	05/B5	5.99
1401-102	¾ x ¾ x 1	25	05/B5	6.91
1401-132	1 x 1 x 1¼	25	05/B5	9.64



Insert x Insert x FPT

Combination Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1402-005	½	50	05/B5	2.41
1402-007	¾	50	05/B5	3.62
1402-010	1	25	05/B5	4.26
1402-012	1¼	10	05/B5	6.26
1402-015	1½	10	05/B5	10.88
1402-020	2	10	05/B5	13.49



Insert x Insert x Reducing Insert

Reducing Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1401-101	¾ x ¾ x ½	25	05/B5	2.73
1401-130	1 x 1 x ½	25	05/B5	3.18
1401-131	1 x 1 x ¾	25	05/B5	3.21
1401-166	1¼ x 1¼ x ½	25	05/B5	4.19
1401-167	1¼ x 1¼ x ¾	25	05/B5	4.19
1401-168	1¼ x 1¼ x 1	25	05/B5	4.19
1401-209	1½ x 1½ x ½	10	05/B5	7.31
1401-210	1½ x 1½ x ¾	10	05/B5	7.31
1401-211	1½ x 1½ x 1	10	05/B5	7.31
1401-212	1½ x 1½ x 1¼	10	05/B5	7.31
1401-247	2 x 2 x ½	10	05/B5	10.38
1401-248	2 x 2 x ¾	10	05/B5	10.38
1401-249	2 x 2 x 1	10	05/B5	10.38
1401-250	2 x 2 x 1¼	10	05/B5	10.88
1401-251	2 x 2 x 1½	10	05/B5	11.21



Insert x Insert x FPT

Combination Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1402-101	¾ x ¾ x ½	25	05/B5	2.99
1402-130	1 x 1 x ½	25	05/B5	3.94
1402-131	1 x 1 x ¾	25	05/B5	3.94
1402-166	1¼ x 1¼ x ½	25	05/B5	5.36
1402-167	1¼ x 1¼ x ¾	25	05/B5	5.93
1402-168	1¼ x 1¼ x 1	25	05/B5	6.26
1402-209	1½ x 1½ x ½	10	05/B5	8.26
1402-210	1½ x 1½ x ¾	10	05/B5	9.80
1402-211	1½ x 1½ x 1	10	05/B5	9.80
1402-212	1½ x 1½ x 1¼	10	05/B5	10.03
1402-247	2 x 2 x ½	10	05/B5	11.07
1402-248	2 x 2 x ¾	10	05/B5	11.71
1402-249	2 x 2 x 1	10	05/B5	12.89
1402-251	2 x 2 x 1½	10	05/B5	13.49



Insert x Reducing Insert x Reducing Insert

Reducing Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1401-094	¾ x ½ x ½	25	05/B5	2.99
1401-125	1 x ¾ x ¾	25	05/B5	5.19
1401-157	1¼ x 1 x ¾	25	05/B5	5.96
1401-158	1¼ x 1 x 1	25	05/B5	5.96
1401-202	1½ x 1¼ x 1	10	05/B5	7.49
1401-203	1½ x 1¼ x 1¼	10	05/B5	7.49



Insert x Reducing Insert x Reducing FPT

Combination Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1402-094	¾ x ½	25	05/B5	3.93
1402-124	1 x ¾ x ½	25	05/B5	4.91
1402-125	1 x ¾ x ¾	25	05/B5	5.85
1402-156	1¼ x 1 x ½	25	05/B5	7.25
1402-157	1¼ x 1 x ¾	25	05/B5	8.48



Insert x Insert x Double Helix

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1401-099	¾	25	05/B5	3.46
1401-129	1	25	05/B5	3.77



Insert x Insert x MPT

Combination Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1403-005	½	50	05/B5	3.07
1403-007	¾	50	05/B5	4.19
1403-010	1	25	05/B5	5.36
1403-012	1¼	10	05/B5	7.00
1403-015	1½	10	05/B5	7.82



Slip x Slip x Insert

Transition Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1102-249	2 x 2 x 1	10	01/B1	5.48*

*See Schedule 40 Price List; Discounts will vary.



Insert x Insert

90° Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1406-005	½	50	05/B5	2.02
1406-007	¾	50	05/B5	2.48
1406-010	1	25	05/B5	2.74
1406-012	1¼	10	05/B5	3.07
1406-015	1½	10	05/B5	3.62
1406-020	2	10	05/B5	5.06
1406-030	3	8	05/B5	28.80

Inserts - PVC



Insert x Reducing Insert

90° Reducing Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1406-101	3/4 x 1/2	25	05/B5	2.35
1406-131	1 x 3/4	25	05/B5	2.88
1406-168	1 1/4 x 1	25	05/B5	4.26
1406-212	1 1/2 x 1 1/4	10	05/B5	5.06



Insert

Cross				
Part No	Size (in)	Ctn Qty	Code	List Price
1420-007	3/4	25	05/B5	5.81
1420-010	1	25	05/B5	7.22



Insert x FPT

90° Combination Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1407-005	1/2	50	05/B5	2.28
1407-007	3/4	50	05/B5	2.48
1407-010	1	25	05/B5	3.18
1407-012	1 1/4	10	05/B5	4.72
1407-015	1 1/2	10	05/B5	5.36
1407-020	2	10	05/B5	9.09



Insert x Insert

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
1429-005	1/2	50	05/B5	1.04
1429-007	3/4	50	05/B5	1.24
1429-010	1	50	05/B5	1.31
1429-012	1 1/4	25	05/B5	1.92
1429-015	1 1/2	25	05/B5	2.27
1429-020	2	10	05/B5	4.34
1429-030	3	10	05/B5	18.92
1429-040	4	10	05/B5	25.75



Insert x FPT

90° Reducing Combination Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1407-101	3/4 x 1/2	50	05/B5	2.35
1407-130	1 x 1/2	25	05/B5	2.48
1407-131	1 x 3/4	25	05/B5	2.88
1407-166	1 1/4 x 1/2	25	05/B5	4.26
1407-167	1 1/4 x 3/4	25	05/B5	4.26
1407-168	1 1/4 x 1	25	05/B5	4.26
1407-211	1 1/2 x 1	10	05/B5	4.85
1407-212	1 1/2 x 1 1/4	10	05/B5	5.27
1407-251	2 x 1 1/2	10	05/B5	8.61



Insert x Reducing Insert

Reducing Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
1429-101	3/4 x 1/2	50	05/B5	1.68
1429-130	1 x 1/2	50	05/B5	2.29
1429-131	1 x 3/4	50	05/B5	1.74
1429-167	1 1/4 x 3/4	25	05/B5	3.54
1429-168	1 1/4 x 1	25	05/B5	2.74
1429-210	1 1/2 x 3/4	25	05/B5	4.34
1429-211	1 1/2 x 1	25	05/B5	4.14
1429-212	1 1/2 x 1 1/4	25	05/B5	3.21
1429-249	2 x 1	10	05/B5	5.85
1429-250	2 x 1 1/4	10	05/B5	5.44
1429-251	2 x 1 1/2	10	05/B5	5.18



Insert x Slip

90° Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
127-957	1 1/2	50	05/B5	9.24



Insert x Double Helix

Reducing Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
1429-099	3/4	50	05/B5	2.24
1429-129	1	50	05/B5	2.39



Insert x MPT

90° Combination Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1413-005	1/2	50	05/B5	2.55
1413-007	3/4	50	05/B5	3.53
1413-010	1	25	05/B5	4.63
1413-012	1 1/4	10	05/B5	6.16
1413-015	1 1/2	10	05/B5	8.18
1413-020	2	10	05/B5	12.91



Insert x Spg/Slip

Fitting Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1432-010	1 x 1 Spigot (3/4 Slip)	50	05/B5	3.07
1432-131	3/4 x 1 Spigot (3/4 Slip)	50	05/B5	3.07



FIPT x Insert

Side Outlet Elbow				
Part No	Size (in)	Ctn Qty	Code	List Price
1414-101	3/4 x 3/4 x 1/2	50	05/B5	5.85
1414-130	1 x 1 x 1 1/2	25	05/B5	6.28
1414-131	1 x 1 x 3/4	25	05/B5	6.28



Insert x FPT

Female Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1435-005	1/2	50	05/B5	4.54
1435-007	3/4	50	05/B5	4.91
1435-101	3/4 x 1/2	50	05/B5	5.82
1435-010	1	50	05/B5	5.44
1435-012	1 1/4	25	05/B5	6.68
1435-015	1 1/2	25	05/B5	8.48
1435-020	2	10	05/B5	10.78



Insert

Side Outlet Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
1416-007	3/4	50	05/B5	7.54
1416-101	3/4 x 1/2	50	05/B5	7.54
1416-130	1 x 1/2	50	05/B5	8.02
1416-131	1 x 3/4	50	05/B5	8.02

KEY:

FPT.....Female Pipe Thread
 MPT.....Male Pipe Thread
 SLIP.....Solvent Cement Socket
 SP.....Spigot



Insert x MPT

Male Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1436-005	1/2	50	05/B5	1.03
1436-007	3/4	50	05/B5	1.24
1436-010	1	50	05/B5	1.29
1436-012	1 1/4	20	05/B5	2.04
1436-015	1 1/2	25	05/B5	2.27
1436-020	2	10	05/B5	4.37
1436-030	3	10	05/B5	20.64
1436-040	4	10	05/B5	28.69



Reducing MPT x Insert

Reducing Male Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1436-074	1/2 x 3/4	50	05/B5	3.21
1436-075	1 x 1/2	50	05/B5	3.34
1436-102	3/4 x 1	50	05/B5	3.34
1436-132	1 x 1 1/4	25	05/B5	4.05
1436-133	1 1/2 x 1	25	05/B5	6.11
1436-169	1 1/4 x 1 1/2	10	05/B5	6.11
1436-213	1 1/2 x 2	10	05/B5	7.85



MPT x Reducing Insert

Reducing Male Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1436-101	3/4 x 1/2	50	05/B5	2.91
1436-131	1 x 3/4	50	05/B5	2.99
1436-167	1 1/4 x 3/4	25	05/B5	3.54
1436-168	1 1/4 x 1	25	05/B5	3.80
1436-211	1 1/2 x 1	25	05/B5	4.63
1436-212	1 1/2 x 1 1/4	25	05/B5	4.63
1436-251	2 x 1 1/2	10	05/B5	7.79



MPT x 2" length SP

Pool Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
1436-170	1 1/4	25	05/B5	5.48
1436-205	1 1/2 x 1 1/4 x 2	25	05/B5	6.31



Insert

Insert Plug				
Part No	Size (in)	Ctn Qty	Code	List Price
1449-005	1/2	100	05/B5	1.84
1449-007	3/4	100	05/B5	1.92
1449-010	1	50	05/B5	2.58
1449-012	1 1/4	25	05/B5	3.28
1449-015	1 1/2	25	05/B5	3.58
1449-020	2	10	05/B5	6.31



MPT x FPT

Riser Extender (White PVC)				
Part No	Size (in)	Ctn Qty	Code	List Price
434-005	1/2 x 2 1/16 lg	50	01/B1	*
434-007	3/4 x 1 5/8 lg	50	01/B1	*
434-008	3/4 x 2 15/16 lg	50	01/B1	*
434-020	2 x 2 11/16 lg	25	01/B1	*
439-005	1/2 x 1 3/8 lg	50	01/B1	*

*See Schedule 40 Price List; Discounts will vary.



Insert x SP

Insert Adapter (White PVC)				
Part No	Size (in)	Ctn Qty	Code	List Price
460-007	3/4 x 3/4 SP (1/2 Slip)	50	01/B1	*
460-010	1 x 1 SP (3/4 Slip)	50	01/B1	*
460-015	1 1/2 x 1 1/2 SP	25	01/B1	*

*See Schedule 40 Price List; Discounts will vary.



Slip x Insert PVC pipe to Flexible pipe

Adapter (White PVC)				
Part No	Size (in)	Ctn Qty	Code	List Price
474-007	3/4	50	01/B1	*
474-010	1	50	01/B1	*
474-015	1 1/2	25	01/B1	*

*See Schedule 40 Price List; Discounts will vary.


RECOMMENDED INSTALLATION PROCEDURES

INSERT (BARBED) CONNECTIONS:

Sizes 1/2, 3/4 and 1 inch - one clamp directly over barbs.

Sizes 1 1/4 inch and greater - one clamp directly over barbs plus one additional clamp.

Insert Diameter Dimensions

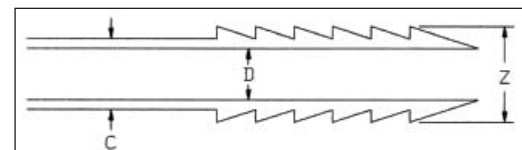

Maximum Diameters

Size	C MAX	D MIN	Z MAX
1/2	0.635	0.406	0.665
3/4	0.835	0.562	0.865
1	1.055	0.750	1.095
1 1/4	1.375	0.995	1.425
1 1/2	1.605	1.125	1.665
2	2.065	1.656	2.125
2 1/2	2.460	2.062	2.520
3	3.065	2.600	3.125
4	4.030	3.525	4.090

DO NOT USE MANUFACTURER'S FITTINGS FOR COMPRESSED AIR OR GASES.
DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.
DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY MANUFACTURER.
MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

STANDARDS AND SPECIFICATIONS – PVC INSERTS

ASTM D-2609 – Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe.

ASTM D-1784 – Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds.

MATERIAL – LASCO PVC Insert Fittings are produced from PVC Type 1, Cell Classification 12454-B.

LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of $\leq 0.25\%$ and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system Components and Related Materials. Includes /ANSI Standard 61, Annex G



7652 Morgan Road • Liverpool, New York 13090
(315) 451-1100 • (800) 776-2266 • Fax: (800) 729-3299



Schedule 40 - PVC Pressure Fittings

Includes

- Schedule 40 - through 8"
- Schedule 40 - 10" and larger
(Separate Discount, call Customer Service)

List Prices

Effective:
March 26, 2015
Revised August 4, 2016

KEY:
 FPT.....Female Pipe Thread SLIP.....Solvent Cement Socket
 MPT.....Male Pipe Thread SP.....Spigot



Slip x Slip x Slip

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
401-003	3/8	100	01/B1	2.61
401-005	1/2	50	01/B1	0.84
401-007	3/4	50	01/B1	0.97
401-010	1	50	01/B1	1.81
401-012	1 1/4	25	01/B1	2.82
401-015	1 1/2	25	01/B1	3.43
401-020	2	25	01/B1	5.00
401-025	2 1/2	10	01/B1	16.49
401-030	3	10	01/B1	21.67
401-040	4	5	01/B1	39.21
401-050	5	4	01/B1	94.68
401-060	6	4	01/B1	131.97
401-080	8	2	01/B1	306.06



Slip x Slip x Slip

Reducer Tee (Con't.)

Part No	Size (in)	Ctn Qty	Code	List Price
401-336	3 x 3 x 1 1/4	10	01/B1	23.58
401-337	3 x 3 x 1 1/2	10	01/B1	23.58
401-338	3 x 3 x 2	10	01/B1	23.54
401-339	3 x 3 x 2 1/2	10	01/B1	29.44
401-416	4 x 4 x 3/4	4	01/B1	39.21
401-417	4 x 4 x 1	4	01/B1	39.21
401-418	4 x 4 x 1 1/4	5	01/B1	39.21
401-419	4 x 4 x 1 1/2	5	01/B1	39.21
401-420	4 x 4 x 2	5	01/B1	39.21
401-422	4 x 4 x 3	5	01/B1	39.21
401-486	5 x 5 x 2	5	01/B1	91.94
401-488	5 x 5 x 3	5	01/B1	91.94
401-490	5 x 5 x 4	5	01/B1	91.94
401-528	6 x 6 x 2	5	01/B1	131.97
401-530	6 x 6 x 3	5	01/B1	131.97
401-532	6 x 6 x 4	5	01/B1	131.97
401-582	8 x 8 x 4	2	01/B1	306.06
401-585	8 x 8 x 6	2	01/B1	306.06

Reducer Tee



Slip x Slip x Slip

Part No	Size (in)	Ctn Qty	Code	List Price
401-094	3/4 x 1/2 x 1/2	50	01/B1	1.63
401-095	3/4 x 1/2 x 3/4	50	01/B1	1.63
401-101	3/4 x 3/4 x 1/2	50	01/B1	1.12
401-122	1 x 1/2 x 1	50	01/B1	3.20
401-124	1 x 3/4 x 1/2	50	01/B1	3.20
401-125	1 x 3/4 x 3/4	50	01/B1	3.20
401-126	1 x 3/4 x 1	50	01/B1	3.20
401-130	1 x 1 x 1/2	50	01/B1	1.91
401-131	1 x 1 x 3/4	50	01/B1	2.08
401-156	1 1/4 x 1 x 1/2	25	01/B1	4.38
401-157	1 1/4 x 1 x 3/4	25	01/B1	4.38
401-158	1 1/4 x 1 x 1	25	01/B1	4.38
401-166	1 1/4 x 1 1/4 x 1/2	25	01/B1	3.11
401-167	1 1/4 x 1 1/4 x 3/4	25	01/B1	3.11
401-168	1 1/4 x 1 1/4 x 1	25	01/B1	3.11
401-199	1 1/2 x 1 1/4 x 1/2	25	01/B1	5.44
401-201	1 1/2 x 1 1/4 x 3/4	25	01/B1	5.44
401-202	1 1/2 x 1 1/4 x 1	25	01/B1	5.44
401-209	1 1/2 x 1 1/2 x 1/2	25	01/B1	5.44
401-210	1 1/2 x 1 1/2 x 3/4	25	01/B1	5.44
401-211	1 1/2 x 1 1/2 x 1	25	01/B1	5.44
401-212	1 1/2 x 1 1/2 x 1 1/4	25	01/B1	5.44
401-238	2 x 1 1/2 x 3/4	10	01/B1	7.78
401-239	2 x 1 1/2 x 1	10	01/B1	7.78
401-241	2 x 1 1/2 x 1 1/2	10	01/B1	7.78
401-247	2 x 2 x 1 1/2	10	01/B1	5.35
401-248	2 x 2 x 3/4	10	01/B1	5.35
401-249	2 x 2 x 1	10	01/B1	5.35
401-250	2 x 2 x 1 1/4	10	01/B1	5.35
401-251	2 x 2 x 1 1/2	10	01/B1	5.35
401-287	2 1/2 x 2 1/2 x 1/2	10	01/B1	16.46
401-288	2 1/2 x 2 1/2 x 3/4	10	01/B1	16.46
401-289	2 1/2 x 2 1/2 x 1	10	01/B1	16.46
401-290	2 1/2 x 2 1/2 x 1 1/4	10	01/B1	16.46
401-291	2 1/2 x 2 1/2 x 1 1/2	10	01/B1	16.46
401-292	2 1/2 x 2 1/2 x 2	10	01/B1	16.46
401-333	3 x 3 x 1/2	10	01/B1	23.58
401-334	3 x 3 x 3/4	10	01/B1	23.58
401-335	3 x 3 x 1	10	01/B1	23.58



Slip x Slip x Slip

Bullhead Tee

Part No	Size (in)	Ctn Qty	Code	List Price
401-074	1/2 x 3/4	50	01/B1	1.78
401-102	3/4 x 1	50	01/B1	3.20
401-132	1 x 1 1/4	50	01/B1	4.28
401-133	1 x 1 1/2	25	01/B1	5.54
401-213	1 1/2 x 2	25	01/B1	7.78
401-341	3 x 4	10	01/B1	40.46

Tee

Part No	Size (in)	Ctn Qty	Code	List Price
402-005	1/2	50	01/B1	1.12
402-007	3/4	50	01/B1	1.74
402-010	1	50	01/B1	3.20
402-012	1 1/4	25	01/B1	5.11
402-015	1 1/2	25	01/B1	6.64
402-020	2	10	01/B1	8.42
402-030	3	10	01/B1	32.62
402-040	4	5	01/B1	49.86



Slip x Slip x FPT

Reducing Tee

Part No	Size (in)	Ctn Qty	Code	List Price
402-071	1/2 x 1/2 x 1/8	50	01/B1	2.41
402-072	1/2 x 1/2 x 1/4	50	01/B1	2.41
402-074	1/2 x 1/2 x 3/4	50	01/B1	2.41
402-094	3/4 x 1/2 x 1/2	50	01/B1	1.68
402-095	3/4 x 1/2 x 3/4	50	01/B1	1.68
402-101	3/4 x 3/4 x 1/2	50	01/B1	1.48
402-124	1 x 3/4 x 1/2	50	01/B1	3.20
402-125	1 x 3/4 x 3/4	50	01/B1	3.20
402-130	1 x 1 x 1/2	50	01/B1	2.25
402-131	1 x 1 x 3/4	50	01/B1	3.20
402-156	1 1/4 x 1 x 1/2	25	01/B1	5.11
402-157	1 1/4 x 1 x 3/4	25	01/B1	5.11
402-166	1 1/4 x 1 1/4 x 1/2	25	01/B1	5.35
402-167	1 1/4 x 1 1/4 x 3/4	25	01/B1	5.35
402-168	1 1/4 x 1 1/4 x 1	25	01/B1	5.35
402-199	1 1/2 x 1 1/4 x 1/2	25	01/B1	6.64
402-202	1 1/2 x 1 1/4 x 1	25	01/B1	6.64



Slip x Slip x FPT

Schedule 40



Slip x Slip x FPT

Reducing Tee (Con't.)					
Part No	Size (in)	Ctn Qty	Code	List Price	
402-209	1½ x 1½ x ½	25	01/B1	6.64	
402-210	1½ x 1½ x ¾	25	01/B1	6.64	
402-211	1½ x 1½ x 1	25	01/B1	6.64	
402-212	1½ x 1½ x 1¼	25	01/B1	6.64	
402-239	2 x 1½ x 1	10	01/B1	8.36	
402-247	2 x 2 x ½	10	01/B1	8.36	
402-248	2 x 2 x ¾	10	01/B1	8.36	
402-249	2 x 2 x 1	10	01/B1	8.36	
402-250	2 x 2 x 1¼	10	01/B1	8.36	
402-251	2 x 2 x 1½	10	01/B1	8.36	
402-287	2½ x 2½ x ½	10	01/B1	18.08	
402-288	2½ x 2½ x ¾	10	01/B1	18.08	
402-289	2½ x 2½ x 1	10	01/B1	18.08	
402-290	2½ x 2½ x 1¼	10	01/B1	18.08	
402-291	2½ x 2½ x 1½	10	01/B1	18.08	
402-292	2½ x 2½ x 2	10	01/B1	18.08	
402-333	3 x 3 x ½	10	01/B1	25.85	
402-334	3 x 3 x ¾	10	01/B1	25.85	
402-335	3 x 3 x 1	10	01/B1	25.85	
402-336	3 x 3 x 1¼	10	01/B1	25.85	
402-337	3 x 3 x 1½	10	01/B1	25.85	
402-338	3 x 3 x 2	10	01/B1	25.85	
402-416	4 x 4 x ¾	4	01/B1	43.17	
402-417	4 x 4 x 1	5	01/B1	43.17	
402-418	4 x 4 x 1¼	5	01/B1	43.17	
402-419	4 x 4 x 1½	5	01/B1	43.17	
402-420	4 x 4 x 2	5	01/B1	43.17	
402-422	4 x 4 x 3	5	01/B1	43.17	
402-490	5 x 5 x 4	5	01/B1	112.77	
402-528	6 x 6 x 2	5	01/B1	146.32	
402-530	6 x 6 x 3	5	01/B1	146.32	
402-532	6 x 6 x 4	5	01/B1	146.32	



Slip x Slip x Insert

Transition Tee					
Part No	Size (in)	Ctn Qty	Code	List Price	
1102-249	2 x 2 x 1	10	01/B1	5.48	



Slip x Slip

90° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
406-003	¾	100	01/B1	3.40	
406-005	½	50	01/B1	0.67	
406-007	¾	50	01/B1	0.77	
406-010	1	50	01/B1	1.36	
406-012	1¼	25	01/B1	2.41	
406-015	1½	25	01/B1	2.58	
406-020	2	25	01/B1	4.05	
406-025	2½	10	01/B1	12.35	
406-030	3	10	01/B1	14.77	
406-040	4	5	01/B1	26.41	
406-050	5	5	01/B1	68.25	
406-060	6	4	01/B1	83.98	
406-080	8	3	01/B1	216.28	



Slip x Slip

Reducing 90° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
406-101	¾ x ½	50	01/B1	1.36	
406-130	1 x ½	50	01/B1	2.02	
406-131	1 x ¾	50	01/B1	2.43	
406-167	1¼ x ¾	25	01/B1	3.86	
406-168	1¼ x 1	25	01/B1	3.86	
406-211	1½ x 1	25	01/B1	6.11	
406-212	1½ x 1¼	25	01/B1	6.11	
406-249	2 x 1	25	01/B1	7.53	
406-250	2 x 1¼	25	01/B1	7.53	
406-251	2 x 1½	25	01/B1	10.41	



Slip x Slip x MPT

Manifold Tee					
Part No	Size (in)	Ctn Qty	Code	List Price	
402B-010	1	50	01/B1	3.64	



Slip x FPT x Slip

Tee					
Part No	Size (in)	Ctn Qty	Code	List Price	
403-005	½	50	01/B1	1.12	
403-007	¾	50	01/B1	1.89	



FPT x FPT x FPT

Tee					
Part No	Size (in)	Ctn Qty	Code	List Price	
405-005	½	50	01/B1	3.09	
405-007	¾	50	01/B1	4.85	
405-010	1	50	01/B1	6.73	
405-012	1¼	25	01/B1	9.29	
405-015	1½	25	01/B1	9.59	



Snap-On x FPT

Snap-On Tee					
Part No	Size (in)	Ctn Qty	Code	List Price	
464-007	¾	25	01/B1	3.09	
464-101	¾ x ½	25	01/B1	2.60	
464-130	1 x ½	50	01/B1	4.67	
464-131	1 x ¾	25	01/B1	4.67	



Slip x FPT

90° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
407-005	½	50	01/B1	0.84	
407-007	¾	50	01/B1	0.97	
407-010	1	50	01/B1	1.81	
407-012	1¼	25	01/B1	3.02	
407-015	1½	25	01/B1	3.36	
407-020	2	10	01/B1	8.67	
407-025	2½	10	01/B1	21.44	
407-030	3	10	01/B1	32.14	
407-040	4	5	01/B1	48.71	



Slip x FPT

Reducing 90° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
407-074	½ x ¾	50	01/B1	1.81	
407-101	¾ x ½	50	01/B1	1.00	
407-130	1 x ½	50	01/B1	2.78	
407-131	1 x ¾	50	01/B1	2.78	
407-168	1¼ x 1	25	01/B1	4.05	
407-211	1½ x 1	25	01/B1	6.75	
407-212	1½ x 1¼	25	01/B1	7.00	
407-249	2 x 1	25	01/B1	11.64	
407-250	2 x 1¼	10	01/B1	11.64	
407-251	2 x 1½	10	01/B1	11.64	

KEY:
 FPT.....Female Pipe Thread SLIP.....Solvent Cement Socket
 MPT.....Male Pipe Thread SP.....Spigot



FPT x FPT

90° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
408-005	1/2	50	01/B1	1.63	
408-007	3/4	50	01/B1	2.43	
408-010	1	50	01/B1	5.17	
408-012	1 1/4	25	01/B1	5.53	
408-015	1 1/2	25	01/B1	7.00	
408-020	2	10	01/B1	10.60	



SP x Slip

90° Street EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
409-005	1/2	50	01/B1	1.91	
409-007	3/4	50	01/B1	2.35	
409-010	1	50	01/B1	4.05	
409-012	1 1/4	25	01/B1	4.85	
409-015	1 1/2	25	01/B1	5.35	
409-020	2	10	01/B1	10.33	
409-025	2 1/2	10	01/B1	18.52	
409-030	3	10	01/B1	22.86	



MPT x Slip

90° Street EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
410-005	1/2	50	01/B1	1.48	
410-007	3/4	50	01/B1	1.74	
410-010	1	50	01/B1	2.91	
410-012	1 1/4	25	01/B1	4.05	
410-015	1 1/2	25	01/B1	4.24	
410-020	2	10	01/B1	10.43	
410-101	3/4 x 1/2	50	01/B1	2.12	



SP x FPT

90° Street EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
411-005	1/2	50	01/B1	1.84	
411-007	3/4	50	01/B1	2.22	
411-010	1	50	01/B1	3.88	
411-012	1 1/4	25	01/B1	4.65	
411-015	1 1/2	25	01/B1	5.86	



MPT x FPT

90° Street EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
412-005	1/2 PVC	50	01/B1	1.99	
412-007	3/4 PVC	50	01/B1	2.43	
412-010	1 PVC	50	01/B1	4.15	
412-012	1 1/4 PVC	25	01/B1	5.17	
412-015	1 1/2 PVC	25	01/B1	5.61	
M412-005	1/2 Poly*	50	01/B1	1.96	
M412-007	3/4 Poly*	50	01/B1	2.36	
M412-010	1 Poly*	50	01/B1	4.12	

*Not Listed by NSF



Slip x Slip x Slip

90° Side Outlet EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
413-005	1/2	50	01/B1	3.67	
413-007	3/4	50	01/B1	5.00	
413-010	1	25	01/B1	6.40	
413-015	1 1/2	25	01/B1	7.02	
413-020	2	10	01/B1	9.75	



Slip x Slip x FPT

90° Side Outlet EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
414-005	1/2	50	01/B1	3.58	
414-010	1	25	01/B1	6.41	
414-101	3/4 x 1/2	50	01/B1	4.63	
414-130	1 x 1 x 1/2	25	01/B1	6.06	



Slip x Slip with SP

Reducing EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
416-251	2 x 1 1/2 (2 Sp)	25	01/B1	10.41	
416-292	2 1/2 x 2 (2 1/2 Sp)	10	01/B1	15.96	



Slip x Slip

45° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
417-005	1/2	50	01/B1	1.12	
417-007	3/4	50	01/B1	1.74	
417-010	1	50	01/B1	2.08	
417-012	1 1/4	25	01/B1	2.91	
417-015	1 1/2	25	01/B1	3.64	
417-020	2	25	01/B1	4.75	
417-025	2 1/2	10	01/B1	12.37	
417-030	3	10	01/B1	19.19	
417-040	4	5	01/B1	34.40	
417-050	5	5	01/B1	68.25	
417-060	6	4	01/B1	85.01	
417-080	8	4	01/B1	204.44	



SP x Slip

45° Street EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
423-015	1 1/2	25	01/B1	3.64	
423-020	2	25	01/B1	4.75	
423-025	2 1/2	10	01/B1	15.45	
423-030	3	10	01/B1	19.19	



Slip x Slip

22 1/2° EII					
Part No	Size (in)	Ctn Qty	Code	List Price	
465-015	1 1/2	20	01/B1	4.68	
465-020	2	10	01/B1	6.77	
465-025	2 1/2	10	01/B1	17.66	
465-030	3	5	01/B1	27.37	
465-040	4	4	01/B1	49.18	
465-060	6	3	01/B1	121.41	

*250 p.s.i. working pressure. 200 p.s.i. working pressure does not comply with ASTM D2466.



Slip x Slip x Slip

Cross					
Part No	Size (in)	Ctn Qty	Code	List Price	
420-005	1/2	50	01/B1	2.58	
420-007	3/4	50	01/B1	4.29	
420-010	1	50	01/B1	5.35	
420-012	1 1/4	25	01/B1	7.07	
420-015	1 1/2	25	01/B1	8.01	
420-020	2	10	01/B1	11.82	
420-025	2 1/2	8	01/B1	25.07	
420-030	3	10	01/B1	30.73	
420-040	4	5	01/B1	45.56	

Schedule 40



Slip x Slip
x Slip x Slip

Reducing Cross				
Part No	Size (in)	Ctn Qty	Code	List Price
420-335	3 x 1	10	01/B1	46.01
420-337	3 x 1½	10	01/B1	46.01
420-338	3 x 2	10	01/B1	46.01
420-419	4 x 1½	5	01/B1	44.91
420-420	4 x 2	5	01/B1	79.18



Slip x Slip x
MPT x MPT

Manifold Cross				
Part No	Size (in)	Ctn Qty	Code	List Price
421A-010	1	50	01/B1	6.29



Slip x Slip

Long Socket Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
428-015	1½ (1.825*)	25	01/B1	3.37
428-020	2 (1.945*)	25	01/B1	4.21

*Socket depth, each side.



Slip x Slip

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
429-003	¾	100	01/B1	1.22
429-005	½	100	01/B1	0.44
429-007	¾	50	01/B1	0.61
429-010	1	50	01/B1	1.07
429-012	1¼	25	01/B1	1.48
429-015	1½	25	01/B1	1.59
429-020	2	25	01/B1	2.43
429-025	2½	10	01/B1	5.35
429-030	3	10	01/B1	8.38
429-040	4	5	01/B1	12.13
429-050	5	4	01/B1	22.19
429-060	6	5	01/B1	38.33
429-080	8	4	01/B1	71.57



Slip x Slip

Reducer Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
429-101	¾ x ½	50	01/B1	1.12
429-131	1 x ¾	50	01/B1	1.91
429-168	1¼ x 1	25	01/B1	3.20
429-212	1½ x 1¼	25	01/B1	3.40
429-251	2 x 1½	10	01/B1	5.41
429-338	3 x 2	5	01/B1	29.06
429-422	4 x 3	4	01/B1	36.33
429-532	6 x 4	4	01/B1	47.94
429-582	8 x 4	4	01/B1	111.16
429-585	8 x 6	4	01/B1	122.76



FPT x FPT

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
430-005	½	100	01/B1	0.85
430-007	¾	50	01/B1	1.59
430-010	1	50	01/B1	2.08
430-020	2	25	01/B1	16.69
430-101	¾ x ½	50	01/B1	2.05
430-131	1 x ¾	50	01/B1	3.54
430-005-45	½ GRAY	100	01/B1	0.97
430-007-45	¾ GRAY	50	01/B1	1.78
430-101-45	¾ x ½ GRAY	50	01/B1	3.21
430-131-45	1 x ¾ GRAY	50	01/B1	3.54



Slip x Slip

Nesting Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
477-005	½*	100	01/B1	0.56
477-007	¾	50	01/B1	0.61
477-010	1	50	01/B1	1.07

*1/2" nesting couplings do not meet ASTM Standards for Sch 40 fittings and are not NSF listed.



Slip x Slip

Deep Socket Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
482-015	1½ (2.169*)	25	01/B1	4.14
482-020	2 (2.389*)	25	01/B1	6.85
482-025	2½ (3.385*)	10	01/B1	8.81
482-030	3 (3.625*)	10	01/B1	13.27
482-040	4 (3.625*)	5	01/B1	26.66

*Socket depth, each side.



MPT x FPT

Riser Extender				
Part No	Size (in)	Ctn Qty	Code	List Price
434-005	½	50	01/B1	1.24
434-007	¾	50	01/B1	2.08
434-008	¾*	50	01/B1	2.14
434-010	1	50	01/B1	2.60
434-020	2	25	01/B1	5.28
439-198	Increasing 1½ x 2	10	01/B1	6.55

*2 5/16 Long



Slip x FPT

Female Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
435-005	½	100	01/B1	0.77
435-007	¾	50	01/B1	0.97
435-010	1	50	01/B1	1.12
435-012	1¼	25	01/B1	1.74
435-015	1½	25	01/B1	1.99
435-020	2	25	01/B1	2.66
435-025	2½	10	01/B1	6.75
435-030	3	10	01/B1	9.05
435-040	4	5	01/B1	15.00
435-050	5	5	01/B1	38.85
435-060	6	4	01/B1	55.20
435-080	8	4	01/B1	104.08



Slip x FPT

Reducing Female Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
435-074	½ x ¾	50	01/B1	1.36
435-101	¾ x ½	50	01/B1	1.36
435-102	¾ x 1	50	01/B1	1.81
435-130	1 x ½	50	01/B1	1.81
435-131	1 x ¾	50	01/B1	1.81
435-211	1 x 1½	25	01/B1	3.64



MPT x Slip

Male Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
436-005	½	100	01/B1	0.61
436-007	¾	50	01/B1	0.67
436-010	1	50	01/B1	1.22
436-012	1¼	25	01/B1	1.48
436-015	1½	25	01/B1	1.99
436-020	2	25	01/B1	2.60
436-025	2½	10	01/B1	7.69
436-030	3	10	01/B1	11.23
436-040	4	5	01/B1	14.33
436-050	5	5	01/B1	23.60
436-060	6	4	01/B1	37.35
436-080	8	4	01/B1	169.76



MPT x Slip

Reducing Male Adapter

Part No	Size (in)	Ctn Qty	Code	List Price
436-073	1/2 x 3/8	100	01/B1	1.22
436-074	1/2 x 3/4	50	01/B1	1.22
436-101	3/4 x 1/2	50	01/B1	1.12
436-102	3/4 x 1	50	01/B1	1.74
436-131	1 x 3/4	50	01/B1	3.72
436-132	1 x 1 1/4	25	01/B1	4.05
436-133	1 x 1 1/2	25	01/B1	4.57
436-168	1 1/4 x 1	25	01/B1	4.57
436-169	1 1/4 x 1 1/2	25	01/B1	4.57
436-212	1 1/2 x 1 1/4	25	01/B1	5.52
436-213	1 1/2 x 2	10	01/B1	5.52
436-251	2 x 1 1/2	10	01/B1	6.29
436-252	2 x 2 1/2	10	01/B1	9.81
436-253	2 x 3	10	01/B1	11.01
436-293	2 1/2 x 3	10	01/B1	11.85
436-341	3 x 4	10	01/B1	18.97



SP x Slip

*Fabricated with Molded Pieces

Reducer Bushing (Con't.)

Part No	Size (in)	Ctn Qty	Code	List Price
437-288	2 1/2 x 3/4	10	01/B1	4.86
437-289	2 1/2 x 1	10	01/B1	4.86
437-290	2 1/2 x 1 1/4	10	01/B1	4.86
437-291	2 1/2 x 1 1/2	10	01/B1	4.86
437-292	2 1/2 x 2	10	01/B1	4.86
437-334*	3 x 3/4	10	01/B1	7.18
437-335	3 x 1	10	01/B1	7.18
437-336	3 x 1 1/4	10	01/B1	7.18
437-337	3 x 1 1/2	10	01/B1	7.18
437-338	3 x 2	10	01/B1	7.18
437-339	3 x 2 1/2	10	01/B1	7.18
437-420	4 x 2	5	01/B1	16.03
437-421	4 x 2 1/2	5	01/B1	16.03
437-422	4 x 3	5	01/B1	16.03
437-488	5 x 3	5	01/B1	22.54
437-490	5 x 4	4	01/B1	22.54
437-528	6 x 2	5	01/B1	39.67
437-529*	6 x 2 1/2	5	01/B1	39.71
437-530	6 x 3	5	01/B1	39.67
437-532	6 x 4	5	01/B1	39.67
437-534	6 x 5	5	01/B1	39.67
437-582	8 x 4	5	01/B1	138.43
437-585	8 x 6	5	01/B1	138.43



Insert Barb x Slip

Adapter

Part No	Size (in)	Ctn Qty	Code	List Price
474-007	3/4	50	01/B1	2.60
474-010	1	50	01/B1	2.75
474-015	1 1/2	25	01/B1	4.85
474-020	2	25	01/B1	8.99



SP x FPT

Fitting Adapter

Part No	Size (in)	Ctn Qty	Code	List Price
478-010	1	25	11	*
478-012	1 1/2	25	11	*
478-015	1 1/2	25	11	*
478-020	2	20	11	*

*See Swing Joint Price List: Discounts will vary.



Insert x SP

Insert Adapter

Part No	Size (in)	Ctn Qty	Code	List Price
460-007	3/4 x 3/4 SP (1/2 Slip)	50	01/B1	3.13
460-010	1 x 1 SP (3/4 Slip)	50	01/B1	3.27
460-015	1 1/2 x 1 1/2 SP	25	01/B1	3.62

ASTM D 2609 - Plastic Insert Fitting for Polyethylene (PE) pipe



SP x Slip

*Fabricated with Molded Pieces

Reducer Bushing

Part No	Size (in)	Ctn Qty	Code	List Price
437-073	1/2 x 3/8	100	01/B1	1.29
437-101	3/4 x 1/2	100	01/B1	0.71
437-130	1 x 1/2	100	01/B1	1.29
437-131	1 x 3/4	100	01/B1	1.29
437-166	1 1/4 x 1/2	25	01/B1	1.74
437-167	1 1/4 x 3/4	25	01/B1	1.74
437-168	1 1/4 x 1	25	01/B1	1.74
437-209	1 1/2 x 1/2	25	01/B1	1.83
437-210	1 1/2 x 3/4	25	01/B1	1.83
437-211	1 1/2 x 1	25	01/B1	1.83
437-212	1 1/2 x 1 1/4	25	01/B1	1.83
437-247	2 x 1/2	10	01/B1	3.02
437-248	2 x 3/4	10	01/B1	3.02
437-249	2 x 1	10	01/B1	3.02
437-250	2 x 1 1/4	10	01/B1	3.02
437-251	2 x 1 1/2	25	01/B1	3.02
437-287	2 1/2 x 1/2	10	01/B1	4.86



SP x FPT

Reducer Bushing

Part No	Size (in)	Ctn Qty	Code	List Price
438-071	1/2 x 1/8	100	01/B1	1.48
438-072	1/2 x 1/4	100	01/B1	1.48
438-073	1/2 x 3/8	100	01/B1	1.48
438-098	3/4 x 1/4	50	01/B1	1.48
438-101	3/4 x 1/2	100	01/B1	1.12
438-130	1 x 1/2	100	01/B1	1.81
438-131	1 x 3/4	100	01/B1	1.81
438-166	1 1/4 x 1/2	25	01/B1	2.78
438-167	1 1/4 x 3/4	25	01/B1	2.78
438-168	1 1/4 x 1	25	01/B1	2.78
438-209	1 1/2 x 1/2	25	01/B1	3.20
438-210	1 1/2 x 3/4	25	01/B1	3.20
438-211	1 1/2 x 1	25	01/B1	3.20
438-212	1 1/2 x 1 1/4	25	01/B1	3.20
438-247	2 x 1/2	10	01/B1	4.29
438-248	2 x 3/4	10	01/B1	4.29
438-249	2 x 1	10	01/B1	4.29
438-250	2 x 1 1/4	10	01/B1	4.29
438-251	2 x 1 1/2	10	01/B1	4.29
438-288	2 1/2 x 3/4	10	01/B1	6.23
438-289	2 1/2 x 1	10	01/B1	6.23
438-290	2 1/2 x 1 1/4	10	01/B1	6.23
438-291	2 1/2 x 1 1/2	10	01/B1	6.23
438-292	2 1/2 x 2	10	01/B1	6.23
438-335	3 x 1	10	01/B1	7.18
438-336	3 x 1 1/4	10	01/B1	7.18
438-337	3 x 1 1/2	10	01/B1	7.18
438-338	3 x 2	10	01/B1	7.18
438-339	3 x 2 1/2	10	01/B1	7.18
438-420	4 x 2	5	01/B1	16.00
438-421	4 x 2 1/2	5	01/B1	16.00
438-422	4 x 3	5	01/B1	16.00
438-490	5 x 4	5	01/B1	31.20
438-528	6 x 2	5	01/B1	52.69
438-532	6 x 4	5	01/B1	58.57

Schedule 40

KEY:
 FPT.....Female Pipe Thread SLIP.....Solvent Cement Socket
 MPT.....Male Pipe Thread SP.....Spigot

Threaded Reducer Bushing

Part No	Size (in)	Ctn Qty	Code	List Price
439-005	1/2	50	01/B1	1.24
439-052	3/8 x 1/4	50	01/B1	3.20
439-072	1/2 x 1/4	50	01/B1	3.20
439-073	1/2 x 3/8	50	01/B1	3.20
439-098	3/4 x 1/4	50	01/B1	1.99
439-099	3/4 x 3/8	50	01/B1	1.99
439-101	3/4 x 1/2	50	01/B1	1.99
439-130	1 x 1/2	50	01/B1	2.78
439-131	1 x 3/4	50	01/B1	2.78
439-166	1 1/4 x 1/2	25	01/B1	4.14
439-167	1 1/4 x 3/4	25	01/B1	4.14
439-168	1 1/4 x 1	25	01/B1	4.14
439-198	Increasing 1 1/2 x 2	10	01/B1	6.55
439-209	1 1/2 x 1 1/2	25	01/B1	5.00
439-210	1 1/2 x 3/4	25	01/B1	5.00
439-211	1 1/2 x 1	25	01/B1	5.00
439-212	1 1/2 x 1 1/4	25	01/B1	5.00
439-249	2 x 1	10	01/B1	5.35
439-250	2 x 1 1/4	10	01/B1	5.35
439-251	2 x 1 1/2	10	01/B1	5.35
439-292	2 1/2 x 2	10	01/B1	18.71
439-338	3 x 2	5	01/B1	22.13



MPT x FPT

Cap

Part No	Size (in)	Ctn Qty	Code	List Price
447-005	1/2	100	01/B1	0.61
447-007	3/4	100	01/B1	0.71
447-010	1	50	01/B1	1.12
447-012	1 1/4	25	01/B1	1.59
447-015	1 1/2	25	01/B1	1.74
447-020	2	25	01/B1	2.08
447-025	2 1/2	10	01/B1	6.64
447-030	3	10	01/B1	7.25
447-040	4	5	01/B1	16.49
447-050	5	5	01/B1	27.71
447-060	6	5	01/B1	39.55
447-080	8	4	01/B1	99.35



Slip

Cap

Part No	Size (in)	Ctn Qty	Code	List Price
448-005	1/2	100	01/B1	1.29
448-007	3/4	100	01/B1	1.48
448-010	1	50	01/B1	2.25
448-012	1 1/4	25	01/B1	2.66
448-015	1 1/2	25	01/B1	2.78
448-020	2	10	01/B1	4.92
448-025	2 1/2	10	01/B1	7.25
448-030	3	10	01/B1	9.48
448-040	4	5	01/B1	16.65



FPT

Plug

Part No	Size (in)	Ctn Qty	Code	List Price
449-003	3/8	50	01/B1	1.83
449-005	1/2	50	01/B1	1.48
449-007	3/4	50	01/B1	1.74



SP



SP



MPT



Slip x Slip

Pressure rated at 150 p.s.i. at 73.4°F. Unions are listed as NSF 61



FPT x FPT

Pressure rated at 150 p.s.i. at 73.4°F. Unions are listed as NSF 61



Buna-N (Nitrile)
(Current style)



Slip

Plug (Con't.)

Part No	Size (in)	Ctn Qty	Code	List Price
449-010	1	50	01/B1	2.08
449-012	1 1/4	25	01/B1	2.78
449-015	1 1/2	25	01/B1	3.54
449-020	2	10	01/B1	4.39
449-025	2 1/2	10	01/B1	7.49
449-030	3	10	01/B1	9.91
449-040	4	5	01/B1	22.43

Plug

Part No	Size (in)	Ctn Qty	Code	List Price
450-005	1/2	50	01/B1	1.83
450-007	3/4	50	01/B1	1.97
450-010	1	50	01/B1	3.20
450-012	1 1/4	25	01/B1	3.37
450-015	1 1/2	25	01/B1	3.62
450-020	2	10	01/B1	4.66
450-025	2 1/2	10	01/B1	6.49
450-030	3	10	01/B1	9.83
450-040	4	5	01/B1	22.18

Union (O-Ring Type)

Part No	Size (in)	Ctn Qty	Code	List Price
457-005	1/2	10	01/B1	6.64
457-007	3/4	10	01/B1	7.55
457-010	1	10	01/B1	7.78
457-012	1 1/4	5	01/B1	25.06
457-015	1 1/2	5	01/B1	26.11
457-020	2	5	01/B1	35.20
457-030	3	5	01/B1	78.71

Union (O-Ring Type)

Part No	Size (in)	Ctn Qty	Code	List Price
458-005	1/2	10	01/B1	7.44
458-007	3/4	10	01/B1	12.43
458-010	1	10	01/B1	16.96
458-012	1 1/4	5	01/B1	29.13
458-015	1 1/2	5	01/B1	29.75
458-020	2	5	01/B1	36.57
458-030	3	5	01/B1	83.55
458-040	4	4	01/B1	110.87

Union O-Ring

Part No	Size (in)	Ctn Qty	Code	List Price
40116	1/2	1	01/B1	2.25
40119	3/4	1	01/B1	2.74
40123	1	1	01/B1	3.16
40128	1 1/4	1	01/B1	3.62
40224	1 1/2	1	01/B1	4.06
40228	2	1	01/B1	4.55
40119Q	119	1	01/B1	2.16

WYE

Part No	Size (in)	Ctn Qty	Code	List Price
475-015	1 1/2*	20	01/B1	12.58
475-020	2*	10	01/B1	37.74
475-040	4**	6	01/B1	119.92
475-422	4 x 4 x 3**	6	01/B1	130.39

*235 psi working pressure

**150 psi working pressure

Schedule 40 Large Diameter

KEY:
 FPT.....Female Pipe Thread SLIP.....Solvent Cement Socket
 MPT.....Male Pipe Thread SP.....Spigot



Slip x Slip x Slip

Tee

Part No	Size (in)	Ctn Qty	Code	List Price
401-100	10	1	91	1014.14
401-120	12	1	91	1498.41



Slip x Slip x Slip

Reducing Tee

Part No	Size (in)	Ctn Qty	Code	List Price
401-624	10 x 10 x 4	1	91	908.79
401-626	10 x 10 x 6	1	91	869.07
401-628	10 x 10 x 8	1	91	1,112.69
401-664	12 x 12 x 4	1	91	1,422.52
401-666	12 x 12 x 6	1	91	1,422.52
401-668	12 x 12 x 8	1	91	1,245.64
401-670	12 x 12 x 10*	1	91	1,956.52

*Fabricated with Bushing



Slip x Slip

90° EII

Part No	Size (in)	Ctn Qty	Code	List Price
406-100	10	1	91	814.65
406-120	12	1	91	1092.59



SP x Slip

Street 90° EII

Part No	Size (in)	Ctn Qty	Code	List Price
409-100	10	1	91	1213.82
409-120	12	1	91	1344.20



SP x Slip

Street 45° EII

Part No	Size (in)	Ctn Qty	Code	List Price
423-100	10	1	91	672.44
423-120	12	1	91	985.19



Slip x Slip

Coupling

Part No	Size (in)	Ctn Qty	Code	List Price
429-100	10	1	91	208.58
429-120	12	1	91	415.57



Slip x Slip

Reducer Coupling

Part No	Size (in)	Ctn Qty	Code	List Price
429-626	10 x 6	1	91	588.77
429-628	10 x 8	1	91	588.77
429-668	12 x 8	1	91	670.39
429-670	12 x 10	1	91	670.39



SP x Slip

Reducer Bushing

Part No	Size (in)	Ctn Qty	Code	List Price
437-623	10 x 3	1	91	415.33
437-624	10 x 4	1	91	415.33
437-626	10 x 6	1	91	376.73
437-628	10 x 8	1	91	376.73
437-661	12 x 3	1	91	560.99
437-664	12 x 4	1	91	560.99
437-666	12 x 6	1	91	560.99
437-668	12 x 8	1	91	418.97
437-670	12 x 10	1	91	418.97



Slip

Cap

Part No	Size (in)	Ctn Qty	Code	List Price
447-100	10	1	91	177.57
447-120	12	1	91	230.52



Slip x Slip

11 1/4° EII

Part No	Size (in)	Ctn Qty	Code	List Price
461-100	10	1	91	391.36
461-120	12	1	91	619.34

FABRICATED FROM PIPE



Slip x Slip

22 1/2° EII

Part No	Size (in)	Ctn Qty	Code	List Price
465-100	10	1	91	391.36
465-120	12	1	91	619.34

FABRICATED FROM PIPE




Slip x Slip


45° EII

Part No	Size (in)	Ctn Qty	Code	List Price
417-100	10	1	91	532.21
417-120	12	1	91	788.67

Why Sealant is Recommended in Threaded Joints

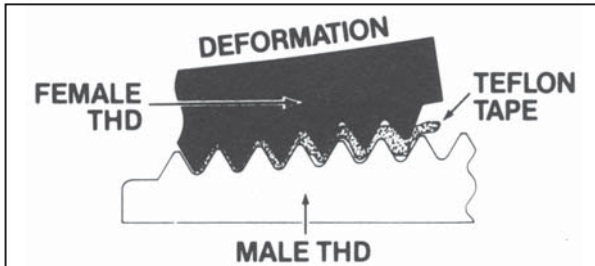

Teflon tape, when compressed between male and female threads in PVC fittings joints, can cause deformation, leading to leakage, and possibly, to cracked female fittings.

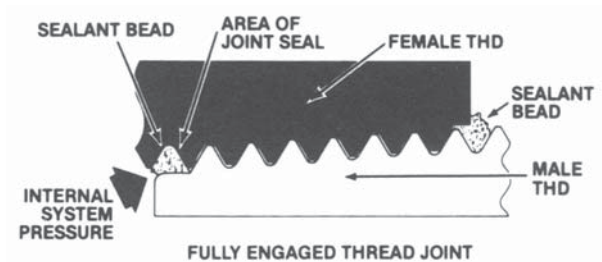

Sealant, when compressed between threads, flows outward to achieve an effective seal against leakage in PVC fittings.

DO NOT USE MANUFACTURER'S FITTINGS FOR COMPRESSED AIR OR GASES.
DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.
DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY MANUFACTURER.
MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

STANDARDS AND SPECIFICATIONS – Schedule 40

ASTM D-1784 – Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds.

ASTM D-2466 – Socket Type Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.

ASTM F-1970 – Standard Specification for Special Engineered Fittings, Appurtenances or Valves for use in Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Systems.

MATERIAL – LASCO Schedule 40 Fittings are produced from PVC Type 1, Cell Classification 12454-B.
– O-rings are produced from a Buna-N (Nitrile) material.

LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of $\leq 0.25\%$ and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system Components and Related Materials. Includes /ANSI Standard 61, Annex G



7652 Morgan Road • Liverpool, New York 13090
(315) 451-1100 • (800) 776-2266 • Fax: (800) 729-3299



Schedule 80 - PVC Pressure Fittings

Includes


- Schedule 80 - through 8"
- Schedule 80 - 10" and larger
(Separate Discount, call Customer Service)

List Prices


Effective:
March 26, 2015
Revised August 4, 2016

Schedule 80

Why Sealant is recommended in Threaded Joints

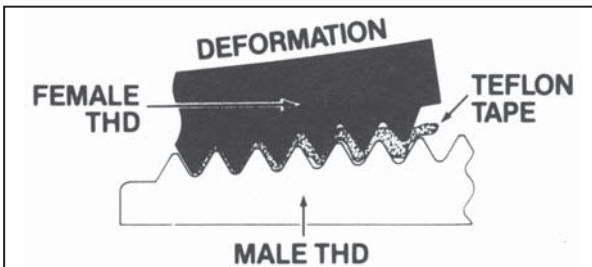


Teflon tape, when compressed between male and female threads in PVC fittings joints, can cause deformation, leading to leakage, and possibly, to cracked female fittings.

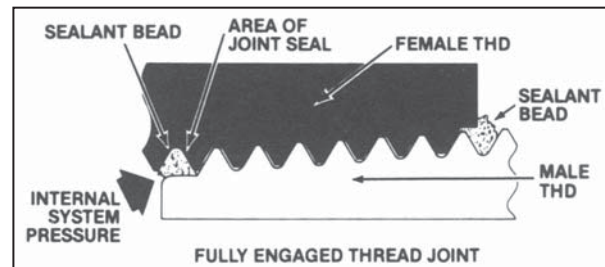

Sealant, when compressed between threads, flows outward to achieve an effective seal against leakage in PVC fittings.

Flange Installation Data Gaskets and Bolts

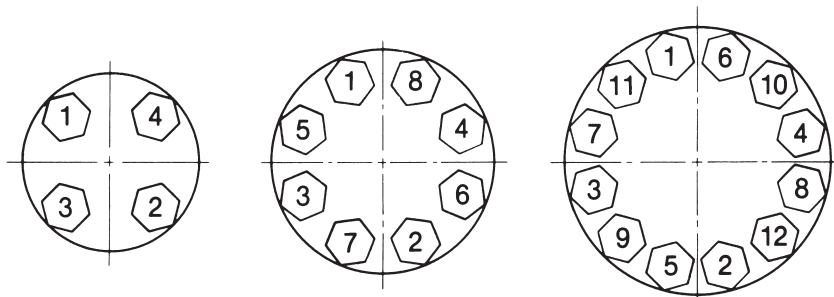

1. Recommended Gaskets: full face 1/8" thick, elastomeric, 50-70 Shore A hardness
2. Bolt Threads should be well lubricated.
3. Nut and bolt threads should be free-running during assembly
4. Follow illustrated bolt-tightening sequence.
5. Always use full size flat washers with bolts and nuts.

NOTE: Flanges conform to ANSI B16.5, Class 150. Socket diameters conform to ASTM D-2467. Recommended working pressure: 150 psi @ 73.4°F. Flanges not NSF listed. Use primer and heavy bodied PVC cement.

Size	Bolt Circle Diameter	Number of Bolts	Bolt Size (UNC x Length)	Recommended Torque (Ft./Lbs.)
1/2	2.37	4	1/2 - 13 x 1 3/4	15-20
3/4	2.75	4	1/2 - 13 x 1 15/16	15-20
1	3.12	4	1/2 - 13 x 2	15-20
1 1/4	3.50	4	1/2 - 13 x 2 1/4	15-20
1 1/2	3.87	4	1/2 - 13 x 2 3/4	15-20
2	4.75	4	5/8 - 11 x 3	20-30
2 1/2	5.50	4	5/8 - 11 x 3 1/4	20-30
3	6.00	4	5/8 - 11 x 3 5/8	20-30
4	7.50	8	5/8 - 11 x 3 3/4	20-30
5	8.50	8	3/4 - 10 x 3 3/4	25-35
6	9.50	8	3/4 - 10 x 4 3/8	33-50
8	11.75	8	3/4 - 10 x 4 3/8	33-50
10	14.25	12	7/8 - 9 x 4 1/2	53-75
12	17.00	12	7/8 - 9 x 4 5/8	53-75

Schedule 80

KEY:

FPT.....Female Pipe Thread SP.....Spigot
 MPT.....Male Pipe Thread BSP.....British Standard
 SLIP.....Solvent Cement Socket Pipe Thread



Slip x Slip x Slip

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
801-002	1/4	25	02/B2	9.82
801-003	3/8	50	02/B2	9.82
801-005	1/2	25	02/B2	9.82
801-007	3/4	25	02/B2	10.28
801-010	1	25	02/B2	12.88
801-012	1 1/4	10	02/B2	35.34
801-015	1 1/2	10	02/B2	35.34
801-020	2	10	02/B2	44.18
801-025	2 1/2	5	02/B2	48.04
801-030	3	5	02/B2	60.04
801-040	4	5	02/B2	69.57
801-060	6	4	02/B2	237.54
801-080	8	2	02/B2	550.92



Slip x Slip x FPT



FPT x FPT x FPT

Reducing Tee

Part No	Size (in)	Ctn Qty	Code	List Price
802-250	2 x 2 x 1 1/4	10	02/B2	45.57
802-251	2 x 2 x 1 1/2	10	02/B2	63.54
802-291	2 1/2 x 2 1/2 x 1 1/2	5	02/B2	78.86

Tee

Part No	Size (in)	Ctn Qty	Code	List Price
805-002	1/4	25	02/B2	11.34
805-003	3/8	25	02/B2	11.34
805-005	1/2	25	02/B2	11.34
805-007	3/4	25	02/B2	12.62
805-010	1	25	02/B2	27.86
805-012	1 1/4	10	02/B2	29.54
805-015	1 1/2	10	02/B2	35.81
805-020	2	10	02/B2	38.49
805-025	2 1/2	5	02/B2	140.16
805-030	3	5	02/B2	146.38
805-040	4	5	02/B2	237.91

90° EII

Part No	Size (in)	Ctn Qty	Code	List Price
806-002	1/4	25	02/B2	3.48
806-003	3/8	25	02/B2	3.48
806-005	1/2	25	02/B2	3.48
806-007	3/4	25	02/B2	4.44
806-010	1	25	02/B2	7.18
806-012	1 1/4	10	02/B2	9.59
806-015	1 1/2	10	02/B2	10.27
806-020	2	10	02/B2	12.42
806-025	2 1/2	5	02/B2	29.04
806-030	3	5	02/B2	32.64
806-040	4	5	02/B2	49.64
806-060	6	4	02/B2	141.25
806-080	8	2	02/B2	389.33

90° EII

Part No	Size (in)	Ctn Qty	Code	List Price
807-005	1/2	25	02/B2	13.68
807-007	3/4	25	02/B2	16.09
807-010	1	25	02/B2	17.41
807-012	1 1/4	10	02/B2	20.07
807-015	1 1/2	10	02/B2	23.95
807-020	2	10	02/B2	31.02

90° EII

Part No	Size (in)	Ctn Qty	Code	List Price
808-002	1/4	25	02/B2	8.63
808-003	3/8	25	02/B2	8.63
808-005	1/2	25	02/B2	8.05
808-007	3/4	25	02/B2	10.03
808-010	1	25	02/B2	12.62
808-012	1 1/4	10	02/B2	13.60
808-015	1 1/2	10	02/B2	19.29
808-020	2	10	02/B2	21.73
808-025	2 1/2	5	02/B2	84.60
808-030	3	5	02/B2	136.42
808-040	4	5	02/B2	240.04



Slip x Slip x Slip

Reducing Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
801-101	3/4 x 3/4 x 1/2	25	02/B2	7.52
801-130	1 x 1 x 1/2	25	02/B2	10.87
801-131	1 x 1 x 3/4	25	02/B2	10.87
801-168	1 1/4 x 1 1/4 x 1	15	02/B2	23.59
801-210	1 1/2 x 1 1/2 x 3/4	10	02/B2	23.59
801-211	1 1/2 x 1 1/2 x 1	10	02/B2	23.59
801-212	1 1/2 x 1 1/2 x 1 1/4	10	02/B2	23.59
801-247	2 x 2 x 1/2	10	02/B2	29.89
801-248	2 x 2 x 3/4	10	02/B2	29.89
801-249	2 x 2 x 1	10	02/B2	29.89
801-250	2 x 2 x 1 1/4	10	02/B2	35.00
801-251	2 x 2 x 1 1/2	10	02/B2	29.89
801-290	2 1/2 x 2 1/2 x 1 1/4	5	02/B2	39.00
801-291	2 1/2 x 2 1/2 x 1 1/2	5	02/B2	39.00
801-292	2 1/2 x 2 1/2 x 2	5	02/B2	39.00
801-337	3 x 3 x 1 1/2	5	02/B2	54.80
801-338	3 x 3 x 2	5	02/B2	54.80
801-420	4 x 4 x 2	5	02/B2	88.54
801-422	4 x 4 x 3	5	02/B2	88.54
801-530	6 x 6 x 3	5	02/B2	176.92
801-532	6 x 6 x 4	5	02/B2	237.54
801-580	8 x 8 x 3	1	02/B2	643.18
801-585*	8 x 8 x 6	2	02/B2	550.92

*Sized with Bushing



Slip x Slip



Slip x FPT



FPT x FPT



Slip x Slip x FPT

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
802-005	1/2	25	02/B2	15.53
802-007	3/4	25	02/B2	20.07
802-010	1	25	02/B2	23.49
802-012	1 1/4	10	02/B2	25.11
802-015	1 1/2	5	02/B2	29.49
802-020	2	5	02/B2	36.39



Slip x Slip

22 1/2° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
865-020	2	10	02/B2	34.43
865-030	3	5	02/B2	88.25

Note: Meets ASTM D-2467 socket and wall dimensions, but fitting pattern is not in D-2467. Working pressure rating of 150 p.s.i. Not NSF Standard 14 Listed.



Slip x Slip

30° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
815-060	6	8	02/B2	199.67



Slip x Slip

45° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
817-002	1/4	25	02/B2	12.45
817-003	3/8	50	02/B2	12.45
817-005	1/2	25	02/B2	6.55
817-007	3/4	25	02/B2	10.01
817-010	1	25	02/B2	15.00
817-012	1 1/4	10	02/B2	19.11
817-015	1 1/2	10	02/B2	22.60
817-020	2	10	02/B2	29.29
817-025	2 1/2	5	02/B2	61.49
817-030	3	5	02/B2	74.85
817-040	4	5	02/B2	134.80
817-060	6	4	02/B2	169.75
817-080	8	2	02/B2	368.03



Slip x Slip

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
829-002	1/4	25	02/B2	10.07
829-003	3/8	25	02/B2	10.07
829-005	1/2	25	02/B2	6.29
829-007	3/4	25	02/B2	8.52
829-010	1	25	02/B2	8.76
829-012	1 1/4	10	02/B2	13.34
829-015	1 1/2	10	02/B2	14.38
829-020	2	10	02/B2	15.44
829-025	2 1/2	5	02/B2	38.01
829-030	3	5	02/B2	43.65
829-040	4	5	02/B2	54.66
829-060	6	5	02/B2	117.64
829-080	8	4	02/B2	160.09



Slip x Slip

Reducer Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
829-101	3/4 x 1/2	20	02/B2	7.71
829-131	1 x 3/4	25	02/B2	11.23
829-168	1 1/4 x 1	10	02/B2	22.81
829-210	1 1/2 x 3/4	25	02/B2	23.87
829-211	1 1/2 x 1	10	02/B2	29.49
829-212	1 1/2 x 1 1/4	10	02/B2	29.49
829-251	2 x 1 1/2	5	02/B2	26.93
829-338	3 x 2	5	02/B2	66.14
829-422	4 x 3	5	02/B2	124.60
829-532	6 x 4	5	02/B2	254.14
829-585	8 x 6	2	02/B2	769.72



FPT x FPT

45° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
819-005	1/2	25	02/B2	12.92
819-007	3/4	20	02/B2	13.88
819-010	1	25	02/B2	17.43
819-012	1 1/4	15	02/B2	26.59
819-015	1 1/2	10	02/B2	33.43
819-020	2	5	02/B2	49.56
819-025	2 1/2	5	02/B2	98.06
819-030	3	5	02/B2	157.73
819-040	4	5	02/B2	226.34



FPT x FPT

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
830-002	1/4	25	02/B2	7.55
830-005	1/2	25	02/B2	7.03
830-007	3/4	25	02/B2	10.05
830-010	1	25	02/B2	10.78
830-012	1 1/4	10	02/B2	13.34
830-015	1 1/2	10	02/B2	29.68
830-020	2	10	02/B2	31.16
830-025	2 1/2	5	02/B2	74.38
830-030	3	5	02/B2	87.22
830-040	4	5	02/B2	151.03



Slip x Slip
x Slip x Slip

Cross				
Part No	Size (in)	Ctn Qty	Code	List Price
820-015	1 1/2	25	02/B2	85.67
820-020	2	4	02/B2	95.44
820-030	3	5	02/B2	162.32
820-040	4	3	02/B2	282.41



Slip x FPT

Female Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
835-002	1/4	50	02/B2	10.65
835-005	1/2	25	02/B2	5.89
835-007	3/4	25	02/B2	8.76
835-010	1	25	02/B2	12.91
835-012	1 1/4	10	02/B2	20.91
835-015	1 1/2	10	02/B2	25.63
835-020	2	10	02/B2	44.72
835-025	2 1/2	5	02/B2	70.60
835-030	3	5	02/B2	79.48
835-040	4	5	02/B2	136.60

Schedule 80

KEY:

FPT.....Female Pipe Thread SP.....Spigot
 MPT.....Male Pipe Thread BSP.....British Standard
 SLIP.....Solvent Cement Socket Pipe Thread



MPT x Slip

Male Adapter				
Part No	Size (in)	Ctn Qty	Code	List Price
836-005	1/2	25	02/B2	7.36
836-007	3/4	25	02/B2	8.12
836-010	1	25	02/B2	14.04
836-012	1 1/4	10	02/B2	16.42
836-015	1 1/2	10	02/B2	23.59
836-020	2	10	02/B2	34.12
836-025	2 1/2	5	02/B2	38.78
836-030	3	5	02/B2	43.04
836-040	4	5	02/B2	76.59



SP x Slip

Reducer Bushing (Flush Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
837-052	3/8 x 1/4	25	02/B2	5.56
837-072	1/2 x 1/4	25	02/B2	5.56
837-073	1/2 x 3/8	25	02/B2	5.56
837-101	3/4 x 1/2	25	02/B2	2.02
837-130	1 x 1/2	25	02/B2	5.81
837-131	1 x 3/4	25	02/B2	5.81
837-166	1 1/4 x 1/2	10	02/B2	9.12
837-167	1 1/4 x 3/4	10	02/B2	9.12
837-168	1 1/4 x 1	10	02/B2	9.12
837-209	1 1/2 x 1/2	10	02/B2	12.42
837-210	1 1/2 x 3/4	10	02/B2	12.42
837-211	1 1/2 x 1	10	02/B2	12.42
837-212	1 1/2 x 1 1/4	10	02/B2	12.42
837-247	2 x 1/2	10	02/B2	17.69
837-248	2 x 3/4	10	02/B2	17.69
837-249	2 x 1	10	02/B2	17.69
837-250	2 x 1 1/4	10	02/B2	17.69
837-251	2 x 1 1/2	10	02/B2	17.69
837-289	2 1/2 x 1	10	02/B2	30.72
837-290	2 1/2 x 1 1/4	10	02/B2	30.72
837-291	2 1/2 x 1 1/2	10	02/B2	30.72
837-292	2 1/2 x 2	10	02/B2	30.72
837-335	3 x 1	5	02/B2	48.75
837-336	3 x 1 1/4	5	02/B2	48.75
837-337	3 x 1 1/2	5	02/B2	48.75
837-338	3 x 2	5	02/B2	48.75
837-339	3 x 2 1/2	5	02/B2	48.75
837-420	4 x 2	5	02/B2	67.49
837-421	4 x 2 1/2	5	02/B2	67.49
837-422	4 x 3	5	02/B2	67.49
837-528	6 x 2	5	02/B2	93.85
837-530	6 x 3	5	02/B2	93.85
837-532	6 x 4	5	02/B2	93.85
837-585	8 x 6	5	02/B2	228.29




SP x FPT

Reducer Bushing (Flush Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
838-052	3/8 x 1/4	25	02/B2	5.56
838-072	1/2 x 1/4	25	02/B2	5.56
838-098	3/4 x 1/4	50	02/B2	3.67
838-101	3/4 x 1/2	25	02/B2	3.67
838-130	1 x 1/2	25	02/B2	5.81
838-131	1 x 3/4	25	02/B2	5.81
838-166	1 1/4 x 1/2	25	02/B2	11.79
838-167	1 1/4 x 3/4	10	02/B2	11.79
838-168	1 1/4 x 1	10	02/B2	11.79
838-209	1 1/2 x 1/2	10	02/B2	14.79
838-210	1 1/2 x 3/4	10	02/B2	14.79
838-211	1 1/2 x 1	10	02/B2	14.79
838-212	1 1/2 x 1 1/4	10	02/B2	14.79
838-247	2 x 1/2	10	02/B2	18.08
838-248	2 x 3/4	10	02/B2	18.08
838-249	2 x 1	10	02/B2	18.08
838-250	2 x 1 1/4	10	02/B2	18.08
838-251	2 x 1 1/2	10	02/B2	18.08
838-292	2 1/2 x 2	10	02/B2	38.27
838-338	3 x 2	5	02/B2	70.87
838-339	3 x 2 1/2	5	02/B2	70.87
838-420	4 x 2	5	02/B2	108.87
838-422	4 x 3	5	02/B2	108.87
838-532	6 x 4	5	02/B2	125.42



MPT x FPT

Reducer Bushing (Flush Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
839-052	3/8 x 1/4	25	02/B2	12.68
839-072	1/2 x 1/4	25	02/B2	12.68
839-073	1/2 x 3/8	25	02/B2	12.68
839-098	3/4 x 1/4	25	02/B2	9.45
839-099	3/4 x 3/8	25	02/B2	9.45
839-101	3/4 x 1/2	25	02/B2	7.79
839-128	1 x 1/4	25	02/B2	15.27
839-129	1 x 3/8	25	02/B2	12.20
839-130	1 x 1/2	25	02/B2	12.20
839-131	1 x 3/4	25	02/B2	12.20
839-166	1 1/4 x 1/2	10	02/B2	12.94
839-167	1 1/4 x 3/4	10	02/B2	12.94
839-168	1 1/4 x 1	10	02/B2	12.94
839-209	1 1/2 x 1/2	10	02/B2	15.34
839-210	1 1/2 x 3/4	10	02/B2	15.34
839-211	1 1/2 x 1	10	02/B2	15.34
839-212	1 1/2 x 1 1/4	10	02/B2	15.34
839-247	2 x 1/2	10	02/B2	22.47
839-248	2 x 3/4	10	02/B2	22.47
839-249	2 x 1	10	02/B2	22.47
839-250	2 x 1 1/4	10	02/B2	22.47
839-251	2 x 1 1/2	10	02/B2	22.47
839-292	2 1/2 x 2	5	02/B2	30.44
839-337	3 x 1 1/2	5	02/B2	41.34
839-338	3 x 2	5	02/B2	41.34
839-339	3 x 2 1/2	5	02/B2	41.34
839-420	4 x 2	5	02/B2	83.44
839-422	4 x 3	5	02/B2	108.87



MPT x BSP

Reducer Bushing (Flush Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
845-249	2 x 1	10	02/B2	22.97



Slip

Cap				
Part No	Size (in)	Ctn Qty	Code	List Price
847-002	1/4	25	02/B2	8.00
847-003	3/8	25	02/B2	8.00
847-005	1/2	25	02/B2	6.16
847-007	3/4	25	02/B2	6.49
847-010	1	25	02/B2	11.53
847-012	1 1/4	10	02/B2	13.92
847-015	1 1/2	10	02/B2	13.92
847-020	2	10	02/B2	27.48
847-025	2 1/2	5	02/B2	56.12
847-030	3	5	02/B2	65.66
847-040	4	5	02/B2	110.73
847-060	6	4	02/B2	275.45
847-080	8	4	02/B2	353.66



FPT

Cap				
Part No	Size (in)	Ctn Qty	Code	List Price
848-002	1/4	25	02/B2	7.71
848-003	3/8	25	02/B2	7.71
848-005	1/2	25	02/B2	7.71
848-007	3/4	25	02/B2	8.63
848-010	1	25	02/B2	10.87
848-012	1 1/4	10	02/B2	12.94
848-015	1 1/2	10	02/B2	14.79
848-020	2	10	02/B2	29.04
848-025	2 1/2	5	02/B2	58.09
848-030	3	5	02/B2	68.39
848-040	4	5	02/B2	120.43



SP

Plug				
Part No	Size (in)	Ctn Qty	Code	List Price
849-007	3/4	50	02/B2	6.41
849-010	1	50	02/B2	7.23
849-012	1 1/4	25	02/B2	9.23
849-015	1 1/2	10	02/B2	10.13
849-020	2	5	02/B2	13.40



MPT

Plug				
Part No	Size (in)	Ctn Qty	Code	List Price
850-002	1/4	25	02/B2	6.65
850-003	3/8	25	02/B2	6.65
850-005	1/2	25	02/B2	5.93
850-007	3/4	25	02/B2	6.16
850-010	1	25	02/B2	7.55
850-012	1 1/4	10	02/B2	11.13
850-015	1 1/2	10	02/B2	13.53
850-020	2	10	02/B2	13.88
850-025	2 1/2	5	02/B2	38.78
850-030	3	5	02/B2	45.25
850-040	4	5	02/B2	88.09



Slip

Flange (Solid Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
851-005	1/2	25	02/B2	19.06
851-007	3/4	25	02/B2	20.37
851-010	1	25	02/B2	22.68
851-012	1 1/4	10	02/B2	23.35
851-015	1 1/2	10	02/B2	23.87
851-020	2	10	02/B2	31.78
851-025	2 1/2	5	02/B2	49.05
851-030	3	5	02/B2	54.16
851-040	4	5	02/B2	68.59
851-060	6	5	02/B2	107.84

See NOTE under "Flange Installation Data"



FPT

Flange (Solid Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
852-005	1/2	25	02/B2	22.81
852-007	3/4	25	02/B2	26.73
852-010	1	25	02/B2	29.26
852-012	1 1/4	10	02/B2	40.35
852-015	1 1/2	10	02/B2	44.03
852-020	2	10	02/B2	45.03
852-025	2 1/2	5	02/B2	103.54
852-030	3	5	02/B2	106.57
852-040	4	5	02/B2	200.23

See NOTE under "Flange Installation Data"



Blind

Flange				
Part No	Size (in)	Ctn Qty	Code	List Price
853-005	1/2	5	02/B2	26.71
853-007	3/4	5	02/B2	31.83
853-010	1	5	02/B2	43.46
853-012	1 1/4	10	02/B2	53.35
853-015	1 1/2	5	02/B2	53.35
853-020	2	5	02/B2	79.72
853-025	2 1/2	5	02/B2	129.87
853-030	3	5	02/B2	156.72
853-040	4	5	02/B2	195.25
853-060	6	2	02/B2	237.25
853-080	8	2	02/B2	296.98

See NOTE under "Flange Installation Data"



Slip

Flange (Loose Ring)				
Part No	Size (in)	Ctn Qty	Code	List Price
854-005	1/2	5	02/B2	19.03
854-007	3/4	5	02/B2	20.36
854-010	1	5	02/B2	22.66
854-012	1 1/4	5	02/B2	23.34
854-015	1 1/2	5	02/B2	23.82
854-020	2	5	02/B2	31.73
854-025	2 1/2	5	02/B2	49.00
854-030FT	3	5	02/B2	54.14
854-040FT	4	5	02/B2	68.49
854-050FT	5	5	02/B2	107.75
854-060FT	6	5	02/B2	107.75
854-080FT	8	5	02/B2	175.45
854-100FT	10	2	02/B2	227.15
854-120FT	12	1	02/B2	244.91

FT Represents FiberTuff Ring.

See NOTE under "Flange Installation Data"

Schedule 80



SP

Flange (Loose Ring)				
Part No	Size (in)	Ctn Qty	Code	List Price
856-005	1/2	25	02/B2	19.14
856-007	3/4	25	02/B2	20.51
856-010	1	5	02/B2	22.86
856-012	1 1/4	10	02/B2	23.58
856-015	1 1/2	5	02/B2	24.04
856-020	2	5	02/B2	31.97
856-025	2 1/2	5	02/B2	49.41
856-030FT	3	5	02/B2	54.58
856-040FT	4	5	02/B2	69.06
856-050FT	5	5	02/B2	107.74
856-060FT	6	5	02/B2	108.62
856-080FT	8	5	02/B2	194.33
856-100FT	10	2	02/B2	227.15
856-120FT	12	2	02/B2	244.91

FT Represents FiberTuff Ring.

See NOTE under "Flange Installation Data"



Slip x Slip

Union (O-Ring Type)				
Part No	Size (in)	Ctn Qty	Code	List Price
897-002	1/4	25	02/B2	24.12
897-003	3/8	25	02/B2	24.12
897-005	1/2	10	02/B2	12.63
897-007	3/4	10	02/B2	16.40
897-010	1	10	02/B2	18.71
897-012	1 1/4	5	02/B2	37.17
897-015	1 1/2	5	02/B2	42.09
897-020	2	5	02/B2	57.05
897-030	3	5	02/B2	106.24
897-040	4	4	02/B2	136.43

Pressure rated at 235 p.s.i. at 73°F. Unions are listed as NSF 61.



MPT x MPT

Reducing TBE Nipple				
Part No	Size (in)	Ctn Qty	Code	List Price
882-101	3/4 x 1/2	50	09/B9	1.54

See Nipple Price List (discounts will vary)



FPT x FPT

Union (O-Ring Type)				
Part No	Size (in)	Ctn Qty	Code	List Price
898-005	1/2	10	02/B2	14.97
898-007	3/4	10	02/B2	20.98
898-010	1	10	02/B2	27.87
898-012	1 1/4	5	02/B2	53.19
898-015	1 1/2	5	02/B2	65.86
898-020	2	5	02/B2	101.33
898-030	3	5	02/B2	257.03
898-040	4	4	02/B2	302.04

Pressure rated at 235 p.s.i. at 73°F. Unions are listed as NSF 61.



Slip x Slip x Slip

WYE				
Part No	Size (in)	Ctn Qty	Code	List Price
875-020	2	10	02/B2	106.54
875-040	4	4	02/B2	471.52
875-060	6	4	02/B2	579.64
875-080	8	1	02/B2	1165.68



Slip x FPT

Union (O-Ring Type)				
Part No	Size (in)	Ctn Qty	Code	List Price
899-005	1/2	10	02/B2	15.72
899-007	3/4	10	02/B2	21.98
899-010	1	10	02/B2	29.23
899-012	1 1/4	5	02/B2	55.84
899-015	1 1/2	5	02/B2	69.12
899-020	2	5	02/B2	106.41

Pressure rated at 235 p.s.i. at 73°F. Unions are listed as NSF 61.



Slip x Slip x Slip

Reducing WYE				
Part No	Size (in)	Ctn Qty	Code	List Price
876-420*	4 x 4 x 2	4	02/B2	501.93
876-422*	4 x 4 x 3	4	02/B2	501.93
876-528*	6 x 6 x 2	5	02/B2	546.52
876-530*	6 x 6 x 3	5	02/B2	546.52
876-532	6 x 6 x 4	5	02/B2	441.77
876-578*	8 x 8 x 2	1	02/B2	1524.89
876-580*	8 x 8 x 3	1	02/B2	1524.89
876-582	8 x 8 x 4	1	02/B2	1165.68
876-585*	8 x 8 x 6	1	02/B2	1422.45

*Sized with Bushing.



Viton

Union O-Ring (Current Style)				
Part No	Size (in)	Ctn Qty	Code	List Price
80115	1/2	1	02/B2	2.60
80118	3/4	1	02/B2	2.88
80215	1	1	02/B2	3.53
80221	1 1/4	1	02/B2	6.06
80223	1 1/2	1	02/B2	6.67
80227	2	1	02/B2	6.67
80235	3	1	02/B2	15.16



Slip x MPT

Union (O-Ring Type)				
Part No	Size (in)	Ctn Qty	Code	List Price
896-005	1/2	10	02/B2	17.29
896-007	3/4	10	02/B2	18.27
896-010	1	10	02/B2	25.68
896-012	1 1/4	5	02/B2	49.85
896-015	1 1/2	5	02/B2	52.81
896-020	2	5	02/B2	64.59
896-030	3	5	02/B2	145.75
896-168	1 1/4 x 1	5	02/B2	67.98

Pressure rated at 235 p.s.i. at 73°F. Unions are listed as NSF 61.



Viton

Union O-Ring (Prior to 2004)				
Part No	Size (in)	Ctn Qty	Code	List Price
80213	1/2	1	02/B2	2.60
80216	3/4	1	02/B2	2.88
80222	1	1	02/B2	3.53
80225	1 1/4	1	02/B2	6.06
80227	1 1/2	1	02/B2	6.67
80231	2	1	02/B2	8.18
80240	3	1	02/B2	15.16

Schedule 80 Large Diameter

KEY:

FPT.....Female Pipe Thread SP.....Spigot
MPT.....Male Pipe Thread BSP.....British Standard
SLIP.....Solvent Cement Socket Pipe Thread



Slip x Slip x Slip

Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
801-100	10	1	92	1820.12
801-120	12	1	92	2570.52



Slip x Slip x Slip

Reducing Tee				
Part No	Size (in)	Ctn Qty	Code	List Price
801-623*	10 x 10 x 3	1	92	1695.82
801-624*	10 x 10 x 4	1	92	1695.82
801-626*	10 x 10 x 6	1	92	1601.72
801-628*	10 x 10 x 8	1	92	1885.01
801-666*	12 x 12 x 6	1	92	2900.78
801-668*	12 x 12 x 8	1	92	2382.88
801-670*	12 x 12 x 10	1	92	3191.00

**Sized with Bushing*



Slip x Slip

90° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
806-100	10	1	92	1742.38
806-120	12	1	92	2271.32



Slip x Slip

11 1/4° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
861-100	10	1	92	684.83
861-120	12	1	92	1002.53

FABRICATED FROM PIPE



Slip x Slip

22 1/2° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
865-100	10	1	92	684.83
865-120	12	1	92	1002.53

FABRICATED FROM PIPE



Slip x Slip

45° EII				
Part No	Size (in)	Ctn Qty	Code	List Price
817-100	10	1	92	1158.68
817-120	12	1	92	1494.62



Slip x Slip

Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
829-100	10	1	92	549.48
829-120	12	1	92	633.27



Slip x Slip

Reducer Coupling				
Part No	Size (in)	Ctn Qty	Code	List Price
829-619*	10 x 2	1	92	1028.06
829-623*	10 x 3	1	92	954.94
829-624*	10 x 4	1	92	901.12
829-626*	10 x 6	1	92	1038.53

**Sized with Bushing*



SP x Slip

Reducer Bushing				
Part No	Size (in)	Ctn Qty	Code	List Price
837-624*	10 x 4	1	92	635.65
837-626	10 x 6	1	92	536.33
837-628	10 X 8	1	92	536.33
837-666*	12 x 6	1	92	865.43
837-668	12 x 8	1	92	619.81
837-670	12 x 10	1	92	619.81

**Sized with Bushing*



Slip

Cap				
Part No	Size (in)	Ctn Qty	Code	List Price
847-100	10	1	92	361.78
847-120	12	1	92	542.94

Schedule 80

DO NOT USE MANUFACTURER'S FITTINGS FOR COMPRESSED AIR OR GASES.
DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.
DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY MANUFACTURER.
MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

STANDARDS AND SPECIFICATIONS – Schedule 80

- ASTM D-1784 – Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds.
- ASTM D-2464 – Threaded Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80.
- ASTM D-2467 – Socket Type Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80.
- ASTM F-1970 – Standard Specification for Special Engineered Fittings, Appurtenances or Valves for use in Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Systems.
- MATERIAL – LASCO Schedule 80 Fittings are produced from PVC Type 1, Cell Classification 12454- B. - O-Rings are produced from a fluorocarbon elastomer (VITON).
- LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of $\leq 0.25\%$ and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system Components and Related Materials. Includes /ANSI Standard 61, Annex G



7652 Morgan Road • Liverpool, New York 13090
(315) 451-1100 • (800) 776-2266 • Fax: (800) 729-3299



INDEX & REFERENCE DATA SECTION X



	PAGE
Index	1-4
Reference Data	5-10
Lead Law reference Symbols	5
Plastic pipe friction loss	6
Copper pipe friction loss	7
Steel pipe friction loss	7
Head and pressure equivalents	8
Discharge rate calculations	9
NEMA Control panel ratings	10



www.americangranby.com

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (800) 268-7570 Fax (905) 629-3204



A

Abrasive Cloth6.22
 Abrasive Wheels11.12
 ABS Well Cap1.71-72
 ABS Well Seals1.73
 Adhesives, Silicone7.8-10
 Adhesives7.8, 7.15, 8-Permatex
 Air Chargers & Kits1.33
 Air Purgers6.6
 Air Releases1.34
 Air Test GaugeP.13, 1.66
 Air Valves1.30
 Air Vents Float Type6.6
 Air Volume Controls1.33
 Air Volume Bushing1.33
 Alarms, Sump & Sewage5.8
 Aluminum Well Caps1.71
 Anchor Kits1.49, 10.46, 11.6, P.46
 Anchors, RopeP.4
 Automatic Flush Valve4.39

B

Backwash Valves1.82
 Ball Valves, CPVC
 Molded in PlaceP.20, 3.16
 Ball Valves, NL Brass3.1-4
 Ball Valves, PVC
 Molded in PlaceP.17-18, 3.14-15
 Ball Valves,
 PVC Single Union ... P.15-16, 3.17-18
 Ball Valves,
 PVC True Union3.19-20
 Ball Valves, Stainless3.3
 Basins & Covers,
 Sump & Sewage5.9
 Basins, Grates9.17-32
 Bathtub protector6.20
 Big Bubba Filters4.9-10
 Black Malleable Fittings12.35-50
 Black Steel Nipples12.53
 Black Steel
 Merchant Couplings12.29
 Blades for Pipe Cutters ... P.39, 11.1-3
 Bleeder Orifices1.36
 Blue Spray AdhesiveP.45, 7.15
 Bodies, Sprinkler10.1-10
 Boiler Drains, Brass3.9-11
 Bolt Kits3.26, P.30
 Braided PVC Hose ... P.33, 1.31, 6.11
 Brass Fittings for Tubing6.9-10
 Brass Nipples12.52
 Brass NL Check Valves2.1-4
 Brass NL Foot Valves2.5-6
 Bremer Check Valves2.9
 Bronze Elevated Tank Crosses ... 1.17
 Bronze NL Check Valves ... 2.1-4, 2.7-9
 Bronze NL Control Centers ... 2.3, 2.8-9
 Bronze NL Foot Valves2.5

Bronze NL Tank Crosses1.9-18
 Bronze Threaded Fittings ... 12.31-33
 Bronze Saddle Tees10.37
 Brushes, Pipe & Fitting6.22
 Bumpers, LadderP.52
 Butterfly ValvesP.27-29, 3.23-25
 Butterfly Valve Bolt Kits ... P.30, 3.26
 Butterfly Valve Installation KitsP.31, 3.27

C

Cable Guards1.35
 Cable Saws11.2, P.40
 Cable Ties1.36
 Caps, Drive1.82
 Caps, Well1.71-72
 Cast Iron Foot Valves2.16
 Cast Iron Well Caps1.71
 Cast Iron Well Seals1.74-77
 Catch Basins & Grates9.17-32
 Cartridges,
 Water Filtration4.5-7, 4.15-20
 Cements, PVC, ABS7.17-26
 Channel Drains9.33-38
 Check Valves,
 NL Brass, Bronze2.1-4, 2.7-9
 Check Valves, Plastic2.15
 Check Valves, PVCP.23-25, 9.7-13
 Check Valves, Ductile Iron2.12
 Check Valves, Sump & Sewage5.4-6, 9.9
 Chemical Reduction Filter
 Systems, Vu-Flow4.31-38
 Chemical Feed Pumps4.45-52
 Chrome Plated, Pool FittingsP.4
 Clamps, Pinch10.55
 Clamps, Worm Drive12.Loose
 Clamps, pipe6.25
 Clamps, repair6.3
 Cleaners, PVC Pipe7.26
 Cleaners8-Permatex
 Clear TubingP.36, 6.8
 Clips, Copper Tube6.24
 Closet Flanges, Gaskets6.18
 Cloth, Abrasive6.22
 Cluster Filters4.25-28
 Coatings8-Permatex
 Commercial Wall Hydrant ... 3.28-30
 Compression Ftgs ... 6.1, 9.1-5, 12.19
 Compression Fittings, Galv ... 12.20
 Compression Splice Kits1.48
 Concrete RepairP.49, 7.13
 Connectors, Electrical, 3M ... 10.43-45
 Control Center Check Valves 2.3, 2.8-9
 Controllers, Sprinkler10.20-24
 Controls, Shallow Well1.34
 Coring Tools10.37
 Corrugated Fittings12.27-28
 Couplings, Compression,
 PVC, CPVC6.1, 9.1-5, 12.19
 Couplings, Drop Pipe1.43
 Couplings, Drive1.82
 Couplings, Flexible & no-hub 6.4, 12.22
 Couplings, Polystretch10.53
 Couplings, Turned1.82
 Cover PumpP.64
 Covers, Sump Basin5.9
 CPVC 3-way valveP.16
 CPVC Ball ValvesP.20, 3.16
 CPVC Compression Ftg9.3-4
 CPVC Fittings12.17-18
 CPVC Nipples12.51
 Crosses, Tank1.9-14, 1.19-22
 Crimp Rings/Tools6A.5
 Cup Leathers1.91-97
 Cutoff Nipples10.33
 Cutting Tools, Pipe ... P.39-42, 11.1-3
 Cylinders1.87-89
 Cylinder Replacement Parts ... 1.90

Couplings, Compression,
 PVC, CPVC6.1, 9.1-5, 12.19
 Couplings, Drop Pipe1.43
 Couplings, Drive1.82
 Couplings, Flexible & no-hub 6.4, 12.22
 Couplings, Polystretch10.53
 Couplings, Turned1.82
 Cover PumpP.64
 Covers, Sump Basin5.9
 CPVC 3-way valveP.16
 CPVC Ball ValvesP.20, 3.16
 CPVC Compression Ftg9.3-4
 CPVC Fittings12.17-18
 CPVC Nipples12.51
 Crosses, Tank1.9-14, 1.19-22
 Crimp Rings/Tools6A.5
 Cup Leathers1.91-97
 Cutoff Nipples10.33
 Cutting Tools, Pipe ... P.39-42, 11.1-3
 Cylinders1.87-89
 Cylinder Replacement Parts ... 1.90

D

Daubers7.26
 Deep Well Air Releases1.34
 Direct Bury Splice Kits10.43
 Discharge Kit, Sump Pump5.3
 Diverter Valve9.12
 Dole Valves1.45-46
 Drain Gate12.26
 Drain & Wire Ftg1.70
 Drainage Emitter9.32
 Drains, Irrigation9.33-38
 Drains, Grates9.19-28
 Drains, Shower/Floor6.17
 Drill Bits11.12
 Drive Caps & Couplings1.82
 Drive Points1.79-81
 Drive Shoes1.83
 Drop Pipe Couplings1.43
 Duct TapeP.45, 7.5

E

Ejector Screens1.36
 Electrical Connectors1.47
 Electrical Tapes7.3-7.4
 Electrodes1.57
 Electronic Metering Pumps ... 4.45-52
 Electronic Solenoid Valves10.17-19, 10.31
 Epoxy, IndustrialP.45
 Equipment Pads1.3, P.51
 Expanding Foam Sealant ... 7.7, P.44
 Expansion tanks6.5

F

Fast Orange Hand
 Cleaners8-Permatex





- Feed Pumps4.45-52
 FHA Plates6.35
 Firestop7.11
 Filter Cartridges
4.5-7, 4.15-21, 4.29-30
 Filter Housings ... 4.1, 4.3, 4.9, 4.13-14
 Filter Kits 4.1, 4.3, 4.22
 Filter, RV/Marine 4.4
 Filters, Vu-Flow 4.31-38
 Firestopping Sealant7.11
 Fittings, Compression, Galv12.20
 Fittings, Corrugated12.27-28
 Fittings, CPVC12.17-18
 Fittings, Funny Pipe, Marlex10.41
 Fittings, Hose thread10.35
 Fittings, Irrigation10.32-35, 10.41
 Fittings, Malleable Iron12.35-49
 Fittings, NL Cast Bronze12.5-6
 Fittings, Pool RopeP.4
 Fittings, Pool, PlasticP.6
 Fittings, Push Connect 6A.17-18, 12.1-2
 Fittings, PVC, Sch 4012.Loose
 Fittings, PVC, Sch 8012.Loose
 Fittings, Red Brass12.13-14
 Fittings, Repair10.53-54
 Fittings, Steel Insert12.7-8
 Fittings, Stainless Steel12.9-10
 Fittings, Sewer & Drain12.23-25
 Fittings, Swing Riser10.41
 Fittings, Threaded Bronze12.31-33
 Fittings, TubingP.37-38, 6.9-10
 Fittings, Yellow Brass12.11
 Fittings Packages for
 Tank Installation ... 1.15-18, 1.23-27
 Fix A LeakP.45
 Flashings, Roof6.21
 Flanges, PVC3.26
 Flexible Couplings6.4
 Float Switches, Sump & Sewage . 5.7-8
 Float ValvesP.26, 3.6, 10.36
 Float Vents6.6
 Floats, PoolP.1
 Floor Drains6.17
 Flometers4.49, P.14
 Flow Control Valves1.45
 FloWell Systems9.15-16
 Flush Valves4.49
 Foam Sealant7.7, P.44
 Foot Valves2.5-6, 2.10
 Foot Valves, Cast Iron2.16
 Foot Valves, Plastic2.15
 Frost Proof Sill Cocks3.12
 Frost Proof Yard Hydrant2.17-20
 Funny Pipe10.42
 Funny Pipe Fittings10.41
- G**
 Galvanized Compression
 Couplings6.2
- Galvanized Drive Coupling1.82
 Galvanized
 Malleable Fittings12.35-49
 Galvanized Steel Nipples12.54
 Galvanized Tank Crosses ... 1.13, 1.18
 Garbage Disposal Kits6.13
 Garden Valves, Bent Nose ... 3.10-12
 Gas Ball Valves3.5
 Gas Test Gauges1.66, P.14
 Gasket, RubberP.30, 3.26
 Gasketing8-Permatex
 Gate Valves, Brass3.7
 Gate Valves, PVC Slice
P.21-22, 3.21-22
 Gauges1.59-66, P.7-14
 Gauge Snubber1.65, P.13
 Gauges, Test1.65-66
 Geothermal Leak Seal1.42
 Glide Clips6.24
 Gloves11.5
 Grates & Basins9.19-30
 Ground Source Elbow1.42
- H**
 Hacksaw/Handsaw11.4, 11.10
 Hand Cleaners7.16, 8-Permatex
 Hand Towels7.16
 Hand Pumps1.82
 Handi-Lock FloatsP.1
 Hanger Accessories6.32
 Hanger Strapping6.23
 Hangers, Swivel & Split6.29-31
 Hangers, Strap & Tube6.33-34
 Harmsco™ Filters4.25-30
 Heat Shrink Kits1.47
 Heater Relief ValveP.47
 Hole Saws11.12
 Hooks, Tube & Pipe6.27-28
 Hooks, Pool RopeP.4
 Hose Bibbs3.9-13
 Hose, Clear Braided ... 1.31, 6.13, P.33
 Hose thread fittings10.35
 Housings, Water Filtration
4.1, 4.3, 4.9, 4.13-14
 Hubs5.9
 Hurricane Filters4.28
 Hydrant Elbows2.17
 Hydrants, Wall3.28-30
 Hydrants, Yard2.17-20
- I**
 Ice Maker Filters4.4, 4.21
 Ideal Clamps12.Loose
 Indexing Valves10.29-30
 Insert Adapters, Submersible .1.37-10
 Insert Fittings, NL Cast Bronze .12.4-6
 Insert Fittings, Nylon12.3
 Insert Fittings, PEX6A.13-18
- Insert Fittings, PVC12.Loose
 Insert Fittings, Red Brass12.13-14
 Insert Fittings, Stainless12.9-10
 Insert Fittings, Steel12.7-8
 Insert Fittings, Yellow Brass12.11
 Irrigation Adapters10.32, 10.34
 Installation Packages
 for Tanks1.15-19, 1.23-27
 Insulated connectors10.43
 IronOut Rust Remover4.22, 6.14
 Irrigation Basins/Grates9.19-30
 Irrigation Manifold Tees10.32
 Irrigation Valve Boxes10.49-51
 Iron Check Valve2.12
- J-K**
 Jet-Lube1.99-104
 Kits, Pool TestP.13
 Kits, Rope & FloatP.2
 Kits, Sump Pump Discharge5.3
 Kits, Water Filtration ... 4.1, 4.3, 4.22
 Knives, Utility11.10
 Kop Kits4.46, 4.48
- L**
 Ladder BumpersP.52
 Laundry Tray Systems5.10
 Leaching Systems9.15-16
 Leathers1.91-98
 Liquid Filled Gauges .1.63-64, P.11-12
 Lightning Arrestor1.48
 Liquid Level Controls1.57
 Lo-Voc Cements7.17-26
 Lubricants8-Permatex
 Lubricants, Boss7.8, P.43
 Lubricants, SuperLube8.1-5
- M**
 Magnetic Connectors1.55-56
 Malleable Iron Fittings12.35-49
 Manifold, Constant Pressure ... 1.4-5
 Manifold Kits1.6-8
 Manifold Ftgs, Irrigation ... 10.32-34
 Marine Filter4.4
 Master BlasterP.52
 Merchant Couplings12.29
 Mini Trol6.6
 Motor CoverP.52
 Mounting Brackets1.4
- N-O**
 Nipple Extractors10.33, 11.7
 Nipples, Brass12.52
 Nipples, Cutoff10.33
 Nipples, Poly10.33
 Nipples, PVC/CPVC12.52
 Nipples, Stainless Steel12.52



Nipples, Steel12.53-54
 No-Hub Couplings6.4
 Nozzles, Sprinkler10.11-16
 Nut Drivers10.37, 11.9
 Oxygen Barrier Tubing6A.2, 6A.4

P

Packing Rings1.98
 Perforated Hanger Strapping6.23
 Peristaltic Pump4.48
 PEX/PE-RT Tubing6A.1-4
 PEX Fittings6A.13-18
 PEX Installation Accy6A.5-6
 PEX Valves6A.9-10
 Pinch Clamps10.55
 Pipe Brushes6.22
 Pipe Cutters & Blades11.1-3, P.39-42
 Pipe ExtendersP.48
 Pipe Hooks6.27-28
 Pipe Joint Compound7.17
 Pipe, Poly swing10.42
 Pipe Repair Clamps6.3, 12.21
 Pipe Repair FittingP.48
 Pipe Straps6.25-26
 Pitcher Pumps & Parts1.68
 Pitless Adapters1.67-69
 Plastic Foot Valves2.15
 Plastic Saddle Tees10.37-40
 Plastic Winterizing PlugsP.61
 Pliers11.9
 Plugs, WinterizingP.61-62
 Plumbing Tools/Wrenches11.9
 Points, Well1.79-81
 Poly Nipples10.33
 Poly Swing Pipe10.42
 Polyethylene Tubing6.7, P.35
 Polypropylene Pool RopeP.3
 Pool Cover PumpP.64
 Pool FittingsP.6
 Pool FloatsP.1
 Pool Plug WrenchP.52
 Pool Rope & Float KitsP.2
 Pool RopeP.3
 Pool Service ToolsP.53-60
 Pool Test KitsP.13
 Power CordsP.46, 1.49, 6.13, 10.46
 Pressure Gauges1.59-66, P.7-12
 Pressure Regulator Valves2.12
 Pressure Switches1.51-53
 Pressure Test GaugeP.13, 1.65
 Primers, PVC Pipe7.25-26
 PTFE Tape7.1-7.2
 Pulling Tools11.10
 Pulsatron Pumps4.47-48
 Pump Rope, Submersible1.36
 Pump Guides, Submersible1.35
 Pump Installation Ftgs1.37-41
 Pump Lights1.48
 Pump Mounting Brackets1.30

Pump Pads1.3, P.51
 Pump Start Relays
1.55-56, 10.25, 10.47-48
 Pump Tank
 Installation Packages1.19-27
 Pump Tanks1.1-2
 Pumps, Chemical Feed4.45-52
 Pumps, Electronic Metering4.45-52
 Pumps, Pitcher/Hand1.85
 Pumps, Pool CoverP.64
 Pumps, Sewage5.2
 Pumps, Sump5.1-2
 Pumps, UtilityP.64 5.1, 10.56
 Push Connect Fittings6A.17-18, 12.1-2
 PVC Ball Valves,
 Molded in PlaceP.17-19, 3.14-16
 PVC Ball Valves,
 Single UnionP.15-16, 3.17-18
 PVC Ball Valves, True Union3.19-20
 PVC Butterfly ValvesP.27-29, 3.23-25
 PVC Cements & Primers7.17-26
 PVC Check Valves 2.15, P.23-25, 9.7-13
 PVC Compression Fittings6.1, 9.1-5
 PVC Drop Pipe Coupling1.43
 PVC Insert Fittings12.Loose
 PVC Hose6.11
 PVC Nipples12.51
 PVC Pipe Cutters11.1-3, P.39-42
 PVC Saddle Tees10.37-40
 PVC Sch 40 Fittings12.Loose
 PVC Sch 80 Fittings12.Loose
 PVC Slice Gate ValvesP.21-22, 3.21-22
 PVC Sewer & Drain Fittings12.23-25
 PVC Swing Check Valves9.10
 PVC UnionsP.5, 12.15-16

R

Radiant Installation Accy6A.11-12
 Radiant Tubing6A.2, 6A.4
 Rain Sensor10.27
 Reciprocating Saw Blades11.12
 Red Brass Saddle Tees10.37
 Reducing Cutoff Nipples10.33
 Relief Valves1.29
 Repair Kits,
 Air Volume Controls1.33
 Repair Clamp6.3
 Repair FittingsP.48, 10.53-54
 Replacement Partssee specific item
 Reverse Osmosis Systems4.11
 Riser Extensions10.33
 Rigid Saddle Tees10.39-40
 RO Systems4.11
 Rod Couplings1.86
 Roof Flashings6.21
 Rope Adapters, Submersible1.38
 Rope and Float KitsP.2
 Rope, PoolP.3
 Rope, Submersible1.36

Rotors, Sprinkler10.1-8
 RV Filter4.4
 Rubber Winterizing PlugsP.61-62
 Rust Remover4.24, 6.14

S

Saddle Tapping Valve4.24, 6.14
 Saddle Tee
 Hole Cutting Tool10.37
 Saddle Tees10.37-40
 Safety Relief ValveP.47
 Sand Separators, Vu-Flow4.31-38
 Saw Blades11.12
 Sch 40 Insert Fittings12.Loose
 Sch 80 Insert Fittings12.Loose
 Screwdrivers11.9
 Scrubs Hand Towels7.16
 Sealant, Foam7.7, P.44
 Sealant, Silicone7.8-10
 Sediment Cartridges4.5-7, 4.15-21
 Service Tools, PoolP.53-60
 Sewage Pumps5.2
 Sewage Pump Packages5.10
 Sewage Basins & Covers5.9
 Sewer & Drain Fittings12.23-25
 Shallow Well Controls1.34
 Shower Drains6.17
 Shower Pan Liner6.20
 Silicone7.8-10, P.43
 Sill Cocks3.10, 3.12
 Sink Faucets, Plastic3.13
 Single Union Ball Valves,
 PVCP.15-16, 3.17-18
 Siphon Drains10.34
 Slice Gate Valve, PVC3.21-22, P.21-22
 Snap-On Pitless Adapters1.69
 Snifter Valves1.30
 Snips11.10
 Snubber1.65, P.13
 Solvent Cements7.17-26
 Solenoid Valves10.17-19, 10.31
 Splice Kits, Compression1.47
 Splice Kits, Direct Bury10.43
 Splice Kits, Heat Shrink1.47
 Spray Adhesive7.15
 Sprinkler Controllers10.20-24
 Sprinkler Systems10.1-16
 Square D Pressure Switches1.53
 Stainless Ejector Screen1.36
 Stainless Electrode1.57
 Stainless Steel Insert Fittings12.9-10
 Stainless Steel Nipples12.52
 Steel Insert Fittings12.7-8
 Steel Nipples12.53-54
 Strap Hangers6.33-34
 Strap Wrench6.1, 11.7
 Stud Protectors6.35
 Styrene FloatsP.1
 Suction Strainers2.13, 2.16





Submersible Pump Guides1.35
 Submersible Rope1.36
 Submersible Rope Adapters1.38
 Sump Alarms5.8
 Sump Basins5.9
 Sump & Sewage Check Valves
5.4-6, 9.9
 Sump Pump Discharge Kits5.3
 Sump Pump Switches/Floats5.7-8
 Sump Pumps5.1-2
 Super Lube8.1-5
 Swing Check Valves, Brass3.8
 Swing Check Valves, PVC5.4, 9.10
 Swing Joint Assemblies10.42
 Swing Riser Fittings10.41
 Switches, Float5.7-8
 Switches, Pressure1.51-53
 Swivel Fittings9.31
 System Manifolds1.4-5

T

Tank Crosses/Tees1.9-14, 9.19-22
 Tank Installation Packages
1.15-18, 1.23-27
 Tank Legs1.30, 12.53
 Tanks, Pump1.1-2
 Tanks, Thermal Expansion6.5
 Tape Measures11.11
 Tapes, DuctP.47, 7.5
 Tapes, Electrical7.3-4
 Tapes, PTFE Thread Seal7.1-2
 Tees, Manifold, Irrigation10.32
 Tees, Saddle10.37-40
 Tees, Tank1.9-13, 1.19-22
 Test Gauge1.65-66, P.13
 Test Kits, PoolP.13
 Test Plugs6.19
 Thermal Expansion Tanks6.5
 Thread Sealants8-Permatex
 Thread Seal PTFE Tapes7.1-2
 Threaded Bronze Fittings12.31-33
 Threaded Rod6.30
 Threadlockers8-Permatex
 Three-way Pool & Spa ValveP.16
 Tools, Saddle Tees10.37
 Tools, Plumbing11.8
 Tools, Pool ServiceP.53-60
 Torque Arrestors1.35
 Tube Hangers6.33
 Transition Fittings10.41
 Trap Wrap™6.15
 True Union Ball Vlv, PVC3.19-20
 True Union Check Valves9.8
 Tub Box, Tub Protector6.20
 Tubes & PillowsP.63
 Tube & Pipe Hooks6.27-28
 Tubing Cutters1.1.1-3, P.39-40
 Tubing, Fittings6.9-10, P.37-38
 Tubing, PEX/PE-RT6A.1-4

Tubing, PolyethyleneP.35, 6.7
 Tubing, VinylP.36, 6.8
 Turned Couplings1.44, 1.82

U

Union Tank Cross1.9-12, 1.16
 Union Male Adapter1.38
 Unions, Malleables12.41, 12.49
 Unions, PVCP.5, 9.12, 12.15
 Urinal Flanges6.18
 Utility Knives11.10
 Utility PumpsP.64, 5.1
 U/V Systems4.41-44

V

Vacuum Breakers2.17, 3.10-12
 Vacuum Gauges1.59-64
 Valve Boxes10.49-51
 Valve Leathers1.98
 Valve Locator10.45
 Valves, 3-Way Pool & SpaP.16
 Valves, 4 N 1 Foot2.15
 Valves, Automatic Flush4.39
 Valves, Backwash1.82
 Valves, Ball, NL Brass3.1-2
 Valves, Bent Nose Garden ...3.10, 3.12
 Valves, Boiler Drain, NL Brass ...3.9-11
 Valves, Boiler Drain, Plastic3.13
 Valves, ButterflyP.27-29, 3.23-25
 Valves, Check
2.1-4, 2.7-9, 2.11-12, 2.15
 Valves, Check, PVCP.23-25, 9.7-13
 Valves, CPVC3.13
 Valves, CPVC
 Molded in PlaceP.17-19, 3.16
 Valves, Diverter9.12
 Valves, FloatP.26, 3.6, 10.36
 Valves, Flow Control1.45
 Valves, Foot .2.5-6, 2.10, 2.13, 2.15-16
 Valves, Gas Ball3.5
 Valves, Gate3.7
 Valves, Hose Bibbs, NL Brass ...3.9-11
 Valves, Hose Bibb, Plastic3.13
 Valves, PEX6A.9-10
 Valves, Pressure Regulator2.12
 Valves, PVC Ball,
 Molded in Place ...P.17-19, 3.14-15
 Valves, PVC Single Union3-17-18
 Valves, Relief1.29
 Valves, Saddle Tapping6.14
 Valves, Sill Cocks3.10-12
 Valves, Single Union BallP.15-16
 Valves, Slice Gate ...3.21-22, P.21-22
 Valves, Solenoid10.17-19, 10.31
 Valves, Stop, Plastic3.13
 Valves, Sump Pump Check5.4-6
 Valves, Swing Check, Brass3.8
 Valves, Swing Check, PVC9.10

Valves, True Union Ball3.19-20
 Valves, True Union Check9.8
 Van Hangers6.24
 Van Stone Flanges3.26
 Vent Pipe & Seals1.78
 Vinyl TubingP.36, 6.8
 Vu-Flow4.31-38

W

Wall Hydrants3.28-30
 Washer Boxes6.17
 Water Hammer Arrestors6.6
 Water Heater Pan6.20
 Water Level Gauge1.65
 Water Tubes, PillowsP.63
 Wax Closet Gaskets6.20
 Well Caps, Aluminum1.72
 Well Caps, Cast Iron1.71
 Well Points1.79-82
 Well Seals, ABS1.73
 Well Seals, Cast Iron1.74-77
 Well Seals Vent Pipe & Seal1.78
 Winterizing AccyP.63
 Winterizing PlugsP.61-62
 Wipes7.16
 Wire Connectors1.47
 Wire Cutter/Crimper/Stripper
1.50, 11.7
 Wire Spud1.70
 Work Gloves11.5
 Wrenches9.6, 11.8-9

X-Y-Z


Yard Hydrants2.17-20
 Yellow Brass Insert Ftgs12.11



The following pages provide reference data for general applications.

Lead Law symbols.....	11.5
Weight of water and pipe	11.6
Plastic Pipe Friction Loss.....	11.6
Copper Pipe Friction Loss.....	11.7
Steel Pipe Friction Loss	11.7
Head and Pressure Equivalents.....	11.8
Discharge Rate Calculations	11.9
NEMA Control Panel Ratings.....	11.10

The following four symbols appear in the AGI catalog to reference the lead free status of any AGI product.



The **UPC/IAPMO R&T** Low Lead symbol indicates products that AGI or our supplier has had certified by IAPMO to NSF/ANSI 372 standards and can be sold in California as well as the rest of the U.S.



The **No Lead/<0.25% weighted avg./NSF/ANSI 372** symbol indicates a product that has been NSF/ANSI 372 certified by another testing agency (other than IAPMO) and can be sold in California as well as the rest of the U.S.



The **No Lead/<0.25% Pb weighted average** symbol indicates a product that meets the new Federal lead standards but has not been certified by a third party and can be sold in all states except California and Louisiana (2013).



The **No Lead/Lead Free** symbol indicates a product not made from brass or bronze and does not contain lead that can be sold in all states except California and Louisiana (2013).

Reference Data



Weight of Water and Pipe (per foot)

Pipe Size	Pipe Type	Pipe ID	Water Weight	Pipe Weight	Total Weight
1"	125 PSI Polyethylene	1.04"	0.38 lbs.	0.20 lbs.	0.58 lbs.
1 1/4"	125 PSI Polyethylene	1.38"	0.65 lbs.	0.33 lbs.	0.98 lbs.
1"	160 PSI Polyethylene	1.049"	0.38 lbs.	0.26 lbs.	0.64 lbs.
1 1/4"	160 PSI Polyethylene	1.38"	0.65 lbs.	0.43 lbs.	1.08 lbs.
1"	Sch 80 PVC	0.957"	0.31 lbs.	0.40 lbs.	0.71 lbs.
1 1/4"	Sch 80 PVC	1.278"	0.56 lbs.	0.55 lbs.	1.11 lbs.
1 1/2"	Sch 80 PVC	1.5"	0.77 lbs.	0.66 lbs.	1.43 lbs.
2"	Sch 80 PVC	1.939"	1.28 lbs.	0.92 lbs.	2.20 lbs.
1"	Steel	1.049"	0.38 lbs.	1.68 lbs.	2.06 lbs.
1 1/4"	Steel	1.38"	0.65 lbs.	2.28 lbs.	2.93 lbs.
1 1/2"	Steel	1.61"	0.88 lbs.	2.73 lbs.	3.61 lbs.
2"	Steel	2.067"	1.45 lbs.	3.68 lbs.	5.13 lbs.

PLASTIC PIPE: FRICTION LOSS (IN FEET OF HEAD) PER 100 Ft.

GPM	GPH	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
1	60	4.25	1.39	.356	.11							
2	120	15.13	4.83	1.21	.38	.10						
3	180	31.97	9.96	2.51	.77	.21	.10					
4	240	54.97	17.07	4.21	1.30	.35	.16					
5	300	84.41	25.76	6.33	1.92	.51	.24					
6	360		36.34	8.83	2.69	.71	.33	.10				
8	480		63.71	15.18	4.58	1.19	.55	.17				
10	600		97.52	25.98	6.88	1.78	.83	.25	.11			
15	900			49.68	14.63	3.75	1.74	.52	.22			
20	1200			86.94	25.07	6.39	2.94	.86	.36	.13		
25	1500				38.41	9.71	4.44	1.29	.54	.19		
30	1800					13.62	6.26	1.81	.75	.26		
35	2100					18.17	8.37	2.42	1.00	.35	.09	
40	2400					23.55	10.70	3.11	1.28	.44	.12	
45	2700					29.44	13.46	3.84	1.54	.55	.15	
50	3000						16.45	4.67	1.93	.66	.17	
60	3600						23.48	6.60	2.71	.93	.25	
70	4200							8.83	3.66	1.24	.33	
80	4800							11.43	4.67	1.58	.41	
90	5400							14.26	5.82	1.98	.52	
100	6000								7.11	2.42	.63	.08
125	7500								10.83	3.80	.95	.13
150	9000									5.15	1.33	.18
175	10500									6.90	1.78	.23
200	12000									8.90	2.27	.30



COPPER PIPE: FRICTION LOSS (IN FEET OF HEAD) PER 100 Ft.												
GPM	GPH	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
1	60	6.2	1.8	.39								
2	120	19.6	6.0	1.2								
5	300		30.0	5.8	1.6							
7	420		53.00	11.0	3.2	2.2						
10	600			19.6	5.3	3.9						
15	900			37.0	9.9	6.2	2.1					
18	1080			55.4	16.1	6.9	3.2					
20	1200				18.5	10.4	3.9					
25	1500				27.7	14.3	5.3	1.5				
30	1800				39.3	18.7	7.6	2.1				
35	2100				48.5	25.4	10.2	2.8				
40	2400					30.0	13.2	3.5	1.2			
45	2700					39.3	16.2	4.2	1.6			
50	3000						19.4	5.1	1.8			
60	3600						27.7	6.9	2.5	1.1		
70	4200						40.0	9.2	3.5	1.4		
75	4500						41.6	9.9	3.7	1.6		
80	4800						45.0	11.6	4.2	1.8		
90	5400						50.8	13.9	4.8	2.2		
100	6000							16.9	6.2	2.8		
125	7500							25.4	8.6	3.7		
150	9000							32.3	11.6	4.8	1.2	
175	10500							41.6	16.2	6.9	1.7	
200	12000							57.8	20.8	9.0	2.1	

STEEL PIPE: FRICTION LOSS (IN FEET OF HEAD) PER 100 Ft.												
GPM	GPH	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
1	60	.3	1.86	.26								
2	120	15.00	4.78	1.21	.38							
3	180	31.80	10.00	2.50	.77							
4	240	54.90	17.10	4.21	1.30	.34						
5	300	83.50	25.80	6.32	1.93	.51	.24					
6	360		36.50	8.87	2.68	.70	.33	.10				
7	420		48.70	11.80	3.56	.93	.44	.13				
8	480		62.70	15.00	4.54	1.18	.56	.17				
9	540			18.80	5.65	1.46	.69	.21				
10	600			23.00	6.86	1.77	.83	.25	.11	.04		
12	720			32.60	9.62	2.48	1.16	.34	.15	.05		
15	900			49.70	14.70	3.74	1.75	.52	.22	.08		
20	1200			86.10	25.10	6.34	2.94	.87	.36	.13		
25	1500				38.60	9.65	4.48	1.30	.54	.19		
30	1800				54.60	13.60	6.26	1.82	.75	.26		
35	2100				73.40	18.20	8.37	2.42	1.00	.35		
40	2400				95.00	23.50	10.79	3.10	1.28	.44		
45	2700					30.70	13.45	3.85	1.60	.55		
70	4200					68.80	31.30	8.86	3.63	1.22	.35	
100	6000						62.20	17.40	7.11	2.39	.63	
150	9000							38.00	15.40	5.14	1.32	
200	1200							66.30	26.70	8.90	2.27	.736



Reference Data



HEAD AND PRESSURE EQUIVALENTS

Feet Head of Water and Equivalent Pressures		Pressure and Equivalent Feet Head of Water	
Feet Head	PSI	PSI	Feed Head
1	.43	1	2.31
2	.87	2	4.62
3	1.30	3	6.93
4	1.73	4	9.24
5	2.17	5	11.54
6	2.60	6	13.85
7	3.03	7	16.16
8	3.46	8	18.47
9	3.90	9	20.78
10	4.33	10	23.09
20	8.66	15	34.63
30	12.99	20	46.18
40	17.32	25	57.72
50	21.65	30	69.27
60	25.99	40	92.36
70	30.32	50	115.45
80	34.65	60	138.54
90	38.96	70	161.63
100	43.31	80	184.72
110	47.64	90	207.81
120	51.97	100	230.90
130	56.30	110	253.98
140	60.63	120	277.07
150	64.96	125	288.62
160	69.29	130	300.16
170	73.63	140	323.25
180	77.96	150	346.34
190	82.29	160	369.43
200	86.62	170	392.52
225	97.45	180	415.61
250	108.27	190	438.90
275	119.10	200	461.78
300	129.93	225	519.51
325	140.75	250	577.24
350	151.58	275	643.03
400	173.24	300	692.69
500	216.55	325	750.41
600	259.85	350	808.13


To change head in feet to pressure in pounds, multiply by .434
 To change pressure in pounds to head in feet, multiply by 2.3



CALCULATION OF DISCHARGE RATE USING HORIZONTAL OPEN DISCHARGE FORMULA

FULL PIPE FLOW -

An L-shaped measuring square can be used to estimate flow capacity, using the chart below. As shown in illustration, place 4" side of square so that it hangs down and touches the water. The horizontal distance shown "A" is located in the first column of the chart and you read across to the pipe diameter (ID) to find the gallons per minute discharge rate.



DISCHARGE RATES IN GPM - NOMINAL PIPE SIZE (ID)												
Horizontal Discharge	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
4	5.7	9.8	13.3	22.0	31.3	48.5	83.5					
5	7.1	12.2	16.6	27.5	39.0	61.0	104	163				
6	8.5	14.7	20.0	33.0	47.0	73.0	125	195	285			
7	10.0	17.1	23.2	38.5	55	85	146	228	334	380		
8	11.3	19.6	26.5	44.0	62.5	97.5	166	260	380	665	1060	
9	12.8	22.0	29.8	49.5	70.0	110	187	293	430	750	1190	1160
10	14.2	24.5	33.2	55.5	78.2	122	208	326	476	830	1130	1850
11	15.6	27.0	36.5	60.5	86.0	134	229	360	525	915	1460	2100
12	17.0	29.0	40.0	66.0	94.0	146	250	390	570	1000	1600	2220
13	18.5	31.5	43.0	71.5	102	158	270	425	620	1080	1730	2400
14	20.0	34.0	46.5	77.0	109	170	292	456	670	1160	1860	2590
15	21.3	36.3	50.0	82.5	117	183	312	490	710	1250	2000	2780
16	22.7	39.0	53.0	88.0	125	196	334	520	760	1330	2120	2960
17		41.5	56.5	93.0	133	207	355	550	810	1410	2260	3140
18			60.0	99.0	144	220	375	590	860	1500	2390	3330
19				110	148	232	395	620	910	1580	2520	3500
20					156	244	415	650	950	1660	2660	3700



NEMA CONTROL PANEL RATINGS

Rating	Desc	Explanation
NEMA 1	General Purpose	To prevent accidental contact with enclosed apparatus. Suitable for application indoors where not exposed to unusual service conditions.
NEMA 2	Driptight	To prevent accidental contact, and in addition, to exclude falling moisture or dirt.
NEMA 3	Weatherproof	Protection against specified weather hazards. Suitable for outdoors.
NEMA 3R	Raintight	Protects against entrance of water from a beating rain. Suitable for general outdoor application not requiring sleetproof.
NEMA 4	Watertight	Designed to exclude water applied in form of hose stream. To protect against stream of water during cleaning operations, etc.
NEMA 4X	Watertight & Corrosion Rest.	Designed to exclude water applied in form of hose stream. To protect against stream of water during cleaning operations, etc. Corrosion Resistant
NEMA 5	Dust tight	Constructed so that dust will not enter enclosed case. Being replaced in some equipment by NEMA 12
NEMA 6	Submersible	Intended to permit enclosed apparatus to be operated successfully when submerged in water under specified pressure and time
NEMA 7	Hazardous Locations	Designed to meet application requirements of the NEC for Class I, Class I - Air Hazardous Locations (explosive atmospheres) Circuit interruption occurs in air.
NEMA 8	Hazardous Locations Class II - Oil A,B,C,D	Identical to NEMA 7 above, except the apparatus is immersed in oil.
NEMA 9	Hazardous Locations Class II - Oil E, F, G	Designed to meet application requirements of the NEC for Class II Hazardous Locations (combustible dust, etc.)
NEMA 10	Bureau of Mines	Meets requirements of US Bureau of Mines. Suitable for coal mines.
NEMA 11	Oil Immersed	Provides oil immersion of apparatus such that it is suitable for application Fume Resistant where equipment is subject to acid or other corrosive fumes.
NEMA 12	Industrial Use	For use in those industries where it is desired to exclude dust, lint, fibers and flyings, or oil or coolant seepage.