

SECTION **K**



# Wallplates

**Table of contents**

<b>Wallplate families</b>	K-2	<b>Oversize wallplates</b>	K-19
<b>CuVerro® wallplates</b>	K-3	Toggle switch	K-19
<b>Wallplate dimensional information</b>	K-4	Decorator	K-19
Mounting holes	K-4	Duplex receptacle	K-19
Plate and cover openings	K-4	Single receptacle	K-19
Wallplate sizes	K-5	Blank - box mounted	K-20
<b>Standard size wallplates</b>	K-6	Combination 2-gang	K-20
Toggle switch	K-6	Telephone & coax	K-20
Duplex receptacle	K-7	<b>Wallplate accessories</b>	K-20
Single receptacle	K-7	<b>LED step lights</b>	K-21
Decorator	K-8	LED step lighting	K-21
Blank - box mounted	K-9	<b>Specification information</b>	K-22
Louver	K-9		
Telephone & coax	K-10		
Combination 2-gang	K-10		
Combination 3-gang	K-10		
Combination 4-gang	K-11		
Power outlet	K-11		
Standard size wallplate guide for power devices	K-11		
Extra depth	K-12		
Pre-marked special use	K-12		
<b>Mid-size wallplates</b>	K-13		
Toggle switch	K-13		
Duplex receptacle	K-13		
Single receptacle	K-13		
Decorator	K-14		
Aspire screwless decorator	K-15		
Screwless decorator	K-15		
Screwless toggle	K-15		
Screwless duplex receptacle	K-15		
Blank - box & strap mounted	K-16		
Telephone & coax	K-16		
Combination 2-gang	K-17		
Combination 3-gang	K-17		
Power outlet	K-17		
Mid-size wallplate guide for power devices	K-17		
Sectional wallplates	K-18		
Pre-marked special use	K-18		



## Wallplate families

### Rugged design and quality materials make Arrow Hart wallplates the best choice

Whether faced with a commercial, institutional or industrial setting, you will find the desired material, configuration, style, size and color you need



**Standard size**  
Wallplates for precision cuts



**Mid-size and oversize**  
Wallplates for applications that require additional wall coverage



**Extra depth**  
Wallplates to provide a flush fit to the wall when an old work outlet box is used



#### Specification grade thermoplastic

- Available in both nylon and polycarbonate constructions
- Virtually unbreakable plates reduce installation and replacement costs
- Preferred for industrial, institutional, and other high-traffic areas
- Exclusive time-saving screw catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil-resistant
- Available in standard size and mid-size configurations with screwless and pre-marked special use versions available



#### Specification grade metal wallplates

- Constructed of non-corrosive 302/304 Stainless steel, brass or chrome
- Available in standard, mid-size, and oversize configurations with pre-marked special use versions available
- 302/304 Stainless steel is non-magnetic and non-corrosive for rugged durability
- Solid brass is coated with transparent lacquer to resist premature oxidation
- Shipped with removable protective film
- Recommended for industrial, institutional and commercial applications

## Same style, same durable quality with CuVerro® antimicrobial copper surfaces

The Arrow Hart line of devices featuring CuVerro® antimicrobial copper surfaces, offer specification grade decorator switches and wallplates in multiple gangs and configurations

### Features & benefits



Wallplates with CuVerro® antimicrobial touch surface



- Touch surfaces constructed of EPA registered<sup>++</sup> CuVerro® antimicrobial copper
- When cleaned regularly, delivers continuous and ongoing antibacterial<sup>+</sup> action, remaining effective in killing greater than 99.9% of bacteria<sup>+</sup> within 2 hours
- Unlike coatings, CuVerro® surfaces are wear resistant and the durable antibacterial<sup>+</sup> properties will remain effective for as long as the product remains in place and is used as directed
- Tarnish resistant with minimal color change over time
- Surfaces should be cleaned to regular protocols
- Durable enough for hospital grade cleaners

<sup>+</sup>Laboratory testing shows that, when cleaned regularly, CuVerro® antimicrobial copper surfaces kill greater than 99.9% of the following bacteria within 2 hours of exposure: MRSA, Staphylococcus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli O157:H7. CuVerro® antimicrobial copper surfaces are a supplement to and not a substitute for standard infection control practices and have been shown to reduce microbial contamination, but do not necessarily prevent cross contamination; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. CuVerro® is a registered trademark of GBC Metals, LLC and is used with permission, CW-0013-1207.

<sup>++</sup>EPA Registration Number 85353-5 (7600CUR Series) and 85353-3 (7600CU Series)


**Compliances, specifications and availability are subject to change without notice.**

[www.eaton.com](http://www.eaton.com)  
[www.eaton.com/arrowhart](http://www.eaton.com/arrowhart)

# Wallplate dimensional information


## Mounting holes for wallplates and covers

These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.

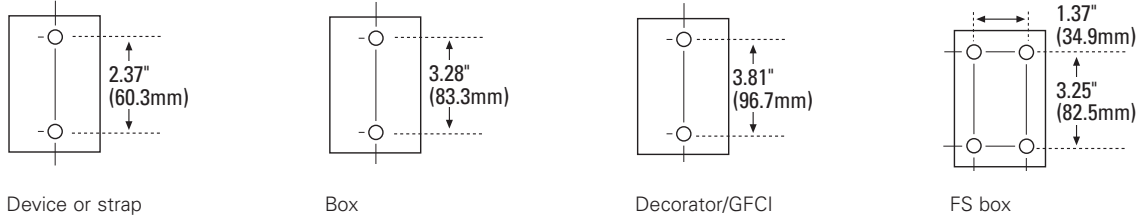


## Cover opening dimensions

Nominal dimensions for cover openings conform to industry standards and practices.

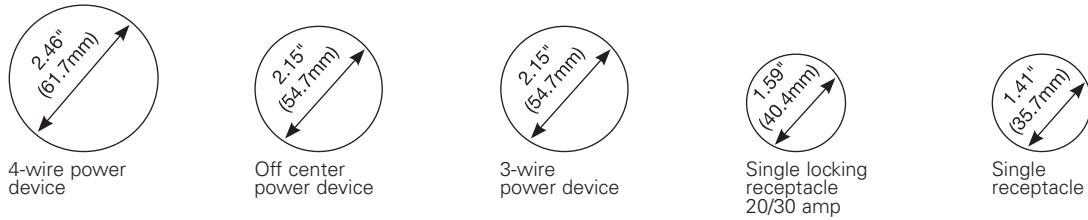

## Plate opening dimensions


Nominal dimensions for plate openings conform to industry standards and practices.

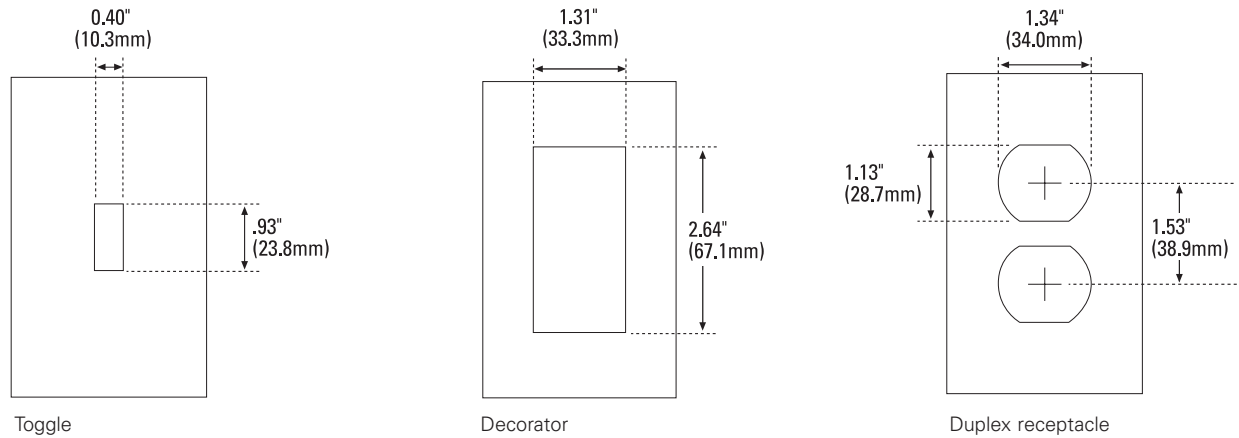


## Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


**Standard**

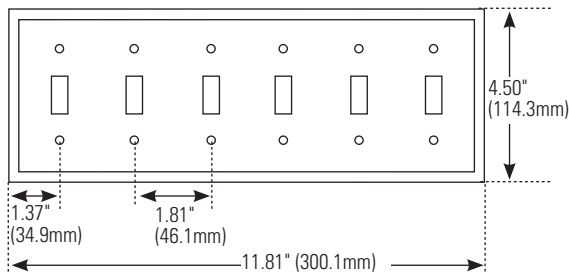


**Mid-size**

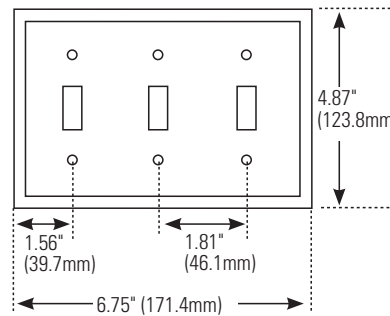

**Oversize Mid-size Standard**

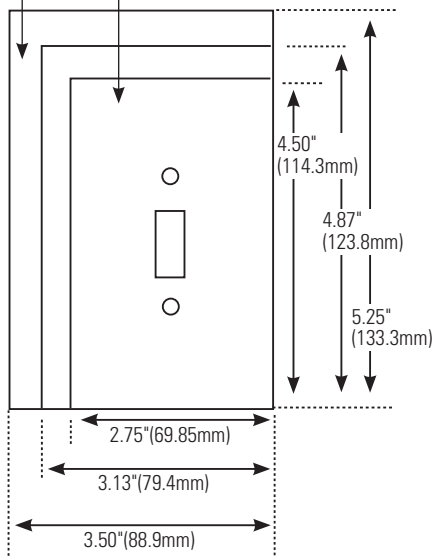

**Oversize**



Compliances, specifications and availability are subject to change without notice.


### Standard size toggle switch wallplates

#### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang



6-Gang


#### Toggle switch wallplates

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5134__	•	•
	Thermoset	A, B, LA, V, W	□ 2134__	•	•
	302/304 Stainless steel	—	□ 93071	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93071__	•	•
	Brass	—	□ 94071	•	•
2-Gang	Nylon	A, B, GY, LA, RD, V, W	□ 5139__	•	•
	Thermoset	A, B, LA, V, W	□ 2139__	•	•
	302/304 Stainless steel	—	□ 93072	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93072__	•	•
	Brass	—	□ 94072	•	•
3-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5141__	•	•
	Thermoset	A, B, LA, V, W	□ 2141__	•	•
	302/304 Stainless steel	—	□ 93073	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93073__	•	•
	Brass	—	□ 94073	•	•
4-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5154__	•	•
	Thermoset	A, B, LA, V, W	□ 2154__	•	•
	302/304 Stainless steel	—	□ 93074	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93074__	•	•
	Brass	—	□ 94074	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2155__	•	•
	302/304 Stainless steel	—	□ 93075	•	•
6-Gang	Thermoset	A, B, V, W	□ 2156__	•	•
	302/304 Stainless steel	—	□ 93076	•	•

See additional CuVerro® wallplate information on K-22

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), CU (White Bronze) CuVerro® ONLY, CUR (Rose) CuVerro® ONLY

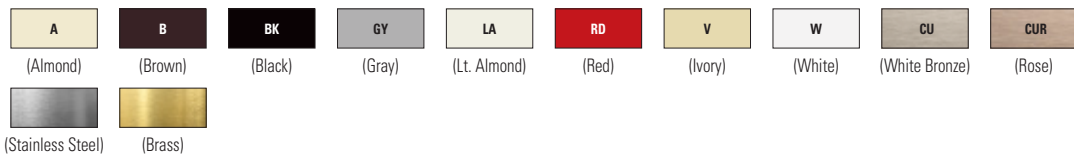

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified; CuVerro® series wallplates are only UL Listed. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32


## Standard size duplex receptacle wallplates

### Product description


1-Gang, 2-Gang, 3-Gang




1-Gang



2-Gang



3-Gang



1-Gang

### Duplex receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5132__	• •
	Thermoset	A, B, LA, V, W	□ 2132__	• •
	302/304 Stainless steel	—	□ 93101	• •
	CuVerro® antimicrobial copper	CU, CUR	□ 93101__	• •
	Brass	—	□ 94101	• •
2-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5150__	• •
	Thermoset	A, B, LA, V, W	□ 2150__	• •
	302/304 Stainless steel	—	□ 93102	• •
	CuVerro® antimicrobial copper	CU, CUR	□ 93102__	• •
	Brass	—	□ 94102	• •
3-Gang	302/304 Stainless steel	—	□ 93103	• •
	CuVerro® antimicrobial copper	CU, CUR	□ 93103__	• •

See additional CuVerro® wallplate information on K-22

## Standard size single receptacle wallplates

### Product description

1-Gang


### Single receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang with 1.406" (35.712mm) hole	Nylon	A, B, BK, GY, RD, V, W	□ 5131__	• •
	Thermoset	A, B, LA, V, W	□ 2131__	• •
	302/304 Stainless steel	—	□ 93091	• •
	CuVerro® antimicrobial copper	CU, CUR	□ 93091__	• •
	Brass	—	□ 94091	• •

See additional CuVerro® wallplate information on K-22

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), CU (White Bronze) CuVerro® ONLY, CUR (Rose) CuVerro® ONLY

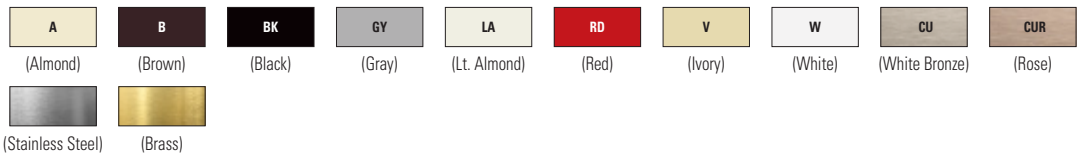

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified; CuVerro® series wallplates are only UL Listed. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page Q-32


RoHS compliant - Page Q-32




### Standard size decorator wallplates

#### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang



6-Gang

#### Decorator wallplates

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, BL, GY, LA, RD, V, W	□ 5151__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2151__	•	•
	302/304 Stainless steel	—	□ 93401	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93401__	•	•
	Brass	—	□ 94401	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5152__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2152__	•	•
	302/304 Stainless steel	—	□ 93402	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93402__	•	•
	Brass	—	□ 94402	•	•
3-Gang	Thermoset	A, B, GY, LA, V, W	□ 2163__	•	•
	302/304 Stainless steel	—	□ 93403	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93403__	•	•
4-Gang	Thermoset	A, B, LA, V, W	□ 2164__	•	•
	302/304 Stainless steel	—	□ 93404	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93404__	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2165__	•	•
	302/304 Stainless steel	—	□ 93405	•	•
6-Gang	Thermoset	A, B, LA, V, W	□ 2166__	•	•
	302/304 Stainless steel	—	□ 93406	•	•

See additional CuVerro® wallplate information on K-22

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), CU (White Bronze) CuVerro® ONLY, CUR (Rose) CuVerro® ONLY

<b>A</b>	<b>B</b>	<b>BK</b>	<b>BL</b>	<b>GY</b>	<b>LA</b>	<b>RD</b>	<b>V</b>	<b>W</b>
(Almond)	(Brown)	(Black)	(Blue)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)
<b>CU</b>	<b>CUR</b>							
(White Bronze)	(Rose)	(Stainless Steel)	(Brass)					

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified; CuVerro® series wallplates are only UL Listed. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**



Indicates NAFTA compliant - Page Q-32



RoHS compliant - Page Q-32


## Standard size blank wallplates

### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang




2-Gang




3-Gang



4-Gang



93630



93631

### Blank - box mounted

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5129__	•	•
	Thermoset	A, B, LA, V, W	□ 2129__	•	•
	302/304 Stainless steel	—	□ 93151	•	•
	CuVerro® antimicrobial copper	CU, CUR	□ 93151__	•	•
	Brass	—	□ 94151	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5137__	•	•
	Thermoset	A, B, LA, V, W	□ 2137__	•	•
	302/304 Stainless steel	—	□ 93152	•	•
3-Gang	CuVerro® antimicrobial copper	CU, CUR	□ 93152__	•	•
	302/304 Stainless steel	—	□ 93153	•	•
4-Gang	CuVerro® antimicrobial copper	CU, CUR	□ 93153__	•	•
	302/304 Stainless steel	—	□ 93154	•	•
4-Gang	CuVerro® antimicrobial copper	CU, CUR	□ 93154__	•	•

See additional CuVerro® wallplate information on K-22

## Standard size louver

### Product description


Horizontal & vertical

### Louvers

Description	Material	Catalog no.		
Horizontal	302/304 Stainless steel	□ 93630	•	•
Vertical	302/304 Stainless steel	□ 93631	•	•

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), CU (White Bronze) CuVerro® ONLY, CUR (Rose) CuVerro® ONLY

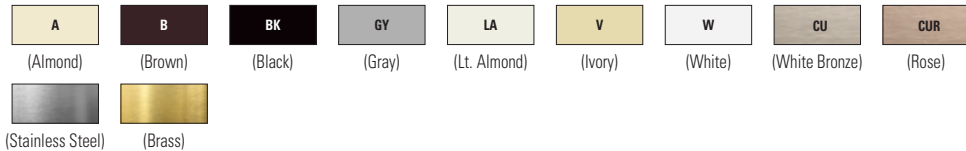

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified; CuVerro® series wallplates are only UL Listed. **Specification information:** K-22 **Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


### Standard size combination wallplates

#### Product description


1-Gang, 2-Gang, 3-Gang




1-Gang,  
0.375" hole




1-Gang,  
0.625" hole




2-Gang, toggle  
& single receptacle




2-Gang, toggle  
& duplex receptacle




2-Gang, toggle  
& decorator




2-Gang, toggle  
& blank




2-Gang, duplex  
receptacle & blank



2-Gang, duplex  
receptacle & decorator



3-Gang, 2 toggles  
& duplex receptacle



3-Gang, 2 toggles  
& decorator

#### Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.375" (9.525mm) hole	Nylon	B, GY, V, W	□ 5128__	•	•
	Thermoset	A, B, LA, V, W	□ 2128__	•	•
	302/304 Stainless steel	—	□ 93696	•	•
1-Gang with 0.625" (15.875mm) hole	Nylon	B, GY, V, W	□ 5159__	•	•
	Thermoset	V, W	□ 2159__	•	•
	302/304 Stainless steel	—	□ 93591	•	•

#### Combination 2-gang

Description	Material	Color suffix	Catalog no.		
Toggle & single receptacle	302/304 Stainless steel	—	□ 93512	•	•
Toggle & duplex receptacle	Nylon	A, B, BK, GY, LA, V, W	□ 5138__	•	•
	Thermoset	A, B, LA, V, W	□ 2138__	•	•
	302/304 Stainless steel	—	□ 93532	•	•
Toggle & decorator	Brass	—	□ 94532	•	•
	Nylon	A, B, BK, GY, LA, V, W	□ 5153__	•	•
	Thermoset	A, B, LA, V, W	□ 2153__	•	•
Toggle & blank	302/304 Stainless steel	—	□ 93432	•	•
	Brass	—	□ 94432	•	•
	Nylon	A, B, BK, LA, V	□ 5171__	•	•
Duplex receptacle & blank	Nylon	A, B, BK, LA, V	□ 5170__	•	•
Duplex receptacle & decorator	Thermoset	A, LA, V, W	□ 2157__	•	•

#### Combination 3-gang

Description	Material	Color suffix	Catalog no.		
2 Toggles & duplex receptacle	Nylon	B, GY, V, W	□ 5158__	•	•
	Thermoset	A, B, LA, V, W	□ 2158__	•	•
	302/304 Stainless steel	—	□ 93543	•	•
2 Toggles & decorator	Thermoset	A, LA, V, W	□ 2173__	•	•
	302/304 Stainless steel	—	□ 93443	•	•

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

## Standard size combination wallplates

### Product description

4-Gang



4-Gang, 3 toggles & duplex receptacle


### Combination 4-gang

Description	Material	Color suffix	Catalog no.		
3 Toggles & duplex receptacle	Thermoset	A, LA, V, W	□ 2174__	•	•
	302/304 Stainless steel	—	□ 93554	•	•


## Standard size power outlet wallplates

### Product description


1-Gang, 2-Gang




93111




93221




192



93223, 69



2168, 93227, 68



93228

### Power outlet

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.59" (40.5mm) hole	302/304 Stainless steel	—	□ 93111	•	•
1-Gang with 2.15" (54.8mm) hole	302/304 Stainless steel	—	□ 93221	•	•
	Chrome (UL)	—	□ 39CH*	•	•
2-Gang with 2.15" (54.7mm) hole	Thermoset	A, B, LA, V, W	□ 2168__	•	•
	302/304 Stainless steel	—	□ 93227	•	•
	Chrome (UL)	—	□ 68*	•	•
2-Gang with 2.15" (54.7mm) Off center hole	Chrome (UL)	—	□ 192*	•	•
2-Gang with 2.28" (57.9mm) hole	302/304 Stainless steel	—	□ 93228	•	•
2-Gang with 2.47" (62.7mm) hole	302/304 Stainless steel	—	□ 93223	•	•
	Chrome (UL)	—	□ 69*	•	•
2-Gang with 2.47" (62.7mm) hole	Nylon	V, W	□ 5169__	•	•

\* UL Listed


## Standard size wallplate guide for power devices

### Wallplates for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	39CH, 68, 2168, 93221, 93227
5515N, 5744N, 5754N, 8430N, 8450N, 8460N, 9460N	69, 5169, 93223
122B	192

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), LA (Light Almond), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page Q-32


RoHS compliant - Page Q-32

## Standard size wallplates


### Standard size extra depth wallplates

#### Product description


1-Gang, 2-Gang, 3-Gang




1-Gang toggle




1-Gang duplex receptacle




2-Gang toggle




2-Gang duplex receptacle




2-Gang blank



2-Gang toggle & duplex receptacle




2-Gang toggle & blank




2-Gang duplex receptacle & blank




EG5134, EM93071




IG5132



EM5132, EM93101



IG5131



EM93102

#### Extra depth\*

Description	Material	Color suffix	Catalog no.		
1-Gang toggle	Thermoset	V, W	□ 4134__	•	•
2-Gang toggle	Thermoset	V, W	□ 4139__	•	•
1-Gang duplex receptacle	Thermoset	V, W	□ 4132__	•	•
2-Gang duplex receptacle	Thermoset	V, W	□ 4150__	•	•
2-Gang blank	Thermoset	V, W	□ 4137__	•	•
2-Gang toggle & duplex receptacle	Thermoset	V, W	□ 4138__	•	•
2-Gang toggle & blank	Thermoset	V, W	□ 4171__	•	•
2-Gang duplex receptacle & blank	Thermoset	V, W	□ 4170__	•	•

\*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts

### Standard size pre-marked special use wallplates

#### Product description

1-Gang, 2-Gang


#### Extra depth\*

Description	Material	Color suffix	Catalog no.		
1-Gang toggle "emergency"	Nylon	RD	□ EM5134	•	•
	302/304 Stainless steel	—	□ EM93071	•	•
1-Gang duplex receptacle "isolated ground"	Nylon	RN	□ IG5132	•	•
1-Gang duplex receptacle "emergency"	Nylon	RD	□ EM5132	•	•
	302/304 Stainless steel	—	□ EM93101	•	•
1-Gang single receptacle with 1.40" (35.7mm) hole "isolated ground"	Nylon	V, RN	□ IG5131__	•	•
2-Gang duplex receptacle "emergency"	302/304 Stainless steel	—	□ EM93102	•	•

\*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32




## Mid-size toggle switch wallplates

### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang




4-Gang




5-Gang




6-Gang



1-Gang



2-Gang



1-Gang

### Toggle switch

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ1__	•
	Thermoset	A, B, LA, V, W	□ 2034__	• •
	302/304 Stainless steel	—	□ 93971	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ2__	•
	Thermoset	A, B, LA, V, W	□ 2039__	• •
	302/ 304 Stainless steel	—	□ 93972	• •
3-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ3__	•
	Thermoset	A, B, LA, V, W	□ 2041__	• •
	302/304 Stainless steel	—	□ 93973	• •
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ4__	•
	Thermoset	A, LA, V, W	□ 2054__	• •
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ5__	•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ6__	•

## Mid-size duplex & single receptacle wallplates

### Product description

1-Gang, 2-Gang

### Duplex receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ8__	•
	Thermoset	A, B, LA, V, W	□ 2032__	• •
	302/304 Stainless steel	—	□ 93901	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ82__	•
	Thermoset	A, LA, V, W	□ 2050__	• •
	302/304 Stainless steel	—	□ 93902	• •

### Single receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang with 1.406" (35.712mm) hole	Thermoset	A, B, LA, V, W	□ 2031__	• •
	302/304 Stainless steel	—	□ 93991	• •

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

<b>A</b>	<b>B</b>	<b>BK</b>	<b>GY</b>	<b>LA</b>	<b>RD</b>	<b>V</b>	<b>W</b>	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


### Mid-size decorator wallplates

#### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang



6-Gang

#### Decorator wallplates

Gang	Material	Color suffix	Catalog no.	 
1-Gang	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ26__	•
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2051__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93934	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ262__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2052__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93935	• •
3-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ263__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2063__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93936	• •
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ264__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2064__	• •
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ265__	•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ266__	•

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32


## Mid-size screwless wallplates

### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang




5-Gang




6-Gang




1-Gang



2-Gang



3-Gang



4-Gang



1-Gang

### Decorator wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, GY, LA, V, W	<input type="checkbox"/> PJS26__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS262__	•
3-Gang	Polycarbonate	A, BB, BK, LA, V, W	<input type="checkbox"/> PJS263__	•
4-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS264__	•
5-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS265__	•
6-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS266__	•

### Toggle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS1__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS2__	•
3-Gang	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS3__	•
4-Gang	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS4__	•

### Duplex receptacle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS8__	•

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

<b>A</b>	<b>B</b>	<b>BB</b>	<b>BK</b>	<b>GY</b>	<b>LA</b>	<b>V</b>	<b>W</b>
(Almond)	(Brown)	(Brushed Bronze)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)

**Certification information:** Aspire series wallplates are cULus Listed to UL1514D, file no. E33216; ; PJ series wallplates are cULus Listed.

**Specification information:** K-22


**Compliances, specifications and availability are subject to change without notice.**

RoHS compliant - Page Q-32


### Mid-size blank wallplates

#### Product description


1-Gang box, 1-Gang strap, 2-Gang box




1-Gang



2-Gang



1-Gang with 0.375" hole



1-Gang with 0.406" hole, box mounted

#### Blank - box & strap mounted

Description	Material	Color suffix	Catalog no.		
1-Gang box	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ13__	•	•
	Thermoset	A, B, LA, V, W	□ 2029__	•	•
	302/304 Stainless steel	—	□ 93951	•	•
1-Gang strap	Polycarbonate	A, B, BK, LA, V, W	□ PJ14__	•	•
2-Gang box	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ23__	•	•
	Thermoset	A, LA, V, W	□ 2037__	•	•

### Mid-size telephone & coax wallplates

#### Product description


1-Gang box

#### Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	□ 2028__	•	•
	302/304 Stainless steel	—	□ 93996	•	•
1-Gang with 0.40" (10.3mm) hole, box mounted	Polycarbonate	A, B, BK, LA, V, W	□ PJ11__	•	•

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


## Mid-size combination wallplates

### Product description


2-Gang, 3-Gang




2-Gang toggle & duplex receptacle




2-Gang, toggle & decorator




2-Gang toggle & blank




2-Gang duplex receptacle & blank




2-Gang, duplex receptacle & decorator




3-Gang, 2 toggles & duplex receptacle




3-Gang, 2 toggles & decorator




1-Gang 1.406" hole



1-Gang 1.594" hole



1-Gang with 2.1563" hole



2-Gang with 2.1563" hole

### Combination 2-gang

Description	Material	Color suffix	Catalog no.	
Toggle & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ18__	•
	Thermoset	A, B, LA, V, W	□ 2038__	• •
	302/304 Stainless steel	—	□ 93932	• •
Toggle & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ126__	•
	Thermoset	A, LA, V, W	□ 2053__	• •
	302/304 Stainless steel	—	□ 93937	• •
Toggle & blank	Polycarbonate	A, B, LA, V, W	□ PJ113__	•
Duplex receptacle & blank	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ138__	•
Duplex receptacle & decorator	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ826__	•

### Combination 3-gang

Description	Material	Color suffix	Catalog no.	
2 Toggles & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ28__	•
2 Toggles & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ226__	•

## Mid-size power outlet wallplates

### Product description

1-Gang, 2-Gang

### Power outlet

Description	Material	Color suffix	Catalog no.	
1-Gang with 1.40" (35.7mm) hole	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ7__	•
1-Gang with 1.59" (40.5mm) hole	Polycarbonate	B, GY, V, W	□ PJ720__	•
1-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, BK, V, W	□ PJ724__	•
	Nylon	V	□ 5068__	• •
	Thermoset	A, B, V, W	□ 2068__	• •
2-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, V, W	□ PJ703__	•

## Mid-size wallplate guide for power devices

### Wallplate for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	2068, 5068, PJ724, PJ703

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

<b>A</b>	<b>B</b>	<b>BK</b>	<b>GY</b>	<b>LA</b>	<b>RD</b>	<b>V</b>	<b>W</b>	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page Q-32








RoHS compliant - Page Q-32



### Mid-size sectional wallplates

#### Product description

1-Gang



#### Sectional wallplates

Description	Material	Location	Color	Catalog no.	
1-Gang toggle	Polycarbonate	Center	W	<input type="checkbox"/> STC1W	•
		End	W	<input type="checkbox"/> STE1W	•
1-Gang decorator	Polycarbonate	Center	W	<input type="checkbox"/> STC26W	•
		End	W	<input type="checkbox"/> STE26W	•
1-Gang duplex receptacle	Polycarbonate	Center	W	<input type="checkbox"/> STC8W	•
		End	W	<input type="checkbox"/> STE8W	•
1-Gang blank	Polycarbonate	Center	W	<input type="checkbox"/> STC14W	•
		End	W	<input type="checkbox"/> STE14W	•
1-Gang single receptacle 1.40" (35.7mm) hole	Polycarbonate	Center	W	<input type="checkbox"/> STC7W	•
		End	W	<input type="checkbox"/> STE7W	•

### Mid-size pre-marked special use wallplates

#### Product description

1-Gang, 2-Gang

#### Pre-marked special use

Description	Material	Color suffix	Catalog no.	
1-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ1EM	•
1-Gang decorator "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ26EM	•
1-Gang orange decorator "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ26IG	•
1-Gang orange single receptacle, 1.40" (35.7mm) hole "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ7IG	•
1-Gang duplex receptacle "computer"	Polycarbonate	V, W	<input type="checkbox"/> PJ8CO_	•
1-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ8EM	•
1-Gang duplex receptacle "GFCI protected"	Polycarbonate	V, W	<input type="checkbox"/> PJ8GF_	•
1-Gang orange duplex receptacle "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ8IG	•
2-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ2EM	•
2-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ82EM	•

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

RoHS compliant - Page Q-32

# Oversize wallplates


## Oversize toggle switch wallplates

### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang toggle




2-Gang toggle




3-Gang




4-Gang




1-Gang



1-Gang



2-Gang



1-Gang 1.406" hole

### Toggle switch

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	□ 2144__	•	•
	302/304 Stainless steel	—	□ 93871	•	•
2-Gang	Thermoset	A, B, LA, V, W	□ 2149__	•	•
	302/304 Stainless steel	—	□ 93872	•	•
3-Gang	Thermoset	V, W	□ 2741__	•	•
	302/304 Stainless steel	—	□ 93873	•	•
4-Gang	302/304 Stainless steel	—	□ 93874	•	•

## Oversize decorator wallplates

### Product description

1-Gang

### Decorator

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	□ 2751__	•	•
	302/304 Stainless steel	—	□ 93834	•	•

## Oversize duplex receptacle wallplates

### Product description

1-Gang, 2-Gang

### Duplex receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	□ 2142__	•	•
	302/304 Stainless steel	—	□ 93801	•	•
2-Gang	Thermoset	V, W	□ 2750__	•	•
	302/304 Stainless steel	—	□ 93802	•	•

## Oversize single receptacle wallplates

### Product description

1-Gang

### Single receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.40" (35.7mm) hole	Thermoset	V, W	□ 2731__	•	•
	302/304 Stainless steel	—	□ 93891	•	•

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), LA (Light Almond), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


### Oversize blank box mounted wallplates

#### Product description


1-Gang, 2-Gang




1-Gang



2-Gang




2-Gang toggle & duplex receptacle



1-Gang with 0.375" hole




GFER



2160



231



153

#### Blank - box mounted

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	□ 2729__	•	•
	302/304 Stainless steel	—	□ 93851	•	•
2-Gang	302/304 Stainless steel	—	□ 93852	•	•

### Oversize combination wallplates

#### Product description

2-Gang

#### Combination 2-gang

Description	Material	Color suffix	Catalog no.		
Toggle & duplex receptacle	Thermoset	B, V, W	□ 2148__	•	•

### Oversize telephone & coax wallplates

#### Product description

2-Gang

#### Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	□ 2728__	•	•
	302/304 Stainless steel	—	□ 93896	•	•

### Wallplate accessories

#### Product description

GFCI extension ring, adapters, wallplate screws & pilot light lamp holder

#### Wallplate accessories

Description	Material	Color suffix	Catalog no.		
GFCI extension ring for use with GFCIs, 7/8" spacer (cULus)	—	B, BLK, LA, V, W	□ GFER-__**	•	
Adapter - decorator to blank	—	B, LA, V, W	□ 2160__	•	•
Adapter - decorator to toggle	—	V, W	□ 2161__	•	•
Toggle & receptacle wallplate screws #6-32 x 1/2" (12.7mm) for toggle & receptacle wallplates	Baked enamel head/metal	B, LA, V, W	□ 231__	•	
	Nylon	RD, V, W	□ 232__	•	
Toggle & receptacle wallplate screws #6-32 x 5/16" (7.9mm) for toggle & receptacle wallplates	Baked enamel head/metal	LA, V, W	□ 2231__	•	
Recessed pilot light lamp holder with 6 watt clear S-6 bulb (cULus)	—	—	□ 153__**†	•	•

\*For use with louver wallplate, \*\* cULus Listed, † UL Listed, CSA certified

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BLK (Black), LA (Light Almond), RD (Red), V (Ivory), W (White)



**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

# LED step lights

## LED step lighting

### Product description

120V/AC  
60Hz



7739

### Features

- Fits into a standard junction box for easy installation (single-gang, handy box, 2" minimum inside width)
- 6 LED's with 6000-6500K light temperature
- Energy-efficient 40,000 hour rated LED lamp light
- Back & side wire, #14 - #12 AWG
- Perfect for any area where low level lighting or safe way-finding is needed, such as hallways, stairways, lobbies, auditoriums and theaters
- Includes vertical and horizontal louvered wallplates

### LED step light

Rating V/AC	Description	Color	Catalog no.
120 V/AC, 60Hz	3W LED step light (vertical and horizontal)	A, LA, W	□ 7739__

Note: dimensional information on K-23

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix; A (Almond), LA (Light Almond), W (White)

#### Example: 7739A



**Material characteristics:** Faceplate, Polycarbonate/ABS. Back Body, Polycarbonate. Strap, Galvanized Steel. Wire, #14 - #12 AWG  
**Specification information:** K-23

**Compliances, specifications and availability are subject to change without notice.**

# Wallplate specification & performance data

## Wallplates

### Product description

Standard size, mid-size, oversize

Wallplate sizes: standard size, mid-sized & oversize wallplates					CuVerro® Wallplate size: standard size
<b>Material type</b>	Thermoset	Nylon	Stainless steel	Polycarbonate	CuVerro® antimicrobial copper surfaces*
<b>Manufacturing process</b>	Injection molded	Injection molded	Stamped	Injection molded	Stamped
<b>Testing &amp; code compliance</b>	<ul style="list-style-type: none"> <li>UL Listed to UL 514D, file no. E33216</li> <li>cUL Listed to C22.2, no. 42.1, UL file E33216</li> </ul>	<ul style="list-style-type: none"> <li>UL Listed to UL 514D, file no. E33216</li> <li>cUL Listed to C22.2, no. 42.1, UL file E33216</li> </ul>	<ul style="list-style-type: none"> <li>UL Listed to 514D, file no. E92003</li> <li>CSA certified to C22.2, no. 42.1</li> </ul>	<ul style="list-style-type: none"> <li>UL Listed to UL 514D, file no. E33216</li> <li>cUL, UL file E33216 certified to C22.2, no. 42.1</li> </ul>	<ul style="list-style-type: none"> <li>UL Listed to UL514D, file no. E92003</li> <li>CSA certified to C22.2, no. 42.1</li> <li>CuVerro® antimicrobial copper EPA registration number 85353-5 (9000CUR series) and 85353-3 (9000CU series)</li> </ul>
<b>Environmental specifications</b>	<b>Flammability:</b> Meets UL94 requirements; 5VA rated <b>Temperature rating:</b> -40°C to 90°C (-40°F to 194°F)	<b>Flammability:</b> Meets UL94 requirements; 5VA rated <b>Temperature rating:</b> -40°C to 70°C (-40°F to 158°F)	<b>Flammability:</b> N/A <b>Temperature rating:</b> -40°C to 70°C (-40°F to 158°F)	<b>Flammability:</b> Meets UL94 requirements 5VA rated <b>Temperature rating:</b> -40° to 70° C(-40°F to 158°F)	<b>Flammability:</b> N/A <b>Temperature rating:</b> -40°C to 70°C (-40°F to 158°F)
<b>Materials</b>	<b>Body:</b> 0.080" thick thermoset urea or phenolic  <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.060" thick thermoplastic  <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance  <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.08" thick thermoplastic polycarbonate  <b>Inner wallplate:</b> 0.071" thick polycarbonate (PJS Series)	<b>Body:</b> 0.040" thick CuVerro® antimicrobial copper alloy, 99.5% containing copper, nickel, iron, manganese, zinc, and 0.05% lead  <b>Inner wallplate:</b> N/A

**\*Footnote:**

Laboratory testing shows that, when cleaned regularly, CuVerro® antimicrobial copper surfaces kill greater than 99.9% of the following bacteria within 2 hours of exposure: MRSA, Staphylococcus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli O157:H7. CuVerro® antimicrobial copper surfaces are a supplement to and not a substitute for standard infection control practices and have been shown to reduce microbial contamination, but do not necessarily prevent cross contamination; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. CuVerro® is a registered trademark of GBC Metals, LLC and is used with permission, CW-0013-1207.

**Compliances, specifications and availability are subject to change without notice.**





# LED accent lights specification & performance data





## Commercial specification grade LED step light

### Product description

120 V/AC 60Hz

<b>Series type</b>	<b>Louvered faceplate 7739 series</b>
<b>Illumination</b>	6 LEDs 18-36 lumens 6000-6500 Kelvin LED life rated 40,000 hours
<b>Power consumption</b>	<3 Watts
<b>Materials</b>	<b>Faceplate:</b> Polycarbonate <b>Bottom Housing:</b> Polycarbonate <b>Strap:</b> Galvanized Steel <b>Termination Accommodations:</b> #14 - #12 AWG
<b>Testing &amp; code compliance</b>	• cULus Listed UL 1958 and UL8750
<b>Power supply</b>	120V/AC, 60Hz
<b>Installation</b>	Single-gang junction box
<b>Environmental</b>	<b>Temperature rating:</b> -35°C -66°C <b>Flammability rating:</b> V-2 Grade

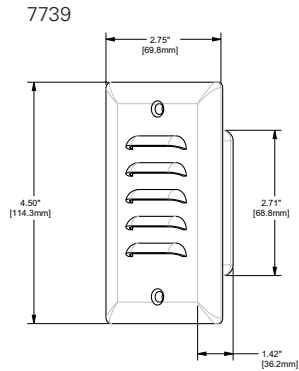

Compliances, specifications and availability are subject to change without notice.