

SECTION **K**



Wallplates

Table of contents

Wallplate families	K-2	Oversize wallplates	K-19
Wallplate dimensional information	K-4	Toggle switch	K-19
Mounting holes	K-4	Decorator	K-19
Plate and cover openings	K-4	Duplex receptacle	K-19
Wallplate sizes	K-5	Single receptacle	K-19
		Blank - box mounted	K-20
Standard size wallplates	K-6	Combination 2-gang	K-20
Toggle switch	K-6	Telephone & coax	K-20
Duplex receptacle	K-7	Wallplate accessories	K-20
Single receptacle	K-7	LED step lights	K-21
Decorator	K-8	LED step lighting	K-21
Blank - box mounted	K-9		
Louver	K-9	Specification information	K-22
Telephone & coax	K-10		
Combination 2-gang	K-10		
Combination 3-gang	K-10		
Combination 4-gang	K-11		
Power outlet	K-11		
Standard size wallplate guide for power devices	K-11		
Extra depth	K-12		
Pre-marked special use	K-12		
Mid-size wallplates	K-13		
Toggle switch	K-13		
Duplex receptacle	K-13		
Single receptacle	K-13		
Decorator	K-14		
Aspire screwless decorator	K-15		
Screwless decorator	K-15		
Screwless toggle	K-15		
Screwless duplex receptacle	K-15		
Blank - box & strap mounted	K-16		
Telephone & coax	K-16		
Combination 2-gang	K-17		
Combination 3-gang	K-17		
Power outlet	K-17		
Mid-size wallplate guide for power devices	K-17		
Sectional wallplates	K-18		
Pre-marked special use	K-18		

Wallplate families

Rugged design and quality materials make Arrow Hart wallplates the best choice

Whether faced with a commercial, institutional or industrial setting, you will find the desired material, configuration, style, size and color you need




Standard size
Wallplates for precision cuts



Mid-size and oversize
Wallplates for applications that require additional wall coverage



Extra depth
Wallplates to provide a flush fit to the wall when an old work outlet box is used



Specification grade thermoplastic

- Available in both nylon and polycarbonate constructions
- Virtually unbreakable plates reduce installation and replacement costs
- Preferred for industrial, institutional, and other high-traffic areas
- Exclusive time-saving screw catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil-resistant
- Available in standard size and mid-size configurations with screwless and pre-marked special use versions available




Specification grade metal wallplates

- Constructed of non-corrosive 302/304 Stainless steel, brass or chrome
- Available in standard, mid-size, and oversize configurations with pre-marked special use versions available
- 302/304 Stainless steel is non-magnetic and non-corrosive for rugged durability
- Solid brass is coated with transparent lacquer to resist premature oxidation
- Shipped with removable protective film
- Recommended for industrial, institutional and commercial applications


Wallplate dimensional information

Mounting holes for wallplates and covers


These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.




Device or strap



Box




Decorator/GFCI




FS box

Cover opening dimensions


Nominal dimensions for cover openings conform to industry standards and practices.




4-wire power device



Off center power device



3-wire power device




Single locking receptacle 20/30 amp




Single receptacle

Plate opening dimensions


Nominal dimensions for plate openings conform to industry standards and practices.

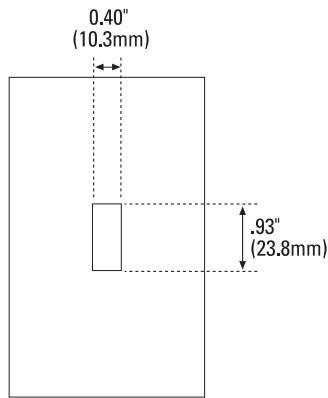

Toggle

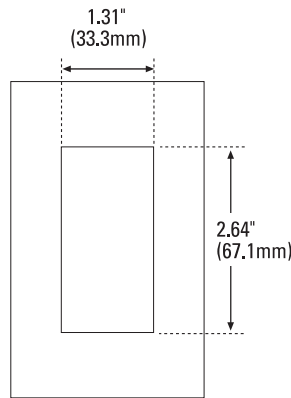

Decorator

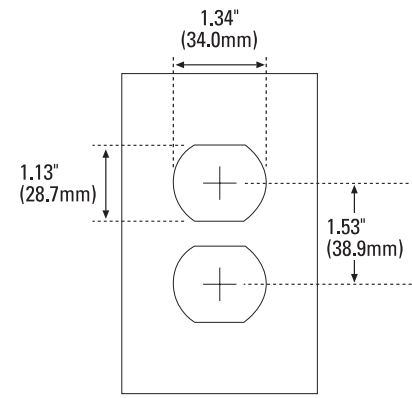

Duplex receptacle


Wallplate dimensional information




Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


Standard

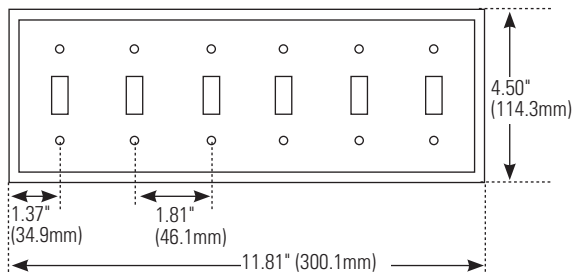


Mid-size

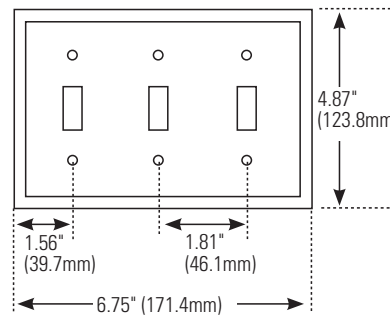

Oversize Mid-size Standard

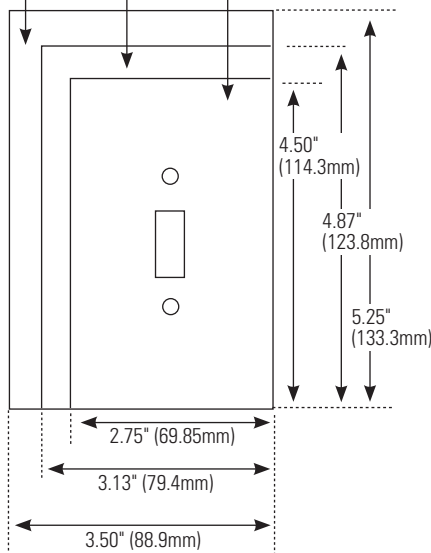

Oversize




Compliances, specifications and availability are subject to change without notice.

www.eaton.com
www.eaton.com/arrowhart


Standard size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang




6-Gang

Toggle switch wallplates

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5134__	•	•
	Thermoset	A, B, LA, V, W	□ 2134__	•	•
	302/304 Stainless steel	—	□ 93071	•	•
	Brass	—	□ 94071	•	•
2-Gang	Nylon	A, B, GY, LA, RD, V, W	□ 5139__	•	•
	Thermoset	A, B, LA, V, W	□ 2139__	•	•
	302/304 Stainless steel	—	□ 93072	•	•
	Brass	—	□ 94072	•	•
3-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5141__	•	•
	Thermoset	A, B, LA, V, W	□ 2141__	•	•
	302/304 Stainless steel	—	□ 93073	•	•
	Brass	—	□ 94073	•	•
4-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5154__	•	•
	Thermoset	A, B, LA, V, W	□ 2154__	•	•
	302/304 Stainless steel	—	□ 93074	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2155__	•	•
	302/304 Stainless steel	—	□ 93075	•	•
6-Gang	Thermoset	A, B, V, W	□ 2156__	•	•
	302/304 Stainless steel	—	□ 93076	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

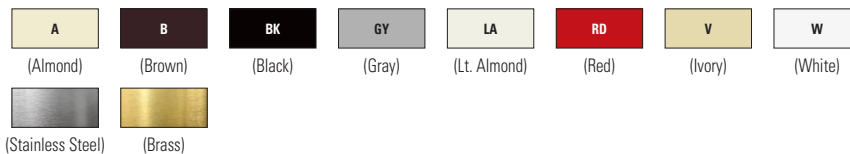

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32


Standard size duplex receptacle wallplates

Product description


1-Gang, 2-Gang, 3-Gang




1-Gang



2-Gang



3-Gang



1-Gang

Duplex receptacle

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5132__	•	•
	Thermoset	A, B, LA, V, W	□ 2132__	•	•
	302/304 Stainless steel	—	□ 93101	•	•
	Brass	—	□ 94101	•	•
2-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5150__	•	•
	Thermoset	A, B, LA, V, W	□ 2150__	•	•
	302/304 Stainless steel	—	□ 93102	•	•
	Brass	—	□ 94102	•	•
3-Gang	302/304 Stainless steel	—	□ 93103	•	•

Standard size single receptacle wallplates

Product description


1-Gang

Single receptacle

Gang	Material	Color suffix	Catalog no.		
1-Gang with 1.406" (35.712mm) hole	Nylon	A, B, BK, GY, RD, V, W	□ 5131__	•	•
	Thermoset	A, B, LA, V, W	□ 2131__	•	•
	302/304 Stainless steel	—	□ 93091	•	•
	Brass	—	□ 94091	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

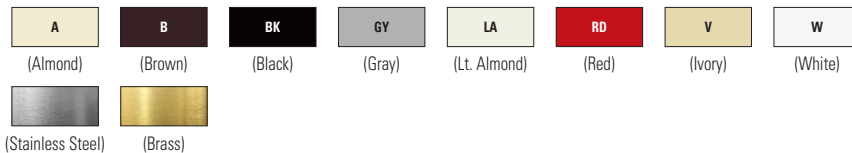

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


Standard size decorator wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang




6-Gang

Decorator wallplates

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, BL, GY, LA, RD, V, W	□ 5151__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2151__	•	•
	302/304 Stainless steel	—	□ 93401	•	•
	Brass	—	□ 94401	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5152__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2152__	•	•
	302/304 Stainless steel	—	□ 93402	•	•
	Brass	—	□ 94402	•	•
3-Gang	Thermoset	A, B, GY, LA, V, W	□ 2163__	•	•
	302/304 Stainless steel	—	□ 93403	•	•
4-Gang	Thermoset	A, B, LA, V, W	□ 2164__	•	•
	302/304 Stainless steel	—	□ 93404	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2165__	•	•
	302/304 Stainless steel	—	□ 93405	•	•
6-Gang	Thermoset	A, B, LA, V, W	□ 2166__	•	•
	302/304 Stainless steel	—	□ 93406	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

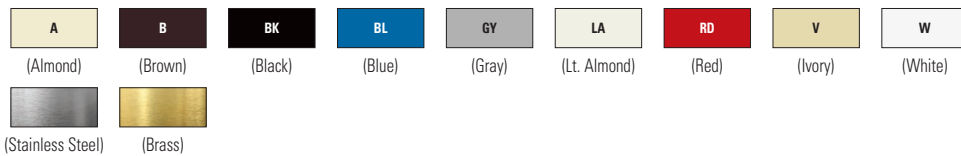

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page Q-32



RoHS compliant - Page Q-32

Standard size wallplates




Standard size blank wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang




2-Gang




3-Gang



4-Gang



93630



93631

Blank - box mounted

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5129__	•	•
	Thermoset	A, B, LA, V, W	□ 2129__	•	•
	302/304 Stainless steel	—	□ 93151	•	•
	Brass	—	□ 94151	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5137__	•	•
	Thermoset	A, B, LA, V, W	□ 2137__	•	•
	302/304 Stainless steel	—	□ 93152	•	•
3-Gang	302/304 Stainless steel	—	□ 93153	•	•
4-Gang	302/304 Stainless steel	—	□ 93154	•	•

Standard size louver

Product description

Horizontal & vertical

Louver

Description	Material	Catalog no.		
Horizontal	302/304 Stainless steel	□ 93630	•	•
Vertical	302/304 Stainless steel	□ 93631	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Standard size combination wallplates

Product description


1-Gang, 2-Gang, 3-Gang




1-Gang,
0.375" hole




1-Gang,
0.625" hole




2-Gang, toggle
& single receptacle




2-Gang, toggle
& duplex receptacle




2-Gang, toggle
& decorator




2-Gang, toggle
& blank




2-Gang, duplex
receptacle & blank



2-Gang, duplex
receptacle & decorator



3-Gang, 2 toggles
& duplex receptacle



3-Gang, 2 toggles
& decorator

Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.375" (9.525mm) hole	Nylon	B, GY, V, W	□ 5128__	•	•
	Thermoset	A, B, LA, V, W	□ 2128__	•	•
	302/304 Stainless steel	—	□ 93696	•	•
1-Gang with 0.625" (15.875mm) hole	Nylon	B, GY, V, W	□ 5159__	•	•
	Thermoset	V, W	□ 2159__	•	•
	302/304 Stainless steel	—	□ 93591	•	•

Combination 2-gang

Description	Material	Color suffix	Catalog no.		
Toggle & single receptacle	302/304 Stainless steel	—	□ 93512	•	•
Toggle & duplex receptacle	Nylon	A, B, BK, GY, LA, V, W	□ 5138__	•	•
	Thermoset	A, B, LA, V, W	□ 2138__	•	•
	302/304 Stainless steel	—	□ 93532	•	•
Toggle & decorator	Brass	—	□ 94532	•	•
	Nylon	A, B, BK, GY, LA, V, W	□ 5153__	•	•
	Thermoset	A, B, LA, V, W	□ 2153__	•	•
Toggle & blank	302/304 Stainless steel	—	□ 93432	•	•
	Brass	—	□ 94432	•	•
	Nylon	A, B, BK, LA, V	□ 5171__	•	•
Duplex receptacle & blank	Nylon	A, B, BK, LA, V	□ 5170__	•	•
Duplex receptacle & decorator	Thermoset	A, LA, V, W	□ 2157__	•	•

Combination 3-gang

Description	Material	Color suffix	Catalog no.		
2 Toggles & duplex receptacle	Nylon	B, GY, V, W	□ 5158__	•	•
	Thermoset	A, B, LA, V, W	□ 2158__	•	•
	302/304 Stainless steel	—	□ 93543	•	•
2 Toggles & decorator	Thermoset	A, LA, V, W	□ 2173__	•	•
	302/304 Stainless steel	—	□ 93443	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Standard size combination wallplates

Product description

4-Gang



4-Gang, 3 toggles & duplex receptacle


Combination 4-gang

Description	Material	Color suffix	Catalog no.		
3 Toggles & duplex receptacle	Thermoset	A, LA, V, W	□ 2174__	•	•
	302/304 Stainless steel	—	□ 93554	•	•


Standard size power outlet wallplates

Product description


1-Gang, 2-Gang




93111




93221




192



93223, 69



2168, 93227, 68



93228

Power outlet

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.59" (40.5mm) hole	302/304 Stainless steel	—	□ 93111	•	•
1-Gang with 2.15" (54.8mm) hole	302/304 Stainless steel	—	□ 93221	•	•
	Chrome (UL)	—	□ 39CH*	•	•
2-Gang with 2.15" (54.7mm) hole	Thermoset	A, B, LA, V, W	□ 2168__	•	•
	302/304 Stainless steel	—	□ 93227	•	•
	Chrome (UL)	—	□ 68*	•	•
2-Gang with 2.15" (54.7mm) Off center hole	Chrome (UL)	—	□ 192*	•	•
2-Gang with 2.28" (57.9mm) hole	302/304 Stainless steel	—	□ 93228	•	•
2-Gang with 2.47" (62.7mm) hole	302/304 Stainless steel	—	□ 93223	•	•
	Chrome (UL)	—	□ 69*	•	•
2-Gang with 2.47" (62.7mm) hole	Nylon	V, W	□ 5169__	•	•

* UL Listed


Standard size wallplate guide for power devices

Wallplates for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	39CH, 68, 2168, 93221, 93227
5515N, 5744N, 5754N, 8430N, 8450N, 8460N, 9460N	69, 5169, 93223
122B	192

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32


RoHS compliant - Page Q-32

Standard size wallplates


Standard size extra depth wallplates

Product description


1-Gang, 2-Gang, 3-Gang




1-Gang toggle




1-Gang duplex receptacle




2-Gang toggle




2-Gang duplex receptacle




2-Gang blank




2-Gang toggle & duplex receptacle




2-Gang toggle & blank




2-Gang duplex receptacle & blank




EG5134, EM93071




IG5132



EM5132, EM93101



IG5131



EM93102

Extra depth*

Description	Material	Color suffix	Catalog no.		
1-Gang toggle	Thermoset	V, W	□ 4134__	•	•
2-Gang toggle	Thermoset	V, W	□ 4139__	•	•
1-Gang duplex receptacle	Thermoset	V, W	□ 4132__	•	•
2-Gang duplex receptacle	Thermoset	V, W	□ 4150__	•	•
2-Gang blank	Thermoset	V, W	□ 4137__	•	•
2-Gang toggle & duplex receptacle	Thermoset	V, W	□ 4138__	•	•
2-Gang toggle & blank	Thermoset	V, W	□ 4171__	•	•
2-Gang duplex receptacle & blank	Thermoset	V, W	□ 4170__	•	•

*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts

Standard size pre-marked special use wallplates

Product description

1-Gang, 2-Gang


Extra depth*

Description	Material	Color suffix	Catalog no.		
1-Gang toggle "emergency"	Nylon	RD	□ EM5134	•	•
	302/304 Stainless steel	—	□ EM93071	•	•
1-Gang duplex receptacle "isolated ground"	Nylon	RN	□ IG5132	•	•
1-Gang duplex receptacle "emergency"	Nylon	RD	□ EM5132	•	•
	302/304 Stainless steel	—	□ EM93101	•	•
1-Gang single receptacle with 1.40" (35.7mm) hole "isolated ground"	Nylon	V, RN	□ IG5131__	•	•
2-Gang duplex receptacle "emergency"	302/304 Stainless steel	—	□ EM93102	•	•

*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


Mid-size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang




4-Gang




5-Gang




6-Gang



1-Gang



2-Gang



1-Gang

Toggle switch

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ1__	•
	Thermoset	A, B, LA, V, W	□ 2034__	• •
	302/304 Stainless steel	—	□ 93971	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ2__	•
	Thermoset	A, B, LA, V, W	□ 2039__	• •
	302/ 304 Stainless steel	—	□ 93972	• •
3-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ3__	•
	Thermoset	A, B, LA, V, W	□ 2041__	• •
	302/304 Stainless steel	—	□ 93973	• •
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ4__	•
	Thermoset	A, LA, V, W	□ 2054__	• •
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ5__	•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ6__	•

Mid-size duplex & single receptacle wallplates

Product description

1-Gang, 2-Gang

Duplex receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ8__	•
	Thermoset	A, B, LA, V, W	□ 2032__	• •
	302/304 Stainless steel	—	□ 93901	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ82__	•
	Thermoset	A, LA, V, W	□ 2050__	• •
	302/304 Stainless steel	—	□ 93902	• •

Single receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang with 1.406" (35.712mm) hole	Thermoset	A, B, LA, V, W	□ 2031__	• •
	302/304 Stainless steel	—	□ 93991	• •

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

A	B	BK	GY	LA	RD	V	W	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


Mid-size decorator wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang



6-Gang

Decorator wallplates

Gang	Material	Color suffix	Catalog no.	 
1-Gang	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ26__	•
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2051__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93934	• •
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ262__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2052__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93935	• •
3-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ263__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2063__	• •
	302/304 Stainless steel	—	<input type="checkbox"/> 93936	• •
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ264__	•
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2064__	• •
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ265__	•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ266__	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32


Mid-size screwless wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang




4-Gang




5-Gang




6-Gang




1-Gang



2-Gang



3-Gang



4-Gang



1-Gang

Decorator wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, GY, LA, V, W	<input type="checkbox"/> PJS26__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS262__	•
3-Gang	Polycarbonate	A, BB, BK, LA, V, W	<input type="checkbox"/> PJS263__	•
4-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS264__	•
5-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS265__	•
6-Gang	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS266__	•

Toggle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS1__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS2__	•
3-Gang	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS3__	•
4-Gang	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS4__	•

Duplex receptacle wallplates

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS8__	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

A	B	BB	BK	GY	LA	V	W
(Almond)	(Brown)	(Brushed Bronze)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)

Certification information: Aspire series wallplates are cULus Listed to UL1514D, file no. E33216; ; PJ series wallplates are cULus Listed.

Specification information: K-22

Compliances, specifications and availability are subject to change without notice.

RoHS compliant - Page Q-32


Mid-size blank wallplates

Product description


1-Gang box, 1-Gang strap, 2-Gang box




1-Gang



2-Gang





1-Gang with 0.375" hole



1-Gang with 0.406" hole, box mounted

Blank - box & strap mounted



Description	Material	Color suffix	Catalog no.		
1-Gang box	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ13__	•	•
	Thermoset	A, B, LA, V, W	□ 2029__	•	•
	302/304 Stainless steel	—	□ 93951	•	•
1-Gang strap	Polycarbonate	A, B, BK, LA, V, W	□ PJ14__	•	•
2-Gang box	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ23__	•	•
	Thermoset	A, LA, V, W	□ 2037__	•	•

Mid-size telephone & coax wallplates

Product description


1-Gang box

Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	□ 2028__	•	•
	302/304 Stainless steel	—	□ 93996	•	•
1-Gang with 0.40" (10.3mm) hole, box mounted	Polycarbonate	A, B, BK, LA, V, W	□ PJ11__	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32


Mid-size combination wallplates

Product description


2-Gang, 3-Gang




2-Gang toggle & duplex receptacle




2-Gang, toggle & decorator




2-Gang toggle & blank




2-Gang duplex receptacle & blank




2-Gang, duplex receptacle & decorator




3-Gang, 2 toggles & duplex receptacle




3-Gang, 2 toggles & decorator




1-Gang 1.406" hole



1-Gang 1.594" hole



1-Gang with 2.1563" hole



2-Gang with 2.1563" hole

Combination 2-gang

Description	Material	Color suffix	Catalog no.	
Toggle & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ18__	•
	Thermoset	A, B, LA, V, W	□ 2038__	• •
	302/304 Stainless steel	—	□ 93932	• •
Toggle & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ126__	•
	Thermoset	A, LA, V, W	□ 2053__	• •
	302/304 Stainless steel	—	□ 93937	• •
Toggle & blank	Polycarbonate	A, B, LA, V, W	□ PJ113__	•
Duplex receptacle & blank	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ138__	•
Duplex receptacle & decorator	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ826__	•

Combination 3-gang

Description	Material	Color suffix	Catalog no.	
2 Toggles & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ28__	•
2 Toggles & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	□ PJ226__	•

Mid-size power outlet wallplates

Product description

1-Gang, 2-Gang

Power outlet

Description	Material	Color suffix	Catalog no.	
1-Gang with 1.40" (35.7mm) hole	Polycarbonate	A, B, BK, GY, LA, RD, V, W	□ PJ7__	•
1-Gang with 1.59" (40.5mm) hole	Polycarbonate	B, GY, V, W	□ PJ720__	•
1-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, BK, V, W	□ PJ724__	•
	Nylon	V	□ 5068__	• •
	Thermoset	A, B, V, W	□ 2068__	• •
2-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, V, W	□ PJ703__	•

Mid-size wallplate guide for power devices

Wallplate for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	2068, 5068, PJ724, PJ703

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

A	B	BK	GY	LA	RD	V	W	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.







Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Mid-size sectional wallplates

Product description

1-Gang



Sectional wallplates

Description	Material	Location	Color	Catalog no.	
1-Gang toggle	Polycarbonate	Center	W	<input type="checkbox"/> STC1W	•
		End	W	<input type="checkbox"/> STE1W	•
1-Gang decorator	Polycarbonate	Center	W	<input type="checkbox"/> STC26W	•
		End	W	<input type="checkbox"/> STE26W	•
1-Gang duplex receptacle	Polycarbonate	Center	W	<input type="checkbox"/> STC8W	•
		End	W	<input type="checkbox"/> STE8W	•
1-Gang blank	Polycarbonate	Center	W	<input type="checkbox"/> STC14W	•
		End	W	<input type="checkbox"/> STE14W	•
1-Gang single receptacle 1.40" (35.7mm) hole	Polycarbonate	Center	W	<input type="checkbox"/> STC7W	•
		End	W	<input type="checkbox"/> STE7W	•

Mid-size pre-marked special use wallplates

Product description

1-Gang, 2-Gang

Pre-marked special use

Description	Material	Color suffix	Catalog no.	
1-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ1EM	•
1-Gang decorator "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ26EM	•
1-Gang orange decorator "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ26IG	•
1-Gang orange single receptacle, 1.40" (35.7mm) hole "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ7IG	•
1-Gang duplex receptacle "computer"	Polycarbonate	V, W	<input type="checkbox"/> PJ8CO_	•
1-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ8EM	•
1-Gang duplex receptacle "GFCI protected"	Polycarbonate	V, W	<input type="checkbox"/> PJ8GF_	•
1-Gang orange duplex receptacle "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ8IG	•
2-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ2EM	•
2-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ82EM	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22


Compliances, specifications and availability are subject to change without notice.

RoHS compliant - Page Q-32


Oversize toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang toggle




2-Gang toggle




3-Gang




4-Gang




1-Gang



1-Gang



2-Gang



1-Gang 1.406" hole

Toggle switch

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	□ 2144__	•	•
	302/304 Stainless steel	—	□ 93871	•	•
2-Gang	Thermoset	A, B, LA, V, W	□ 2149__	•	•
	302/304 Stainless steel	—	□ 93872	•	•
3-Gang	Thermoset	V, W	□ 2741__	•	•
	302/304 Stainless steel	—	□ 93873	•	•
4-Gang	302/304 Stainless steel	—	□ 93874	•	•

Oversize decorator wallplates

Product description

1-Gang

Decorator

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	□ 2751__	•	•
	302/304 Stainless steel	—	□ 93834	•	•

Oversize duplex receptacle wallplates

Product description

1-Gang, 2-Gang

Duplex receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	□ 2142__	•	•
	302/304 Stainless steel	—	□ 93801	•	•
2-Gang	Thermoset	V, W	□ 2750__	•	•
	302/304 Stainless steel	—	□ 93802	•	•

Oversize single receptacle wallplates

Product description

1-Gang

Single receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.40" (35.7mm) hole	Thermoset	V, W	□ 2731__	•	•
	302/304 Stainless steel	—	□ 93891	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


Oversize blank box mounted wallplates

Product description


1-Gang, 2-Gang




1-Gang



2-Gang




2-Gang toggle & duplex receptacle



1-Gang with 0.375" hole




GFER



2160



231



153

Blank - box mounted

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	□ 2729__	•	•
	302/304 Stainless steel	—	□ 93851	•	•
2-Gang	302/304 Stainless steel	—	□ 93852	•	•

Oversize combination wallplates

Product description

2-Gang

Combination 2-gang

Description	Material	Color suffix	Catalog no.		
Toggle & duplex receptacle	Thermoset	B, V, W	□ 2148__	•	•

Oversize telephone & coax wallplates

Product description

2-Gang

Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	□ 2728__	•	•
	302/304 Stainless steel	—	□ 93896	•	•

Wallplate accessories

Product description

GFCI extension ring, adapters, wallplate screws & pilot light lamp holder

Wallplate accessories

Description	Material	Color suffix	Catalog no.		
GFCI extension ring for use with GFCIs, 7/8" spacer (cULus)	—	B, BLK, LA, V, W	□ GFER-__**	•	
Adapter - decorator to blank	—	B, LA, V, W	□ 2160__	•	•
Adapter - decorator to toggle	—	V, W	□ 2161__	•	•
Toggle & receptacle wallplate screws #6-32 x 1/2" (12.7mm) for toggle & receptacle wallplates	Baked enamel head/metal	B, LA, V, W	□ 231__	•	
	Nylon	RD, V, W	□ 232__	•	
Toggle & receptacle wallplate screws #6-32 x 5/16" (7.9mm) for toggle & receptacle wallplates	Baked enamel head/metal	LA, V, W	□ 2231__	•	
Recessed pilot light lamp holder with 6 watt clear S-6 bulb (cULus)	—	—	□ 153__**†	•	•

*For use with louver wallplate, ** cULus Listed, † UL Listed, CSA certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BLK (Black), LA (Light Almond), RD (Red), V (Ivory), W (White)

B	BLK	LA	RD	V	W	
(Brown)	(Black)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

LED step lights

LED step lighting

Product description

120V/AC
60Hz



7739

Features

- Fits into a standard junction box for easy installation (single-gang, handy box, 2" minimum inside width)
- 6 LED's with 6000-6500K light temperature
- Energy-efficient 40,000 hour rated LED lamp light
- Back & side wire, #14 - #12 AWG
- Perfect for any area where low level lighting or safe way-finding is needed, such as hallways, stairways, lobbies, auditoriums and theaters
- Includes vertical and horizontal louvered wallplates

LED step light

Rating V/AC	Description	Color	Catalog no.
120 V/AC, 60Hz	3W LED step light (vertical and horizontal)	A, LA, W	□ 7739__

Note: dimensional information on K-23

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix; A (Almond), LA (Light Almond), W (White)

Example: 7739A



Material characteristics: Faceplate, Polycarbonate/ABS. Back Body, Polycarbonate. Strap, Galvanized Steel. Wire, #14 - #12 AWG
Specification information: K-23

Compliances, specifications and availability are subject to change without notice.

Wallplate specification & performance data

Wallplates

Product description

Standard size, mid-size, oversize

Wallplate sizes: standard size, mid-sized & oversize wallplates

	Thermoset	Nylon	Stainless steel	Polycarbonate
Material type	Thermoset	Nylon	Stainless steel	Polycarbonate
Manufacturing process	Injection molded	Injection molded	Stamped	Injection molded
Testing & code compliance	<ul style="list-style-type: none"> UL Listed to UL 514D, file no. E33216 cUL Listed to C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> UL Listed to UL 514D, file no. E33216 cUL Listed to C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> UL Listed to 514D, file no. E92003 CSA certified to C22.2, no. 42.1 	<ul style="list-style-type: none"> UL Listed to UL 514D, file no. E33216 cUL, UL file E33216 certified to C22.2, no. 42.1
Environmental specifications	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40°C to 90°C (-40°F to 194°F)</p>	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40°C to 70°C (-40°F to 158°F)</p>	<p>Flammability: N/A</p> <p>Temperature rating: -40°C to 70°C (-40°F to 158°F)</p>	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40° to 70° C (-40°F to 158°F)</p>
Materials	<p>Body: 0.080" thick thermoset urea or phenolic</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.060" thick thermoplastic</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.08" thick thermoplastic polycarbonate</p> <p>Inner wallplate: 0.071" thick polycarbonate (PJS Series)</p>

Compliances, specifications and availability are subject to change without notice.

LED accent lights specification & performance data



Commercial specification grade LED step light

Product description

120 V/AC 60Hz

Series type	Louvered faceplate 7739 series
Illumination	6 LEDs 18-36 lumens 6000-6500 Kelvin LED life rated 40,000 hours
Power consumption	<3 Watts
Materials	Faceplate: Polycarbonate Bottom Housing: Polycarbonate Strap: Galvanized Steel Termination Accommodations: #14 - #12 AWG
Testing & code compliance	• cULus Listed UL 1958 and UL8750
Power supply	120V/AC, 60Hz
Installation	Single-gang junction box
Environmental	Temperature rating: -35°C -66°C Flammability rating: V-2 Grade

7739

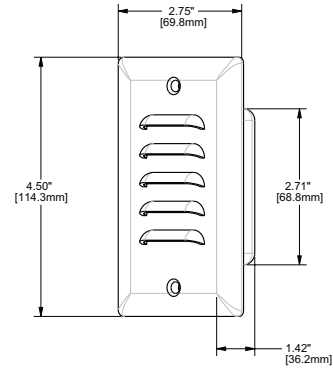

Compliances, specifications and availability are subject to change without notice.