

FIBERGLASS

375 lbs. TYPE IAA
load capacity*

STEPLADDER FS1100HD SERIES



FS1106HD

SHOX

FIBERGLASS

375 lbs. TYPE IAA
load capacity*

STEPLADDER FS1300HD SERIES



FS1306HD

SHOX™ - superior
impact absorption

Molded top with
recessed tray

Full Metal
Boot™

Extra heavy
duty inside
spreader braces

Heavy duty
reinforcement plates

Double-rivet step
construction w/ heavy
duty gusset bracing

Heavy gauge
metal top

Aluminum angle
slip-resistant
rubber feet

Inside spreader
braces

Double-rivet
step construction

Heavy duty
gusset bracing

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1104HD	4'	3"	20 9/16"	29"	19	4.2'
FS1106HD	6'	3"	24 1/16"	40 13/16"	27	7.2'
FS1108HD	8'	3"	27 9/16"	52 5/8"	36	11.1'
FS1110HD	10'	3"	31 1/16"	64 7/16"	45	15.5'
FS1112HD	12'	3"	34 9/16"	76 1/4"	56	20.4'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



FEATURING THE EXCLUSIVE
**FULL
METAL
BOOT**

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1304HD	4'	3"	18 13/16"	29"	15	4'
FS1305HD	5'	3"	20 5/16"	35"	18	5.4'
FS1306HD	6'	3"	21 13/16"	41"	22	6.8'
FS1308HD	8'	3"	24 13/16"	54"	28	10.3'
FS1310HD	10'	3"	27 13/16"	64 9/16"	40	14.2'
FS1312HD	12'	3"	30 13/16"	78"	41	18.4'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



FIBERGLASS

STEPLADDER FS1400HD SERIES

375 lbs. TYPE IAA
load capacity*

BRUTE



FS1406HD



Patent #D597,685 & patents pending

A multifunctional top designed to increase productivity.

- **HARDWARE TRAY**
Recessed tray provides area to secure hardware from falling off the top.
- **PAINT BUCKET HOLDER**
Convenient recessed tray holds quarter/half/full gallon paint buckets.
- **DRILL SLOTS**
Two separate drill slots make for a variety of convenient options especially when also using the paint bucket holder.
- **SCREWDRIVERS/PLIERS**
Featuring plenty of slots, ProTop™ will hold all the tools needed.
- **CURVED FRONT**
Curved surface on front of top helps provide leg comfort.
- **PIPE & 2X4 HOLDER**
Groove across top keeps pipes and 2x4's from getting away from you.
- **MAGNET TRAY**
Easily secures metallic hardware and tools. Not available on type II ladders.

**SHOX™ - superior
impact absorption**

**ProTop™ - versatile
and durable**

**Da Boot™
Patent #7,000,731 B2**

**Inside spreader
braces**

**Riveted step
construction
with gussets**

Wide back braces



SHOX™

The cutting edge of impact absorption!

- ENHANCED IMPACT ABSORPTION
- BETTER PROTECTION AGAINST DAMAGE
- ALSO AVAILABLE WITH THE SUPERIOR DA BOOT™

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1404HD	4'	3"	19 1/16"	28 15/16"	15	3.7'
FS1405HD	5'	3"	21 1/16"	34 7/8"	17	4.8'
FS1406HD	6'	3"	22 3/16"	40 7/8"	21	6.1'
FS1407HD	7'	3"	24 1/16"	46 13/16"	25	7.5'
FS1408HD	8'	3"	25 3/16"	52 3/4"	28	8.7'
FS1410HD	10'	3"	28 3/16"	64 11/16"	34	12.6'
FS1412HD	12'	3"	31 3/16"	76 1/8"	51	16.7'



FIBERGLASS

300 lbs. load capacity*
TYPE IA

STEPLADDER FS1500 SERIES



FS1506

SHOX

FIBERGLASS

300 lbs. load capacity*
TYPE IA

STEPLADDER L-3016 SERIES



L-3016-06

SHOX™ - superior
impact absorption

ProTop™ - versatile
and durable

Da Boot™
Patent #7,000,731 B2

**Inside spreader
braces**

**Double-rivet
step construction**

Wide back braces

**Molded top
with handyman's
tool slots**

**Aluminum angle
slip-resistant
rubber feet**

**Inside spreader
braces**

**Heavy duty
gusset bracing**

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1502*	2'	3"	17"	18 1/4"	8	1.8'
FS1503	3'	3"	18 1/16"	23	12	2.6'
FS1504	4'	3"	19 1/16"	28 15/16"	14	3.6'
FS1505	5'	3"	21 1/16"	34 7/8"	17	4.9'
FS1506	6'	3"	22 3/16"	40 7/8"	20	5.7'
FS1507	7'	3"	24 1/16"	46 13/16"	22	7.9'
FS1508	8'	3"	25 3/16"	52 3/4"	26	8.7'
FS1510	10'	3"	28 3/16"	64 1/16"	34	10.9'
FS1512	12'	3"	31 3/16"	76 1/16"	47	15.8'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-3016-04	4'	3"	18 13/16"	28 3/16"	14	3.6'
L-3016-06	6'	3"	21 13/16"	40 1/16"	20	5.7'
L-3016-08	8'	3"	24 13/16"	51 7/8"	26	8.7'
L-3016-10	10'	3"	27 13/16"	64 1/16"	34	10'
L-3016-12	12'	3"	30 13/16"	75 1/16"	47	15.8'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



*FS1502 is a folding step stand & is not equipped with Da Boot™, ProTop™, SHOX™, or inside spreader braces.

FIBERGLASS

375 lbs. TYPE IAA
load capacity*

TWIN FRONT LADDER FM1100HD SERIES



FM1106HD

SHOX

FIBERGLASS

375 lbs. TYPE IAA
load capacity*

TWIN FRONT LADDER FM1400HD SERIES



FM1406HD

SHOX

SHOX™ - superior
impact absorptionFull Metal
Boot™Inside spreader
bracesHeavy gauge
steel hingesDouble-rivet step
construction w/ heavy
duty gusset bracingReinforcement
platesSHOX™ - superior
impact absorptionDa Boot™
Patent #7,000,731 B2Heavy gauge
steel hingesInside spreader
bracesHeavy duty
gusset bracingRiveted step
construction

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1104HD	4'	3"	20 1/2"	36"	28	5.2'
FM1106HD	6'	3"	24"	52"	32	9'
FM1108HD	8'	3"	27 1/2"	67"	48	13.7'
FM1110HD	10'	3"	31"	83"	64	19.2'
FM1112HD	12'	3"	34 1/2"	98"	78	25.5'


ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5

**FULL
METAL
BOOT**

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials.
Therefore the duty rating for this ladder is PER SIDE.

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1404HD	4'	3"	19 1/8"	37 1/2"	21	4.7'
FM1405HD	5'	3"	21 1/8"	44 7/8"	24	6.5'
FM1406HD	6'	3"	22 1/8"	52 1/8"	27	8.3'
FM1407HD	7'	3"	24 1/8"	59 1/8"	32	10.2'
FM1408HD	8'	3"	25 1/8"	67 1/8"	36	12.4'
FM1410HD	10'	3"	28 1/8"	81 1/8"	55	17.5'
FM1412HD	12'	3"	31 1/8"	96 3/4"	68	23.2'
FM1414HD*	14'	3"	34 1/8"	111 1/2"	84	27.5'
FM1416HD*	16'	3"	37 1/8"	126 1/8"	100	33.5'


ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5

BRUTE 375


*Special duty: manufacturer tested to 375 lbs.
BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials.
Therefore the duty rating for this ladder is PER SIDE.

FIBERGLASS

300 lbs. TYPE IA load capacity*
*includes weight of one side material

TWIN FRONT LADDER FM1500 SERIES



FM1506

SHOX

FIBERGLASS

250 lbs. TYPE I load capacity*
*includes weight of one side material

TWIN FRONT LADDER FM2000 SERIES



FM2006

SHOX™ - superior impact absorption

Da Boot™
Patent #7,000,731 B2

Inside spreader braces

Double-rivet step construction

Heavy gauge steel hinges

Aluminum angle slip-resistant rubber feet

Heavy gauge steel hinges

Double-rivet step construction

Pinch-resistant spreader braces

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1503	3'	3"	18 1/16"	30 1/8"	16	3.4'
FM1504	4'	3"	19 9/16"	37 1/2"	19	4.9'
FM1505	5'	3"	21 1/16"	44 7/8"	22	6.5'
FM1506	6'	3"	22 9/16"	52 5/16"	27	8.4'
FM1507	7'	3"	24 1/16"	59 1/16"	30	10.2'
FM1508	8'	3"	25 9/16"	67 1/8"	34	12.3'
FM1510	10'	3"	28 9/16"	81 15/16"	44	17.3'
FM1512	12'	3"	31 9/16"	96 3/4"	62	23.1'

MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM2004	4'	3"	18 3/4"	37 1/4"	17	4.6'
FM2006	6'	3"	21 3/4"	52"	24	8.1'
FM2008	8'	3"	24 3/4"	66 13/16"	34	12'
FM2010	10'	3"	27 3/4"	81 5/8"	45	16.8'
FM2012	12'	3"	30 3/4"	96 7/16"	55	22.1'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials.
Therefore the duty rating for this ladder is PER SIDE.

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials.
Therefore the duty rating for this ladder is PER SIDE.

FIBERGLASS

300 lbs. TYPE IA
load capacity*

PLATFORM LADDER FP1500 SERIES



FP1504

**IMPROVED
PLATFORM
DESIGN!**

Gapless and slimmer
for improved storage.

SHOX

SHOX™ - superior
impact absorption

Da Boot™
Patent #7,000,731 B2

Gapless
slip-resistant
platform

Top rail
guard

Double-rivet step
construction



MODEL	HT. TO PLATFORM	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FP1503	2' 10"	3"	23 3/16"	34 1/4"	19	3.9'
FP1504	3' 9"	3"	24 13/16"	39 7/8"	23	5.2'
FP1505	4' 9"	3"	26 3/16"	45 3/4"	25	6.5'
FP1506	5' 8"	3"	27 3/4"	52"	28	7.6'
FP1508	7' 7"	3"	30 7/8"	63 3/4"	41	10'
FP1510	9' 6"	3"	33 13/16"	75 5/8"	57	12.9'
FP1512	11' 5"	3"	36 13/16"	86 5/8"	68	15.4'



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5



FIBERGLASS

375 lbs. TYPE IAA
load capacity*

STEP-TO-STRAIGHT LADDER FC1200 SERIES



FC1206

Hinging
mechanism

Standard
pole grip

Utility-style
safety shoes

Double-rivet
step construction

Runglock



MODEL	LADDER SIZE	MAX. EXT. LENGTH	FLARED SECTION MIN. O.D.	FLARED SECTION MAX. O.D.
FC1206	6'	9'	17 7/8"	23 5/8"
FC1207	7'	11'	17 7/8"	24 5/8"
FC1208	8'	13'	17 7/8"	25 5/8"

Table
continued
below...

MODEL	PARALLEL SECTION O.D.	APPROX. WT. (LBS)	APPROX. CUBES
FC1206	14 5/8"	33	6.8'
FC1207	14 5/8"	36	8.4'
FC1208	14 5/8"	41	9.8'



O.D. denotes outside dimension

FIBERGLASS

300 lbs. **TYPE IA**
load capacity*
*Excludes weight of user and materials

EXTENSION TRESTLE LADDER FX1100 SERIES



FX1108

FIBERGLASS

300 lbs. **TYPE IA**
load capacity*
*Excludes weight of user and materials

SHELF LADDER FH1000 SERIES



FH1006

Aluminum angle
slip-resistant
rubber feetLocking
bailSlide guides &
spreader bracesHeavy trestle
top hingeHeavy duty
gusset bracingAluminum angle
slip-resistant
rubber feetRubber
bumperAngled
stepsDouble-rivet step
constructionSerrated
aluminum stepsHeavy duty
gusset bracing

MODEL	LADDER SIZE	MAX. EXT. LENGTH	STEP SIZE	BOTTOM WIDTH
FX1108	8'	12' 6"	3"	33"
FX1110	10'	15' 6"	3"	39"
FX1112	12'	19' 6"	3"	45"

Table
continued
below...

MODEL	APPROX. SPREAD	INSIDE WIDTH FLY	OUTSIDE WIDTH FLY	APPROX. WT. (LBS)	APPROX. CUBES
FX1108	70 1/4"	15 1/2"	18 1/4"	65	19.1'
FX1110	82 1/16"	15 1/2"	18 1/4"	90	22.7'
FX1112	93 15/16"	15 1/2"	18 1/4"	115	30.4'


ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.5


MODEL	LADDER SIZE	STEP SIZE	WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
FH1004	4'	3"	15 1/4"	8	1.5'
FH1005	5'	3"	15 1/4"	10	1.9'
FH1006	6'	3"	15 1/4"	11	2.4'
FH1007	7'	3"	15 1/4"	12	2.7'
FH1008	8'	3"	15 1/4"	14	3'
FH1010	10'	3"	15 1/4"	20	3.6'
FH1012	12'	3"	15 1/4"	24	4.5'
FH1014	14'	3"	15 1/4"	28	5.2'
FH1016	16'	3"	15 1/4"	32	6.1'



FIBERGLASS

300 lbs. load capacity*
*includes weight of user and tools

TYPE 1A

EXTENSION LADDER FE3200 SERIES



FE3220

QuickLatch®
 Patent # 5429207

Steel swivel safety shoe w/ metal shield
Outside slide guides
D-shaped rungs
Mar-resistant rail end caps


SINGLE LADDERS - FE3100

MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE3108	8'	16	3'
FE3110	10'	21	5.3'
FE3112	12'	25	4.8'
FE3114	14'	28	5.6'
FE3116	16'	36	6.7'
FE3118	18'	41	7.5'
> FE3120	20'	45	11.4'

> Special order item.

SIZES	RAIL DEPTH	OUTSIDE WIDTH	INSIDE WIDTH
8'-14'	3 1/4"	17 1/16"	14 1/16"
16'-20'	3 5/16"	17 1/16"	15 5/16"

ALSO AVAILABLE WITH...



L-3022-PT SERIES

Patent #7,753,170

A multifunctional top designed to increase productivity.

- **CORNER GRIP**
The V-shape design provides greater stability on corners.
- **POLE GRIP**
The V-shape design with rubber tread makes it ideal for working against poles or trees. The tool slots provide the option for lashing the ladder to the pole or tree.
- **INTEGRATED BUMPER**
Soft non-marking/non-marring rubber tread protects the work surface.
- **WIDER DESIGN**
Wider design provides greater stability and 700% more contact area on flat surfaces.
- **WORK TRAY**
Non-conductive molded work-tray with convenient handyman's tool slots.

EXTENSION LADDERS WITH PROTOP™



MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EX. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	42	8.6'
L-3022-24PT	24'	12'	21'	52	10.2'
L-3022-28PT	28'	14'	25'	58	10.6'
L-3022-32PT	32'	16'	29'	70	12'

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EX. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE3216*	16'	8'	13'	30	6.5'
FE3220	20'	10'	17'	42	8.6'
FE3224	24'	12'	21'	52	10.2'
FE3228	28'	14'	25'	58	11.9'
FE3232	32'	16'	29'	70	12.6'
FE3236**	36'	18'	32'	79	15.8'
FE3240**	40'	20'	35'	93	17.5'

*Does not include rope and pulley.
 ** 250 lb. Type I rated.

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	3 1/4"	6 1/4"	14 1/16"	13 1/16"	17 1/16"	16 1/16"
32'-40'	3 5/16"	6 1/4"	15 5/16"	14 5/16"	17 1/16"	16 1/16"


ANSI
 Meets or exceeds requirements
 of American National Standards Institute
ANSI A14.5




FE7220

Aluminum plate
connection rungs

Aluminum swivel
safety shoe with
Full Metal Boot™

QuickLatch®
Patent # 5429207

D-shaped or
round rungs

Outside
slide guides

Mar-resistant
rail end caps

ROUND-RUNG

SINGLE LADDERS

MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE7512	12'	27	4.8'
> FE7514	14'	31	5.6'
> FE7516	16'	36	7.0'
> FE7518	18'	50	11.3'
> FE7520	20'	54	15.3'

> Special order item.

D-RUNG

SINGLE LADDERS

MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE7108	8'	16	4.7'
FE7110	10'	22	6.9'
FE7112	12'	26	7.3'
FE7114	14'	32	8.3'
FE7116	16'	37	9.5'
FE7118	18'	53	10.6'
FE7120	20'	61	12.8'

D-RUNG

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE7216*	16'	8'	13'	34	6.7'
FE7220	20'	10'	17'	45	8.8'
FE7224	24'	12'	21'	53	10.7'
FE7228	28'	14'	25'	62	12.5'
FE7232	32'	16'	29'	72	14.1'
FE7236	36'	18'	32'	110	19.1'
FE7240	40'	20'	35'	117	21.1'

*Does not include rope and pulley.

ROUND-RUNG

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE7616*	16'	8'	13'	34	6.7'
FE7620	20'	10'	17'	44	8.8'
FE7624	24'	12'	21'	52	10.7'
FE7628	28'	14'	25'	60	12.5'
FE7632	32'	16'	29'	73	14.1'
FE7636	36'	18'	32'	100	19.1'
FE7640	40'	20'	35'	108	21.1'

> Special order item.

*Does not include rope and pulley.

INSIDE WIDTH

OUTSIDE WIDTH

SIZES	RAIL DEPTH	STACK HEIGHT	BASE	FLY	BASE	FLY
16'-28'	3 1/4"	6 1/4"	15"	13 1/16"	17 3/8"	16 1/16"
32'-40'	4"	6 15/16"	15"	13 1/16"	18 1/2"	17 1/4"



STEEL

450 lbs. load capacity*
*includes weight of user plus materials

ROLLING WAREHOUSE LADDER GSW SERIES



GSW2410



GSW1601A-W04

Spring
loaded casters



Locking
device



Premium
powder paint



**Toeboard
(12" + models only)



No forward
descent



GSW1600 SERIES: 16" x 10" PLATFORM | GSW2400 SERIES: 24" x 10" PLATFORM

MODEL	STEPS	STEP WIDTH	HT. TO PLATFORM	OVERALL HEIGHT	OVERALL DEPTH	OVERALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
NO HANDRAILS								
GSW1601A-W04	1	16"	12"	12"	17"	19"	1.9	16
GSW1602	2	16"	20"	20"	19"	20"	3.4	25
GSW2402	2	24"	20"	20"	19"	28"	8.1	30
GSW2403	3	24"	30"	30"	27"	28"	8.1	41
GSW1604	4	16"	40"	40"	35"	23"	8.3	47
GSW2404	4	24"	40"	40"	35"	31"	10.4	55

HANDRAILS								
GSW1603A-W03	3	16"	30"	66"	27"	20"	5	46
GSW2403-W03	3	24"	30"	66"	27"	28"	8.1	56
GSW1604-W03	4	16"	40"	76"	35"	23"	8.3	58
GSW2404-W03	4	24"	40"	76"	35"	31"	10.4	66
GSW1605	5	16"	50"	86"	42"	23"	10.1	67
GSW2405	5	24"	50"	86"	42"	31"	12.6	79
GSW2406	6	24"	60"	96"	50"	34"	14.9	109
GSW2407	7	24"	70"	106"	57"	34"	17.2	121
GSW2408	8	24"	80"	116"	63"	34"	19.4	151
GSW2409	9	24"	90"	126"	70"	34"	21.7	170
GSW2410	10	24"	100"	136"	77"	34"	23.9	198
GSW2411	11	24"	110"	146"	83"	34"	26.2	214
GSW2412	12	24"	120"	156"	90"	34"	28.5	228
GSW2413	13	24"	130"	166"	97"	39"	30.7	289
GSW2414	14	24"	140"	176"	104"	39"	33	298
GSW2415	15	24"	150"	186"	110"	39"	35.2	311

ACCESSORIES & OPTIONS

- ❑ EXTRA DEEP TOP
(16" & 24" wide models)
ACCESSORY #W01 (adds 10")
ACCESSORY #W02 (adds 20")
- ❑ *SPRING LOADED CASTERS
- ❑ HANDRAIL & GUARDRAIL
ACCESSORY #W03
- ❑ HANDRAIL & OUTRIGGER

HANDRAIL & OUTRIGGER (ACCESSORY)

Mandatory when local codes require 3:1 height to base ratio

5 Step (16" Wide Only)	GRCAL05EC-B
5-9 Step	GRCAL0509-B
10-12 Step	GRCAL1012-B
13-15 Step	GRCAL1315-B

CONSULT LEAD TIMES WITH A CUSTOMER SERVICE REPRESENTATIVE FOR THE PRODUCTS ON THIS PAGE



*Spring loaded casters available for 1-5 step models only.
 **Toeboard only available on models GSW2412 and up.

HEAVY DUTY STEEL 450 lbs. load capacity*

WAREHOUSE LADDER GSX2400 SERIES



SHOWN WITH
EASY-TURN
DESIGN!
(option #X09)


HEAVY DUTY STEEL 450 lbs. load capacity*

WAREHOUSE LADDER GSX1600 SERIES



GSX1603

This super heavy duty ladder is constructed for the most demanding requirements, yet it is only 16" wide—the number one choice for narrow spaced industrial applications.

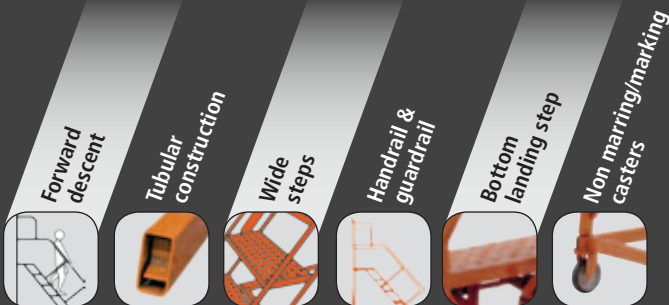


GSX2400 SERIES: 24" x 17" PLATFORM.

MODEL	STEPS	STEP WIDTH	HT. TO PLATFORM	OVER ALL HEIGHT	OVER ALL DEPTH	OVER ALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
GSX2404	4	24"	40"	76"	49"	28"	14.6	113
GSX2405	5	24"	50"	86"	58"	28"	17.2	126
GSX2406	6	24"	60"	96"	66"	34"	19.8	146
GSX2407	7	24"	70"	106"	74"	34"	22.4	159
GSX2408	8	24"	80"	116"	82"	34"	25	200
GSX2409	9	24"	90"	126"	91"	34"	27.6	232
GSX2410	10	24"	100"	136"	99"	34"	30.2	248
GSX2411	11	24"	110"	146"	107"	34"	32.8	264
GSX2412	12	24"	120"	156"	116"	34"	35.4	280
GSX2413	13	24"	130"	166"	124"	39"	38	356
GSX2414	14	24"	140"	176"	133"	39"	40.6	369
GSX2415	15	24"	150"	186"	141"	39"	43.3	392



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.7

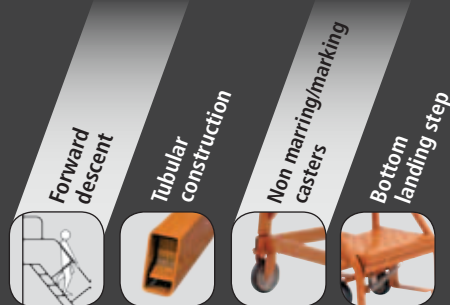

GSX1600 SERIES: 16" x 17" PLATFORM.

MODEL	STEPS	STEP WIDTH	HT. TO PLATFORM	OVER ALL HEIGHT	OVER ALL DEPTH	OVER ALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
GSX1603	3	16"	30"	66"	41"	27"	9.6'	75
GSX1604	4	16"	40"	76"	49"	27"	11.7'	91
GSX1605	5	16"	50"	86"	58"	27"	13.8'	104
GSX1606	6	16"	60"	96"	66"	27"	15.8'	118
GSX1607	7	16"	70"	106"	74"	27"	17.9'	132



ANSI
Meets or exceeds requirements
of American National Standards Institute
ANSI A14.7

HANDRAIL & OUTRIGGER (ACCESSORY)

Mandatory when local codes require 3:1 height to base ratio

3-7 Step (16" wide only)	GRCAL05EC-O
4-9 Step	GEAL0509-O
10-12 Step	GRCAL1012-O
13-15 Step	GRCAL1315-O

CONSULT LEAD TIMES WITH A CUSTOMER SERVICE REPRESENTATIVE FOR THE PRODUCTS ON THIS PAGE