



METALTECH
SCAFFOLDING ®

FULL PRODUCT LINE

WWW.METALTECH.CO



BETTER SELL THROUGH WITH **RETAIL READY PACKAGING**



Consumers and contractors can easily find all the visual information to compare products and make the best purchase decision for their needs, right on the box. Without having to open the packaging.

Convenient QR code on each box, customers can get up to date information on their mobile devices, instruction manuals and assembly videos.

Creative merchandising solutions for any format retailers.

**JOB SITE
SERIES™**

CONTENTS

CONTENTS

ALTHOUGH THE METALTECH PRODUCTS SHOWN IN THIS CATALOG ARE IN LINE WITH THE MARKET REQUIREMENTS FOR CANADA AND USA, METALTECH IS NOT RESPONSIBLE FOR ANY MODEL OR PRODUCT SPECIFICATIONS THAT MIGHT CHANGE THROUGHOUT THE YEAR. SOME PRODUCTS MAY NOT BE EXACTLY AS SHOWN IN THE PHOTOS. RESERVING OUR RIGHTS FOR PRINTER'S ERROR OR DISCONTINUED PRODUCTS.

DO NOT HESITATE TO CONSULT METALTECH CUSTOMER SERVICE FOR MORE INFORMATION OR ADVICE.

METALTECH
1735 St-Elzear Blvd. West
Laval (Quebec) Canada H7L 3N6

Toll Free Customer Service Number
1 800 363-7587

Customer Service Fax Number
1 866 517-7585

Customer Service Email
cs@metaltech.co



WE RESERVE THE RIGHT TO CHANGE OR MODIFY CONTENT, SPECIFICATIONS, FEATURES, PRODUCTS, OPTIONS, DIMENSIONS AND MATERIALS AT ANY TIME WITHOUT NOTICE OR OBLIGATION. ALL DIMENSIONS AND MEASUREMENTS ARE APPROXIMATE AND MAY VARY FROM ACTUAL PRODUCTS.

METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC.

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

STANDARD FRAMES	8-9
WALK-THRU ARCH FRAMES.....	10-11
LADDER ARCH FRAMES	12
LIGHT DUTY FRAMES & ACCESSORIES	13
CROSS BRACES & ACCESSORIES	14-15
GUARDRAILS, TOEBOARDS & TIE-OFF BARS	16
BASES	17
SIDE BRACKETS	18
PLATFORMS.....	19
STAIRWAYS.....	20
ACCESS LADDERS, TAG, HOIST POSTS & PULLEY.....	21
RACK, NETTING, TARP & WAGON	22

WALL BRACKETS, BEAMS & SHORING POSTS

WALL BRACKETS	23
BEAMS.....	23
POST DRIVER	23
LIGHT DUTY SHORING POST.....	23

JOB SITE SERIES™

JOB SITE SERIES™ 6' BAKER	26-27
JOB SITE SERIES™ PERRY STYLE™	28-29
JOB SITE SERIES™ 6'	30-31
JOB SITE SERIES™ 5'	32
JOB SITE SERIES™ 4' DELUXE	33
JOB SITE SERIES™ 4'	34
4' HIGH PORTABLE SCAFFOLD	35
JOB SITE SERIES™ DRYWALL & PANEL LIFT.....	36-37

ALU SERIES™

ALU SERIES™ 6' BAKER	38-39
ALU SERIES™ 6'	40
ALU SERIES™ 4'	41

BUILDMAN™ GRADE

BUILDMAN™ 6' DRYWALL BAKER.....	44-45
BUILDMAN™ 6'	46-47
BUILDMAN™ 4'	48
BUILDMAN™ WALL HAULER™ SERIES 3600 REMOVABLE HANDLE	49
BUILDMAN™ WALL HAULER™ SERIES 3000 PERMAQUICK™	50
BUILDMAN™ WALL HAULER™ SERIES 3000 WELDED	51
BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED	52
BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL PERMAQUICK™	53
BUILDMAN™ WALL HAULER™ SERIES H	54
BUILDMAN™ DRYWALL STILTS	55
BUILDMAN™ 18"-30" DRYWALL BENCH	56
BUILDMAN™ WORK STAND	57
BUILDMAN™ DRYWALL & PANEL LIFT.....	58-59

ALUMINUM SCAFFOLDING

ALUMINUM TOWER KITS	62-63
ALUMINUM SCAFFOLDING	64-65

EASY-SET SCAFFOLD TOWER™

EASY-SET SCAFFOLD TOWER™	66-67
--------------------------------	-------

FIBERGLASS SERIES™ SCAFFOLDING

THE TOWER.....	70
ACCESSORIES.....	71
FIBERGLASS TOWER KITS	72
SPEEDY™ SCAFFOLDING	73

LADDERS, STEPLADDERS AND WORK PLATFORMS

12.5' TELESCOPIC LADDER.....	76
15.5' TELESCOPIC LADDER.....	77
TELESCOPING MULTI-POSITION LADDER	78
TELESCOPING WORK PLANK AND LADDER JACK.....	79
STEPLADDERS.....	80
STEPLADDERS AND PORTABLE WORK PLATFORM	81

TEMPORARY FENCES

CROWD & TRAFFIC CONTROL.....	84
JOB SITES SECURITY	85
FENCE ACCESSORIES	86-87


SET UP AND SAFETY GUIDELINES

EXTERIOR SCAFFOLDING - VIEW	88-89
EXTERIOR SCAFFOLDING - SET UP INSTRUCTIONS	90
EXTERIOR SCAFFOLDING - SAFETY GUIDELINES	91

REPLACEMENT PARTS.....	92-94
INDEX (BY PRODUCT CODES)	95-97



EXTERIOR SCAFFOLDING COMPONENTS **SAFERSTACK®**

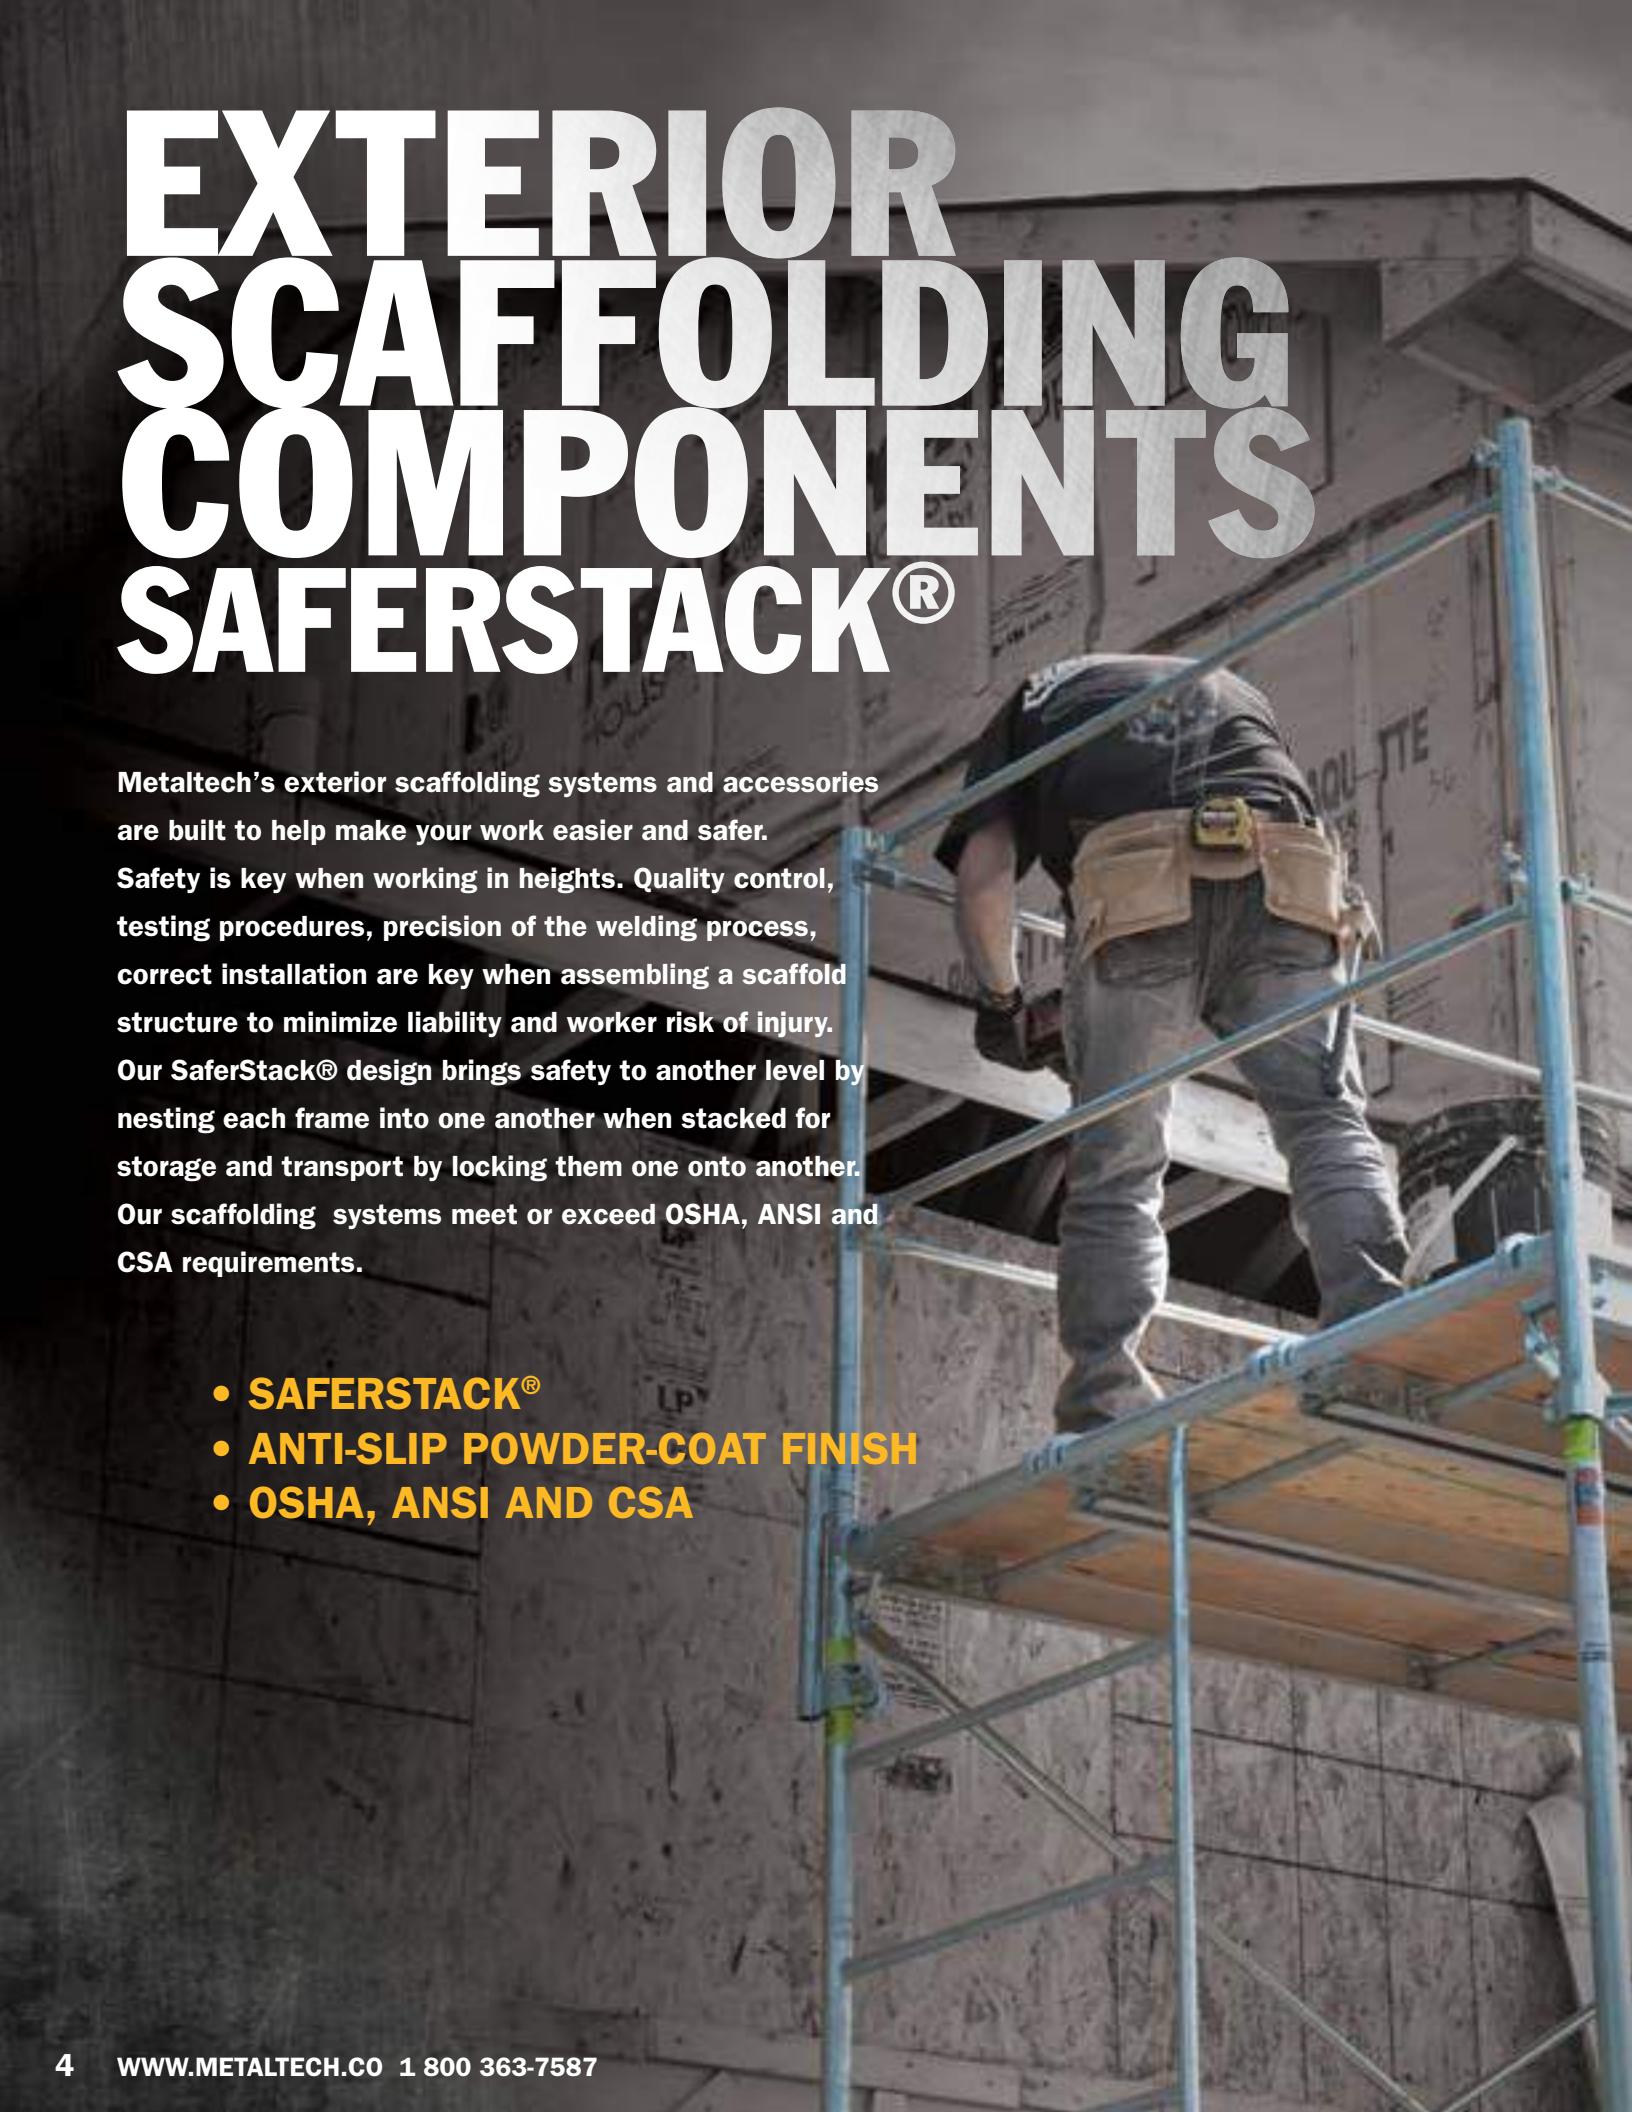

Metaltech's exterior scaffolding systems and accessories are built to help make your work easier and safer.

Safety is key when working in heights. Quality control, testing procedures, precision of the welding process, correct installation are key when assembling a scaffold structure to minimize liability and worker risk of injury.

Our SaferStack® design brings safety to another level by nesting each frame into one another when stacked for storage and transport by locking them one onto another.

Our scaffolding systems meet or exceed OSHA, ANSI and CSA requirements.

- **SAFERSTACK®**
- **ANTI-SLIP POWDER-COAT FINISH**
- **OSHA, ANSI AND CSA**

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



**BUILT TOUGH FOR
SAFETY**

METALTECH

LESS IS BEST



**STACKS IN 30%
LESS SPACE THAN
REGULAR FRAMES**

**FRAMES INTERLOCK
FOR SAFER STORAGE
AND TRANSPORT**

**TESTED TO MEET
ANSI, CSA AND
OSHA STANDARDS**

**SAFERSTACK®
HELPS PREVENT STACKED
FRAMES FROM SLIDING**

**100% COMPATIBLE
WITH ANY STANDARD
METALTECH® FRAME**




**WITH SAFERSTACK, STACK
100 FRAMES WHERE
YOU CURRENTLY STACK ONLY
70 STANDARD FRAMES**

SAFERSTACK®
A METALTECH INNOVATION


GO ONLINE TO SEE
THE INNOVATION
WWW.METALTECH.CO

CUSTOM MANUFACTURING

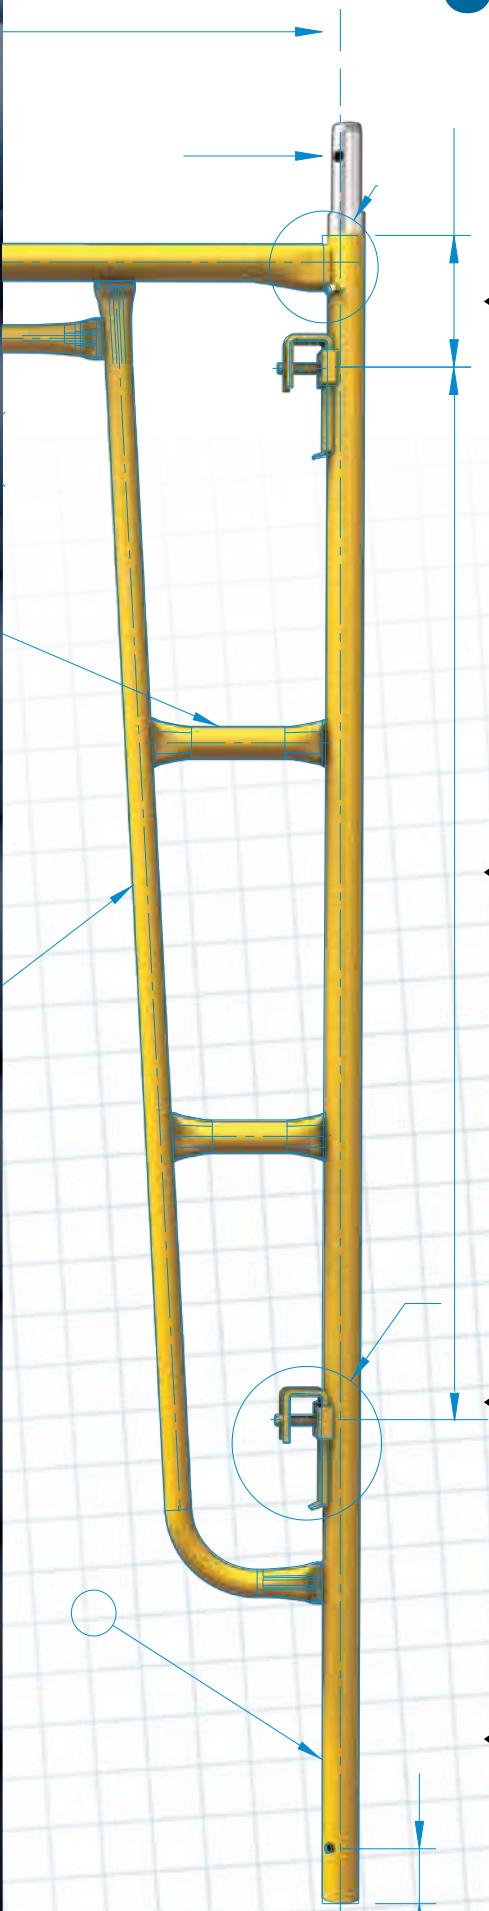


COUPLING PINS

Connect & secure your coupling pin to any scaffold frame legs with our choice of spring-lock, clevis or roll pins. Ask our customer service for more details.

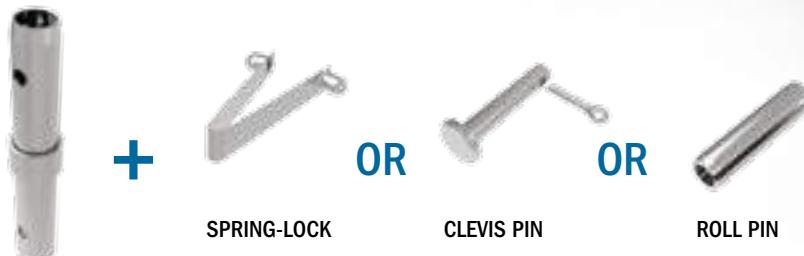

FRAME LOCKS*

Metaltech offers a wide range of frame locks to meet your needs. Order your choice through our customer service for either one of our Gravity-Lock, T-Lock, F-Lock, C-Lock, U-Lock, V-Lock or K-Lock locking systems.

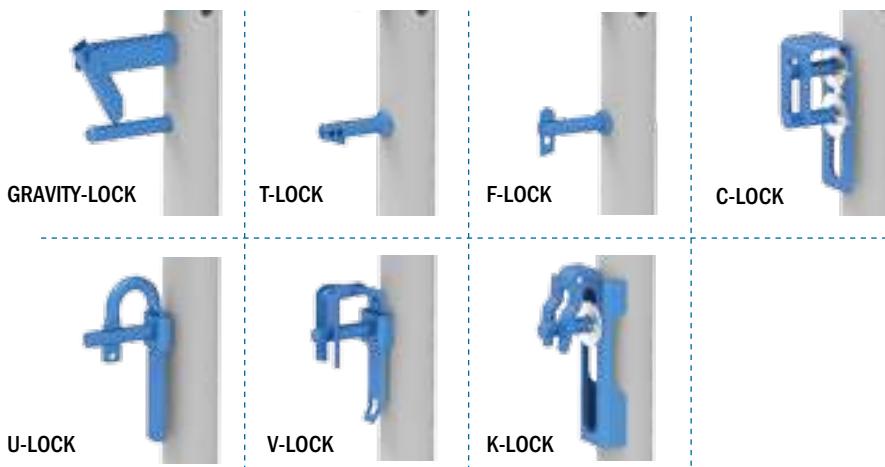

CUSTOM FRAMES*

With our 55 years of experience, supported by our manufacturing facility and engineering team, we can match your needs by developing custom frames. They can be compatible with brands such as Vanguard, Bill Jax, Waco and Safway, we fit them all. Contact our customer service for more information.[†]

[†]All trademarks and registered trademarks listed above are the property of their respective owners.




SPECIAL COLORS*

Customize your frames with your color choice. Please inquire with customer service for our competitive prices.



*Minimum order quantity applies

STANDARD FRAMES

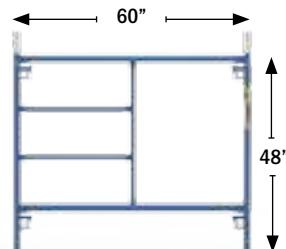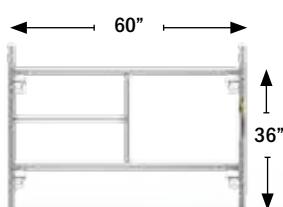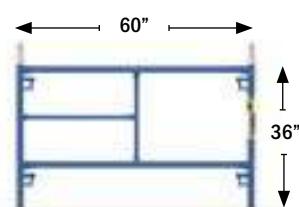

DIMENSIONS (H X W)

36" X 60"




LOCK SPACING	24 IN.
WEIGHT	31.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MF3660PS
UPC	778300800353

36" X 60"

LOCK SPACING	24 IN.
WEIGHT	35.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	GALVANIZED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MF3660GVPS
UPC	778300801350

48" X 60"

LOCK SPACING	36 IN.
WEIGHT	36.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MF4860PS
UPC	778300800452

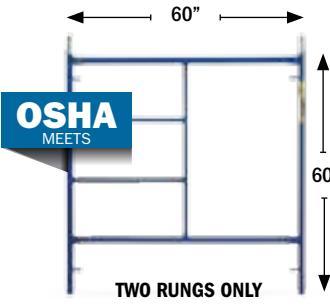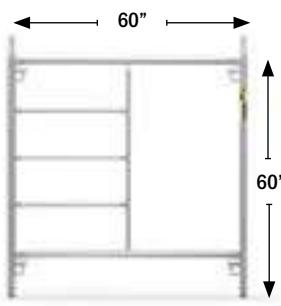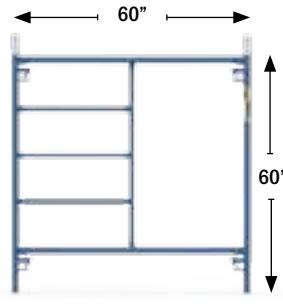

DIMENSIONS (H X W)

60" X 60"

LOCK SPACING	48 IN.
WEIGHT	40.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MF6060PS
UPC	778300800551


60" X 60"

LOCK SPACING	48 IN.
WEIGHT	43.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	GALVANIZED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MF6060GVPS
UPC	778300801558


60" X 60"

LOCK SPACING	48 IN.
WEIGHT	38 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE
FINISH	POWDER COATED - AVAILABLE IN GALVANIZED
COUPLING PIN	SPRING-LOCK
FRAME LOCK	T-LOCK
STANDARDS	ANSI AND OSHA
MODEL	M-MF6060PS-A
UPC	778300800575

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®


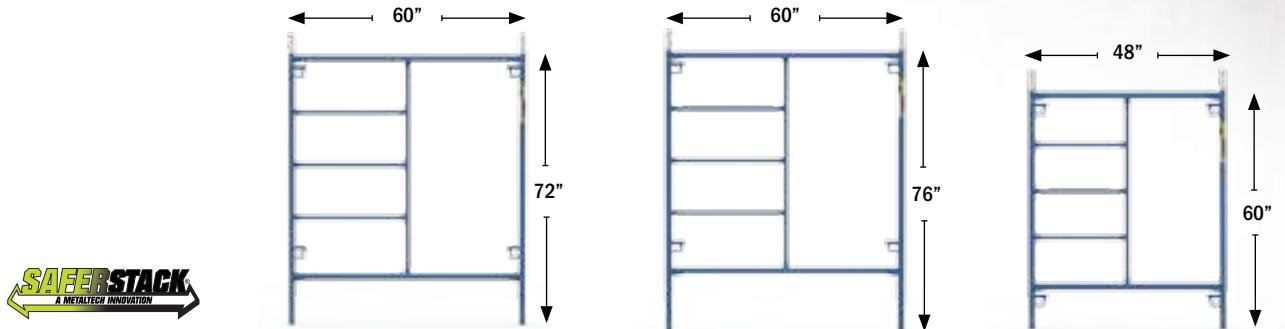


DIMENSIONS (H X W)	72" X 60"	76" X 60"	60" X 48"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	42.8 LB	45.8 LB	37.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF7260PS	M-MF7660PS	M-MF6048PS
UPC	778300800650	778300807659	778300800544


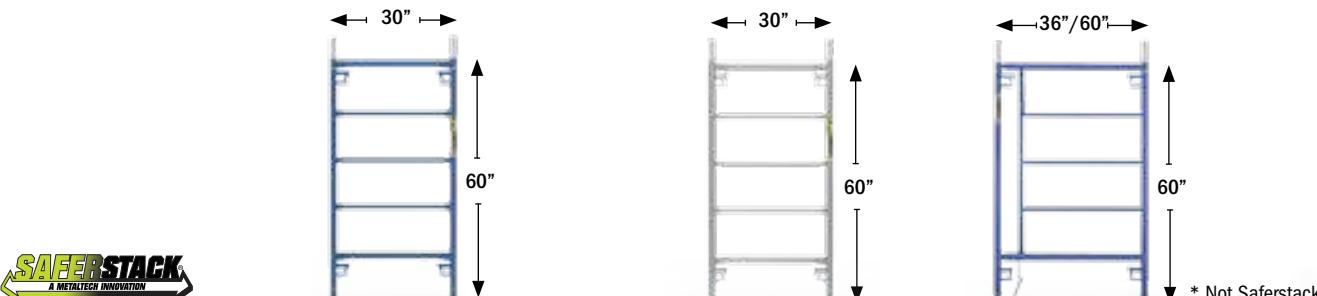


DIMENSIONS (H X W)	60" X 30"	60" X 30"	60" X 36"/60" (ADJUSTABLE FRAME)*
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	31.8 LB	31.8 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF6030PS	M-MF6030GVPS	M-MF60EPS
UPC	778300800537	778300801534	778300805563

WALK-THRU ARCH FRAMES

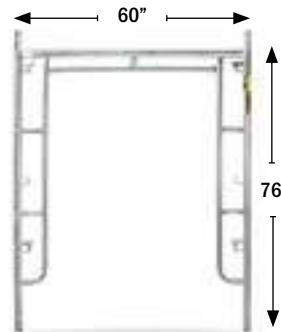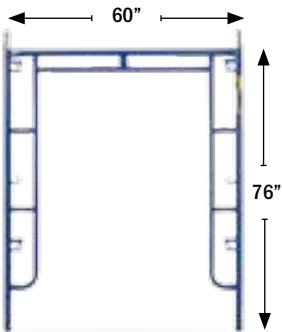


DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	46.8 LB	48.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660PS	M-MA7660GVPS
UPC	778300806454	778300816453

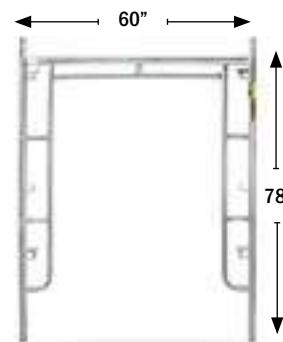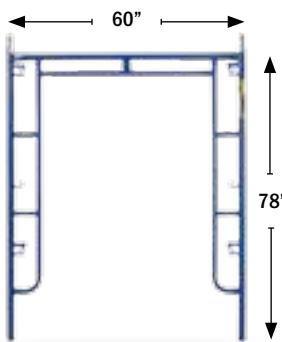


DIMENSIONS (H X W)	78" X 60"*	78" X 60"*
LOCK SPACING	48 IN.	48 IN.
WEIGHT	47.3 LB	49.3 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860PS	M-MA7860GVPS
UPC	778300806652	778300816651

* A set-up charge of \$250 is required for order less than 250 units.

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

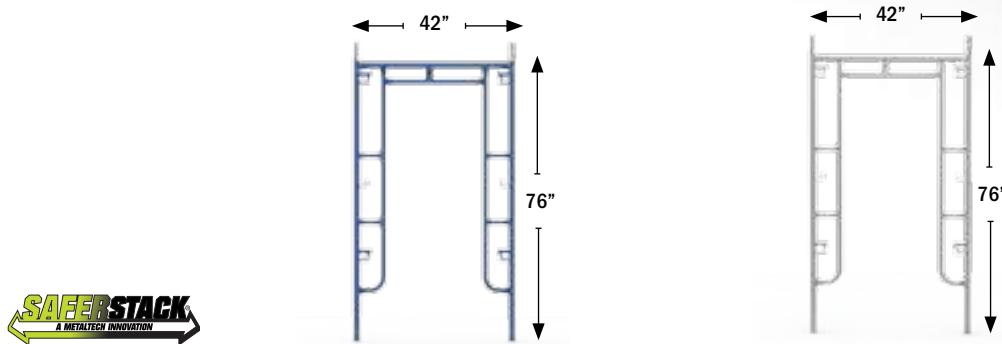


DIMENSIONS (H X W)	76" X 42"	76" X 42"
LOCK SPACING	48 PO	48 PO
WEIGHT	41.1 LB	41.4 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7642PS	M-MA7642GVPS
UPC	778300806409	778300806416

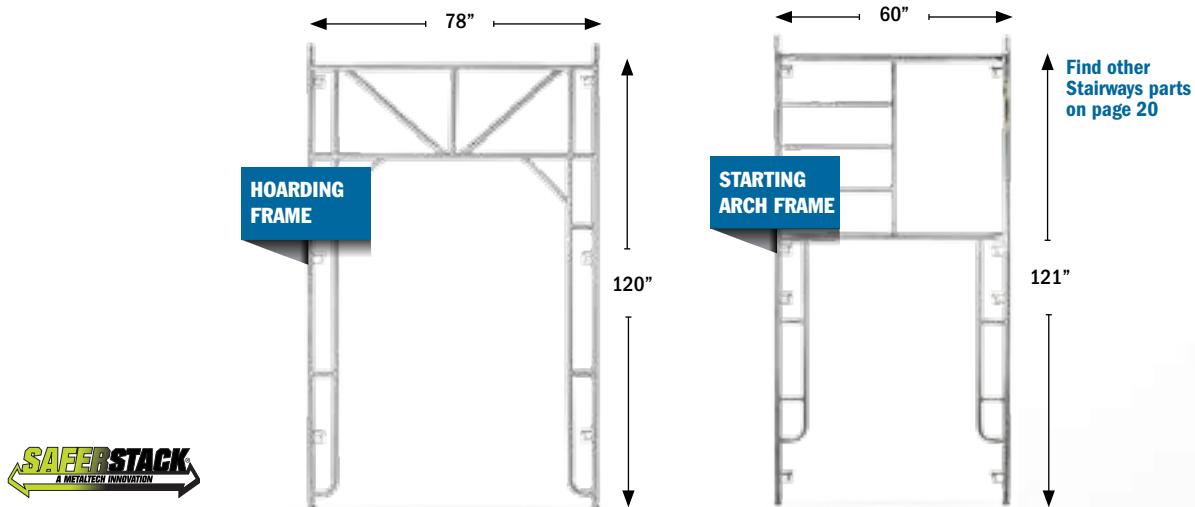


DIMENSIONS (H X W)	120" X 78"	121" X 60"
LOCK SPACING	N/A	N/A
WEIGHT	101 LB	66.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	GALVANIZED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA12078GV	M-MA12160DEGV
UPC	778300806102	778300950195

LADDER ARCH FRAMES

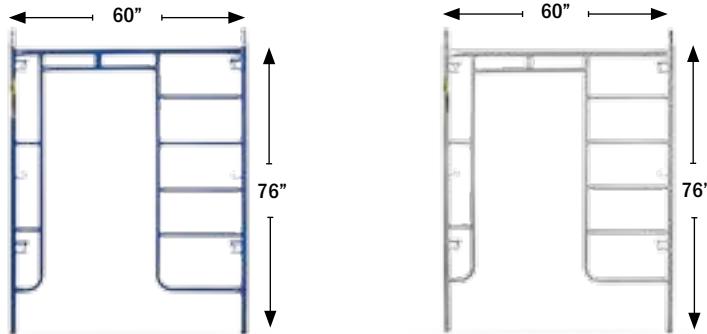


DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	52.8 LB	55.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660LPS	M-MA7660LGVPS
UPC	778300806461	778300816460

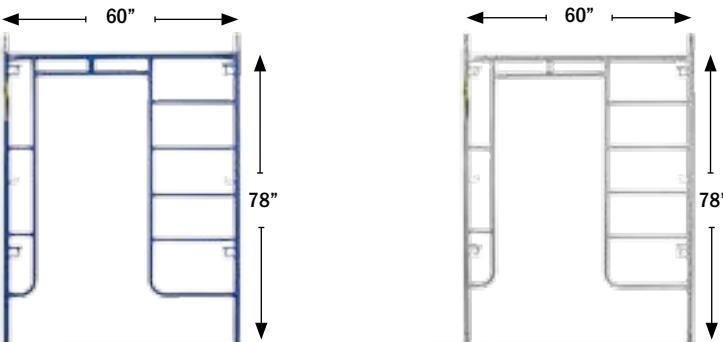

DIMENSIONS (H X W)	78" X 60"*	78" X 60"*
LOCK SPACING	48 IN.	48 IN.
WEIGHT	53.5 LB	56.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860LPS	M-MA7860LGVPS
UPC	778300816477	778300816668

*A set-up charge of \$250 is required for order less than 250 units.


LIGHT DUTY FRAMES & ACCESSORIES

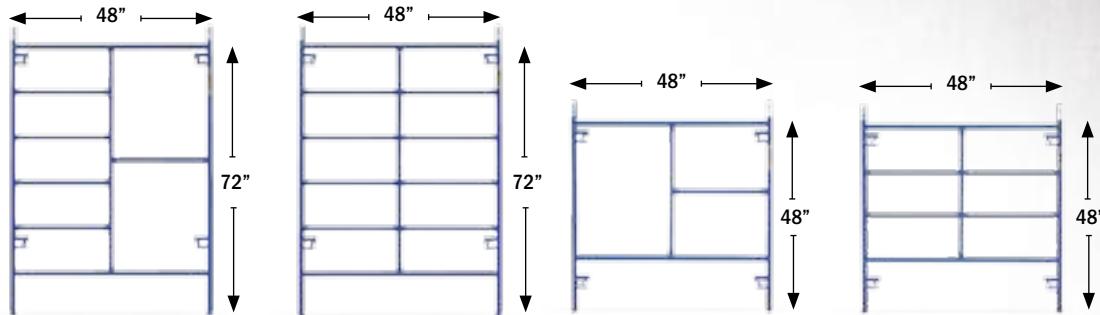

DIMENSIONS (H X W)	72" X 48"	72" X 48"	48" X 48"	48" X 48"
LOCK SPACING	48 IN.	48 IN.	36 IN.	36 IN.
WEIGHT	29.8 LB	37.1 LB	21.8 LB	26.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN.			
PERIMETER TUBES	OUTSIDE DIAMETER 1.25 IN.			
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LD7248-4MPS	LD-LD7248DS-4M	LD-LD4848PS	LD-LD4848DS
UPC	778300814473	N/A	778300814442	N/A



DESCRIPTION	LOCK ARM	GUARDRAIL POST WITH HALF CLAMP	CASTER (WITH 1" STEM)	GALVANIZED LEVELING JACK
DIMENSIONS	24 IN.	56.5 IN.	5 IN.	24 IN.
WEIGHT	1.5 LB	11 LB	3 LB	1 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDLA24	LD-LDGPC1	I-I1CAS5P	LD-LDBJP24
UPC	778300880249	N/A	778300211555	778300920129

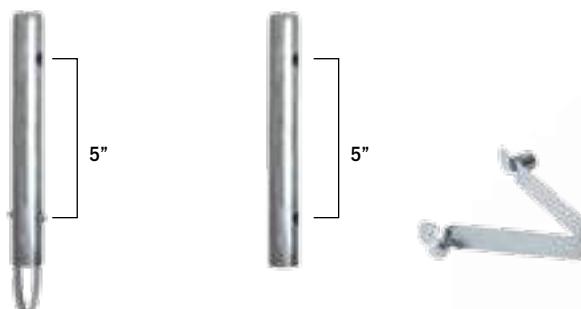


DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK
DIMENSIONS	9.5 IN.	8 IN.	N/A
WEIGHT	0.48 LB	0.43 LB	0.05 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDCLS	LD-LDCL	LD-LDLS
UPC	778300001545	778300881345	778300883004

iINFO

Our light frames have different dimensions than the other categories of frames and they come with their own assembly components. The lock arms, leveling jacks, casters, coupling pins and spring locks are specifically designed to be used with the light frames only.

CROSS BRACES & ACCESSORIES

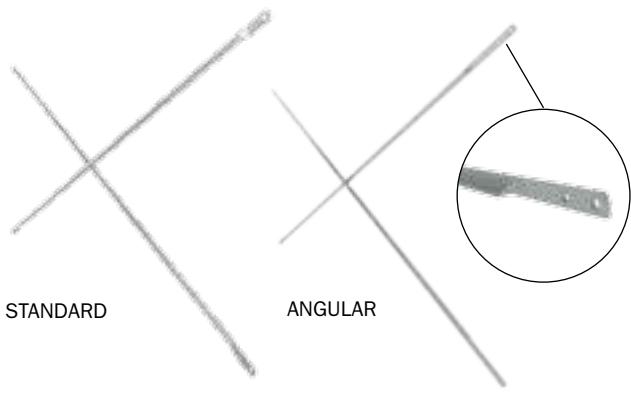

STANDARD

ANGULAR

GALVANIZED DIAGONAL BRACE

DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
7 FT SPAN	30 IN.	4.89 LB	M-MDB3084	778300930845
7 FT SPAN	60 IN.	5.65 LB	M-MDB6084	778300950706
10 FT SPAN	30 IN.	6.78 LB	M-MDB30120	778300930104
10 FT SPAN	60 IN.	7.10 LB	M-MDB60120	778300951000

STANDARDS: ANSI, CSA AND OSHA


GALVANIZED STANDARD CROSS BRACE

DIMENSIONS (H X W)	WEIGHT	MODEL	UPC
2 X 7 FT	9.7 LB	M-MC2484	778300820726
27.75 IN. X 7 FT	9.8 LB	M-MC27.7584	778300820757
3 X 7 FT	10.1 LB	M-MC3684	778300820733
4 X 7 FT	10.7 LB	M-MC4884	778300820740
2 X 8 FT	11 LB	M-MC2496	778300820825
3 X 8 FT	11.3 LB	M-MC3696	N/A
4 X 8 FT	11.9 LB	M-MC4896	778300820849
2 X 10 FT	13.5 LB	M-MC24120	778300821020
27.75 IN. X 10 FT	13.6 LB	M-MC27.75120	778300821051
3 X 10 FT	13.8 LB	M-MC36120	778300821037
4 X 10 FT	14.2 LB	M-MC48120	778300821044

GALVANIZED ANGULAR CROSS BRACE

3 OR 4 X 7 FT	13 LB	M-MC364884AN	N/A
3 OR 4 X 8 FT	15 LB	M-MC364896AN	N/A

STANDARDS: ANSI, CSA AND OSHA

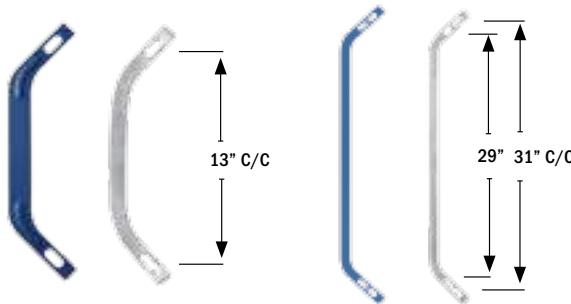

LOCK ARM

DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
13 IN.	POWDER COATED	0.71 LB	M-MLA13	778300950157
13 IN.	GALVANIZED	0.9 LB	M-MLA13GV	778300951154
29-31 IN.	POWDER COATED	1.86 LB	M-MLA2931	778300952939
29-31 IN.	GALVANIZED	1.9 LB	M-MLA2931GV	778300952946

STANDARDS: ANSI, CSA AND OSHA

EYE BOLT

DIMENSIONS	WEIGHT	FINISH	MODEL	UPC
3/8 X 2 1/2 IN.	0.11 LB	GALVANIZED	M-MTWAEYE	778300872107

WALL ATTACHMENT & PLATE

4 FT TUBE (MTA)	7.6 LB	GALVANIZED / ALUMINUM
		M-MTWAGVPL
		778300872022

STANDARDS: ANSI, CSA AND OSHA



ALUMINUM TUBE


DIMENSIONS	WEIGHT	MODEL	UPC
10 FT SCHEDULE 40 (Ø 1.9 IN.)	9.4 LB	M-MTA120	778300871209
20 FT SCHEDULE 40 (Ø 1.9 IN.)	18.72 LB	M-MTA240	778300872404

STANDARDS: ANSI, CSA AND OSHA

WALL ATTACHMENT

4 FT TUBE	EYE BOLT (1)	CLAMP (2)	WEIGHT	MODEL	UPC
✓	-	-	5.86 LB	M-MTWA	778300872008
✓	✓	-	6 LB	M-MTWAK	778300872015
✓	✓	✓	9.22 LB	M-MTWAFDUK	778300000913

STANDARDS: ANSI, CSA AND OSHA

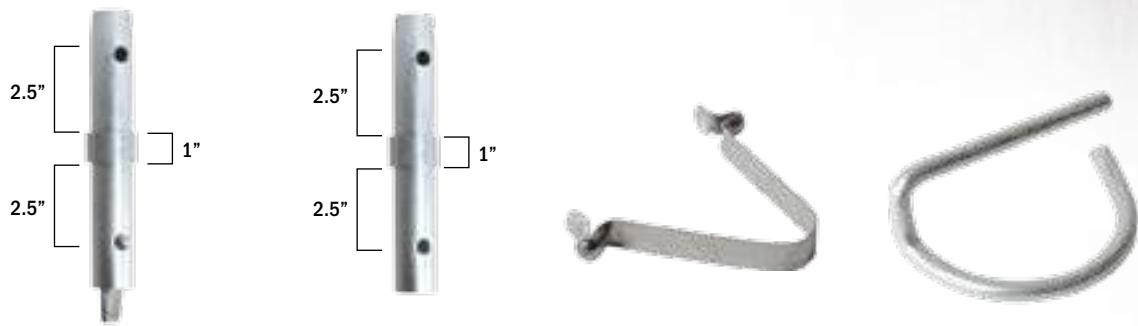

DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK	PIG TAIL
DIMENSIONS	1 3/8 IN. WITH 1 IN. COLLAR	1 IN. COLLAR	FOR HOLE Ø 1/2 IN.	1 1/2 X 3 IN.
WEIGHT	0.9 LB	0.86 LB	0.04 LB	0.1 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLC1S	M-MLC1	M-MLS	M-MLG
UPC	778300882014	778300880348	778300882007	778300950300




DESCRIPTION	TOGGLE PIN	BOLT & NUT	WEDGE CLAMPS 90°	WEDGE CLAMPS 90°
DIMENSIONS	3.5 IN.	3/8 X 2 1/4 IN.	Ø 1.90 IN.	Ø 1.69 - 1.90 IN.
WEIGHT	0.15 LB	0.08 LB	3.3 LB	2.32 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA			
MODEL	M-MTOGGLE	M-MLB	M-MTCFW1	M-MTCFW2
UPC	778300880416	778300950393	778300862009	778300862016



DESCRIPTION	SWIVEL WEDGE CLAMPS	SWIVEL WEDGE CLAMPS	BOLTED 90° FIXED CLAMP	BOLTED SWIVEL CLAMP
DIMENSIONS	Ø 1.90 IN.	Ø 1.69 - 1.90 IN.	Ø 1.69 - 1.90 IN.	Ø 1.69 - 1.90 IN.
WEIGHT	3.7 LB	3.62 LB	3.25 LB	3.75 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MTCSW1	M-MTCSW2	M-MTCFDU	M-MTCSDU
UPC	778300862030	778300862047	778300862108	778300862115

GUARDRAILS, TOEBOARDS & TIE-OFF BARS

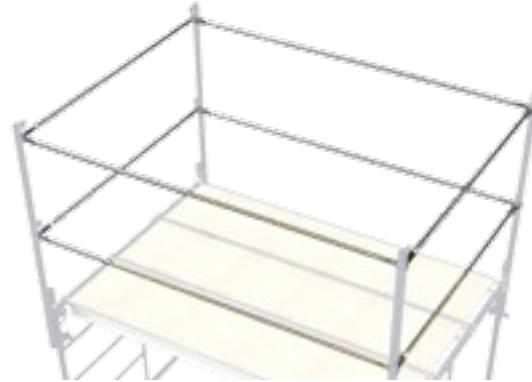

GUARDRAIL POST WITH WEDGE CLAMP


FINISH	WEIGHT	MODEL	UPC
POWDER COATED	10.8 LB	M-MGPUSL	778300950089
GALVANIZED	11.1 LB	M-MGPUSLGV	778300950096

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED GUARDRAIL

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	1.73 LB	M-MGR30	778300950065
48 IN.	2.71 LB	M-MGR4	778300950485
60 IN.	3 LB	M-MGR5	778300950058
84 IN.	4.36 LB	M-MGR7	778300950072
96 IN.	5.19 LB	M-MGR8	N/A
120 IN.	8.22 LB	M-MGR10	778300950102

STANDARDS: ANSI, CSA AND OSHA

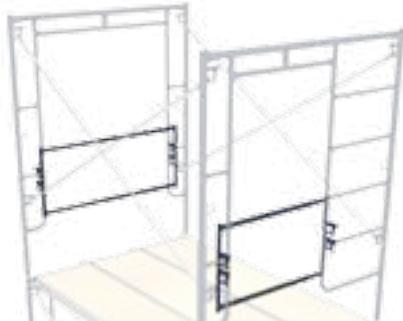

ADJUSTABLE END-STOP GUARDRAIL

COMPATIBLE	ALL ARCH FRAMES
WEIGHT	10.6 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEX
UPC	N/A

ADJUSTABLE END-STOP GUARDRAIL

ALL ARCH FRAMES	10.8 LB
GALVANIZED	
ANSI, CSA AND OSHA	
M-MGRMAEXGV	
N/A	



GALVANIZED TOEBOARD

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	3.49 LB	M-MGT30	778300712304
60 IN.	6.47 LB	M-MGT60	778300712007
84 IN.	8.33 LB	M-MGT84	778300710690
120 IN.	12.20 LB	M-MGT120	778300712052

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM TIE-OFF BAR

DIMENSIONS	WEIGHT	MODEL	UPC
7 FT	31.7 LB	M-BAA07	778300000364
8 FT	35.2 LB	M-BAA08	778300001354
10 FT	42.2 LB	M-BAA10	778300000371

BASES



6 X 6 IN. BASE PLATE

WEIGHT	FINISH
2 LB	POWDER COATED
2.2 LB	GALVANIZED

MODEL	UPC
M-MBBF	778300920273
M-MBBFGV	778300920297

6 X 6 IN. SWIVEL BASE PLATE

WEIGHT	FINISH
2.92 LB	POWDER COATED
4 LB	GALVANIZED

MODEL	UPC
M-MBBS	778300920280
M-MBBSGV	778300920266

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK WITH PLATE


DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	6 LB	HOLLOW	M-MBSJP24H	778300920112
24 IN.	11 LB	SOLID	M-MBSJP24	778300920105
36 IN.	16 LB	SOLID	M-MBSJP36	778300920310

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED LEVELING JACK

DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	7 LB	HOLLOW	M-MBSJS24H	778300920020
24 IN.	11 LB	SOLID	M-MBSJS24	778300920013
36 IN.	15 LB	SOLID	M-MBSJS36	778300920037

STANDARDS: ANSI, CSA AND OSHA

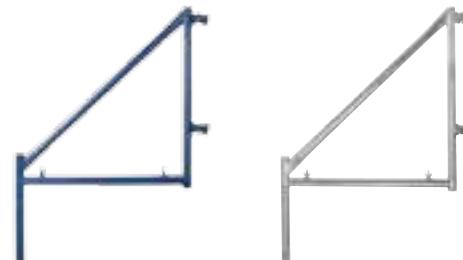

GALVANIZED LEVELING JACK WITH SWIVEL BASE

DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	7.32 LB	HOLLOW	M-MBSJPSW24H	778300000227
24 IN.	13 LB	SOLID	M-MBSJPSW24	778300000210

STANDARDS: ANSI, CSA AND OSHA

OUTRIGGER

DIMENSIONS	WEIGHT	FINISH	MODEL	UPC
32 IN.	22 LB	POWDER COATED	M-M032	778300890101
32 IN.	22.3 LB	GALVANIZED	M-M032GV	778300890118

STANDARDS: ANSI, CSA AND OSHA




DESCRIPTION	LEVELING JACK WITH 8" U-HEAD
DIMENSIONS	24 IN.
TUBE	SOLID
WEIGHT	16.67 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MBSJP8U24

DESCRIPTION	LEVELING JACK WITH 4" AND 8" FORK HEAD
DIMENSIONS	24 IN.
TUBE	SOLID
WEIGHT	15.94 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MBSJP24

DESCRIPTION	GALVANIZED U-HEAD
LOAD CAPACITY	4 IN.
DIMENSIONS	N/A
WEIGHT	5.18 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MBB4UGV
UPC	

DESCRIPTION	HEAVY-DUTY CASTER
LOAD CAPACITY	1,100 LB
DIMENSIONS	8 IN.
WEIGHT	10.65 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MBC8HD
UPC	778300930098

DESCRIPTION	CASTER
LOAD CAPACITY	750 LB
DIMENSIONS	8 IN.
WEIGHT	9.8 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MBC8
UPC	778300930081



SIDE BRACKETS

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	ELEVATOR SIDE BRACKET	ELEVATOR SIDE BRACKET	DESCRIPTION	STORAGE BIN
CLOSED DIMENSIONS	39 X 26.75 X 12.75 IN.	39 X 36 X 12.75 IN.	DIMENSIONS	44.25 X 44.25 X 50.25 IN.
ADJUSTABLE	18.75 OR 23.75 IN.	27.75 OR 37.75 IN.	CAPACITY	10 BRACKETS
LOAD CAPACITY	500 LB	500 LB	COMPATIBLE	ELEVATOR SIDE BRACKET
WEIGHT	54.6 LB	57.2 LB	WEIGHT	201 LB
FINISH	ELECTROPLATING	ELECTROPLATING	FINISH	GALVANISED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	STANDARDS	N/A
MODEL	M-MSJ	M-MSJL	MODEL	M-MSJRACK
UPC	778300892440	778300892464	UPC	778300000388



DESCRIPTION	ANTI-THEFT SYSTEM	ANTI-THEFT SYSTEM WITH PADLOCK	END PLANK GUARDRAIL	END BRACKET*
DIMENSIONS	6.25 X 3.25 X 3.75 IN.	6.25 X 4 X 4 IN.	43.5 X 22 X 6 IN.	20 IN.
WEIGHT	2.56 LB	4.22 LB	16.5 LB	10 LB
FINISH	ELECTROPLATING	ELECTROPLATING	GALVANISED	POWDER COATED
COMPATIBLE	ELEVATOR SIDE BRACKET	ELEVATOR SIDE BRACKET	SCAFFOLD PLANK	N/A
STANDARDS	N/A	N/A	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MSJLOCK	M-MSJLOCKK	M-MSJGARDGV	M-ME20
UPC	N/A	N/A	N/A	778300892419

* Galvanized finish available on special order.



DESCRIPTION	SIDE BRACKET	SIDE BRACKET	SIDE BRACKET*	SIDE BRACKET*
DIMENSIONS	20 IN.	20 IN.	30 IN.	40 IN.
WEIGHT	9.16 LB	9.45 LB	12.44 LB	15.5 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED	POWDER COATED
NORMES	ANSI, CSA AND OSHA			
MODEL	M-MS20	M-MS20GV	M-MS30	M-MS40
UPC	778300892402	778300892433	778300893003	778300894000

* Galvanized finish available on special order.

* Galvanized finish available on special order.

PLATFORMS



ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	33.2 LB	M-MPP719	778300900077
7 FT X 24 IN.	75 LB/FT ²	45 LB	M-MPP724	778300900725
7 FT X 28 IN.	25 LB/FT ²	40 LB	M-MPP728	N/A
8 FT X 19 IN.	75 LB/FT ²	41.5 LB	M-MPP819	N/A
10 FT X 19 IN.	75 LB/FT ²	46 LB	M-MPP1019	778300900107
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024	778300900121

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM PLATFORM WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	34.2 LB	M-MPP719RE	778300000579
10 FT X 19 IN.	75 LB/FT ²	47 LB	M-MPP1019RE	778300000562

STANDARDS: ANSI, CSA AND OSHA

FEATURES

CROSSBEAM



- EVENLY SUPPORTS THE 5/8" THICK PLYWOOD AND PREVENTS IT FROM FLEXING
- GALVANIZED STEEL
- ERGONOMIC HANDLE CUT OUT FOR COMFORT AND EASY HANDLING

STANDARD ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

EDGE CAPPING



- PREVENTS EXTREMITY WEAR
- RE-INFORCES PLYWOOD DECK EXTREMITIES
- INCREASES THE PLYWOOD LIFESPAN
- CUSTOMIZE YOUR EDGE CAPPING WITH YOUR COMPANY NAME. (MINIMUM ORDER QUANTITY APPLIES)

ONLY AVAILABLE ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

SIDE RAILS



- PROTECTS THE PLYWOOD EDGES TO PREVENTS WATER INFILTRATION, DELAMINATION AND PREMATURE WEAR



ALL ALUMINUM PLATFORM

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	27.5 LB	M-MPA719	778300901074
8 FT X 19 IN.	75 LB/FT ²	35 LB	M-MPA819	778300000906
10 FT X 19 IN.	75 LB/FT ²	42.46 LB	M-MPA1019	778300901104


STANDARDS: ANSI, CSA AND OSHA

STAIRWAYS

iINFO

Find Starting Stairways
Frames on page 11


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

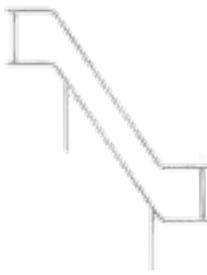

DESCRIPTION	60" STEEL STAIR WITH HANDRAILS (7' X 60") FOR 60" FRAME	OUTER HANDRAIL (7' X 60") FOR 60" FRAME	INNER HANDRAIL (7' X 60") FOR 60" FRAME	SHORT END OUTER HANDRAIL (7' X 60") FOR 60" FRAME
DIMENSIONS	84 X 60 IN.	103.25 X 78 IN.	103.25 X 61 IN.	103.25 X 61 IN.
WEIGHT	110 LB	19 LB	21 LB	21 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760	M-MST760OR	M-MST760RFN	M-MST760RDE
UPC	778300961009	778300002238	778300002269	778300002245




DESCRIPTION	SHORT END INNER HANDRAIL (7' X 60") FOR 60" FRAME	STAIRWAY GUARDRAIL FOR 60" FRAME	STAIR STARTING TUBE	STAIR STARTING TUBE
DIMENSIONS	103.25 X 78 IN.	33.5 X 20 IN.	60 IN.	60 IN.
WEIGHT	11 LB	1 LB	8.5 LB	8.8 LB
FINISH	GALVANIZED	GALVANIZED	POWDER COATED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760IR	M-MSTGR6060	M-MSTB	M-MSTBGV
UPC	778300002252	778300950188	778300002276	778300002283

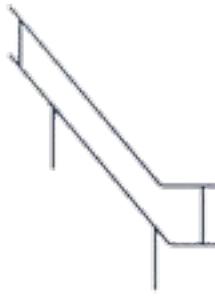

DESCRIPTION	76" STEEL STAIR & HANDRAILS (7' X 76") FOR 76" FRAME	76" STEEL STAIR (7' X 76") FOR 76" FRAME	OUTER HANDRAIL (7' X 76") FOR 76" FRAME	INNER HANDRAIL (7' X 76") FOR 76" FRAME
DIMENSIONS	84 X 76 IN.	84 X 76 IN.	101 X 74 IN.	91 X 45 IN.
WEIGHT	117.2 LB (53.1 KG)	83 LB (37.6 KG)	20 LB (9.1 KG)	14.2 LB (6.4 KG)
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST776US	M-MST776USNR	M-MST776USOR	M-MST776USIR
UPC	778300002221	778300002191	778300002214	778300002207

* All trademarks and registered trademarks listed above are the property of their respective owners.

ACCESS LADDERS, TAG, HOIST POSTS & PULLEY

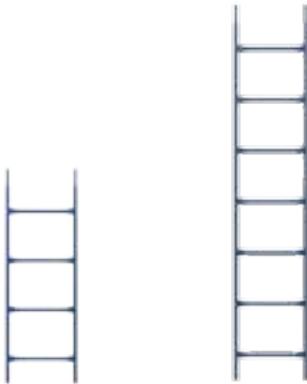

FIT ALL FRAMES



DESCRIPTION	48" ACCESS LADDER
DIMENSIONS	48 X 16 IN. (15 IN. C/C)
WEIGHT	11 LB (5 KG)
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MFL4415
UPC	778300001903

DESCRIPTION	81" ACCESS LADDER
DIMENSIONS	81 X 16 IN. (15 IN. C/C)
WEIGHT	16.5 LB (7.5 KG)
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MFL7715
UPC	778300001774

DESCRIPTION	STARTER BRACKET
DIMENSIONS	12 X 16.5 IN. (15 IN. C/C)
WEIGHT	7.1 LB (3.2 KG)
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MFLBR
UPC	778300001781



DESCRIPTION	GIN BLOCK PULLEY
LOAD CAPACITY	250 LB
WEIGHT	14.4 LB
FINISH	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MHP
UPC	778300959204

DESCRIPTION	HOIST POST
LOAD CAPACITY	250 LB
WEIGHT	32.17 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MHA
UPC	778300959006

DESCRIPTION	HOIST POST
LOAD CAPACITY	250 LB
WEIGHT	43 LB
FINISH	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MHAGV
UPC	778300959105

DESCRIPTION	HOIST POST & GIN BLOCK PULLEY KIT
LOAD CAPACITY	250 LB
WEIGHT	46.57 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MHAP
UPC	778300959402



SCAFFOLD INSPECTION SAFETY TAGS

DESCRIPTION	COLOR	QUANTITY	MODEL	UPC
TAG HOLDER	WHITE	20	M-THUS	77830002153
COMPLETE SCAFFOLD TAG	GREEN	500	M-TGRUS	77830002160
PRE-SHIFT INSPECTION TAG	YELLOW	500	M-TYWUS	77830002177
INCOMPLETE SCAFFOLD TAG	RED	500	M-TRDUS	77830002184

RACK, NETTING, TARP & WAGON

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	SCAFFOLDING RACK
DIMENSIONS	63 X 47 X 9 IN.
COMPATIBLE	60" WIDE FRAME
CAPACITY	24 FRAMES
WEIGHT	140 LB
FINISH	GALVANIZED
MODELS	M-MFRACKGV

DESCRIPTION	LIFTING SLING
DIMENSIONS	48 X 5 X 9 IN.
COMPATIBLE	M-MFRACK
CAPACITY	1,500 LB
WEIGHT	21 LB
FINISH	ALUMINUM
MODELS	M-MFRSLING

DESCRIPTION	DEBRIS NETTING
DIMENSIONS	10 X 164 FT
PACKAGE	66 X 11.5 IN.
COLOR	BLACK
WEIGHT	46.2 LB
MODEL	M-MDNET10BK
UPC	778300000623

DESCRIPTION	DEBRIS NETTING
DIMENSIONS	10 X 164 FT
PACKAGE	66 X 11.5 IN.
COLOR	GREEN
WEIGHT	46.2 LB
MODEL	M-MDNET10GN
UPC	778300000616



DESCRIPTION	SCAFFOLD TARP
DIMENSIONS	13 FT X 100 FT X 10 MIL
PACKAGE	78 X 9 IN.
MATERIAL	FLAME RETARDANT
WEIGHT	69 LB / 250 GSM
MODEL	M-MTE13100
UPC	778300000586

DESCRIPTION	BUNGEE TIES
DIMENSIONS	11 IN.
PACKAGE	BAG OF 100
MODEL	M-MBT11
UPC	778300000593

DESCRIPTION	SCREW CONNECTORS
DIMENSIONS	1.25 IN. DIAM.
PACKAGE	BAG OF 250
MODEL	M-MTESCREW
UPC	778300001347



DESCRIPTION	WAGON WITH 16" WHEELS
DIMENSIONS	ADJUSTABLE 7 - 10 FT
LOAD CAPACITY	1,800 LB
WEIGHT	184 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MW71016
UPC	778300940301


DESCRIPTION	WAGON WITH 26" WHEELS
DIMENSIONS	ADJUSTABLE 7 - 10 FT
LOAD CAPACITY	1,800 LB
WEIGHT	312 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MW71026
UPC	778300940400

DESCRIPTION	YELLOW FLATPROOF WHEEL
DIMENSIONS	16 IN.
WEIGHT	450 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MWC16FP
UPC	778300940318

DESCRIPTION	RECYCLED WHEEL*
DIMENSIONS	26 IN.
WEIGHT	450 LB
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MWC26
UPC	778300940417

* The measurement can vary.
For information purposes only.

WALL BRACKETS, BEAMS & SHORING POSTS

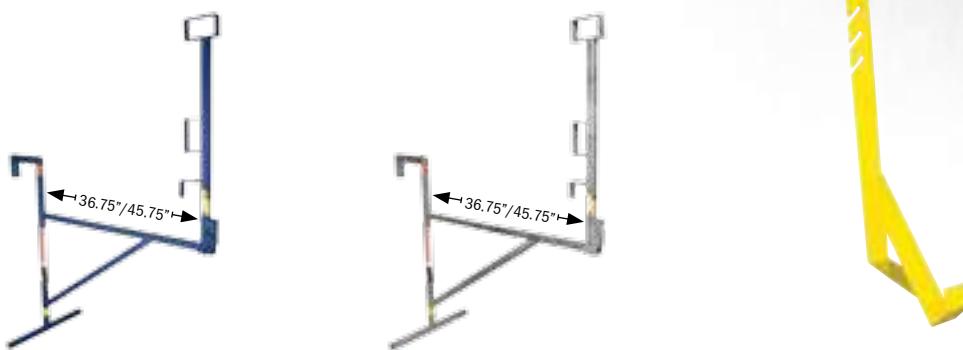

DESCRIPTION	WALL BRACKET	WALL BRACKET	ROOF BRACKET (FIXED)
DIMENSIONS	50.25 X 79 X 27.5 IN.	50.25 X 79 X 27.5 IN.	9.25 X 1.5 X 18.25 IN.
LOAD CAPACITY	1,000 LB	1,000 LB	290 LB
ADJUSTABLE	36.75 OR 45.75 IN.	36.75 OR 45.75 IN.	N/A
WEIGHT	67 LB	71 LB	2.5 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	OSHA, ANSI, CWB AND CSA	OSHA, ANSI, CWB AND CSA	ANSI, CSA AND OSHA
MODEL	M-MWB42	M-MWB42GV	M-MRBF
UPC	778300940516	778300940523	778300890057



DESCRIPTION	POST DRIVER
FINISH	POWDER COATED
WEIGHT	17.6 LB
MODEL	C-MART
UPC	778300976270



TUFSTUD™ (GALVANIZED STEEL)*		
DIMENSIONS	WEIGHT	MODEL
360 X 23 CM (12 FT X 9 IN.)	162 LB	M-TUFSTUD144
180 X 23 CM (6 FT X 9 IN.)	94 LB	M-TUFSTUD72
90 X 23 CM (3 FT X 9 IN.)	55 LB	M-TUFSTUD36
45 X 23 CM (1.5 FT X 9 IN.)	36 LB	M-TUFSTUD18
FASTBOLT FOR TUFSTUD™		
0.75 X 1.5 IN.	N/A	M-FASTBOLT1.5
0.75 X 2 IN.	N/A	M-FASTBOLT2

*Imperial unit for approximate reference



ALUMINUM BEAM		
DIMENSIONS	WEIGHT	MODEL
4 FT X 6.5 IN.	15 LB	M-PA4B
5 FT X 6.5 IN.	19 LB	M-PA5B
6 FT X 6.5 IN.	23 LB	M-PA6B
8 FT X 6.5 IN.	30 LB	M-PA8B
10 FT X 6.5 IN.	38 LB	M-PA10B
12 FT X 6.5 IN.	45 LB	M-PA12B
14 FT X 6.5 IN.	53 LB	M-PA14B
16 FT X 6.5 IN.	60 LB	M-PA16B
18 FT X 6.5 IN.	68 LB	M-PA18B
20 FT X 6.5 IN.	73 LB	M-PA20B
21 FT X 6.5 IN.	79 LB	M-PA21B
24 FT X 6.5 IN.	90 LB	M-PA24B
28 FT X 6.5 IN.	105 LB	M-PA28B
32 FT X 6.5 IN.	122 LB	M-PA32B



GALVANIZED LIGHT DUTY SHORING POST*			
DIMENSIONS	WEIGHT	MODEL	UPC
3'6" TO 6'	28 LB	M-SHOREPOST0	778300976317
5'6" TO 10'	30 LB	M-SHOREPOST1	778300976324
6'6" TO 11'	32 LB	M-SHOREPOST2	778300976331
8'6" TO 13'	40 LB	M-SHOREPOST3	778300976348
10'6" TO 15'6"	44 LB	M-SHOREPOST4	778300976355

* The measurements and weights may differ. Contact us to get the latest capacity chart.

MOBILE SCAFFOLDING JOBSITE SERIES™

Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**




BUILT TOUGH FOR
SAFETY

METALTECH

JOB SITE SERIES™ 6' BAKER

JOB SITE SERIES™

iINFO



COMPATIBLE WITH:
BILJAX, BUFFALO,
WERNER, UST AND
BUILDMAN 6'
DRYWALL BAKER*

1,000 lb
LOAD CAPACITY

12'
REACH



Model: I-CISC

ASSEMBLED DIMENSIONS (WXDXH) **74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)**

PACKAGE DIMENSIONS (WXDXH) **75 X 30.5 X 5.25 IN. (190.5 X 77.5 X 13.3 CM)**

WEIGHT **119 LB (54 KG)**

LOAD CAPACITY **1,000 LB (454 KG). Combined weight of user + materials**

WORKING HEIGHTS **FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights**

REACH **12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach**

FINISH **POWDER COATED**

PLATFORM **1/2 IN. (12 MM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING**

STRUCTURE **1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL**

CASTERS **5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY**

REPLACEMENT PARTS **SEE PAGE 92**

STANDARDS **ANSI, CSA AND OSHA**

MODEL **I-CISC**

UPC **778300200108**

iINFO



MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.75" (75.6 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 27" to 73" (68.6 to 185 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

ALSO AVAILABLE WITH TRAP DOOR



Model: I-CISCTP

PLATFORM **PLATFORM WITH TRAP DOOR
1/2 IN. (12 MM) PLYWOOD THICK
WITH PROTECTIVE STEEL EDGE
BANDING**

WEIGHT **131 LB (59.4 KG)**

MODEL **I-CISCTP**

UPC **778300200122**

* All trademarks and registered trademarks listed above are the property of their respective owners.



SCAFFLOCK® CK

DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (WXDXH)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (WXDXH)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	59 LB (26.8 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CISC, I-CISCTP, I-CISCH1, I-CISCAS AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS AND I-BMSS	I-CISTR	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-IRC
MODEL	I-CISGRJP	I-ISEX4PPNCAS	77830000463	I-ISL
UPC	778300001316	778300200405		778300001552




ADJUSTABLE
90°
45°

FOR 2 UNITS HIGH

FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (WXDXH)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (WXDXH)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	33 LB (15 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS AND I-CISCPY
MODEL	I-IBBF4	I-IBSJP12H4	I-CISO4	I-CISO4TT
UPC	778300001699	778300001644	778300613151	778300613120


*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

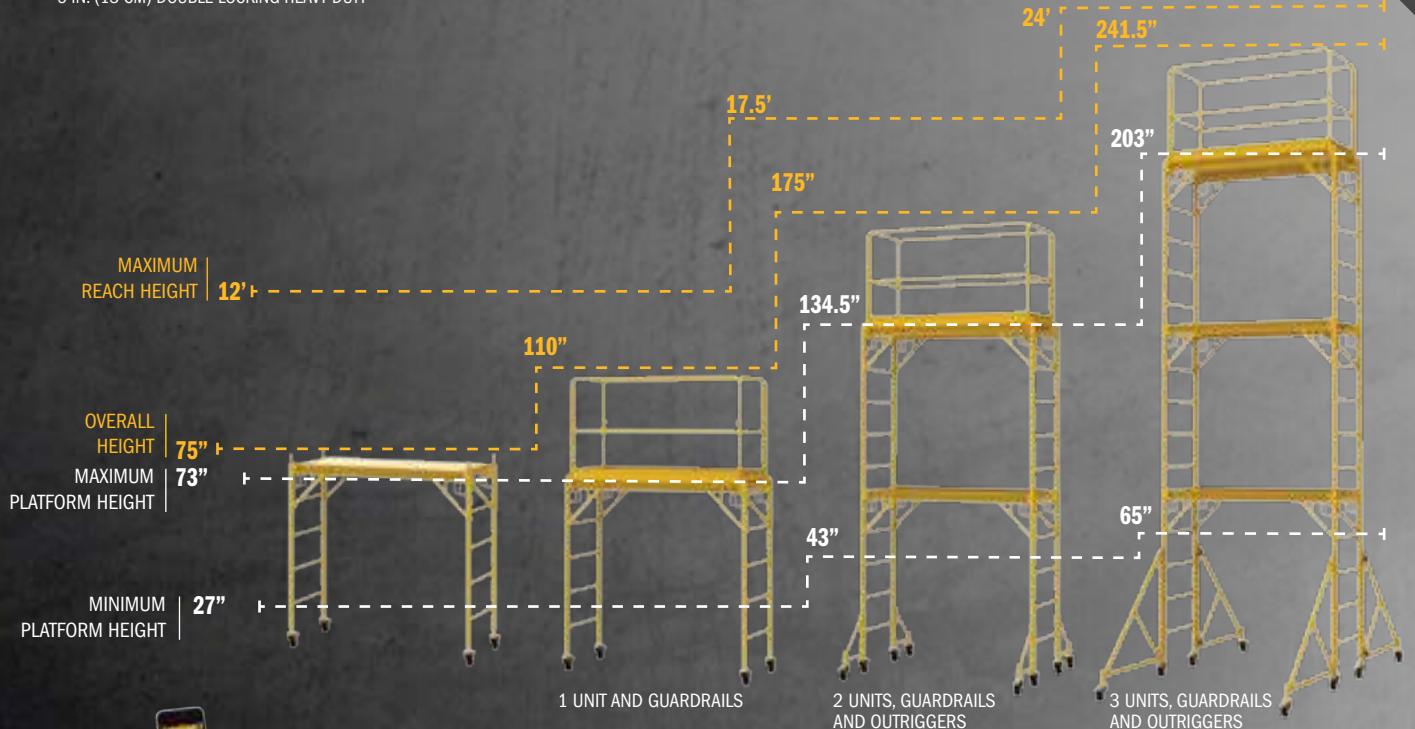

JOB SITE SERIES™ PERRY STYLE™

JOB SITE SERIES™

iINFO



COMPATIBLE
WITH:
NU-WAVE
PERRY 660*

1,250 lb
LOAD CAPACITY

12'
REACH



ASSEMBLED DIMENSIONS (WxDxH)	73.75 X 29.25 X 78.75 IN. (187.3 X 74.3 X 200 CM)
PACKAGE DIMENSIONS (WxDxH)	75.25 X 30 X 5.25 IN. (191.2 X 76.2 X 13.3 CM)
WEIGHT	134.6 LB (61 KG)
COMPATIBLE WITH	NU-WAVE PERRY MODEL 660*
LOAD CAPACITY	1,250 LB (567 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 75.75 IN. (68.6 TO 192.4 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	5/8 IN. (1.6 CM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING. ANTI-SLIP
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI AND OSHA
MODEL	I-CISCPY
UPC	778300200115

iINFO



PERRY STYLE COMPATIBLE

All components are 100% fully compatible with Nu-Wave Perry Model 660*.




ANTI-SLIP DECK

5/8" (16 mm) plywood, slip-resistant.



MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.25" (74.3 cm) wide, it can easily roll through doorways.



SCAFFLOCK™

DESCRIPTION	GUARDRAILS SYSTEM	40" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (WXDXH)	70 X 33.5 X 48.5 IN. (177.8 X 83.8 X 121.9 CM)	73.75 X 30.5 X 43.5 IN. (187.3 X 77.5 X 110.5 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (WXDXH)	72.25 X 7.25 X 50.5 PO (182.9 X 17.8 X 127 CM)	83.5 X 30.75 X 3.75 IN. (211.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	89 LB (40.4 KG)	63 LB (28.5 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-CISCPYGR	I-EX4PPNCASPY	I-CISTR	I-ISL
UPC	778300610037	778300000357	778300000463	778300001552



ADJUSTABLE
| 90° | 45° |

FOR 2 UNITS HIGH


FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (WXDXH)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (WXDXH)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	45 LB (20.4 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCPY AND I-BMSS	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CAISC, I- CISCH1, I-CISCAS AND I-CISCPY
MODEL	I-IBBF4	I-IBSJ12H4	I-CISO4PY	I-CISO4TT
UPC	778300001699	778300001644	778300613137	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

DESCRIPTION	SET OF FOUR 5" HEAVY DUTY CASTERS
COMPATIBLE WITH	I-CISCPY
WEIGHT	21.2 LB (9.6 KG)
MODEL	I-C4CAS5PYHD
UPC	778300001668

MAXIMUM REACH HEIGHT	12' ↗
OVERALL HEIGHT	78.75" ↗
MAXIMUM PLATFORM HEIGHT	78.5" ↗
MINIMUM PLATFORM HEIGHT	26.5" ↗

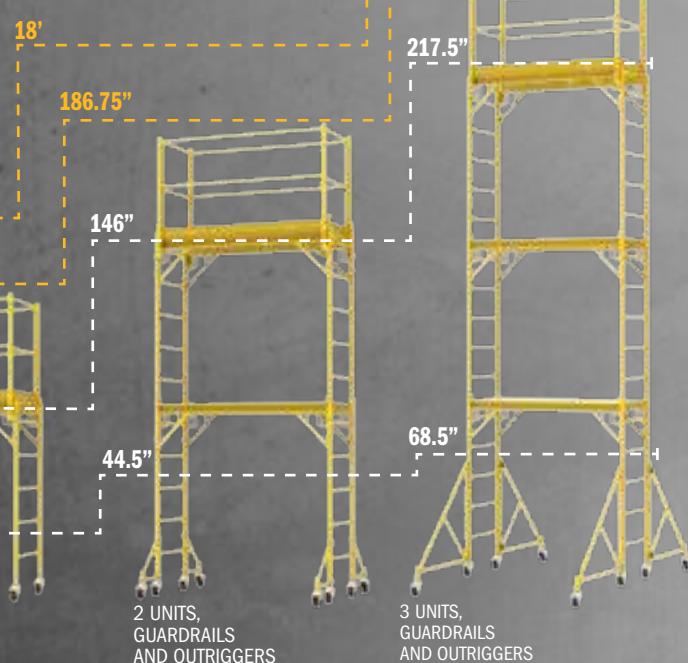

GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

JOB SITE SERIES™ 6'

JOB SITE SERIES™



850 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	75 X 30.5 X 78.25 IN. (190.5 X 77.5 X 198.8 CM)
PACKAGE DIMENSIONS (WxDxH)	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	850 LB (385 KG) Combined weight of user + materials. 300 lb (136 kg) per platform
WORKING HEIGHTS	13 - 25 - 37 - 49 - 61 - 73 IN. (33 - 63.5 - 94 - 124.5 - 155 - 185.5 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IRC
UPC	778300400157

iNFO





STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



EASY STORAGE
Folds flat for compact storage and transport



TWO-MINUTE ASSEMBLY
No tools required.

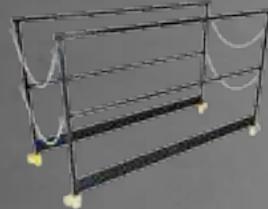

DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	36" HIGH EXTENSION	72" HIGH EXTENSION
ASSEMBLED DIMENSIONS (WXDXH)	25 X 3.5 X 23 IN. (63.5 X 8.9 X 58.4 CM)	70.5 X 30.5 X 44.25 IN. (179.1 X 77.5 X 112.4 CM)	75 X 30.5 X 36 IN. (190.5 X 77.5 X 91.4 CM)	75 X 30.5 X 71.5 IN. (190.5 X 77.5 X 181.6 CM)
PACKAGE DIMENSIONS (WXDXH)	27 X 26.25 X 4.5 IN. (66.6 X 66.8 X 11.4 CM)	N/A	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)	76.75 X 31 X 6.5 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	39.76 LB (18 KG)	50 LB (22.7 KG)	114 LB (51.7 KG)	127 LB (57.6 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*	2 GUARDRAILS, 4 CHAINS, 4 ADAPTERS	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE
COMPATIBLE WITH	I-IRC	I-IRC	I-IRC	I-IRC
MODEL	I-IRO4	I-IRGR	I-IREX3	I-IREX6
UPC	778300411153	778300410101	778300412938	778300412952

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



DESCRIPTION	TOOL SHELF
ASSEMBLED DIMENSIONS (WXDXH)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)
PACKAGE DIMENSIONS (WXDXH)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)
WEIGHT	5.5 LB (2.5 KG)
INCLUDED IN THE BOX	1 TOOL SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCYP, I-CAISC, I-CISCH1, I-CISCAS AND I-IRC
MODEL	I-CISTR
UPC	778300000463



MAXIMUM REACH HEIGHT | 12' 0"

OVERALL HEIGHT | 78.25"

MAXIMUM PLATFORM HEIGHT | 73"

MINIMUM PLATFORM HEIGHT | 13"

114.75"

18'

182.75"

140.75"

1 UNIT AND GUARDRAILS

2 UNITS,
GUARDRAILS
AND OUTRIGGERS

GET THE METALTECH APP

BUILT TOUGH FOR
Safety**METALTECH**

JOB SITE SERIES™ 5'

JOB SITE SERIES™



10'
REACH

900 lb
LOAD CAPACITY



ASSEMBLED DIMENSIONS (WxDxH)	50.5 X 31 X 76.5 IN. (128.3 X 78.7 X 194.3 CM)
PACKAGE DIMENSIONS (WxDxH)	44 X 23 X 7.5 IN. (111.8 X 58.4 X 19.1 CM)
WEIGHT	77 LB (35 KG)
LOAD CAPACITY	900 LB (408 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	11.5 - 25 - 36.5 - 48 IN. (29 - 64 - 93 - 122 CM)
REACH	10 FT (3 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMIS
UPC	778300100019

iINFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 900 lb (408 kg) capacity.



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

JOB SITE SERIES™ 4' DELUXE



9'
500 lb
REACH LOAD CAPACITY

ASSEMBLED DIMENSIONS (WxDxH)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (WxDxH)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	65 LB (29.5 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNDX
UPC	778300100392

iINFO



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability.
Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



RUNNING BOARD
Easy access to decks.



UTILITY HOOKS
Great to hang extensions and hoses.

JOB SITE SERIES™ 4'

JOB SITE SERIES™



500 lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WxDxH)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (WxDxH)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	59 LB (26.8 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNT
UPC	778300100224

iINFO



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

4' HIGH PORTABLE SCAFFOLD



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH)	41 X 22.5 X 45.75 IN. (104.1 X 57.2 X 116.2 CM)
PACKAGE DIMENSIONS (WXDXH)	43.25 X 24 X 3.75 IN. (109.7 X 60.8 X 9.8 CM)
WEIGHT	50 LB (22.7 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCN
UPC	778300100200



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace



EASY STORAGE

Folds flat for compact storage and transport

iINFO

JOB SITE SERIES™ DRYWALL & PANEL LIFT



150 lb
LOAD CAPACITY **11'**
MAX HEIGHT

ASSEMBLED DIMENSIONS (WxDxH)	57.9 X 48.4 X 57 IN. (147 X 122.9 X 144.7 CM)
PACKAGE DIMENSIONS (WxDxH)	51 X 21.5 X 6.5 IN. (129.5 X 54.5 X 16.5 CM)
WEIGHT	91 LB (41.2 KG)
LOAD CAPACITY	150 LB (68 KG)
MAXIMUM HEIGHT	11 FT. (3.35 M)
LOADING HEIGHT	34 IN. (86 CM)
MAXIMUM PANEL SIZE	4 X 16 FT. (1.22 X 4.87 M)
CABLE	HIGH TENSILE 1/8" CABLE (0.3 CM)
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 94
MODEL	I-IDPL
UPC	778300002061

iNFO



CRADLE TIPTS

Cradle tilts for sloped ceiling or vertical wall installations. 34" (86 cm) loading height.



CASTERS

Three 5" (13 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH

Fast action single stage winch with silent cam lock brake.

JOB SITE SERIES™



ALU SERIES™ 6' BAKER

ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	74 X 30.75 X 74.5 IN. (187.7 X 78.2 X 189.5 CM)
PACKAGE DIMENSIONS (WXDXH)	74.75 X 30.25 X 6.25 IN. (189.7 X 76.9 X 16 CM)
WEIGHT	85 LB (38.6 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 26.75 TO 73 IN. (67.9 TO 185.1 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	ANODIZED ALUMINUM
PLATFORM	ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAISC
UPC	778300220106

iINFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 30.75" (78.2 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 26.75 to 73 in. (67.9 to 185.1 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.



SCAFFLOCK™


DESCRIPTION	GUARDRAILS SYSTEM	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (WXDXH)	69.5 X 30 X 41.5 IN. (176.5 X 76.2 X 105.4 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (WXDXH)	71 X 45 X 4 IN. (180.3 X 114.3 X 10.2 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	13 LB (5.9 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-CAISCGR	I-CISTR	I-SSL
UPC	778300620012	778300000463	778300001552



FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	FOR 2 UNITS HIGH	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (WXDXH)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	24 X 4.5 X 27.25 IN. (61 X 11.4 X 69.2 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (WXDXH)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	27 X 27 X 4 IN. (68.9 X 68.9 X 10.2 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	32 LB (14.5 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCPY AND I-BMSS	I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS AND I-CISCPY
MODEL	I-IBBF4	I-IBSJ12H4	I-CAIS04	I-CIS04TT
UPC	778300001699	778300001644	778300620166	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

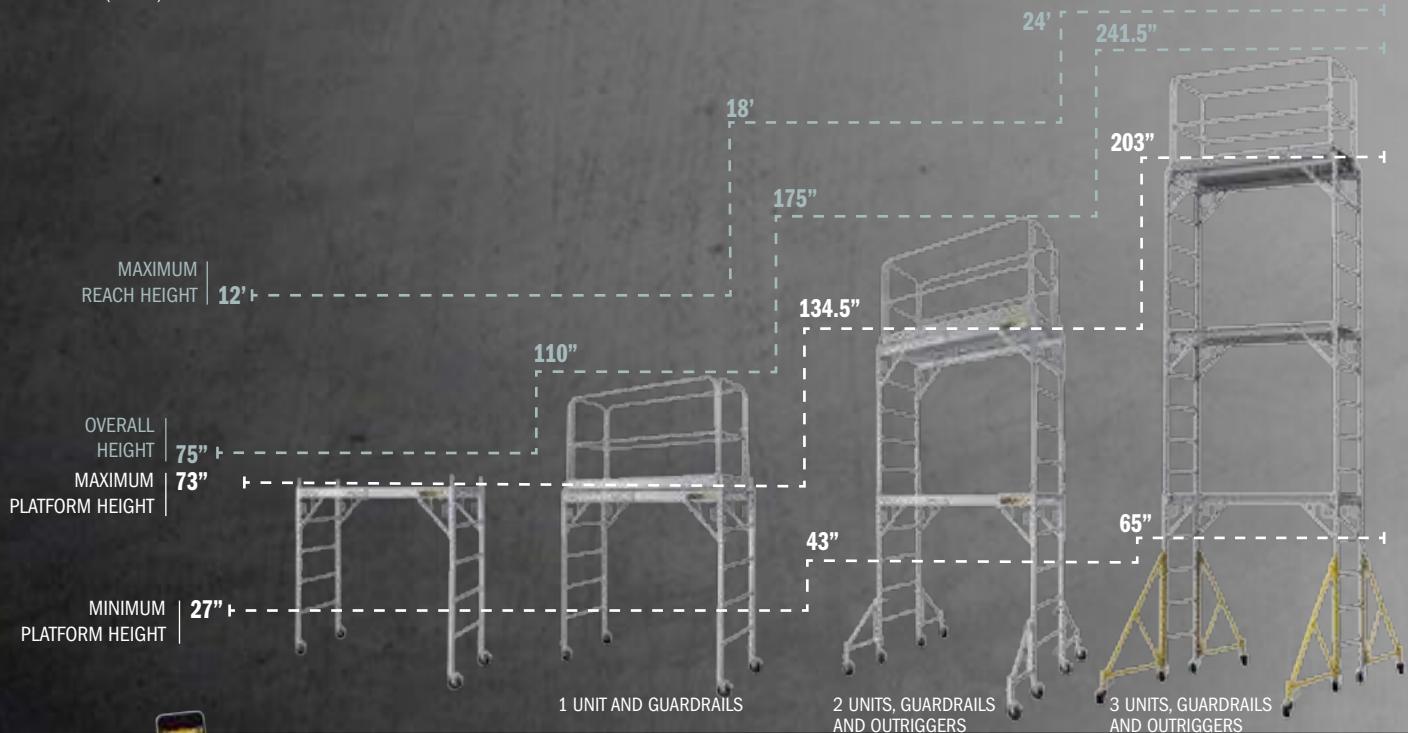

GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

ALU SERIES™ 6'

ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	56.5 X 29 X 72 IN. (143.5 X 73.7 X 182.9 CM)
PACKAGE DIMENSIONS (WxDxH)	67.5 X 30.5 X 6.5 IN. (171.5 X 77.5 X 16.5 CM)
WEIGHT	67 LB (30.4 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	11.75 - 23.5 - 35.25 - 47 - 59 - 70.75 IN. (30 - 60 - 90 - 119 - 150 - 180 CM)
REACH	12 FT (3.7 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	3 ANTI-SLIP, AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) OUTSIDE DIAMETER, AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAIRC
UPC	778300420155

iINFO



LIGHTWEIGHT

This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 700 lb (318 KG) capacity.



EASY STORAGE

Folds flat for compact storage and transport

ALU SERIES™ 4'



9'
REACH

600 lb
LOAD CAPACITY

ALU SERIES™

ASSEMBLED DIMENSIONS (WXDXH) **42.25 X 22.25 X 47.75 IN. (107.3 X 56.5 X 121.4 CM)**

PACKAGE DIMENSIONS (WXDXH) **43.75 X 22.5 X 4.75 IN. (111 X 57.2 X 12.1 CM)**

WEIGHT **35.2 LB (16 KG)**

LOAD CAPACITY **600 LB (272 KG). Combined weight of user + materials**

WORKING HEIGHTS **9.5 - 21.25 - 33 IN. (24 - 54 - 84 CM)**

REACH **9 FT (2.75 M)**

FINISH **ANODIZED ALUMINUM**

PLATFORMS **2 ANTI-SLIP, 14 GAUGE STEEL**

STRUCTURE **1.2 IN. (3.05 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063**

CASTERS **4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY**

REPLACEMENT PARTS **SEE PAGE 93**

STANDARDS **ANSI, CSA AND OSHA**

MODEL **I-IMAC**

UPC **778300100408**



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 600 lb (272 KG) capacity.



LIGHTWEIGHT

This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



EASY STORAGE

Folds flat for compact storage and transport

iINFO

INDUSTRIAL AND DRYWALL BUILDMAN™ GRADE

BuildMan™ Grade Scaffold work platforms and panel carts boast higher capacities and more stability than other brands on the market. With larger and higher capacity casters, bigger and thicker steel components and more features, BuildMan™ grade is the choice for professional and industrial users that require more stability, ease of use and larger casters to easily roll over obstacles.

- **HEAVY DUTY**
- **HIGHER CAPACITY**
- **BIGGER CASTERS**

BUILDMAN™ GRADE



BUILT TOUGH FOR
SAFETY

METALTECH


BUILDMAN™ 6' DRYWALL BAKER™

BUILDMAN™ GRADE

NEW WITH
SAFECLIMB™
PLATFORM



iINFO



COMPATIBLE:
BILJAX, BUFFALO,
WERNER, UST
AND METALTECH
BAKER*

1,500 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	75.75 X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
PACKAGE DIMENSIONS (WxDxH)	76.25 X 34.5 X 7 IN. (193.7 X 87.6 X 17.8 CM)
WEIGHT	180 LB (81.6 KG)
LOAD CAPACITY	1,500 LB (680 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 29 TO 71.5 IN. (73.7 TO 181.6 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORM	PLATFORM WITH TRAP DOOR. 19/32 IN. (15 MM) PLYWOOD, SLIP-RESISTANT
STRUCTURE	1.75 IN. (4.5 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BMSS
UPC	778300100057

iINFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).




MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 31" (78.7 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 28" to 71.5" (71.1 to 181.6 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

* All trademarks and registered trademarks listed above are the property of their respective owners.

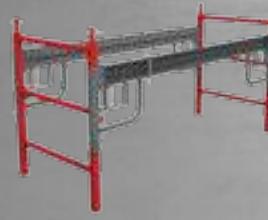


DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS
ASSEMBLED DIMENSIONS (WxDxH)	21.5 X 4 X 26.5 IN. (54.6 X 10.2 X 67.3 CM)
PACKAGE DIMENSIONS (WxDxH)	24 X 16.75 X 9.25 IN. (61 X 42.5 X 23.5 CM)
WEIGHT	52 LB (23.6 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-BMSS
MODEL	I-BMS04
UPC	778300100262

DESCRIPTION	GUARDRAILS SYSTEM
ASSEMBLED DIMENSIONS (WxDxH)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)
PACKAGE DIMENSIONS (WxDxH)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)
WEIGHT	59 LB (26.8 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS
COMPATIBLE WITH	I-CISC, I-CISC, I-CISCTP, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-BMSGRJP
UPC	77830001828

DESCRIPTION	39" HIGH EXTENSION
ASSEMBLED DIMENSIONS (WxDxH)	74.25 X 30.75 X 39.75 IN. (188.6 X 78.1 X 101 CM)
PACKAGE DIMENSIONS (WxDxH)	78 X 34.25 X 4.5 IN. (198.1 X 87 X 11.4 CM)
WEIGHT	88.8 LB (40.3 KG)
INCLUDED IN THE BOX	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-BMSSEX
UPC	77830001323


*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



DESCRIPTION	SET OF 4 BASE PLATES
ASSEMBLED DIMENSIONS (WxDxH)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)
PACKAGE DIMENSIONS (WxDxH)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)
WEIGHT	10.1 LB (4.6 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-IBBF4
UPC	77830001699

DESCRIPTION	SET OF 4 LEVELING JACKS
ASSEMBLED DIMENSIONS (WxDxH)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)
PACKAGE DIMENSIONS (WxDxH)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)
WEIGHT	24.2 LB (11 KG)
INCLUDED IN THE BOX	4 LEVELING JACKS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCPY AND I-BMSS
MODEL	I-IBSJ12H4
UPC	77830001644

DESCRIPTION	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (WxDxH)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (WxDxH)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-ISL
UPC	77830001552

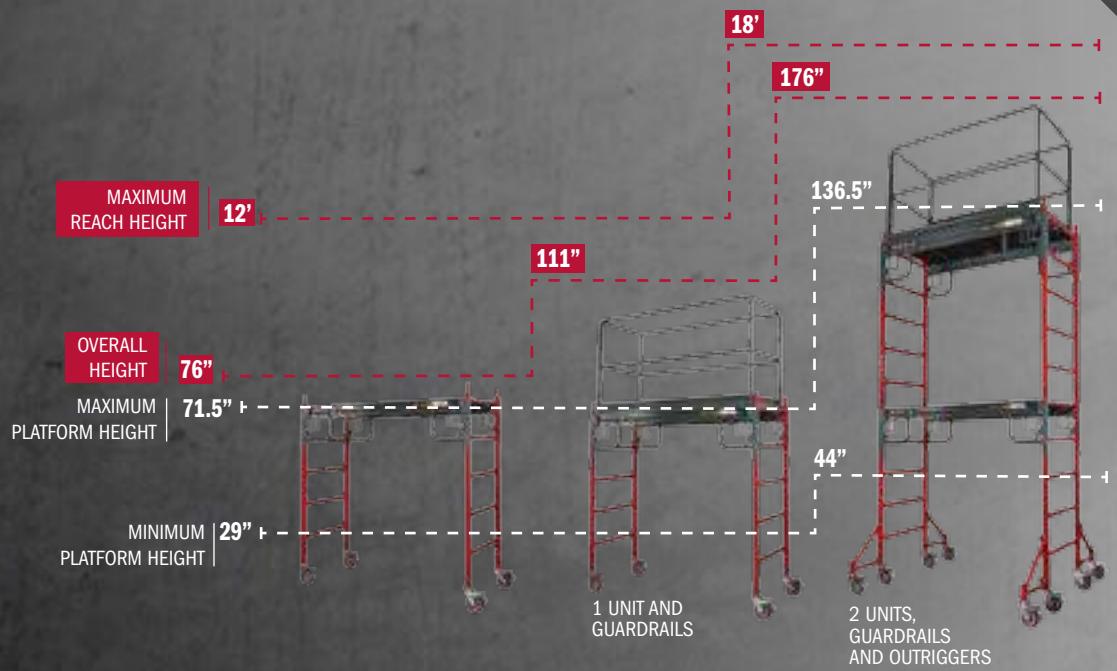

GET THE METALTECH APP

BUILDMAN™ 6'

BUILDMAN™ GRADE



1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	59.25 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
PACKAGE DIMENSIONS (WXDXH)	70 X 31.25 X 6 IN. (177.8 X 79.4 X 15.2 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) Combined weight of user + materials. Large platforms: MAX. 375 lb (170 kg) / Small platform: MAX. 250 lb (113 kg)
WORKING HEIGHTS	11.75 - 23.75 - 35.75 - 47.75 - 59.75 - 71.75 PO (29.9 - 60.3 - 90.8 - 121.3 - 151.8 - 182.3 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 94
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM6S
UPC	778300100064

iINFO



TWO-MINUTE ASSEMBLY

No tools required.



EASY STORAGE

Folds flat for compact storage and transport




TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites.
1,000 lb (454 kg) capacity.

OPTIONS



BUILDMAN™ GUARDRAILS AND OUTRIGGERS COMPLETE SYSTEM

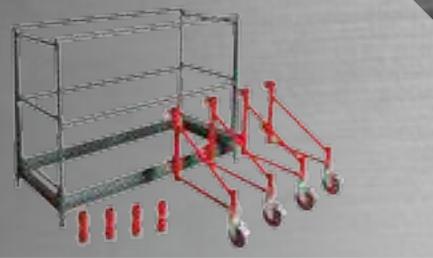

PACKAGE DIMENSIONS (WXDXH) 55.5 X 43.5 X 3.5 IN. (140.5 X 110.5 X 9 CM)

WEIGHT 114.6 LB (52 KG)

INCLUDED IN THE BOX 2 GUARDRAIL PANELS, 4 OUTRIGGERS, 4 CASTERS, 4 COUPLING PINS, 20 LOCKING PINS, 8 KNOBS, 4 PIG TAILS

COMPATIBLE WITH I-BM6S

STANDARDS ANSI, CSA AND OSHA

MODEL I-BM6SK

UPC 778300100361

DESCRIPTION

ASSEMBLED DIMENSIONS (WXDXH) 54.5 X 23.5 X 42 IN. (138.4 X 59.4 X 107 CM)

PACKAGE DIMENSIONS (WXDXH) 55.5 X 43.5 X 2.75 IN. (140.5 X 110.5 X 6.9 CM)

WEIGHT 43.2 LB (19.6 KG)

MODEL I-BM6GR

UPC 778300100491

GUARDRAILS SYSTEM

DESCRIPTION

ASSEMBLED DIMENSIONS (WXDXH) 21.25 X 4 X 23.75 IN. (54 X 10.2 X 60.1 CM)

PACKAGE DIMENSIONS (WXDXH) 22.75 X 19.75 X 6 IN. (57.6 X 50.2 X 15.5 CM)

WEIGHT 52 LB (23.6 KG)

CASTERS 5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

MODEL I-BM604

UPC 778300100477

SET OF 4 OUTRIGGERS WITH CASTERS

DESCRIPTION

ASSEMBLED DIMENSIONS (H X DIAM.) 6.5 X 1.9 IN. (16.5 X 4.8 CM)


PACKAGE DIMENSIONS (WXDXH) 11 X 6.5 X 2.5 IN. (28 X 16 X 6.5 CM)

WEIGHT 7.2 LB (3.3 KG)

MODEL I-BM6C4

UPC 778300100538

SET OF 4 COUPLING PINS

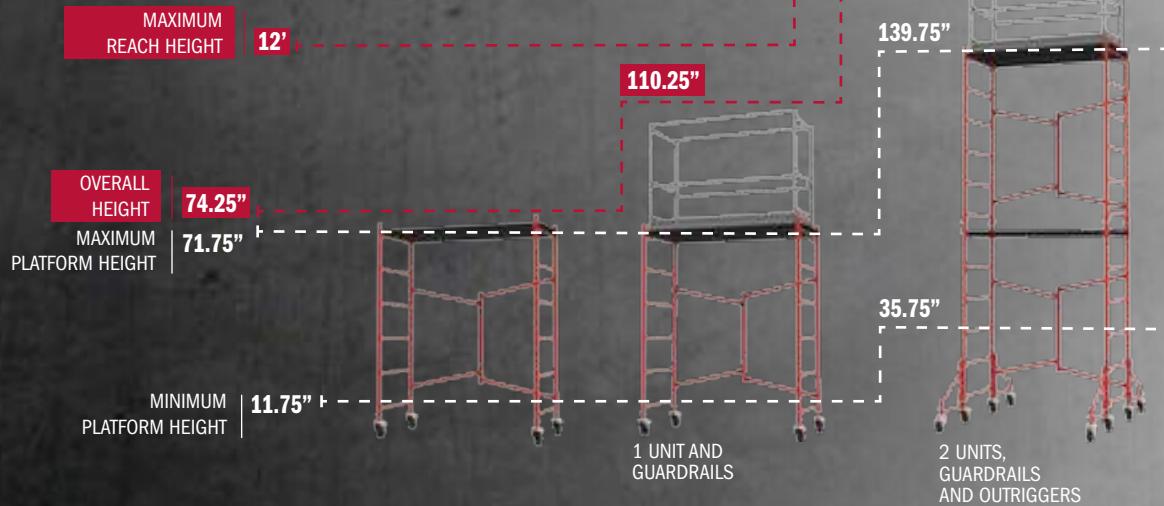

GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

BUILDMAN™ 4'

BUILDMAN™ GRADE



750 lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WxDxH)	50.5 X 23.75 X 61.5 IN. (128.3 X 60.3 X 156.2 CM)
PACKAGE DIMENSIONS (WxDxH)	44 X 23.25 X 6.25 IN. (111.8 X 59 X 15.9 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 94
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM4S
UPC	778300100040

iINFO



EASY STORAGE
Folds flat for compact storage and transport



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability.
Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites.
750 lb (340 kg) capacity.

WALL HAULER™ SERIES 3600 DRYWALL CART

REMOVABLE HANDLE

iINFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER



3,600 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH)

44.25 X 22 X 47.25 IN. (112.4 X 55.9 X 120 CM)

PACKAGE DIMENSIONS (WXDXH)

46.25 X 38.75 X 4.75 IN. (117.5 X 98.4 X 12.1 CM)

PLATFORM DIMENSIONS

11.5 X 44.25 IN. (29.2 X 112.4 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).

WEIGHT

90 LB (40.8 KG)

LOAD CAPACITY

3,600 LB (1,633 KG)

FINISH

POWDER COATED

HANDLE BAR

1.65 IN. (4.2 CM) OUTSIDE DIAMETER, 13 GAUGE STEEL

OPTION

SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: **I-BMDSP**).

REPLACEMENT PARTS

SEE PAGE 94

STANDARDS

ANSI, CSA AND OSHA

MODELS

I-BMD3631R

8 IN. (20 CM) POLYURETHANE
CASTERS ON POLYPROPYLENE
CORE.*

UPC

778300100170

I-BMD3631P

8 IN. (20 CM) PHENOLIC
CASTERS.*

778300100002

I-BMD3631RK

KINGPINLESS 8 IN. (20 CM)
POLYURETHANE CASTERS ON
POLYPROPYLENE CORE.*

778300100187

I-BMD3631PK

KINGPINLESS 8 IN. (20 CM)
PHENOLIC CASTERS.*

778300100096

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



REMOVABLE HANDLE

With its removable support handle, it can easily be transported and stored flat.



FLAT CART

Can also be used as a flat cart to carry bulky loads.

iINFO

WALL HAULER™ SERIES 3000 DRYWALL CART

PERMAQUICK™

BUILDMAN™ GRADE



3,000 lb
LOAD CAPACITY

iINFO

KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

ASSEMBLED DIMENSIONS (WXDXH)		43.5 X 24 X 48.75 IN. (110.5 X 61 X 123.8 CM)		
PACKAGE DIMENSIONS (WXDXH)		45 X 37.75 X 6.25 IN. (114.3 X 95.9 X 15.9 CM)		
PLATFORM DIMENSIONS		12 X 42 IN. (30.5 X 106.7 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).		
WEIGHT		107.8 LB (48.9 KG)		
LOAD CAPACITY		3,000 LB (1,361 KG)		
FINISH		POWDER COATED		
HANDLE BAR		1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL		
OPTION		SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP).		
REPLACEMENT PARTS		SEE PAGE 94		
STANDARDS		ANSI, CSA AND OSHA		
MODELS	I-BMD3031R	I-BMD3031P	I-BMD3031RK	I-BMD3031PK
	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	8 IN. (20 CM) PHENOLIC CASTERS.*	KINGPINLESS 8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	KINGPINLESS 8 IN. (20 CM) PHENOLIC CASTERS.*
UPC	778300100071	778300100194	778300100255	778300100316

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE

iINFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



**AS TOUGH
AS WELDED**

PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



OPTION (I-BMDSP)

SLIDING COATING

Optional sliding coating protects the surface against abrasion.

WALL HAULER™ SERIES 3000 DRYWALL CART WELDED



**3,000 lb
LOAD CAPACITY**

ASSEMBLED DIMENSIONS (WXDXH)	49.25 X 22.25 X 48.5 IN. (125.1 X 56.5 X 123.2 CM)
PACKAGE DIMENSIONS (WXDXH)	49.25 X 22.25 X 38.25 IN. (125.1 X 56.5 X 97.2 CM)
PLATFORM DIMENSIONS	11.5 X 42 IN. (29.2 X 106.7 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	80 LB (36.3 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
CASTERS	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP).
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA
FINISH	POWDER COATED
MODEL	I-BMD3131YGR
UPC	778300000104



KINGPINLESS
I-DCC8KPL4



PHENOLIC CASTER
I-DCC8P4



OPTION (I-BMDSP)

SLIDING COATING
Optional sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

iINFO

WALL HAULER™ SERIES 2000 DRYWALL CART

RESIDENTIAL WELDED



3,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WxDxH)	38 X 20 X 44.5 IN. (96.5 X 50.8 X 113 CM)
PACKAGE DIMENSIONS (WxDxH)	38 X 20 X 34.25 IN. (96.5 X 50.8 X 87 CM)
PLATFORM DIMENSIONS	10.5 X 38 IN. (26.7 X 96.5 CM). Can carry up to 20 gypsum boards of 1/2 in. (13 mm).
WEIGHT	71.5 LB (32.4 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
HANDLE BAR	1.125 IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
CASTERS	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
REPLACEMENT PARTS	SEE PAGE 94
SLIDING COATING	STANDARD
STANDARDS	ANSI, CSA AND OSHA
FINISH	POWDER COATED
MODEL	I-BMD2131YGR
UPC	778300000098

iNFO



SLIDING COATING

Sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

OPTION



KINGPINLESS
I-DCC8KPL4



PHENOLIC CASTER
I-DCC8P4

WALL HAULER™ SERIES 2000 DRYWALL CART

RESIDENTIAL PERMAQUICK™

BUILDMAN™ GRADE

iINFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER



2,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH)

39 X 19.25 X 44.25 IN. (99 X 48.9 X 112.4 CM)

PACKAGE DIMENSIONS (WXDXH)

40.75 X 32.5 X 6.5 IN. (103.5 X 82.6 X 16.5 CM)

PLATFORM DIMENSIONS

9.5 X 37.5 IN. (24.1 X 95.3 CM). Can carry up to 18 gypsum boards of 1/2 in. (13 mm).

WEIGHT

76.3 LB (34.6 KG)

LOAD CAPACITY

2,000 LB (907 KG)

FINISH

POWDER COATED

HANDLE BAR

1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL

REPLACEMENT PARTS

SEE PAGE 94

STANDARDS

ANSI, CSA AND OSHA

MODELS

I-BMD2031R

8 IN. (20 CM) POLYURETHANE
CASTERS ON POLYPROPYLENE
CORE.*

I-BMD2031P

8 IN. (20 CM) PHENOLIC
CASTERS.*

I-BMD2031RK

KINGPINLESS 8 IN. (20 CM)
POLYURETHANE CASTERS ON
POLYPROPYLENE CORE.*

I-BMD2031PK

KINGPINLESS 8 IN. (20 CM)
PHENOLIC CASTERS.*

UPC

778300100439

778300100446

778300100453

778300100460

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



AS TOUGH
AS WELDED

PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



iINFO

MOVE IN A SMALL SPACE

This narrower model is made to move drywall sheets in a small space, turn your load on a dime!



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

WALL HAULER™ SERIES H DRYWALL CART



3,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WxDxH)	50.75 X 27.25 X 45.75 IN. (128.9 X 69.2 X 116.2 CM)
PACKAGE DIMENSIONS (WxDxH)	50.75 X 27.25 X 6.75 IN. (128.9 X 69.2 X 17.1 CM)
PLATFORM DIMENSIONS	48 X 15.5 IN. (121.9 X 39.4 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).
WEIGHT	87 LB (39.5 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
HANDLE BAR	2 IN. (5 CM) OUTSIDE DIAMETER. 9 GAUGE STEEL
CASTERS	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA
FINISH	POWDER COATED
MODEL	I-BMDHER31YGR
UPC	778300000548

iNFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

OPTION



KINGPINLESS
I-DCC8KPL4



PHENOLIC CASTER
I-DCC8P4

BUILDMAN™ DRYWALL STILTS

BUILDMAN™ GRADE



225 lb
LOAD CAPACITY

	18-30 IN. DRYWALL STILTS	24-40 IN. DRYWALL STILTS
ASSEMBLED DIMENSIONS (1 STILT) (WXDXH)	12.5 X 6 X 38 IN. (31.8 X 15.2 X 96.5 CM)	12.5 X 6 X 44 IN. (31.8 X 15.2 X 111.8 CM)
PACKAGE DIMENSIONS (WXDXH)	13.25 X 8 X 25 IN. (33.7 X 20.3 X 63.5 CM)	13.25 X 8 X 31 IN. (33.7 X 20.3 X 63.5 CM)
ADJUSTABLE HEIGHTS	18 UP TO 30 IN. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.	24 UP TO 40 IN. (61 cm up to 1.02 m) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)	10 FT (3.5 M)
MATERIAL	ANODIZED ALUMINUM	ANODIZED ALUMINUM
WEIGHT (1 STILT)	7.1 LB (3.2 KG)	8.1 LB (3.7 KG)
LOAD CAPACITY	225 LB (102 KG)	225 LB (102 KG)
REPLACEMENT PARTS	SEE PAGE 94	SEE PAGE 94
MODEL	I-BMDS1830	I-BMDS2440
UPC	778300001989	778300001996

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach



ADJUSTABLE
Adjustable heights.



DUAL SPRING ACTION
For more flexibility and natural walking feel



CONTACT GRIP
One piece rubber outsole

iINFO

BUILDMAN™ 18"-30" DRYWALL BENCH

BUILDMAN™ GRADE



500 lb
LOAD CAPACITY

9'-3"
REACH

OPEN BENCH (WxDxH)	48 X 17.5 X 18/30 IN. (121.9 X 44.5 X 46/76 CM)
CLOSED BENCH (WxDxH)	48 X 17.5 X 6.25 IN. (121.9 X 44.5 X 15.9 CM)
PACKAGE DIMENSIONS (WxDxH)	16.5 X 7 X 49.25 IN. (42 X 18 X 125 CM)
WORK SURFACE (W x D)	48 X 9.5 IN. (121.9 X 24.1 CM)
WORKING HEIGHT	18 up to 30 in. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)
MATERIAL	ALUMINUM 6061-T6
WEIGHT	29.3 LB (13.3 KG)
LOAD CAPACITY	500 LB (227 KG)
REPLACEMENT PARTS	SEE PAGE 94
MODEL	I-BMDWB18
UPC	778300002009

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach

iINFO



ADJUSTABLE
18" to 30" (46 to 76 CM) adjustable heights. Auto-locking system with lock indicator device



STEP-UP
Extra-wide step-up



FOOTING
Anti-slip heavy-duty footing

BUILDMAN™ WORK STAND



660 lb
LOAD CAPACITY



660 lb
LOAD CAPACITY

DESCRIPTION	19" ALUMINUM WORK STAND
OPEN DIMENSIONS (WXDXH)	25.75 X 25 X 19.25 IN. (65.4 X 63.6 X 48.9 CM)
CLOSED DIMENSIONS (WXDXH)	25.75 X 11.25 X 23 IN. (65.4 X 28.6 X 58.4 CM)
DECK DIMENSIONS (WxD)	12.25 X 23.75 IN. (31.1 X 60.3 CM)
LOAD CAPACITY	660 LB (300 KG)
WEIGHT	13.2 LB (6 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7000AL
UPC	778300002030

DESCRIPTION	29" ALUMINUM WORK STAND
OPEN DIMENSIONS (WXDXH)	26.75 X 31.25 X 29 IN. (68.9 X 79.4 X 73.7 CM)
CLOSED DIMENSIONS (WXDXH)	26.75 X 11.5 X 32.5 IN. (68.3 X 29.2 X 82.5 CM)
DECK DIMENSIONS (WxD)	12.25 X 23.75 IN. (31.1 X 60.3 CM)
LOAD CAPACITY	660 LB (300 KG)
WEIGHT	17.4 LB (7.9 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7100AL
UPC	778300002047

660 lb
LOAD CAPACITY

DESCRIPTION	38" ALUMINUM WORK STAND
OPEN DIMENSIONS (WXDXH)	27.75 X 38.5 X 38 IN. (70.5 X 97.8 X 96.5 CM)
CLOSED DIMENSIONS (WXDXH)	27.75 X 11.75 X 42.25 IN. (70.5 X 29.8 X 107.3 CM)
DECK DIMENSIONS (WxD)	12.25 X 23.75 IN. (31.1 X 60.3 CM)
LOAD CAPACITY	660 LB (300 KG)
WEIGHT	21.9 LB (9.9 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7200AL
UPC	778300002054



BUILDMAN™ GRADE

BUILDMAN™ DRYWALL & PANEL LIFT



200 lb
LOAD CAPACITY

14'-5"
MAX HEIGHT

BUILDMAN™ GRADE

ASSEMBLED DIMENSIONS (WxDxH)

60.25 X 48.75 X 58.25 IN. (153.3 X 124.1 X 148.1 CM)

PACKAGE DIMENSIONS (WxDxH)

BOX ONE: 49.5 X 14.25 X 7 IN. (125.9 X 36.3 X 17.5 CM)

BOX TWO: 50.5 X 21.25 X 6 IN. (128.4 X 54.2 X 15.5 CM)

WEIGHT

146.6 LB (66.6 KG)

LOAD CAPACITY

200 lb (90.7 kg)

MAXIMUM HEIGHT

14 FT. 5 IN. (4.39 M)

LOADING HEIGHT

37 IN. (94 CM)

MAXIMUM PANEL SIZE

4 X 16 FT. (1.22 X 4.87 M)

CHAINS

COMMERCIAL GRADE

CASTERS

6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY.

REPLACEMENT PARTS

SEE PAGE 94

MODEL

I-BMDPL

UPC

778300002078

iN10



CRADLE TILTS

Cradle tilts for sloped ceiling or vertical wall installations. 34" (86 cm) loading height.



CASTERS

Three 5" (13 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH

Fast action single stage winch with silent cam lock brake.

BUILDMAN™ GRADE



GET THE METALTECH APP

BUILT TOUGH FOR
Safety

METALTECH

ALUMINUM SCAFFOLDING

Metaltech's Aluminum scaffolds are our lightest range of scaffolding. It is a high strength system, designed for quick and easy assembly. The Aluminum is a flexible and low maintenance solution used for all jobsites work. Our Span 300 and 400 towers are available in narrow and wide width and in heights ranging from 6' to 41'. They are compatible with Instant Upright, Alufase and Vault scaffolding.[†]

- **LIGHT WEIGHT**
- **HIGH STRENGTH SYSTEM**
- **QUICK & EASY ASSEMBLY**
- **HIGH DURABILITY**
- **HIGHLY VERSATILE**

[†]All trademarks and registered trademarks listed above are the property of their respective owners.

ALUMINUM SCAFFOLDING



BUILT TOUGH FOR
SAFETY

METALTECH

ALUMINUM TOWER SPAN 300 KITS

ALUMINUM SCAFFOLDING

iINFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2



SPAN 300 NARROW KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F3001	AL-G3000	AL-G4101	AL-D0002	AL-B0002	AL-P0002	AL-T0102	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K3007	13'-1 1/2" (4 M)	339 LB (154 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 16'-8 1/2" (2.496 X 0.677 X 5.092 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K3013	19'-8 1/4" (6 M)	447 LB (203 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 23'-8 1/4" (2.496 X 0.677 X 7.092 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K3019	26'-3" (8 M)	563 LB (256 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 29'-10" (2.496 X 0.677 X 9.092 M)	8	2	2	9	13	4	1	4	4	0	4



SPAN 300 WIDE KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F3003	AL-G3001	AL-G4101	AL-D0002	AL-B0002	AL-P0002	AL-T0103	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K3028	13'-1 1/2" (4 M)	422 LB (192 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 16'-8 1/2" (2.496 X 1.290 X 5.092 M)	4	2	2	6	5	1	2	1	4	4	0
AL-K3034	19'-8 1/4" (6 M)	546 LB (248 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 23'-8 1/4" (2.496 X 1.290 X 7.092 M)	6	2	2	10	9	1	3	1	4	4	0
AL-K3040	26'-3" (8 M)	671 LB (305 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 29'-10" (2.496 X 1.290 X 9.092 M)	8	2	2	14	13	1	4	1	4	4	0
AL-K3046	32'-9 3/4" (10 M)	805 LB (366 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 36'-4 3/4" (2.496 X 1.290 X 11.092 M)	10	2	2	17	17	1	5	1	4	4	0
AL-K3052	39'-4 1/2" (12 M)	926 LB (421 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 42'-11 3/8" (2.496 X 1.290 X 13.092 M)	12	2	2	20	21	1	6	1	4	4	0



[†]All trademarks and registered trademarks listed above are the property of their respective owners.

ALUMINUM TOWER SPAN 400 KITS



iINFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2


ALUMINUM SCAFFOLDING

SPAN 400 NARROW KITS



MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D X H)	AL-F4002	AL-G4000	AL-G4101	AL-D0002	AL-B0002	AL-P0002	AL-T0102	AL-C0002	AL-J0001	AL-Q0000	AL-U0002
AL-K4007	13'-9 3/8" (4.2 M)	326 LB (148 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 17'-4 3/8" (2.496 X 0.677 X 5.292 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K4013	20'-8" (6.3 M)	427 LB (194 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 24'-3" (2.496 X 0.677 X 7.392 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K4019	27'-2 3/4" (8.3 M)	539 LB (245 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 30'-9 3/4" (2.496 X 0.677 X 9.392 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 400 WIDE KITS

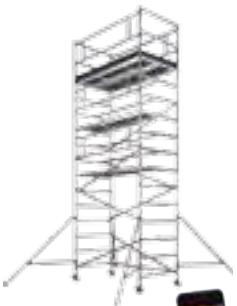

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D X H)	AL-F4005	AL-G4001	AL-G4101	AL-D0002	AL-B0002	AL-P0101	AL-T0103	AL-C0002	AL-J0001	AL-Q0000	AL-U0002
AL-K4028	13'-9 3/8" (4.2 M)	409 LB (186 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 17'-4 3/8" (2.496 X 1.290 X 5.292 M)	4	2	2	6	5	1	2	1	4	4	0
AL-K4034	20'-8" (6.3 M)	528 LB (240 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 24'-3" (2.496 X 1.290 X 7.392 M)	6	2	2	10	9	1	3	1	4	4	0
AL-K4040	27'-2 3/4" (8.3 M)	647 LB (294 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 30'-9 3/4" (2.496 X 1.290 X 9.392 M)	8	2	2	14	13	1	4	1	4	4	0
AL-K4046	34'-1 1/2" (10.4 M)	777 LB (353 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 37'-8 1/2" (2.496 X 1.290 X 11.492 M)	10	2	2	17	17	1	5	1	4	4	0
AL-K4052	41'-0 1/8" (12.5 M)	889 LB (404 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 44'-7 1/8" (2.496 X 1.290 X 13.592 M)	12	2	2	20	21	1	6	1	4	4	0



GET THE METALTECH APP


BUILT TOUGH FOR
SAFETY

METALTECH

ALUMINUM SCAFFOLDING

ALUMINUM SCAFFOLDING

SPAN 300

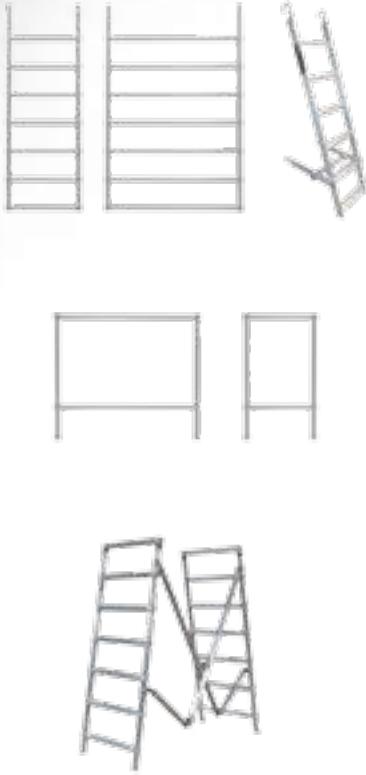

iINFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

SPAN 300 FRAME

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME	26 5/8 X 43 1/2 IN. (0.677 X 1.106 M)	12.5 LB (5.7 KG)	AL-F3000
	26 5/8 X 76 1/8 IN. (0.677 X 1.934 M)	18.7 LB (8.5 KG)	AL-F3001
WIDE FRAME	50 3/4 X 43 1/2 IN. (1.290 X 1.106 M)	18.7 LB (8.5 KG)	AL-F3002
	50 3/4 X 76 1/8 IN. (1.290 X 1.934 M)	24.6 LB (11.2 KG)	AL-F3003

SPAN 300/400 LADDER

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
6-STEPS LADDER WITH LATCH	78.7 IN. (2 M)	14 LB (6.4 KG)	AL-L0002


SPAN 300 GUARDRAIL

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW GUARDRAIL FRAME WITH UPPER PIN SYSTEM	26 5/8 X 32 1/4 IN. (0.677 X 0.818 M)	6 LB (2.7 KG)	AL-G3000
NARROW GUARDRAIL FRAME WITH LOWER PIN SYSTEM	26 5/8 X 42 IN. (0.677 X 1.066M)	6.2 LBS (2.8 KG)	AL-G3002
WIDE GUARDRAIL FRAME WITH UPPER PIN SYSTEM	50 3/4 X 32 1/4 IN. (1.290 X 0.818 M)	8.8 LB (4 KG)	AL-G3001
WIDE GUARDRAIL FRAME WITH LOWER PIN SYSTEM	50 3/4 X 42 IN. (1.290 X 1.066 M)	9 LB (4.1 KG)	AL-G3003

SPAN 300 FOLDABLE BASE

DESCRIPTION	DIMENSIONS (W X D X H)	WEIGHT	MODEL
NARROW FOLDABLE BASE WITH ADJUSTABLE LEGS	75 1/4 X 26 5/8 X 71 IN. (1.912 X 0.677 X 1.803 M)	55.4 LB (25.2 KG)	AL-Q3000
	8 FT 2 1/4 IN. X 26 5/8 IN. X 71 IN. (2.496 X 0.677 X 1.803 M)	57.6 LB (26.2 KG)	AL-Q3001
WIDE FOLDABLE BASE WITH ADJUSTABLE LEGS	8 FT 2 1/4 IN. X 50 3/4 IN. X 71 IN. (2.496 X 1.290 X 1.803 M)	76.1 LB (34.6 KG)	AL-Q3004

SPAN 400

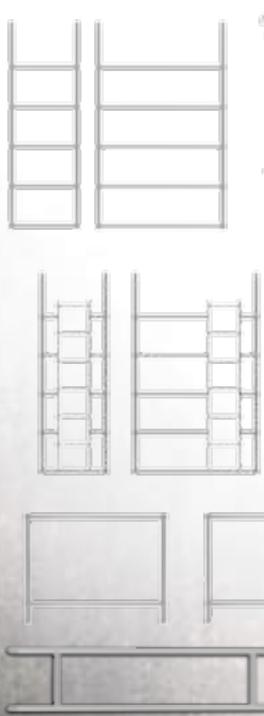

SPAN 400 FRAME

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME	26 5/8 X 48 7/8 IN. (0.677 X 1.243 M)	8.8 LB (4 KG)	AL-F4000
	26 5/8 X 65 1/4 IN. (0.677 X 1.657 M)	18.6 LB (8.4 KG)	AL-F4001
	26 5/8 X 81 5/8 IN. (0.677 X 2.072 M)	16.4 LB (7.4 KG)	AL-F4002
WIDE FRAME	50 3/4 X 48 7/8 IN. (1.290 X 1.243 M)	13 LB (5.9 KG)	AL-F4003
	50 3/4 X 65 1/4 IN. (1.290 X 1.657 M)	16.7 LB (7.6 KG)	AL-F4004
	50 3/4 X 81 5/8 IN. (1.290 X 2.072 M)	20.6 LB (9.3 KG)	AL-F4005

SPAN 300/400 LADDER

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
6-STEPS LADDER WITH LATCH	78.7 IN. (2 M)	14 LB (6.4 KG)	AL-L0002

SPAN 400 FRAME WITH LADDER SPAN

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME WITH LADDER SPAN	26 5/8 X 81 5/8 IN. (0.677 X 2.072 M)	23.3 LB (10.6 KG)	AL-F4101
WIDE FRAME WITH LADDER SPAN	50 3/4 X 81 5/8 IN. (1.290 X 2.072 M)	27.7 LB (12.6 KG)	AL-F4103

SPAN 400 GUARDRAIL

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW GUARDRAIL FRAME WITH UPPER PIN SYSTEM	26 5/8 X 27 5/8 IN. (0.677 X 0.703 M)	6.4 LB (2.9 KG)	AL-G4000
WIDE GUARDRAIL FRAME WITH UPPER PIN SYSTEM	50 3/4 X 27 5/8 IN. (1.290 X 0.703 M)	8 LB (3.6 KG)	AL-G4001
FRAME GUARDRAIL BRACING	75 1/4 IN. (1.912 M)	11.3 LB (5.1 KG)	AL-G4100
	8 FT 2 1/4 IN. (2.496 M)	13 LB (5.9 KG)	AL-G4101
	10 FT (3.048 M)	14.5 LB (6.6 KG)	AL-G4102

SPAN 300 NARROW FOLDABLE SCAFFOLD

DIMENSIONS (W X D X H)	75 1/4 X 26 5/8 X 78 IN. (1.912 X 0.677 X 1.980 M)
INCLUDES	CASTERS AND TRAPDOOR PLATFORM
WEIGHT	82.9 LB (37.6 KG)
MODEL	AL-Q3101



BRACE DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
DIAGONAL BRACE	82 IN. (2.084 M) 8 FT 7 1/2 IN. (2.630 M) 10 FT 8 1/8 IN. (3.25 M)	4 LB (1.8 KG) 4.8 LB (2.2 KG) 5.5 LB (2.5 KG)	AL-D0001 AL-D0002 AL-D0003
HORIZONTAL BRACE	75 1/4 IN. (1.912 M) 8 FT 2 1/4 IN. (2.496 M) 10 FT (3.048 M)	3.7 LB (1.7 KG) 4.4 LB (2 KG) 5.3 LB (2.4 KG)	AL-B0001 AL-B0002 AL-B0003

PLATFORM DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
ALUMINUM PLATFORM WITH ANTI-SLIP PLYWOOD DECK*	75 1/4 X 24 IN. (1.912 X 0.609 M) 8 FT 2 1/4 IN. X 24 IN. (2.496 X 0.609 M) 10 FT X 24 IN. (3.048 X 0.609 M)	30.4 LB (13.8 KG) 37.9 LB (17.2 KG) 43.3 LB (19.7 KG)	AL-P0100 AL-P0101 AL-P0102
ALUMINUM TRAPDOOR PLATFORM WITH ANTI-SLIP PLYWOOD DECK*	75 1/4 X 24 IN. (1.912 X 0.609 M) 8 FT 2 1/4 IN. X 24 IN. (2.496 X 0.609 M) 10 FT X 24 IN. (3.048 X 0.609 M)	31 LB (14.1 KG) 38.5 LB (17.5 KG) 44 LB (20 KG)	AL-P0001 AL-P0002 AL-P0003

TOEBOARD DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW WOODEN TOEBOARD SET	75 1/4 X 27 1/8 IN. (1.912 X 0.689 M) 8 FT 2 1/4 IN. X 27 1/8 IN. (2.496 X 0.689 M)	15 LB (6.8 KG) 18.8 LB (8.4 KG)	AL-T0100 AL-T0102
WIDE WOODEN TOEBOARD SET	75 1/4 X 51 1/8 IN. (1.912 X 1.298 M) 8 FT 2 1/4 IN. X 51 1/8 IN. (2.496 X 1.298 M)	19.1 LB (8.7 KG) 25.3 LB (11.5 KG)	AL-T0101 AL-T0103

BASE DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
SWIVEL POLYURETHANE CASTER WITH NON-MARKING TREAD	5 IN. (0.125 M) 8 IN. (0.200 M)	5 LB (2.3 KG) 9.6 LB (4.4 KG)	AL-C0000 AL-C0002
HIGH ADJUSTABLE LEG	16 IN. (0.406 M) 24 1/4 IN. (0.615 M)	2.4 LB (1.1 KG) 3.1 LB (1.4 KG)	AL-J0001 AL-J0002
SWIVEL BASE PLATE	6 X 6 IN. (15.2 X 15.2 CM)	1.42 LB (0.6 KG)	AL-A0000

OUTRIGGER DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
TELESCOPIC OUTRIGGER	68 1/8 IN. TO 8 FT 1/8 IN. (1.730 TO 2.440 M)	11.4 LB (5.2 KG)	AL-O0000
OUTRIGGER	72 3/4 IN. (1.849 M) 10 FT 6 IN. (3.200 M)	8.8 LB (4 KG) 15 LB (6.8 KG)	AL-O0001 AL-O0002

CLAMP DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
IN-LINE CLAMP	Ø 1.99 IN. (0.505 CM)	1.2 LB (0.5 KG)	AL-A0001

*Maximum load capacity: 25 lb/sq. ft. (122 kg/m²)



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

EASY-SET SCAFFOLD TOWER™

EASY-SET SCAFFOLD TOWER™



6' EASY-SET SCAFFOLD TOWER™		6' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS	12' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS
DIMENSIONS (W X D X H)	65 X 31 X 72 IN. (165 X 78 X 185 CM)	65 X 31 X 108 IN. (165 X 78 X 275 CM)	65 X 31 X 180 IN. (165 X 78 X 455 CM)
STANDING HEIGHT	6 FT (1.8M)	6 FT (1.8M)	12 FT (3.5M)
REACH HEIGHT	12 FT (3.5M)	12 FT (3.5M)	18 FT (5.3M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 11 1/2 IN. (190 X 82 X 29 CM)	75 X 32 1/2 X 21 1/4 IN. (190 X 82 X 54 CM)	75 X 32 1/2 X 28 3/4 IN. (190 X 82 X 73 CM)
PACKAGING WEIGHT	72.9 LB (33.1 KG)	159.2 LB (72.2 KG)	268 LB (121.5 KG)
LOAD CAPACITY	800 LB (363 KG)	800 LB (363 KG)	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 – 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 – 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 – 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0100	AL-Q0105	AL-Q0106
UPC	778300001460	778300001477	778300001484
INCLUDED IN PACK		INCLUDED IN PACK	INCLUDED IN PACK
QTY.		QTY.	QTY.
1	FOLDABLE BASE	1	FOLDABLE BASE
1	PLATFORM	1	PLATFORM
1	DIAGONAL BRACE	2	DIAGONAL BRACE
4	CASTER	4	CASTER
		5	HORIZONTAL BRACE
		2	4 RUNG EXTENSION FRAME
			4
			OUTRIGGER
			1
			TOE BOARD SET
			2
			7 RUNG EXTENSION FRAME

iN! O



BRACE HOOK
FRAME LOCKING PIN



ADJUSTABLE LEG AND
CASTER



OUTRIGGER EXTENSION

EASY-SET SCAFFOLD TOWER™



18' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS

DIMENSIONS (W X D X H)	65 X 31 X 252 IN. (165 X 78 X 640 CM)
STANDING HEIGHT	18 FT (5.3M)
REACH HEIGHT	24 FT (7.1M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 33 1/2 IN. (190 X 82 X 85 CM)
PACKAGING WEIGHT	322.6 LB (146.3 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0107
UPC	778300001491

24' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS

DIMENSIONS (W X D X H)	65 X 31 X 324 IN. (165 X 78 X 823 CM)
STANDING HEIGHT	24 FT (7.1M)
REACH HEIGHT	30 FT (8.9M)
PACKAGE DIMENSIONS (W X D X H)	88 1/2 X 32 1/2 X 42 IN. (225 X 82 X 107 CM)
PACKAGING WEIGHT	431.5 LB (195.7 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0108
UPC	778300001729

INCLUDED IN PACK

QTY.

- 1 FOLDABLE BASE
- 2 PLATFORM
- 8 DIAGONAL BRACE
- 4 ADJUSTABLE LEG WITH CASTER
- 9 HORIZONTAL BRACE
- 2 4 RUNG EXTENSION FRAME
- 4 OUTRIGGER
- 1 TOE BOARD SET
- 4 7 RUNG EXTENSION FRAME

INCLUDED IN PACK

QTY.

- 1 FOLDABLE BASE
- 3 PLATFORM
- 10 DIAGONAL BRACE
- 4 ADJUSTABLE LEG WITH CASTER
- 13 HORIZONTAL BRACE
- 2 4 RUNG EXTENSION FRAME
- 4 JUMBO OUTRIGGER
- 1 TOE BOARD SET
- 6 7 RUNG EXTENSION FRAME



PLATFORM HOOK



FOLDING BASE UNIT

FIBERGLASS SERIES™ SCAFFOLDING

The Fiberglass Series™ scaffolding offering is designed for uses when non-conductive, static free or chemical resistance is required. Easy to set up and lighter than steel or aluminum scaffold types, it can quickly be assembled and moved into position.

- NON-CONDUCTIVE
- CHEMICAL ENVIRONMENTS
- VERY LIGHT

FIBERGLASS SERIES™ SCAFFOLDING



**BUILT TOUGH FOR
SAFETY**

METALTECH


THE TOWER

TESTED IN CONFORMITY TO CSA STANDARD S269.2

FIBERGLASS SERIES™ SCAFFOLDING

iNFO

Imperial units for reference only.

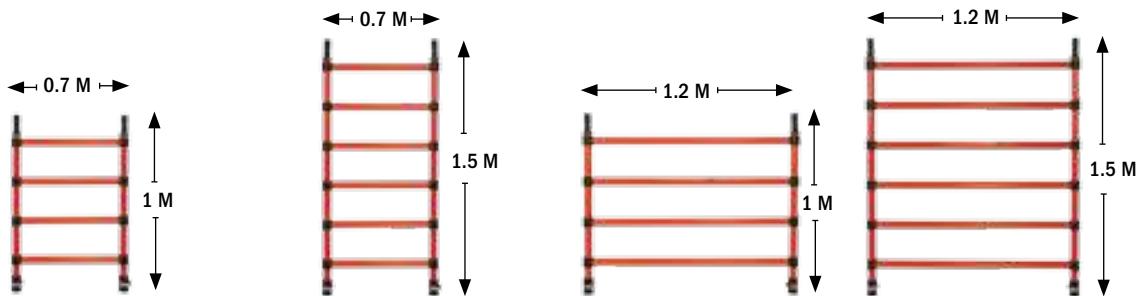

DESCRIPTION	1 X 0.7 M FRAME	1.5 X 0.7 M FRAME	1 X 1.2 M FRAME	1.5 X 1.2 M FRAME
DIMENSIONS (H X W)	1 X 0.7 M (3'-3 3/8" X 2'-3 9/16")	1.5 X 0.7 M (4'-11 1/16" X 2'-3 9/16")	1 X 1.2 M (3'-3 3/8" X 3'-11 1/4")	1.5 X 1.2 M (4'-11 1/16" X 3'-11 1/4")
WEIGHT	4 KG (8.8 LB)	4.8 KG (10.6 LB)	5.4 KG (11.9 LB)	6.8 KG (15 LB)
STANDARDS	CSA - S269.2	CSA - S269.2	CSA - S269.2	CSA - S269.2
MODEL	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L




DESCRIPTION	TOEBOARD BRACKET
DIMENSIONS	N/A
WEIGHT	0.35 KG (0.8 LB)
STANDARDS	CSA - S269.2
MODEL	F-TBBrack



DESCRIPTION	TOEBOARD	DIMENSIONS	WEIGHT	STANDARDS	MODEL
		0.7 M (2'-3 9/16")	1.1 KG (2.4 LB)	CSA - S269.2	F-TB07
		1.2 M (3'-11 1/4")	2.2 KG (4.9 LB)	CSA - S269.2	F-TB12
		2.4 M (7'-10 1/2")	4.2 KG (9.3 LB)	CSA - S269.2	F-TB24


THE TOWER ACCESSORIES

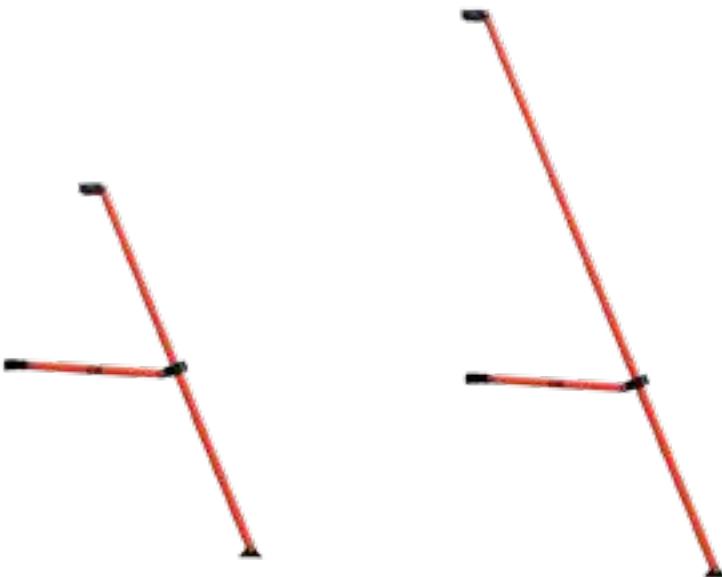

DESCRIPTION	2 M OUTRIGGER	3.05 M OUTRIGGER	CASTER WITH LEVELING JACK
DIMENSIONS	2 M (6'-6 3/4")	3.05 M (10' 3/32")	85 CM (2'-9 15/32")
WEIGHT	3 KG (6.6 LB)	4 KG (8.8 LB)	6.12 KG (13.5 LB)
STANDARDS	CSA - S269.2	CSA - S269.2	CSA - S269.2
MODEL	F-OUT20	F-OUT30	F-ADJ200



BRACE					
DESCRIPTION	DIMENSIONS	WEIGHT	STANDARDS	COLOR ID	MODEL
HORIZONTAL	2.4 M (7'-10 1/2")	2.4 KG (5.3 LB)	CSA - S269.2	YELLOW	F-BRAH24
DIAGONAL	2.6 M (8'-6")	2.81 KG (6.2 LB)	CSA - S269.2	BLUE	F-BRAD24
0.7 M BRACE PLAN	0.7 X 2.4 M (2' X 7'-10 1/2")	2.81 KG (6.2 LB)	CSA - S269.2	RED	F-PBRA0724
1.2 M BRACE PLAN	1.2 X 2.4 M (4' X 7'-10 1/2")	2.9 KG (6.4 LB)	CSA - S269.2	RED	F-PBRA1224

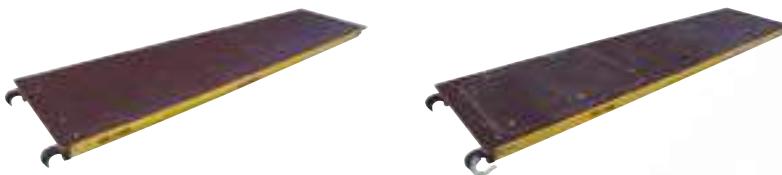

DESCRIPTION	PLATFORM ANTI-SLIP	PLATFORM ANTI-SLIP WITH TRAP DOOR	ACCESS LADDER
DIMENSIONS	2.4 M (7'-10 1/2")	2.4 M (7'-10 1/2")	2.4 - 3.65 M (7'-10 1/2" X 11'-11 11/16")
CAPACITY	225 KG (496 LB)	225 KG (496 LB)	149.69 KG (330 LB)
WEIGHT	22.27 KG (49.1 LB)	20.28 KG (44.7 LB)	15.47 KG (34.1 LB)
STANDARDS	CSA - S269.2	CSA - S269.2	CSA - S269.2
MODEL	F-DP24	F-DH24	F-LAD2436

FIBERGLASS TOWER KITS

TESTED IN CONFORMITY TO CSA STANDARD S269.2

UP TO 20
TOWER
KITS

FIBERGLASS SERIES™ SCAFFOLDING


0.7 M WIDE FIBERGLASS TOWER KITS

MODEL	TOWER KIT DIMENSIONS	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L	F-BRAH24	F-BRD24	F-PBRA0724	F-PBRA1224	F-DP24	F-DH24	F-AD200	F-OUT20	F-OUT30	F-LAD2436	F-B07	F-B12	F-B24	F-BRACK
F-KIT0715	1.5 M (4'11 1/16")	2	2			4	2	1		1		4							
F-KIT0720	2 M (6'6 3/4")		4			6	4	1		1		4	4			2	2	4	
F-KIT0725	2.5 M (8'2 7/16")	4	2			6	4	1			1	4	4		1	2		2	4
F-KIT0730	3 M (9'10 1/8")	2	4			6	6	1			1	4	4		1	2		2	4
F-KIT0735	3.5 M (11'5 25/32")		6			6	6	1			1	4		4	1	2		2	4
F-KIT0740	4 M (13'1 15/32")	4	4			6	8	1			1	4		4	1	2		2	4
F-KIT0745	4.5 M (14'9 5/32")	2	6			6	8	1			1	4		4	1	2		2	4
F-KIT0750	5 M (16'4 27/32")		8			8	8	1			2	4		4	2	2		2	4

1.2 M WIDE FIBERGLASS TOWER KITS

F-KIT1215	1.5 M (4'11 1/16")		2	2	4	2		1	2		4								
F-KIT1220	2 M (6'6 3/4")			4	6	4		1	2		4				2	2	4		
F-KIT1225	2.5 M (8'2 7/16")		4	2	6	4		1	1	1	4			1	2	2	4		
F-KIT1230	3 M (9'10 1/8")		2	4	6	6		1	1	1	4		4	1	2	2	4		
F-KIT1235	3.5 M (11'5 25/32")			6	6	6		1	1	1	4		4	1	2	2	4		
F-KIT1240	4 M (13'1 15/32")		4	4	6	8		1	1	1	4		4	1	2	2	4		
F-KIT1245	4.5 M (14'9 5/32")		2	6	6	8		1	1	1	4		4	1	2	2	4		
F-KIT1250	5 M (16'4 27/32")			8	8	10		1	1	2	4		4	2	2	2	4		
F-KIT1255	5.5 M (18'17 32/32")		4	6	8	10		1	1	2	4		4	2	2	2	4		
F-KIT1260	6 M (19'8 7/32")		2	8	8	12		1	1	2	4		4	2	2	2	4		
F-KIT1265	6.5 M (21'3 29/32")		6	6	8	12		1	1	2	4		4	2	2	2	4		
F-KIT1270	7 M (22'11 19/32")		4	8	8	14		1	1	2	4		4	2	2	2	4		

Imperial unit for approximate reference

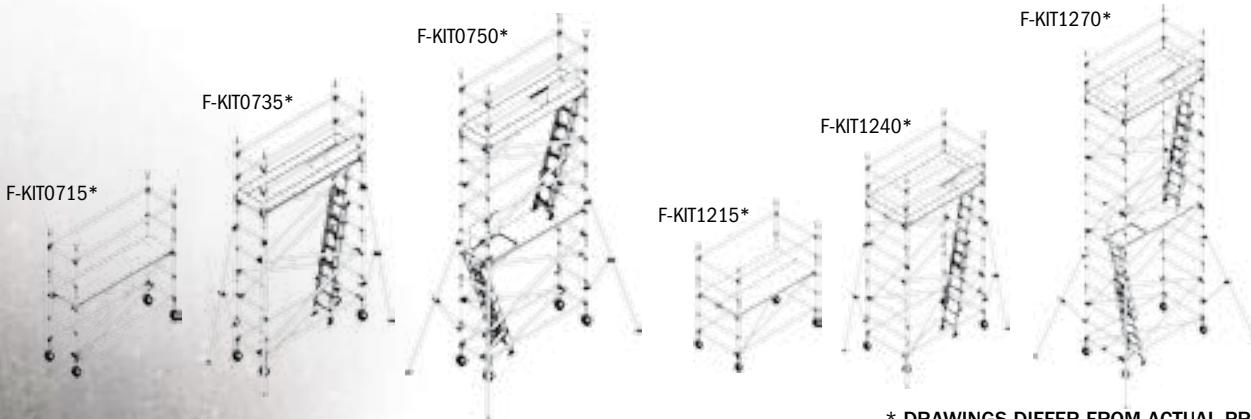

* DRAWINGS DIFFER FROM ACTUAL PRODUCTS

SPEEDY™ SCAFFOLDING

TESTED IN CONFORMITY TO CSA STANDARD S269.2



iNFO

Imperial units for reference only.

3 m
REACH

227 kg
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH) 196 X 74 X 196 CM (77 3/16 X 29 1/8 X 77 3/16 IN.)

PACKAGE DIMENSIONS (WXDXH) 78 X 206 X 27 CM (30 3/4 X 81 1/8 X 10 5/8 IN.)

WEIGHT 43.5 KG (96 LB)

LOAD CAPACITY 227 KG (500 LB)

REACH 3 M (9' 10 1/8")

PLATFORMS ANTI-SLIP

STRUCTURE 5 CM (2 IN.) TUBULAR FIBERGLASS

CASTERS 13 CM (5 IN.) DOUBLE LOCKING HEAVY DUTY

STANDARD TESTED IN CONFORMITY TO CSA STANDARD S269.2

MODEL F-ISPC

UPC 778300700660



- » Compact storage
- » Easily assembled



- » Light weight
- » Corrosion resistant



- » Non conductive
- » Prevent static electricity

iNFO

FIBERGLASS SERIES™ SCAFFOLDING

LADDERS, STEPLADDERS AND WORK PLATFORMS

Metaltech provides a range of ladders and stepladders to complete its work at heights products category, they are designed for specific and multi-purpose use, for interior or exterior applications. Most are built to include aluminum in their construction, they are lightweight, safe, versatile and easy to store.

- **LIGHTWEIGHT**
- **VERSATILITY**
- **EASE AND SAFE TO USE**

LADDERS, STEPLADDERS AND WORK PLATFORMS



BUILT TOUGH FOR
SAFETY

METALTECH

12.5' TELESCOPIC LADDER

LADDERS, STEPLADDERS AND WORK PLATFORMS

250 lb
LOAD CAPACITY

16'
REACH



OPEN (W X D X H)	19 X 4.5 X 150 IN. (48.3 X 11.4 X 381 CM)
CLOSED (W X D X H)	19 X 4.5 X 32 IN. (48.3 X 11.4 X 81.3 CM)
PACKAGE DIMENSIONS (W X D X H)	21 X 5.25 X 33.5 IN. (53.3 X 13.3 X 85 CM)
REACH	16 FT (4.9 M)
WEIGHT	25 LB (11 KG)
LOAD CAPACITY	250 LB (113 KG)
OPTION	CARRYING BAG
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD12T2
UPC	778300401222

iINFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT





15.5' TELESCOPIC LADDER



19'
REACH

250 lb
LOAD CAPACITY

OPEN (WXDXH)	19.5 X 4.5 X 188.5 IN. (49.5 X 11.4 X 478.8 CM)
CLOSED (WXDXH)	19.5 X 4.5 X 36 IN. (49.5 X 11.4 X 91.4 CM)
PACKAGE DIMENSIONS (WXDXH)	21.5 X 6 X 38 IN. (54.6 X 15.2 X 96.5 CM)
REACH	19 FT (5.8 M)
WEIGHT	40.5 LB (18.4 KG)
LOAD CAPACITY	250 LB (113 KG)
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD15T1
UPC	778300401512



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT

iINFO

LADDERS, STEPLADDERS AND WORK PLATFORMS

TELESCOPING MULTI-POSITION LADDER

5 IN 1

300 lb
LOAD CAPACITY



DESCRIPTION	13' MULTI-POSITION LADDER	17' MULTI-POSITION LADDER	21' MULTI-POSITION LADDER	25' MULTI-POSITION LADDER
CLOSED DIMENSIONS (WxDxH)	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
LADDER HEIGHT	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
MAXIMUM REACH*	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
WEIGHT	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
NUMBER OF POSITIONS	19	28	38	49
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA
MODEL	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
UPC	778300001590	778300001606	778300001613	778300000937

HIGHEST STANDING LEVEL

STEPLADDER	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
EXTENSION LADDER	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
SCAFFOLD SUPPORTS	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

INFO



EXTENSION LADDER




TWO-PERSON STEPLADDER



SCAFFOLD SUPPORTS


TELESCOPING WORK PLANK AND LADDER JACK

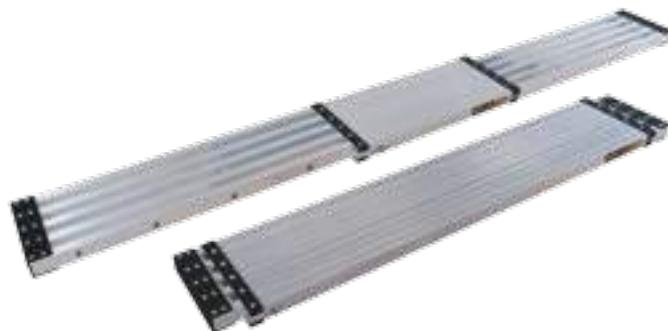

iINFO



DESCRIPTION	9' TELESCOPING WORK PLANK	13' TELESCOPING WORK PLANK	17' TELESCOPING WORK PLANK
CLOSED DIMENSIONS (WxDxH)	72 X 12 X 2 IN. (183.2 X 30.2 X 5 CM)	96 X 12 X 2 IN. (244.2 X 30.2 X 5 CM)	120 X 12 X 2 IN. (305.2 X 30.2 X 5 CM)
OPEN DIMENSIONS (WxDxH)	107.75 X 12 X 2 IN. (273.8 X 30.2 X 5 CM)	156 X 12 X 2 IN. (396 X 30.2 X 5 CM)	204 X 12 X 2 IN. (518 X 30.2 X 5 CM)
EXTEND	6 UP TO 9 FT (1.8 UP TO 2.7 M)	8 UP TO 13 FT (2.4 UP TO 4 M)	10 UP TO 17 FT (3 UP TO 5.2 M)
LOAD CAPACITY	250 LB (113 KG)	250 LB (113 KG)	250 LB (113 KG)
WEIGHT	31.1 LB (14.1 KG)	41 LB (18.6 KG)	50.7 LB (23 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-PEP7000AL	M-PEP7100AL	M-PEP7200AL
UPC	778300000241	778300000258	778300000265

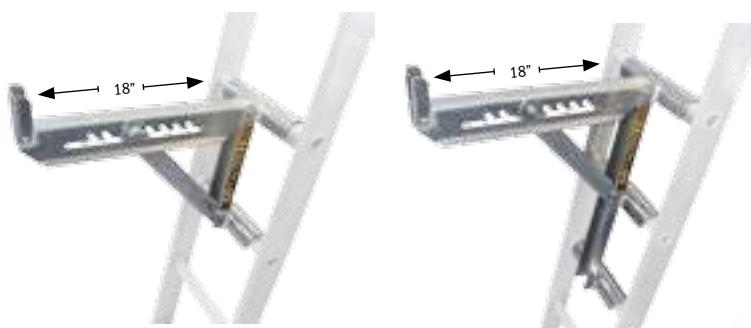

iINFO



DESCRIPTION	2 RUNGS LADDER JACK (18 IN.)	3 RUNGS LADDER JACK (18 IN.)
DIMENSIONS (WxDxH)	21.75 X 10 X 16.75 IN. (55.3 X 25.4 X 42.6 CM)	21.75 X 10 X 29 IN. (55.3 X 25.4 X 73.7 CM)
QTY PER BOX	2	2
LOAD CAPACITY	250 LB	250 LB
ADJUSTABLE	8 NOTCHES OF ANGLE ADJUSTMENT	8 NOTCHES OF ANGLE ADJUSTMENT
WEIGHT	12 LB	15 LB
FINISH	ALUMINUM	ALUMINUM
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	E-LJ20P	E-LJ30P
UPC	778300000005	778300000067

STEPLADDERS

LADDERS, STEPLADDERS AND WORK PLATFORMS



**DIRECT
CONTAINER
ORDER ONLY**

**DIRECT
CONTAINER
ORDER ONLY**

DESCRIPTION	ULTRA-LIGHT 2 STEPS*	ULTRA-LIGHT 3 STEPS*
OPEN DIMENSIONS (W X D X H)	17.5 X 17.75 X 35.25 IN. (44.5 X 45.1 X 89.5 CM)	18.75 X 24 X 44.5 IN. (47.6 X 61 X 113 CM)
CLOSED DIMENSIONS	ONLY 2 IN. (5 CM) THICK WHEN CLOSED	ONLY 2 IN. (5 CM) THICK WHEN CLOSED
WEIGHT	5.1 LB (2.3 KG)	6.8 LB (3.1 KG)
LOAD CAPACITY	200 LB (90.7 KG)	200 LB (90.7 KG)
HIGHEST STANDING LEVEL	19 IN. (48.3 CM)	28.75 IN. (73 CM)
STEPS	2 WITH ANTI-SLIP GROOVES	3 WITH ANTI-SLIP GROOVES
MATERIAL	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
4 UNITS SHIPPING BOX	40.2 X 50.8 X 114.3 IN. (102 X 20 X 45 CM)	51.2 X 7.7 X 20.1 IN. (130.1 X 19.6 X 51.1 CM)
MODEL	E-SLA2RD	E-SLA3RD
UPC	778300730001	77830000432

*Direct container order only

*Direct container order only

iINFO

- » Foam handle for a comfortable firm grip
- » Sturdy structure with incredible lightness, made of aircraft grade aluminum, steel and ABS
- » Designed to be folded up without difficulty and easily stored against a wall or behind a door
- » Thickness is only 2 inches when closed

CUSTOM COLORS AVAILABLE



**DIRECT
CONTAINER
ORDER ONLY**

DESCRIPTION	1 STEP*
OPEN DIMENSIONS (W X D X H)	18.75 X 16.75 X 19 IN. (47.6 X 42.5 X 48.3 CM)
CLOSED DIMENSIONS (W X D X H)	18.75 X 3.75 X 23.5 IN. (47.6 X 9.5 X 59.7 CM)
HIGHEST STANDING LEVEL	10 IN. (25.4 CM)
STEP	1 ANTI-SLIP RUBBER COATED
LOAD CAPACITY	225 LB (102 KG)
WEIGHT	7.2 LB (3.3 KG)
MATERIAL	STEEL
STANDARDS	ANSI TYPE III AND CSA GRADE 3
MODEL	E-SLS1BK
UPC	77830000494

*Direct container order only

STEPLADDERS AND PORTABLE WORK PLATFORM



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	FOLDING STEPLADDER WITH UTILITY TRAY*
OPEN DIMENSIONS (W X D X H)	18.5 X 36.5 X 50.75 IN. (47 X 92.7 X 128.9 CM)
CLOSED DIMENSIONS	ONLY 2.65 IN. (6.7 CM) THICK WHEN CLOSED
WEIGHT	18 LB (8.16 KG)
STEPLADDER WORKING LOAD	200 LB (90.7 KG)
TRAY WORKING LOAD	20 LB (9.1 KG)
HIGHEST STANDING LEVEL	28.75 IN. (73 CM)
STEPS	3 ANTI-SLIP RUBBER COATED
MATERIAL	STEEL AND ABS
STANDARDS	ANSI TYPE III AND CSA GRADE 3
MODEL	E-SLT3RD
UPC	778300730025

*Direct container order only

DESCRIPTION	HAND TRUCK AND FOLDING STEPLADDER*
OPEN DIMENSIONS (W X D X H)	17.75 X 25.5 X 51.5 IN. (45.1 X 64.8 X 130.8 CM)
CLOSED DIMENSIONS	ONLY 3.5 IN. (8.9 CM) THICK WHEN CLOSED
WEIGHT	25 LB (11.3 KG)
STEPLADDER WORKING LOAD	200 LB (90.7 KG)
HAND TRUCK WORKING LOAD	120 LB (54.4 KG)
TRAY WORKING LOAD	20 LB (9.1 KG)
HIGHEST STANDING LEVEL	27.75 IN. (70 CM)
STEPS	3 ANTI-SLIP RUBBER COATED
CASTERS	6 IN. (15.3 CM)
MATERIAL	STEEL AND ABS
STANDARDS	ANSI TYPE III AND CSA GRADE 3
MODEL	E-LADDERCARTYW

*Direct container order only



ADJUSTABLE HEIGHT

DESCRIPTION	30" PORTABLE WORK PLATFORM
OPEN DIMENSIONS (W X D X H)	42.75 X 15.75 X 19.5 IN. (108.6 X 40 X 49.5 CM)
CLOSED DIMENSIONS (W X D X H)	31.25 X 15.75 X 6.5 IN. (79.4 X 40 X 16.5 CM)
DECK DIMENSIONS (W X D)	30.25 X 11.75 IN. (76.8 X 29.8 CM)
LOAD CAPACITY	225 LB (102 KG)
WEIGHT	10.2 LB (4.6 KG)
MATERIAL	ALUMINUM
MODEL	E-PWP7000AL
UPC	778300401505

DESCRIPTION	39" PORTABLE WORK PLATFORM
OPEN DIMENSIONS (W X D X H)	52.25 X 15.5 X 20.25 IN. (132.7 X 39.4 X 51.4 CM)
CLOSED DIMENSIONS (W X D X H)	39.75 X 15.5 X 5.75 IN. (101 X 39.4 X 14.6 CM)
DECK DIMENSIONS (W X D)	39 X 11.75 IN. (99.1 X 29.8 CM)
LOAD CAPACITY	225 LB (102 KG)
WEIGHT	11.4 LB (5.2 KG)
MATERIAL	ALUMINUM
MODEL	E-PWP7100AL
UPC	778300000418

DESCRIPTION	30" ADJUSTABLE WORK PLATFORM
OPEN DIMENSIONS (W X D X H)	51 X 22.25 X 35 IN. (129.5 X 56.5 X 88.9 CM)
CLOSED DIMENSIONS (W X D X H)	35 X 19 X 7 IN. (88.9 X 48.3 X 17.8 CM)
DECK DIMENSIONS (W X D)	30.75 X 11.75 IN. (78.1 X 29.8 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	15 LB (6.8 KG)
MATERIAL	ALUMINUM
MODEL	E-PWP7101AL
UPC	778300000425

TEMPORARY FENCES

Metaltech's innovative temporary fence & barrier systems are designed with maximum security features and minimum installation cost. Seasonal outdoor businesses, construction sites or special public events deserve to be protected by the most transparent and aesthetically pleasing temporary fences and barriers on the market today.

Made of all-weather and maintenance free galvanized steel components, Metaltech's fences and barriers, offer competitive pricing and superior site protection over chain link, wood or plastic systems.

- **INSTALLS TWICE AS FAST WITH HALF THE STAFF!**
- **DESIGNED FOR JOB SITES SECURITY**
- **ONE MAN INSTALLATION**
- **MAINTENANCE-FREE GALVANIZED STEEL PANELS**



TEMPORARY FENCES

BUILT TOUGH FOR
SAFETY

METALTECH®

CROWD & TRAFFIC CONTROL

TEMPORARY FENCES



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	42" SECURIGARD
DIMENSIONS (H X W)	42 X 86 IN.
WEIGHT	36 LB (16.3 KG)
GAUGE	6
MESH OPENING	2 X 6 IN.
FINISH	GALVANIZED
OPTION	3 IN. BASE FOR INTERIOR, TOEBOARD
QTY/PALLET	30
WEIGHT/PALLET	1,410 LB (640 KG)
MODEL	CT-SEC GARD GV
UPC	778300084432



3 7/8"
MESH OPENING

GALVANIZED
FINISH

DESCRIPTION	42" SECURICROWD
DIMENSIONS (H X W)	42 X 101 IN.
WEIGHT	58.9 LB (26.7 KG)
TUBE	0.5 IN.
TUBES SPACING	3.875 IN.
FINISH	GALVANIZED
QTY/PALLET	30
WEIGHT/PALLET	2,065 LB (937 KG)
MODEL	CT-SEC CROWD GV



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	PANEL FOR CONCRETE JERSEY
DIMENSIONS (H X W)	52 X 76 IN.
WEIGHT	33.5 LB (15.2 KG)
FINISH	GALVANIZED
MODEL	CT-TFP5276PLUSHS

INFO



CUSTOMIZE IT!

- PROMOTE YOUR COMPANY WITH A PERSONALIZED NAMEPLATE*
- INCREASE YOUR VISIBILITY WITH COLORFUL FENCES

OPTIONAL COLORS:



* The identification plates are only sold with a minimum order.
Please check with our customer service to get our great rates!

JOB SITES SECURITY


TEMPORARY FENCES

ADVICE

Add 5/8" per fence panel length to calculate the required linear feet




2" X 6"
MESH OPENING **6**
GAUGE **GALVANIZED**
FINISH

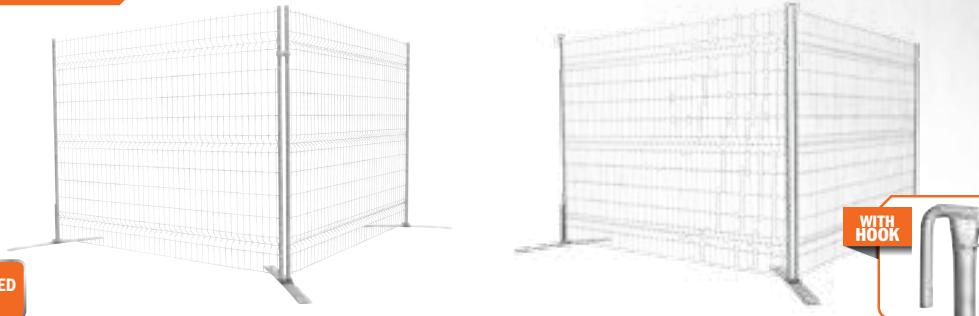

DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6' PROTEC SAFERSTACK	71 X 90 5/16 IN.	46 LB (20.9 KG)	CT-TFP7296S	60	3,608 LB (1,637 KG)
6' PROTEC SAFERSTACK WITH HOOK	71 X 90 5/16 IN.	47 LB (21.3 KG)	CT-TFP7296HS	60	3,668 LB (1,664 KG)
8' PROTEC SAFERSTACK	98 X 90 5/16 IN.	63.5 LB (28.8 KG)	CT-TFP9696S	45	3,473 LB (1,575 KG)
8' PROTEC SAFERSTACK WITH HOOK	98 X 90 5/16 IN.	64.5 LB (29.3 KG)	CT-TFP9696HS	45	3,518 LB (1,596 KG)



2" X 4 7/8"
MESH OPENING **6**
GAUGE **GALVANIZED**
FINISH

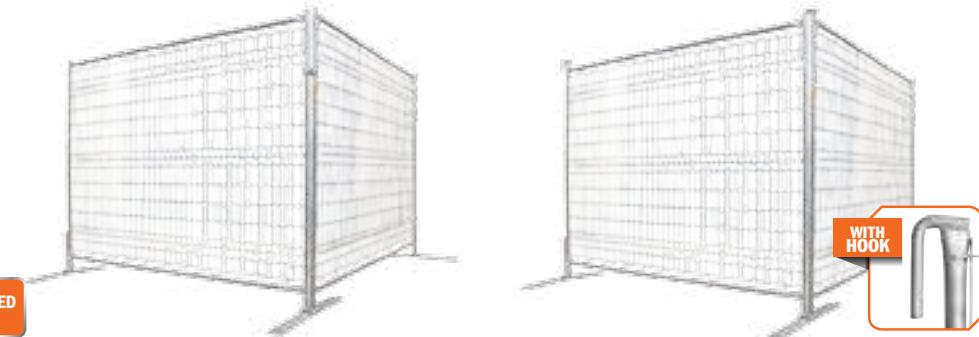

DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6'4" PROTEC PLUS SAFERSTACK	76 X 90 5/16 IN.	54 LB (24.5 KG)	CT-TFP7696PLUSS	50	3,418 LB (1,550 KG)
6'4" PROTEC PLUS SAFERSTACK WITH HOOK	76 X 90 5/16 IN.	55 LB (25 KG)	CT-TFP7696PLUSHS	50	3,468 LB (1,573 KG)
8'6" PROTEC PLUS	103 X 90 5/16 IN.	80 LB (36.3 KG)	CT-TFP10396PLUSS	28	2,578 LB (1,169 KG)
8'6" PROTEC PLUS WITH HOOK	103 X 90 5/16 IN.	78 LB (35.4 KG)	CT-TFP10396PLUSHS	28	2,606 LB (1,182 KG)

DIRECT
CONTAINER
ORDER ONLY

2" X 4"
MESH OPENING **10**
GAUGE



6' PROTEC SQUARE*		8' PROTEC SQUARE*	
DIMENSIONS (H X W)	WEIGHT	DIMENSIONS (H X W)	WEIGHT
72 X 114 1/4 IN.	65 LB (29.3 KG)	96 X 114 1/4 IN.	80 LB (36.3 KG)
MODEL	FINISH	MODEL	FINISH
CT-TFP72120SQ	POWDER COATED	CT-TFP96120SQ	POWDER COATED
CT-TFP72120SQZN	ZINC PLATED	CT-TFP96120SQZN	ZINC PLATED
CT-TFP72120SQZNSP	ZINC PLATED + POWDER COATED	CT-TFP96120SQZNSP	ZINC PLATED + POWDER COATED
CT-TFP72120SQGV	GALVANIZED	CT-TFP96120SQGV	GALVANIZED
CT-TFP72120SQGVSP	GALVANIZED + POWDER COATED	CT-TFP96120SQGVSP	GALVANIZED + POWDER COATED
QTY/CONTAINER		QTY/CONTAINER	
400		320	
400		320	
400		320	
400		320	
400		320	

*Direct container order only

FENCE ACCESSORIES

TEMPORARY FENCES



P

DESCRIPTION	PEDESTRIAN ACCESS GATE	ACCESS GATE BASE	ACCESS GATE TOP ARCH	ACCESS GATE IDENTIFICATION
COMPATIBLE	PROTEC & PROTEC PLUS	PEDESTRIAN ACCESS GATE	PEDESTRIAN ACCESS GATE	ACCESS GATE TOP ARCH
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	N/A
WEIGHT	49 LB (22 KG)	32 LB (14.5 KG)	17 LB (7.7 KG)	0.25 LB (0.1 KG)
MODEL	CT-TAGK	CT-TAGB	CT-TAGT	ETI-TAGTL
UPC	778300094554	N/A	778300000159	N/A



P



P



P



P

DESCRIPTION	FENCE STABILIZER	DOUBLE CLAMP	GATE HINGE KIT	GATE LATCH AND FINGER KIT
COMPATIBLE	PROTEC & PROTEC PLUS			
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	5.3 LB (2.4 KG)	0.75 LB (0.3 KG)	4.24 LB (1.9 KG)	2 LB (0.9 KG)
MODEL	CT-STABILGV	CT-TFDCGK	CT-TFHG	CT-TFLGF
UPC	778300000180	778300000128	778300000135	778300000142



P



P

DESCRIPTION	TRANSPORT & STORAGE SYSTEM	PRIVACY FENCE NETTING (90% SHADE)					MODEL	UPC
COMPATIBLE	PROTEC & PROTEC PLUS	72 IN. X 150 FT	72 X 10 IN.	BLACK	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BK	778300084456
INFO	FOR 6 X 8 FT PANELS	72 IN. X 150 FT	72 X 10 IN.	GREEN	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6GN	778300084463
FINISH	POWDER COATED	72 IN. X 150 FT	72 X 10 IN.	BLUE	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BL	778300084401
WEIGHT	253 LB (115 KG)	96 IN. X 150 FT	96 X 10 IN.	BLACK	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BK	778300084470
MODEL	CT-SAFERRACK	96 IN. X 150 FT	96 X 10 IN.	GREEN	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8GN	778300084487
UPC	778300094547	96 IN. X 150 FT	96 X 10 IN.	BLUE	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BL	778300084494

COMPATIBILITY

- P** PROTEC & PROTEC PLUS
- PS** PROTEC SQUARE
- S** SECURIGARD
- SC** SECURICROWD
- G** ACCESS GATE
- J** PANEL FOR CONCRETE JERSEY




P **J**



P **S**



S



S

DESCRIPTION	IDENTIFICATION PLATE*
COMPATIBLE	PROTEC, PROTEC PLUS & JERSEY
DIMENSIONS	8.25 X 4.25 IN. (FOLDED)
FINISH	N/A
WEIGHT	N/A
MODEL	CT-PLAQUEIDGEN
UPC	N/A

REINFORCED BASE PLATE
PROTEC, PROTEC PLUS & SECURIGARD
34 X 3.5 X 14 IN.
GALVANIZED
11 LB (5 KG)
CT-TFBPG
778300000111

FIXED SQUARE BASE PLATE
SECURIGARD
6 X 6 X 4 IN.
GALVANIZED
2.7 LB (1.2 KG)
CT-SECBPGV
778300084449

TOEBOARD
SECURIGARD
85 X 7 IN.
GALVANIZED
10 LB (4.5 KG)
CT-SGTBVG
N/A

* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!



SC



SC



J



J

DESCRIPTION	BASE PLATE (HOOK SIDE)
COMPATIBLE	SECURICROWD
FINISH	GALVANIZED
WEIGHT	4.7 LB (2.1 KG)
MODEL	CT-TFBPCTYHGV
UPC	778300002085

BASE PLATE (RECEIVER SIDE)
SECURICROWD
GALVANIZED
3.2 LB (1.5 KG)
CT-TFBPCTYRGV
778300002092

SIDE FENCE BASE
PANEL FOR CONCRETE JERSEY
GALVANIZED
2.9 LB (1.3 KG)
CT-TFPJSEBP
N/A

MIDDLE FENCE BASE
PANEL FOR CONCRETE JERSEY
GALVANIZED
3.2 LB (1.5 KG)
CT-TFPJSMBP
N/A



J



PS



PS

DESCRIPTION	FENCE CONNECTION
COMPATIBLE	PANEL FOR CONCRETE JERSEY
FINISH	GALVANIZED
WEIGHT	2.7 LB (1.2 KG)
MODEL	CT-TFPJSC

DESCRIPTION	BASE PLATE
COMPATIBLE	PROTEC SQUARE
WEIGHT	11 LB (5 KG)
FINISH	POWDER COATED
	ZINC PLATED
	GALVANIZED

U-SHAPE COUPLER
PROTEC SQUARE
0.75 LB (0.3 KG)
POWDER COATED
ZINC PLATED
GALVANIZED
ZINC PLATED + POWDER COATED
GALVANIZED + POWDER COATED

EXTERIOR SCAFFOLDING VIEW

VISUALIZATION OF THE COMPONENTS LOCATION
OF A BASIC SCAFFOLDING STRUCTURE.

EXTERIOR SCAFFOLDING - VIEW



COUPLING PIN · P.7



FRAME · P.8-13



FRAME LOCKS · P.7



BASE PLATE · P.17




LEVELING JACK · P.17



CASTER · P.17




EXTERIOR SCAFFOLDING - VIEW

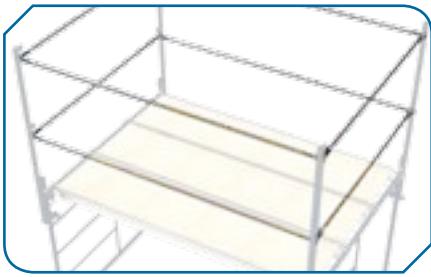

GUARDRAIL · P.16



GUARDRAIL POST · P.16

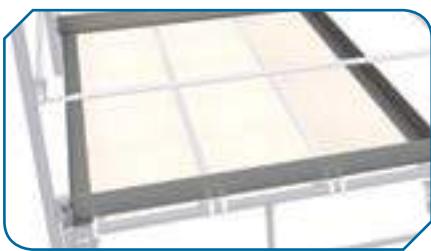

TOEBOARD · P.16



PLATFORM · P.19



WALL ATTACHMENT · P.14



LOCK ARM · P.14



PIG TAIL · P.15



OUTRIGGER · P.17



DIAGONAL BRACE · P.14




CROSS BRACE · P.14

EXTERIOR SCAFFOLDING SET UP INSTRUCTIONS


Scaffolding should be erected by at least two people. One person should be knowledgeable in erecting scaffolding to supervise the work. These step-by-step instructions are only a general guide. The following example is based on building a scaffolding that is 7 x 5 ft. by 1 frame high.

1

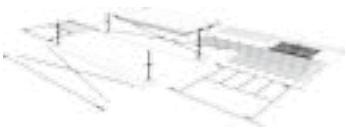

Select and prepare the ground area. Place suitable sills and make sure there are no holes under the sills. Select the equipment you need and place it near the work area. Put the adjustable leveling jack plates on the sills in the location that matches your scaffold dimensions. Do not secure the bases to the sills at this step.

2

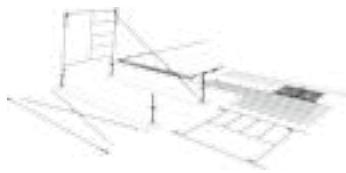

Adjust the nuts of the leveling jack, starting at the highest point of the ground level. The nuts at the highest ground level should be set to 3-6 inches from the top of the sill, depending on the slope. Place the first frame onto the base at the highest point. Connect the first cross brace to the frame. Allow the frame to lean slightly forward and rest on the sill while you prepare for the next frame to be installed.

3




Install the second frame onto the leveling jack. Secure the first cross brace to the second frame.

4



Install the second cross brace to both frames. Next, you need to level and plumb the scaffolding. Start at the highest point of the scaffolding. If possible, use the leveling jack to bring the highest corner down closer to the sill. Next, bring all four corners up to that point. If the bottom cross braces of each frame are level with each other, then frames should also be plumb. Install the diagonal brace to keep the scaffolding square. Check the level again and plumb if necessary. Fasten the leveling jack to the sills with either nails or screws.

5

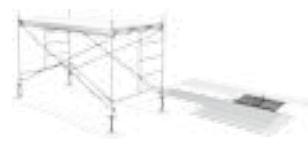


Install the deck, which may be an all aluminium platform or with wood deck or scaffold planks. If using wooden planks, they must extend beyond the supporting points at least 6 inches but not more than 12 inches. Secure the deck so it cannot move.

6



Install the guardrail posts onto the coupling pins seated in the top of the frames. Put a pig tail lock through the top and bottom of each coupling pin to avoid any separation.

7

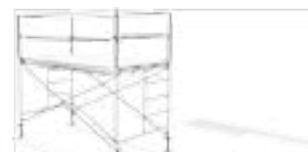

Attach the guardrails to the posts on all the exposed sides.

8



Install toeboards as required. The gap between the bottom of the toeboard and the top of the platform must not be more than 1/2 inches.

SET UP VIDEO

SCAN THIS CODE TO WATCH OUR SET UP VIDEO
(HTTP://MOBILE.METALTECH.CO/SETUP)



EXTERIOR SCAFFOLDING SAFETY GUIDELINES

THE PRODUCT OR ASSEMBLY VARIANTS SHOWN IN THESE INSTRUCTIONS FOR ASSEMBLY AND USE MAY BE SUBJECT TO LOCAL REGULATIONS. THE PRODUCT USER BEARS THE RESPONSIBILITY FOR COMPLIANCE WITH SUCH REGULATIONS, IF THERE IS A CONFLICT BETWEEN THIS GUIDELINES AND THE LOCAL REGULATIONS, LOCAL REGULATIONS SHALL SUPERSEDE THESE GUIDELINES.

REQUIREMENTS FOR ACCESS FRAME SCAFFOLDING

- A scaffold must be erected, altered, and dismantled by qualified workers or under the direct supervision of a qualified person. The qualified person must ensure that the erection is carried out properly, and that the correct components and materials are being used. All equipment must be inspected before use to ensure that it is in good repair and suitable for the intended use.
- The base must be firm and level enough to support the load of scaffolding, workers, and materials. Sills and base plates are required on any soil or unstable ground condition, or where any leveling adjustment is needed. The sill must be sound, rigid, and capable of supporting the maximum loads without settlement or deformation.
- Leveling jack base must be adjusted within the limits specified by the local regulation.
- The frames must be plumb and level and spaced to adequately support the loads.
- If uplift could cause the components to separate, locking pins must be used and the components secured. Uplift might be caused by the action of wind on a secured deck or by the leverage action of a cantilever side bracket on the scaffolding. All joints must be pinned on rolling scaffoldings and free-standing towers.
- With a rolling scaffolding or free-standing tower, the platform height must not exceed three times its smallest base dimension (3 to 1 rule).
- A scaffolding built above the 3 to 1 rule must be effectively guyed or secured to a building or structure to prevent overturning. The guying of a scaffolding may require the direction of a professional engineer.
- Guardrails must be installed on all open sides of the platform where a person could fall a distance of 10 ft. or more. The top rail must be placed 40-44 in. above the work surface. An intermediate rail must be placed halfway between the top rail and the toeboard, if one is provided, or halfway between the top rail and the work surface if no toeboard is provided.

- Toeboards must be installed on all the open sides of a platform where it is possible for tools and or materials to roll off. The top of the toeboard must be at least 4 in. above the platform. If loose materials are to be stacked above the height of the toeboard, then the toeboard must be increased in height or mesh panels must be installed to prevent materials from falling off the scaffolding.

BEFORE ERECTING ACCESS FRAME SCAFFOLDING

- What will the scaffolding be used for? For example, light duty (one or two workers; painting a wall), or heavy duty (several tradespersons, with large and heavy materials on the platform)?
- How high will the scaffolding be? Will it be erected in one operation or as the work progresses?
- Is the ground firm? Can it support the loads from the scaffolding, workers, and materials on it?
- Will the scaffolding need to be tied in? How will this be done? Will the ties be moved as the work progresses?
- Is the scaffolding likely to be covered or enclosed as a protection against the elements? Is there provision for adding additional ties to the adjoining structure?
- What will be the method of access and egress? For example, a sloping ladder, vertical ladder, built-in stairway, or direct from the floors of the building structure?
- On a multi-level scaffolding, how many levels will be loaded with materials at one time? Will an engineer be required to make the calculations for the total anticipated loading and possibly design the scaffolding and the sills?
- If a rolling scaffolding is required, consider ground surface, height restriction (3 to 1 rule) hazards when moving (such as power lines, projections from the building, and potholes).

EQUIPMENT INSPECTION

YOU MUST INSPECT THE EQUIPMENT YOU PLAN TO USE TO MAKE SURE THAT IT IS IN GOOD REPAIR AND SUITABLE FOR THE JOB. CHECK THE FOLLOWING:

- Sills: suitable size and strength for the loads. Not split or rotten.
- Frames: no cracks in the welded joints. No kinks or dents in the top or bottom cross-members. Legs plumb and square with the cross-members. Brace locks in good working order. Coupling pins in place and secured to the frame.
- Cross braces and diagonal braces: straight with no bent ends. Pivot connection in good working order. No excessive rust.
- Scaffold planks: no split ends, saw cuts, notches, protruding nails, excessive warping. No contamination that may affect the integrity of the plank, such as oil, chemicals, and burns. (If you have any doubts about the strength of the plank, you may need to have it load-tested).
- All aluminium or with plywood deck platforms: not mis-shaped or cracked. Locks working. All bolts and screws in place. No burns or broken ends. If upper surface has non-skid coating, no rot or plywood separation on underside.
- Side or end brackets: hook-on attachment not distorted. No cracks in welds. No dents, kinks, or any signs of abuse.
- Guardrails: straight, with no kinks, dents, or excessive rust.
- Casters: same size and from same manufacturer. Wheel rotates well and the swivel below the stem is working. Brake mechanism works properly. Wheel tread has no damage.
- Leveling jacks: no cracks in weld where leveling jack is attached to the top of the caster. No thread damage. No curling or warping of the base plate. Adjusting nut is a tight fit.
- Other equipment: inspect any other equipment in the frame structure. Damaged equipment should be tagged and marked as not fit for use. Inform the supervisor so that others do not use it.

REPLACEMENT PARTS

REPLACEMENT PARTS



JOB SITE SERIES™ 6' BAKER™

I-CISC PARTS

CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISP	PLATFORM



JOB SITE SERIES™ 6' BAKER™ (TRAP DOOR)

I-CISCTP PARTS

CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISPT	PLATFORM WITH TRAP DOOR



JOB SITE SERIES™ PERRY STYLE™

I-CISCPY PARTS

CODE	DESCRIPTION
I-C1CAS5PY	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5PY	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISCPY	PLATFORM



JOB SITE SERIES™ 6'

I-HRC PARTS

CODE	DESCRIPTION
I-CW5	ONE 5" CASTER WITH LOCKING PIN
I-4CW5	FOUR 5" CASTERS WITH LOCKING PINS
I-H1CAS5	ONE 5" CASTER. 3/4 THREAD

CODE	DESCRIPTION
I-4CAS5	FOUR 5" CASTERS. 3/4 THREAD
I-IRP	PLATFORM
I-IRPP	PLATFORM ANTI-SLIP INSERTS



JOB SITE SERIES™ 5'

I-HIMIS PARTS

CODE	DESCRIPTION
I-CW5	ONE 5" CASTER WITH LOCKING PIN
I-4CW5	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN
I-MIPA	PLATFORM

CODE	DESCRIPTION
I-MIAPA	STEP BAR
I-MPPN	PLATFORM ANTI-SLIP INSERTS
I-IMIGRA	SAFETY RAIL



JOB SITE SERIES™ 4' DELUXE

I-MCNDX PARTS

CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN
I-MPN	PLATFORM

CODE	DESCRIPTION
I-MAPN	STEP BAR
I-MCHOOK	UTILITY HOOK
I-MPPN	PLATFORM ANTI-SLIP INSERTS
I-MCGR	SAFETY RAIL



JOB SITE SERIES™ 4'

I-MCNT PARTS

CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-MPN	PLATFORM
I-MPPN	PLATFORM ANTI-SLIP INSERTS
I-MCGR	SAFETY RAIL

4' HIGH PORTABLE SCAFFOLD



I-IMCN PARTS

CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN

CODE	DESCRIPTION
I-IMPN	PLATFORM
I-IMPPN	PLATFORM ANTI-SLIP INSERTS

JOB SITE SERIES™ DRYWALL & PANEL LIFT



I-IDPL PARTS

CODE	DESCRIPTION
VB-ESPRG.016X.188X1.5Z	TRIPOD LOCK SPRING
I-BMDPL029	BRAKE HANDLE RUBBER CAP
I-IDPL038	TUBE END COVER
I-IDPL901	BIPOD BRAKE FOOT KIT
I-IDPL902	TRIPOD PIN & C-CLIP KIT
I-IDPL903	HANDLE KIT

CODE	DESCRIPTION
I-IDPL904	MAST HEAD PIN & C-CLIP
I-IDPL905	OUTRIGGER LOCK KIT
I-IDPL906	CRADLE & OUTRIGGER RUBBER CAPS
I-IDPL907	PANEL SUPPORT HOOK KIT
I-ICW5	ONE 5" CASTER
I-CAS4PIN	LOCKING PIN

ALU SERIES™ 6' BAKER™



I-CAISC PARTS

CODE	DESCRIPTION
I-1CAS5SALU	ONE 5" CASTER WITH LOCKING PIN
I-4CAS5SALU	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN

ALU SERIES™ 6'



I-CAIRC PARTS

CODE	DESCRIPTION
I-1CAS5RALU	ONE 5" CASTER WITH LOCKING PIN
I-4CAS5RALU	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS5PIN	LOCKING PIN

CODE	DESCRIPTION
I-CAIRP	PLATFORM
I-IMPPA	PLATFORM ANTI-SLIP INSERTS

ALU SERIES™ 4'



I-IMAC PARTS

CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN

CODE	DESCRIPTION
I-IMPALU	PLATFORM
I-IMPPA	PLATFORM ANTI-SLIP INSERTS

REPLACEMENT PARTS

REPLACEMENT PARTS



BUILDMAN™ 6' BAKER™

I-BMSS PARTS

CODE	DESCRIPTION
I-C1CAS6	ONE 6" CASTER WITH LOCKING PIN
I-C4CAS6	FOUR 6" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-BMSS003	PLATFORM WITH TRAP DOOR



BUILDMAN™ 6'

I-BM6S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS5PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM6P	PLATFORM OF 8.75"
I-BM6SP	PLATFORM OF 6.5"
I-IMPPN	PLATFORM ANTI-SLIP INSERTS



BUILDMAN™ 4'

I-BM4S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM4P	PLATFORM
I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-BM4GR	SAFETY RAIL



WALL HAULER™ SERIES 2000, 3000, 3006 AND H DRYWALL CART

I-BMD3631 / I-BMD3031 / I-BMD3131 / I-BMD2131 / I-BMD2031 / I-BMDHER31 PARTS

CODE	DESCRIPTION
I-DCC8KPL	KINGPINLESS CASTER FRAME FOR 8" CASTER
I-DCCDL	DIRECTIONAL LOCK FOR CASTER
I-DCCWL	CASTER BRAKE
M-MLS	SPRING-LOCK (I-BMD3631)
I-DCC8P	ONE PHENOLIC 8" CASTER
I-DCC8P4	FOUR PHENOLIC 8" CASTERS
I-DCC8R	ONE POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8R4	FOUR POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE
I-DCC8YGR	ONE YELLOW POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8YGR4	FOUR YELLOW POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE



BUILDMAN™ DRYWALL STILTS

I-BMDS1830 / I-BMDS2440 PARTS

CODE	DESCRIPTION
I-BMDS1830901	SPRING KIT
I-BMDS1830902	FOOT STRAP KIT
I-BMDS1830903	HEEL CUP KIT
I-BMDS1830904	FLOOR SOLE KIT
I-BMDS1830905	SLEEVE KIT
I-BMDS1830906	LEG STRAP KIT

CODE	DESCRIPTION
VB-HTL1_4X13_4	ADJUSTMENT KNOB
I-BMDS1830006	LOWER SIDE POLE (I-BMDS1830)
I-BMDS1830005	UPPER SIDE POLE ASSEMBLY (I-BMDS1830)
I-BMDS2440006	LOWER SIDE POLE (I-BMDS2440)
I-BMDS2440005	UPPER SIDE POLE ASSEMBLY (I-BMDS2440)



BUILDMAN™ 18"-30" DRYWALL BENCH

I-BMDWB18 PARTS

CODE	DESCRIPTION
I-BMDWB18902	STEP-UP KIT
I-BMDWB18003	BENCH LEG WITH FOOT
I-BMDWB18903	RUBBER FOOT KIT

CODE	DESCRIPTION
I-BMDWB18904	FOOT COVER KIT
I-BMDWB18905	FINGER LEVERS LOCK KIT
I-BMDWB18901	LOCKING BRACE KIT



BUILDMAN™ DRYWALL & PANEL LIFT

I-BMDPL PARTS

CODE	DESCRIPTION
I-BMDPL901	TRIPOD LOCK KIT
I-BMDPL906	CRADLE & OUTRIGGER RUBBER CAPS
I-BMDPL903	RUBBER WASHER & NUT KIT
I-BMDPL025	HANDLE KIT
I-BMDPL904	OUTRIGGER LOCK KIT

CODE	DESCRIPTION
I-BMDPL905	PANEL SUPPORT HOOK KIT
I-CAS5PIN	LOCKING PIN
I-C1CAS6	CASTER
I-BMDPL902	BIPOD BRAKE FOOT KIT
I-BMDPL029	BRAKE HANDLE RUBBER CAP

INDEX

INDEX

AL-A0000.....65	AL-K4034	63	CT-TFDGK.....86	E-PWP7000AL	81
AL-A0001.....65	AL-K4040	63	CT-TFHG	E-PWP7100AL	81
AL-B0001.....65	AL-K4046	63	CT-TFLGF	E-PWP7101AL	81
AL-B0002.....65	AL-K4052	63	CT-TFNET6BK.....86	E-PWS7000AL	57
AL-B0003.....65	AL-L0002	64	CT-TFNET6BL.....86	E-PWS7100AL	57
AL-C0000.....65	AL-L0002	64	CT-TFNET6GN.....86	E-PWS7200AL	57
AL-C0002.....65	AL-O0000	65	CT-TFNET8BK.....86	E-SLA2RD	80
AL-D0001.....65	AL-O0001	65	CT-TFNET8BL.....86	E-SLA3RD	80
AL-D0002.....65	AL-O0002	65	CT-TFNET8GN.....86	E-SLS1BK	80
AL-D0003.....65	AL-P0001	65	CT-TFP5276PLUSHS.....84	E-SLT3RD	81
AL-F3000.....64	AL-P0002	65	CT-TFP7296HS.....85	ETI-TAGTL	86
AL-F3001.....64	AL-P0003	65	CT-TFP7296S.....85	F-ADJ200	71
AL-F3002.....64	AL-P0100	65	CT-TFP7696PLUSHS.....85	F-BRAD24	71
AL-F3003.....64	AL-P0101	65	CT-TFP7696PLUSS.....85	F-BRAH24	71
AL-F4000.....64	AL-P0102	65	CT-TFP9696HS.....85	F-DH24	71
AL-F4001.....64	AL-Q0100	66	CT-TFP9696S.....85	F-DP24	71
AL-F4002.....64	AL-Q0105	66	CT-TFP10396PLUSHS.....85	F-FRA0710L	70
AL-F4003.....64	AL-Q0106	66	CT-TFP10396PLUSS.....85	F-FRA0715L	70
AL-F4004.....64	AL-Q0107	67	CT-TFP72120SQ.....85	F-FRA1210L	70
AL-F4005.....64	AL-Q0108	67	CT-TFP72120SQGV	F-FRA1215L	70
AL-F4101.....64	AL-Q3000	64	CT-TFP72120SQGVSP	F-ISPC	73
AL-F4103.....64	AL-Q3001	64	CT-TFP72120SQZN	F-KIT0715	72
AL-G3000.....64	AL-Q3004	64	CT-TFP72120SQZNSP	F-KIT0720	72
AL-G3001.....64	AL-Q3101	65	CT-TFP96120SQ	F-KIT0725	72
AL-G3002.....64	AL-T0100	65	CT-TFP96120SQGV	F-KIT0730	72
AL-G3003.....64	AL-T0101	65	CT-TFP96120SQGVSP	F-KIT0735	72
AL-G4000.....64	AL-T0102	65	CT-TFP96120SQZN	F-KIT0740	72
AL-G4001.....64	AL-T0103	65	CT-TFP96120SQZNSP	F-KIT0745	72
AL-G4100.....64	C-MART	23	CT-TFPJSC	F-KIT0750	72
AL-G4101.....64	CT-PLAQUEIDGEN	87	CT-TFPJSEBP	F-KIT1215	72
AL-G4102.....64	CT-SAFERRACK	86	CT-TFPJSMBP	F-KIT1220	72
AL-J0001.....65	CT-SECBPFGV	87	CT-UCOPLERSQ	F-KIT1225	72
AL-J0002.....65	CT-SECCTYGV	84	CT-UCOPLERSQZN	F-KIT1230	72
AL-K3007.....62	CT-SECGARDGV	84	CT-UCOPLERSQZNSP	F-KIT1235	72
AL-K3013.....62	CT-SGTBVG	87	CT-UCOUPLESQGV	F-KIT1240	72
AL-K3019.....62	CT-STABILGV	86	CT-UCOUPLESQGVSP	F-KIT1245	72
AL-K3028.....62	CT-TAGB	86	E-LAD12T2	F-KIT1250	72
AL-K3034.....62	CT-TAGK	86	E-LAD15T1	F-KIT1255	72
AL-K3040.....62	CT-TAGT	86	E-LADDERCARTYW	F-KIT1260	72
AL-K3046.....62	CT-TFBPCTYHGV	87	E-LJ20P	F-KIT1265	72
AL-K3052.....62	CT-TFBPCTYRGV	87	E-LJ30P	F-KIT1270	72
AL-K4007.....63	CT-TFBPG	87	E-MTL7000AL	F-LAD2436	71
AL-K4013.....63	CT-TFBPSQ	87	E-MTL7100AL	F-OUT20	71
AL-K4019.....63	CT-TFBPSQGV	87	E-MTL7200AL	F-OUT30	71
AL-K4028.....63	CT-TFBPSQZN	87	E-MTL7300AL	F-PBRA0724	71

INDEX

INDEX

F-PBRA1224.....	71	I-BMDS1830902.....	94	I-CISP	92	I-IMIPA.....	92
F-TB07	70	I-BMDS1830903.....	94	I-CISPT.....	92	I-IMIS.....	32
F-TB12.....	70	I-BMDS1830904.....	94	I-CISTR.....	27,29,31,39	I-IMPALU.....	93
F-TB24.....	70	I-BMDS1830905.....	94	I-DCC8KPL.....	94	I-IMPN	92,93
F-TBBRACK.....	70	I-BMDS1830906.....	94	I-DCC8P.....	94	I-IMPPA.....	93
I-BM4GR.....	94	I-BMDS2440005.....	94	I-DCC8P4.....	94	I-IMPPN	92,93,94
I-BM4P	94	I-BMDS2440006.....	94	I-DCC8R.....	94	I-IRC	30
I-BM4S	48	I-BMDSP	49,50,51	I-DCC8R4	94	I-IREX3	31
I-BM6C4	47	I-BMDWB18.....	56	I-DCC8YGR.....	94	I-IREX6	31
I-BM6GR.....	47	I-BMDWB18003	94	I-DCC8YGR4	94	I-IRGR.....	31
I-BM604.....	47	I-BMDWB18901	94	I-DCCCDL.....	94	I-IRO4	31
I-BM6P	94	I-BMDWB18902	94	I-DCCWL	94	I-IRP	92
I-BM6S	46	I-BMDWB18903	94	I-EX4PPNCASPY	29	I-IRPP	92
I-BM6SK.....	47	I-BMDWB18904	94	I-I1CAS5	92	I-ISEX4PPNCAS.....	27
I-BM6SP	94	I-BMDWB18905	94	I-I1CAS5P	13	I-ISL.....	27,29,39,45
I-BMD2031P	53	I-BMS04	45	I-I1CAS5RALU.....	93	LD-LD4848DS	13
I-BMD2031PK	53	I-BMSGRJP	45	I-I1CAS5SALU.....	93	LD-LD4848PS.....	13
I-BMD2031R	53	I-BMSS	44	I-I4CAS5	92	LD-LD7248-4MPS	13
I-BMD2031RK	53	I-BMSS003.....	94	I-I4CAS5RALU.....	93	LD-LD7248DS-4M	13
I-BMD2131YGR	52	I-BMSSEX	45	I-I4CAS5SALU.....	93	LD-LDBJP24.....	13
I-BMD3031P	50	I-C1CAS4.....	92,93	I-I4CW5	92	LD-LDCL.....	13
I-BMD3031PK	50	I-C1CAS5.....	92	I-I4CW5RD.....	94	LD-LDCLS	13
I-BMD3031R	50	I-C1CAS5PY.....	92	I-IBBF4	27,29,39,45	LD-LDGpcl	13
I-BMD3031RK	50	I-C1CAS6.....	94	I-IBSJP12H4	27,29,39,45	LD-LDLA24	13
I-BMD3131YGR	51	I-C4CAS4.....	92,93	I-ICW5	92,93	LD-LDLS.....	13
I-BMD3631P	49	I-C4CAS5.....	92	I-ICW5RD.....	94	M-BAA07	16
I-BMD3631PK	49	I-C4CAS5PY.....	92	I-IDPL	36	M-BAA08	16
I-BMD3631R	49	I-C4CAS5PYHD	29	I-IDPL038	93	M-BAA10	16
I-BMD3631RK	49	I-C4CAS6.....	94	I-IDPL901	93	M-FASTBOLT1.5.....	23
I-BMDHER31YGR	54	I-CAIRC	40	I-IDPL902	93	M-FASTBOLT2.....	23
I-BMDPL	58	I-CAIRP	93	I-IDPL903	93	M-MA7642GVPS.....	11
I-BMDPL025	94	I-CAISO4	39	I-IDPL904	93	M-MA7642PS	11
I-BMDPL029	93	I-CAISC	38	I-IDPL905	93	M-MA7660GVPS.....	10
I-BMDPL029	94	I-CAISCR	39	I-IDPL906	93	M-MA7660LGVPS	12
I-BMDPL901	94	I-CAS4PIN.....	92,93,94	I-IDPL907	93	M-MA7660LPS	12
I-BMDPL902	94	I-CAS5PIN.....	92,93,94	I-IMAC.....	41	M-MA7660PS	10
I-BMDPL903	94	I-CISC	26	I-IMAPN	92	M-MA7860GVPS.....	10
I-BMDPL904	94	I-CISCPY	28	I-IMCGR	92	M-MA7860LGVPS	12
I-BMDPL905	94	I-CISCPYGR	29	I-IMCGR	92	M-MA7860LPS	12
I-BMDPL906	94	I-CISCPYP	92	I-IMCHOOK	92	M-MA7860PS	10
I-BMDS1830	55	I-CISCTP	26	I-IMCN	35	M-MA12078GV.....	11
I-BMDS2440	55	I-CISGRJP	27	I-IMCNDX	33	M-MA12160DEGV	11
I-BMDS1830005	94	I-CIS04	27	I-IMCNT	34	M-MBB4UGV.....	17
I-BMDS1830006	94	I-CIS04PY	29	I-IMIAPA	92	M-MBBF	17
I-BMDS1830901	94	I-CIS04TT.....	27,29,39	I-IMIGRA	92	M-MBBFGV	17

INDEX

M-MBBS	17	M-MF7260PS	9	M-MPP819	19	M-MW71016	22
M-MBBSGV	17	M-MF7660PS	9	M-MPP1019	19	M-MW71026	22
M-MBC8	17	M-MFL4415.....	21	M-MPP1019AS.....	19	M-MWB42	23
M-MBC8HD.....	17	M-MFL7715.....	21	M-MPP1019RE.....	19	M-MWB42GV	23
M-MBSJP8U24	17	M-MFLBR.....	21	M-MPP1024	19	M-MWC16FP.....	22
M-MBSJP24.....	17	M-MFRACKGV	22	M-MPP1024AS	19	M-MWC26	22
M-MBSJP24H	17	M-MFRSLING	22	M-MRBF.....	23	M-PA4B	23
M-MBSJP36.....	17	M-MGPUSL	16	M-MS20	18	M-PA5B	23
M-MBSJPF24	17	M-MGPUSLGV	16	M-MS20GV	18	M-PA6B	23
M-MBSJPSW24	17	M-MGR4	16	M-MS30	18	M-PA8B	23
M-MBSJPSW24H	17	M-MGR5	16	M-MS40	18	M-PA10B	23
M-MBSJS24.....	17	M-MGR7	16	M-MSJ	18	M-PA12B	23
M-MBSJS24H	17	M-MGR8	16	M-MSJGARDGV	18	M-PA14B	23
M-MBSJS36.....	17	M-MGR10	16	M-MSJL.....	18	M-PA16B	23
M-MBT11.....	22	M-MGR30	16	M-MSJLOCK	18	M-PA18B	23
M-MC27.7584.....	14	M-MGRMAEX.....	16	M-MSJLOCKKK	18	M-PA20B	23
M-MC27.75120.....	14	M-MGRMAEXGV	16	M-MSJRACK	18	M-PA21B	23
M-MC2484	14	M-MGT30.....	16	M-MST760	20	M-PA24B	23
M-MC2496	14	M-MGT60	16	M-MST760IR	20	M-PA28B	23
M-MC3684	14	M-MGT84	16	M-MST760RDE	20	M-PA32B	23
M-MC3696	14	M-MGT120	16	M-MST760RFN	20	M-PEP7000AL	79
M-MC4884	14	M-MHA	21	M-MST776US	20	M-PEP7100AL	79
M-MC4896	14	M-MHAGV	21	M-MST776USIR	20	M-PEP7200AL	79
M-MC24120	14	M-MHAP	21	M-MST776USNR	20	M-SHOREPOST0	23
M-MC36120	14	M-MHP	21	M-MST776USOR	20	M-SHOREPOST1	23
M-MC48120	14	M-MLA13	14	M-MST7600R	20	M-SHOREPOST2	23
M-MC364884AN	14	M-MLA13GV	14	M-MSTB	20	M-SHOREPOST3	23
M-MC364896AN	14	M-MLA2931	14	M-MSTBGV	20	M-SHOREPOST4	23
M-MDB3084	14	M-MLA2931GV	14	M-MSTGR6060	20	M-TGRUS	21
M-MDB6084	14	M-MLB	15	M-MTA120	14	M-THUS	21
M-MDB30120	14	M-MLC1	15	M-MTA240	14	M-TRDUS	21
M-MDB60120	14	M-MLC1S	15	M-MTCFDU	15	M-TUFSTUD18	23
M-MDNET10BK	22	M-MLG	15	M-MTCFW1	15	M-TUFSTUD36	23
M-MDNET10GN	22	M-MLS	15,94	M-MTCFW2	15	M-TUFSTUD72	23
M-ME20	18	M-MO32	17	M-MTCSDU	15	M-TUFSTUD144	23
M-MF60EPS	9	M-MO32GV	17	M-MTCSW1	15	M-TYWUS	21
M-MF3660GVPS	8	M-MPA719	19	M-MTCSW2	15	VB-ESPRG.016X.	
M-MF3660PS	8	M-MPA819	19	M-MTE13100	22	188X1.5Z	93
M-MF4860PS	8	M-MPA1019	19	M-MTESCREW	22	VB-HTL1_4X13_4	94
M-MF6030GVPS	9	M-MPP719	19	M-MTOGGLE	15		
M-MF6030PS	9	M-MPP719AS	19	M-MTWA	14		
M-MF6048PS	9	M-MPP719RE	19	M-MTWAEYE	14		
M-MF6060GVPS	8	M-MPP724	19	M-MTWAFDUK	14		
M-MF6060PS	8	M-MPP724AS	19	M-MTWAGVPL	14		
M-MF6060PS-A	8	M-MPP728	19	M-MTWAK	14		

NOTES

BUILT TOUGH FOR SAFETY

Our mission at Metaltech is to develop, manufacture and sell safe, reliable, innovative products that make work easier and faster to execute with built in safety and sturdiness.

We have been building safety into our scaffolding for over 57 years. Innovation, design and great packaging drive us.

We strive to develop and design products specifically suited for each of our market segments; residential and commercial construction, rental and industrial.



BUILT TOUGH FOR SAFETY



CUSTOMER SERVICE

T : **1 800 363-7587** (TOLL FREE NUMBER)
F : **1 866 517-7585**
@ : **CS@METALTECH.CO**



FOR THE LATEST ADDITIONS TO THE METALTECH
PRODUCTS CATALOG, VISIT OUR ON-LINE CATALOG AT
WWW.METALTECH.CO



METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC. PRINTED IN CANADA ©METALTECH-OMEGA INC. C-MTECH-NA-EN10

