



Industrial Hand Tools



CALLEN. ARMSTRONG Campbell®


















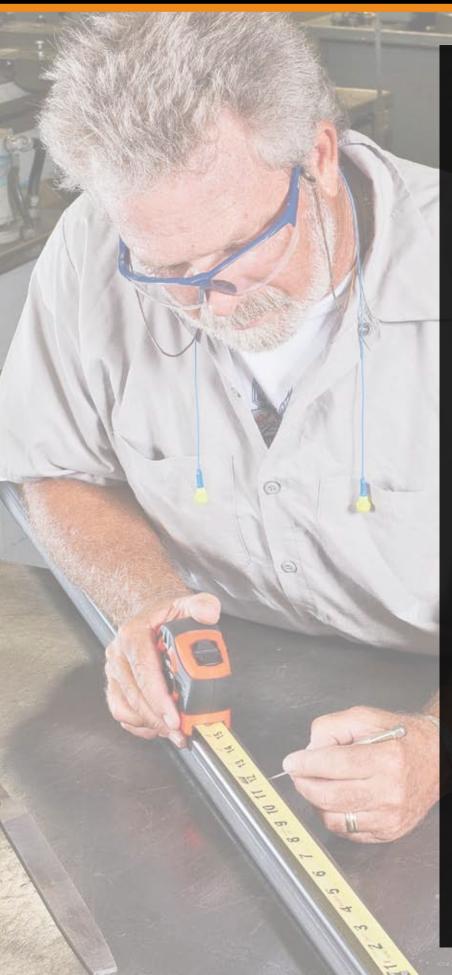

Lufkin®

Short Tapes	1042
Pocket Tapes	1046
Long Tapes	1049
Fiberglass Tapes	1053
Oil Gauging Tapes	1057
Surveying/Engineering Tapes	1061
Reels and Frames	1064
Folding Rules	1066
Measuring Rules	1069
Measuring Wheels	1070

GEARWRENCH

Automotive Inspection Tools	1076
Calipers	1074
Spark Plug Gap Gauges	1073
Feeler Gauges	10/1

ARMSTR©NG°

Feeler	Gauges	 1078

Lufkin Measuring

Ever since the first Lufkin® wood rule was produced in 1869, the Lufkin brand has been synonymous with high quality and unmatched accuracy. Today, Lufkin wood rules, power tapes, engineering and surveying tapes, specialty tapes and measuring wheels comprise one of the widest selections of measuring products available from any manufacturer.

For over a century, Lufkin® tapes have been recognized as the standard for accuracy and high quality. Lufkin® steel tapes are manufactured to government standards traceable to the U.S. Department of Commerce, National Institute of Standards and Technology. Periodically, these standards are recalibrated with renewed certification by the N.I.S.T.




OIL GAUGING TAPES



Lufkin[®]

How to Change Short Tape Blades

- Pull old blade out past end until about 2" of bluish metal spring is exposed. Put a nail in round hole(A) in spring to hold it.
- 2. Note how old blade is attached, then remove it.
- 3. New blade is reverse wound, ready to attach to spring. With blade graduations up, turn spring sideways and insert from bottom into slot (B) in new blade. Twist spring and pull back until notches (C) lock at rear of slot (B).
- 4. Remove nail and return blade to case.



Short Tape Blade Styles

A1 YELLOW CLAD

11

- 1/2" width only
- · Black and red markings one side only
- Graduated feet and inches to 1/16ths top edge
- Graduated inches to 1/16ths bottom edge, first 12 inches to 1/32nds
- Instantaneous foot readings
- Stud marks every 16"

A2 YELLOW CLAD



- 3/4" width only
- Black and red markings one side only
- Graduated feet and inches to 1/16ths top edge
- Graduated inches to 1/16ths bottom edge, first 12" to 1/32nds
- · Instantaneous foot readings
- . Stud marks every 16"

A3 YELLOW CLAD



- 3/4" and 1" widths
- Graduated feet and inches to 1/16ths top and bottom edge
- · Vertical numbering
- · Fractional and decimal equivalent marking
- Stud marks every 16"

A4 YELLOW CLAD



- 3/4" and 1" widths
- Graduated feet, 1/10ths and 1/100ths top edge; feet, inches and 1/16ths on bottom edge
- Instantaneous foot readings
- NOTE: 1" width has red and black markings; 3/4" has black markings only
- . Stud marks every 16"

A5 YELLOW CLAD



- 1-3/16" and 1" widths
- · Black and red markings one side only
- Consecutive inches to 16ths
- Stud marks every 16"
- Truss marks every 19.2"
- Instantaneous foot readings

A6 CHROME CLAD®



- 1/2" width only
- Chrome Clad® blade
- · Black markings one side only
- Graduated to 1/10ths of inches on both edges

A7 YELLOW CLAD



- 1/2" width only
- · Black markings one side only
- Graduated to 1/10ths of inches on both edges
- First 6" on bottom edge graduated to 1/50ths

A8 CHROME CLAD®



- 1/2" width only
- Chrome Clad® blade
- Black markings one side only
- Graduated consecutive inches and 1/16ths on top and bottom edges

A9 YELLOW CLAD



- · Available in 13mm, 19mm and 25mm widths
- Black and red markings one side only
- Both edges graduated to millimeters; numbered consecutive centimeters with larger red numbers at each decimeter



A11 YELLOW CLAD



- 1/2"/13mm width only
- . Black and red markings one side only
- Top edge graduated and numbered inches
- Bottom edge to millimeters, numbered consecutive millimeters with red number at each decimeter.

A12 YELLOW CLAD

F 1 3F 2 3F 3 3F 920 830 940 950 960 970 980 990 1000 101

- 3/4"/19mm width
- · Black and red markings one side only
- Top edge graduated and numbered inches (no stud centers); bottom edge graduated in millimeters, numbered consecutive millimeters with red number at each decimeter
- Stud marks every 16" and 40cm

A13 YELLOW CLAD



- 1/2"/13mm and 3/4"/19mm widths
- · Black and red markings one side only
- Top edge to 1/16ths, continuous inches; feet and decimeters marked in red
- Bottom edge graduated to millimeters, numbered consecutive centimeters

A16 YELLOW CLAD

1|1, | 1|2, | 1|1, | 1|3, | 1, | 1

- 1/4" width only
- · Black markings one side only
- Consecutive inches to 1/16ths bottom edge, first 12" to 1/32nds
- Stud marks every 16" and 40cm

A17 YELLOW CLAD




- 1/4"/6mm width only
- · Black markings one side only
- Top edge graduated in inches to 1/16ths
- Bottom edge graduated in millimeters, numbered in centimeters: 1 to 9 in each decimeter

A18 YELLOW CLAD




- 1/4" width only
- · Black markings both sides
- Consecutive inches to 1/16ths, first 12" to 1/32nds on side 1
- Diameter inches to 1/64ths side 2; blank space ahead of zero

A19 YELLOW CLAD




- 1/4" width only
- Markings both sides
- Consecutive inches to 1/16ths, first 12" to 1/32nds on side 1
- Diameter inches to 1/100ths side 2; blank space ahead of zero

A20 YELLOW CLAD



- 6mm width only
- Markings both sides
- Consecutive centimeters to millimeters on side 1
- Diameter to millimeters side 2, numbered in centimeters

A21 YELLOW CLAD



- 1/4" width only
- Black markings both sides
- One side marked 1/4th scale (1 to 240), other side has 1/8th scale (1 480)

A29 YELLOW CLAD



- 3/4"/19mm and 1"/25mm widths
- Black and red markings one side only
- Graduated millimeters on top edge and feet
- 1/10ths and 1/100ths on bottom edge

A30 YELLOW CLAD



- 1"/25mm width only
- Markings one side only
- English top edge to 1/16ths, first 12" to 1/32nds, (continuous inches plus consecutive inch marks within each foot from 1' mark). Truss marks every 19.2"
- Metric bottom edge graduated to millimeters, numbered consecutive centimeters

A31 YELLOW CLAD



- 1/2" width only
- · Black and red markings on one side only
- Graduated to 1/16ths on top edge graduated in 1/32nds
- 1/10ths on bottom edge; first 6 inches graduated in 1/50ths

A35 YELLOW CLAD



- 1" width only
- Black and red markings one side only
- Graduated in feet, 1/10ths and 1/100ths of feet, numbered in feet and 10ths of feet

A36 YELLOW CLAD



- 1/2" width only
- Black and red markings one side only
- Top edge numbered every 10 millimeters with red print for every 100cm increment and graduations every millimeter. Bottom edge numbered in consecutive inches graduated in 1/10ths of an inch with first 12" graduated to 1/50ths and numbered in 10ths

A37 YELLOW CLAD



- 1" width only
- · Black and red markings one side only
- Top edge graduated to 1/16ths, and numbered in consecutive inches and fractional equivalents to 1/8ths.
- Bottom edge with red print numbered at the mid-point of the measurement on the top edge





- Hi-Viz® Orange Case Easy to Find on the Job
- Rubber Cushion Case Exterior Protects Tape From Impact and Improves Grip
- Fits Easily Into Most Tape Holsters
- Bright Yellow Blade Has Clear Easy-To-Read Numerals
- Toggle Lock is Positioned for Convenient Operation
- Holds the Blade Securely in Any Position
- Cushioned Blade Return



Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
PHV1433	037103252081	Carded	Hi-Viz® Orange	1 in	33 ft	A 5	None	1.34 lb	6
PHV1433DM	037103252098	Carded	Hi-Viz® Orange	25 mm, 1 in	10 m, 33 ft	A29	None	1.34 lb	6
PHV1410CME	037103252074	Carded	Hi-Viz® Orange	25 mm, 1 in	10 m, 33 ft	A30	None	1.34 lb	6
PHV1425	037103252005	Carded	Hi-Viz® Orange	1 in	25 ft	A5	None	1.07 lb	6
PHV1425D	037103252012	Carded	Hi-Viz® Orange	1 in	25 ft	A4	None	1.07 lb	6
PHV1425ED	037103252029	Carded	Hi-Viz® Orange	1 in	25 ft	A35	None	1.07 lb	6
PHV1048CM	037103251978	Carded	Hi-Viz® Orange	25 mm	8 m	A9	None	1.07 lb	6
PHV1048CME	037103251985	Carded	Hi-Viz® Orange	25 mm, 1 in	8 m, 26 ft	A30	None	1.07 lb	6
PHV1048DM	037103251992	Carded	Hi-Viz® Orange	1 in	25 ft	A29	None	1.07 lb	6
PHV1316	037103251930	Carded	Hi-Viz® Orange	3/4 in	16 ft	A2	RW316	0.62 lb	6
PHV1035CM	037103251916	Carded	Hi-Viz® Orange	19 mm	5 m	Α9	None	0.62 lb	6
PHV1035CME	037103251923	Carded	Hi-Viz® Orange	19 mm, 3/4 in	5 m, 16 ft	A13	RY35CME	0.62 lb	6
PHV1312	037103251848	Carded	Hi-Viz® Orange	3/4 in	12 ft	A2	R1312	0.60 lb	6
PHV1312D	037103251855	Carded	Hi-Viz® Orange	3/4 in	12 ft	A4	None	0.60 lb	6
PHV1034CME	037103251824	Carded	Hi-Viz® Orange	19 mm, 3/4 in	4 m, 13 ft	A13	None	0.60 lb	6
PHV1034DM	037103251831	Carded	Hi-Viz® Orange	19 mm, 3/4 in	3.7 m, 12 ft	A29	None	0.60 lb	6
PHV1012	037103251770	Carded	Hi-Viz® Orange	1/2 in	12 ft	A1	RY212	0.32 lb	6
PHV1024CME	037103251787	Carded	Hi-Viz® Orange	13 mm, 1/2 in	4 m, 13 ft	A13	None	0.32 lb	6
PHV1010	037103251701	Carded	Hi-Viz® Orange	1/2 in	10 ft	A1	RY210	0.29 lb	6
PHV1023CM	037103251718	Carded	Hi-Viz® Orange	13 mm	3 m	А9	None	0.29 lb	6
PHV1023CME	037103251725	Carded	Hi-Viz® Orange	13 mm, 1/2 in	3 m, 10 ft	A13	RY23CME	0.29 lb	6

Co 2 1 1 1





- Case Designed to Fit Perfectly in the Hand
- Lightweight, High Strength Chrome Finished Case
- Fits Easily Into Most Tape Holsters
- Bright Yellow Blade Has Clear Easy-To-Read Numerals
- Toggle Lock Positioned for Convenient Operation, Holds Blade Securely
- Cushioned Blade Return
- Removable Belt Clip


Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
P2133	037103252067	Carded	Chrome	1 in	33 ft	A5	None	1.72 lb	6
P2133D	037103252043	Carded	Chrome	1 in	33 ft	A4	None	1.72 lb	6
P2410CME	037103252050	Carded	Chrome	25 mm, 1 in	10 m, 33 ft	A30	None	1.72 lb	6
P2125	037103251954	Carded	Chrome	1 in	25 ft	A5	None	1.07 lb	6
P2048CME	037103251961	Carded	Chrome	25 mm, 1 in	8 m, 26 ft	A30	None	1.07 lb	6
P2316	037103251909	Carded	Chrome	3/4 in	16 ft	A2	RW316	0.62 lb	6
P2335ME	037103251893	Carded	Chrome	19 mm, 3/4 in	5 m, 16 ft	A12	RY35ME	0.62 lb	6
P2035CM	037103251879	Carded	Chrome	19 mm	5 m	A9	None	0.60 lb	6
P2035CME	037103251886	Carded	Chrome	19 mm, 3/4 in	5 m, 16 ft	A13	RY35CME	0.60 lb	6
P2312	037103251817	Carded	Chrome	3/4 in	12 ft	A2	R2312	0.60 lb	6
P2312D	037103251800	Carded	Chrome	3/4 in	12 ft	A4	None	0.60 lb	6
P2034CME	037103251794	Carded	Chrome	19 mm, 3/4 in	4 m, 13 ft	A13	None	0.60 lb	6
P2212	037103251763	Carded	Chrome	1/2 in	12 ft	A1	RY212	0.32 lb	6
P2212X	037103251756	Carded	Chrome	1/2 in	12 ft	A7	None	0.32 lb	6
P2212DX	037103251749	Carded	Chrome	1/2 in	12 ft	A31	None	0.32 lb	6
P2024CME	037103251732	Carded	Chrome	13 mm, 1/2 in	4 m, 13 ft	A13	None	0.32 lb	6
P2210	037103251695	Carded	Chrome	1/2 in	10 ft	A1	RY210	0.29 lb	6
P2210MEX	037103251671	Carded	Chrome	13 mm, 1/2 in	3 m, 10 ft	A36	None	0.29 lb	6
P2223CME	037103251688	Carded	Chrome	13 mm, 1/2 in	3 m, 10 ft	A13	RY23CME	0.29 lb	6



Lufkin® Quickread® Power Tapes

- Graduations Printed in Fractions and Decimal Equivalents
- Rubber Cushion Case Exterior Protects Tape From Impact and Improves Grip
- Positive Toggle Lock Holds Blade Securely at Any Length
- Self-Compensating End Hook for Inside and Outside Measurements
- Durable ABS Case Withstands Rugged Use on the Job Site
- Built in Bumper Reduces Shock When Blade is Retracted
- Blade Style: A3









- Positive Toggle Lock Holds Blade Securely at Any Length
- Chrome or Easy-To-Find Hi-Viz® Orange Case Finish Available
- Self-Compensating End Hook for Inside and Outside Measurements
- Patented Quad Hook Extends Blade Life By Reducing Blade Breakage
- Built in Bumper Reduces Shock Upon Blade Retraction, Extends Tape Life
- Removable Belt Clip
- All Shelf Pack Power Tapes Are Carded

Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
HV420	037103104168	Carded	Orange	1 in	20 ft	A5	None	0.72 lb	6
Y420	037103104113	Carded	Chrome	1 in	20 ft	A5	None	0.70 lb	6
Y46CME	037103001047	Carded	Chrome	25 mm, 1 in	6 m, 20 ft	A30	None	0.80 lb	6
HV116	037103039149	Carded	Orange	1 in	16 ft	A5	None	0.70 lb	6



- New Blade Design Achieves 10' Stand-Out, Make Longer Measurements
- Soft Touch Lock Button for Better Feel and Control
- Rubber Cushion Absorbs Impact and Improved Grip
- Case Designed to Fit Your Hand
- Clearcoat Blade Protection More Durable Markings
- 4-Rivet Reinforced End Hook Increased Strength for Long Blade Life
- Non-Slip Slide Lock for Positive Blade Locking
- Easy On/Off Belt Clip for Fast Attachment to Belt

Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
XL8525	037103222923	Carded	Orange	1-3/16 in	25 ft	A 5	None	1.25 lb	4
XL8525D	037103223999	Carded	Orange	1-3/16 in	25 ft	A4	None	1.03 lb	4
XL8548CME	037103225856	Carded	Orange	30 mm, 1-3/16 in	8 m, 26 ft	A30	None	1.03 lb	4



Lufkin 800 Series Xtra-Wide Control Power Tape

- Drag Strip[™] Finger Access for Measuring and Retraction Control
- Wide End-Hook Holds Better and Makes Marking Easier
- New Blade Design Achieves 10' Stand-Out, Make Longer Measurements
- Clearcoat Blade Protection More Durable Markings
- Durable Case Allows for Added Control and Grip
- Integrated D-ring for Tether Strap or Easy Handing Storage
- Easy On/Off Belt Clip for Fast Attachment to Belt



Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
CS8516	037103263537	Carded	Orange	1-3/16 in	16 ft	A5	None	0.55 lb	6
CS8525	037103263544	Carded	Orange	1-3/16 in	25 ft	A5	None	1.22 lb	4
CS8525CME	037103263551	Carded	Orange	30 mm, 1-3/16 in	8 m, 26 ft	A30	None	1.24 lb	4





- Automatic Blade Lock Holds the Blade in Extended Position
- Recessed Lock Release to Reduce Chance of Accidental Retraction
- Non-Slip Co-Molded Rubber Grip
- Durable Clearcoat Blade Protection for Longer Blade Life
- Steel Reinforced End Hook for Longer Service Life
- Tough ABS Case to Stand Up to the Toughest Work Site



Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
AL725	037103214539	Carded	Orange	1 in	25 ft	A5	None	0.80 lb	8
AL748CME	037103214546	Carded	Orange	25 mm, 1 in	8 m, 26 ft	A 5	None	0.80 lb	8



Lufkin 700 Series Magnetic End Hook

- Magnetic End Hook is a Time-Saver for Framers, HVAC Installers, and More
- Use for One-Man Measurements of Steel Framing and Drop
- Powerful Dual Magnets Can Also Serve As A Pick-Up Tool
- Non-Slip Co-Molded Rubber Grip
- Durable ABS Case Stands Up to the Toughest Work Site
- Non-Slip Rubber Blade Lock Button



Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
L725MAG	037103214560	Carded	Orange	1 in	25 ft	A5	None	0.80 lb	8
L748MAG	037103214522	Carded	Orange	25 mm, 1 in	8 m, 26 ft	A13	None	0.80 lb	8

Lufkin 700 Series Auto-Lock, Magnetic End Hook

- Automatic Blade Lock Holds the Blade in Extended Position
- Recessed Lock Release to Reduce Chance of Accidental Retraction
- Magnetic End Hook is a Time-Saver for Framers, HVAC Installers, and More
- Use for One-Man Measurements of Steel Framing and Drop Ceiling Grids
- Powerful Dual Magnets Can Also Serve As A Pick-Up Tool
- Non-Slip Co-Molded Rubber Grip
- Durable Clearcoat Blade Protection for Longer Blade Life
- Steel Reinforced End Hook for Longer Service Life
- Tough ABS Case to Stand Up to the Toughest Work Site







Lufkin L600 Series Power Return Tapes

- Lightweight, High Strength, Case Fits Comfortably in Hand
- Hi-Viz® Blue Case Easy to Find on the Job
- Unique Slide Lock Design Allows for Easy Control of Tape Blade
- Wide Base Helps Keep Tape Standing Upright
- Clear Coat Blade Protection for More Durable Markings
- Easy-To-Read Yellow Clad Blade (Not Replaceable)
- Fits Easily in Most Tape Holsters

Cat. No.	UPC No.	Packaging	Case Color	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
L610	037103241061	Carded	Orange	1/2 in	10 ft	A1	None	0.25 lb	6
L610CME	037103241078	Carded	Orange	13 mm, 1/2 in	3 m, 10 ft	A13	None	0.25 lb	6
L616	037103241085	Carded	Orange	3/4 in	16 ft	A2	None	0.45 lb	6
L616CME	037103241092	Carded	Orange	19 mm, 3/4 in	5 m, 16 ft	A13	None	0.45 lb	6
L625	037103241108	Carded	Orange	1 in	25 ft	A 5	None	0.80 lb	8
L625CME	037103241115	Carded	Orange	25 mm, 1 in	8 m, 26 ft	A13	None	0.80 lb	8
L625SCTMP	037103241122	Carded	Orange	1 in	25 ft	A37	None	0.80 lb	8
QRL625MP	037103241139	Carded	Blue	1 in	25 ft	A3	None	0.80 lb	8



- Chrome Plated Case
- Yellow Clad Blade
- Power Retraction Operation
- Belt Clip



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
W928	037103458728	Carded	1/2 in	8 ft	A 1	None	0.20 lb	6
W9210	037103458735	Carded	1/2 in	10 ft	A1	RY210	0.30 lb	6
Y8210	037103457967	Carded	1/2 in	10 ft	A1	None	0.20 lb	6
W9212	037103458742	Carded	1/2 in	12 ft	A1	RY212	0.26 lb	6
W9312	037103458780	Carded	3/4 in	12 ft	A2	RW312	0.40 lb	6
W9312D	037103458797	Carded	3/4 in	12 ft	A4	None	0.38 lb	6
W9210ME	037103458766	Carded	13 mm, 1/2 in	3 m, 10 ft	A11	None	0.24 lb	6
Y8212	037103457981	Carded	1/2 in	12 ft	A 1	RY212	0.24 lb	6

Lufkin[®] Mezurall™ Chrome Clad®

- 1/2" X 12' Chrome Clad® Blade
- Ideal for Industrial Use
- Chrome Plated Case
- Hard Chrome Plated Blade is Tough and Accurate
- Power Retraction Operation



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C9212X	037103455574	Carded	1/2 in	12 ft	A6	None	0.30 lb	6
C9212	037103455567	Carded	1/2 in	12 ft	A8	None	0.30 lb	6





- Pocket Size Ideal for Office or Home
- High Strength Case
- Yellow Clad Blade
- 1/4"/6mm Wide Blade is Flexible; Bold Graduations on Yellow Background
- Power Retraction Operation

Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
Y613ME	037103104106	Carded	6 mm, 1/4 in	3 m, 10 ft	A17	None	0.11 lb	6
W616	037103458575	Carded	1/4 in	6 ft	A16	None	0.10 lb	6
W6110	037103458544	Carded	1/4 in	10 ft	A16	None	0.12 lb	6
W616B0	037103028624	Carded	1/4 in	6 ft	A16	None	0.00 lb	6



- Convenient for Office, Briefcase, or Pocket
- 6' Easy-To-Read Blade
- Power Retraction



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
W606	037103458551	Boxed	1/4 in	6 ft	A16	None	0.09 lb	6
W606ME	037103458520	Boxed	6 mm, 1/4 in	2 m, 6 ft	A17	None	0.09 lb	6
W608	037103458568	Boxed	1/4 in	8 ft	A16	None	0.10 lb	6

Lufkin[®]

Executive® Diameter

- Designed for Measuring Diameters of Pipe, Cable, Tire, etc.
- Polished Chrome Case
- Zero Falls in the Same Place on Each Side of the Blade
- Conversion From Diameter to Circumference, Simply Turn the Blade
- Easy-To-Read Bold Graduations on Yellow Background
- Spring Action Returns Blade to Case





Lufkin® Architect's Pocket Scale

- Yellow Clad Blade
- 1/4"/6mm Yellow Steel Blade Has Jet Black Markings
- Automatic Blade Return
- Blade Style: A21





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
W393	037103458483	Boxed	1/4 in	5 ft	A21	None	0.20 lb	6



Long Tape Blade Styles

B1 YELLOW CLAD

- 3/8" width only
- · Yellow clad blade
- · Black and red markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by a diamond

B4 CHROME CLAD®

- 3/8" width only
- · Chrome Clad® blade
- · Black markings one side only
- Graduated consecutive inches to 1/10ths

B2 CHROME CLAD®



- 3/8" width only
- Chrome Clad® blade
- · Black markings one side only
- Graduated feet and inches to 1/16ths with instantaneous readings

B3 CHROME CLAD® AND NUBIAN®



- 3/8" width only
- Chrome Clad® and Nubian® blade
- · Black markings one side only
- · Graduated consecutive inches to 1/16ths

B5 CHROME CLAD® AND YELLOW CLAD

- 3/8" width only
- Chrome Clad® and yellow clad blade
- · Black markings one side only
- Graduations feet to 1/10ths and 1/100ths

B7 CHROME CLAD® AND NICKEL CLAD®



- 3/8" width only
- Chrome Clad®, nickel clad and yellow clad blade
- · Black markings one side only
- · Graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by diamond

B8 YELLOW CLAD




- 3/8" width only
- Yellow clad blade
- · Black and red markings both sides
- · Bottom side graduated millimeters, numbered in centimeters and meters
- Top side graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by a diamond

B9 YELLOW CLAD



- 3/8"/10mm width only
- · Yellow clad blade
- · Black and red markings both sides
- One side graduated feet and inches to 1/8ths with instantaneous readings; other side graduated in consecutive millimeters with instantaneous meter numbers at every 100mm

B10 CHROME CLAD® AND NUBIAN®



- 3/8" width only
- Nubian® and Chrome Clad® blade
- Markings both sides
- One side graduated 1/10ths and 1/100ths of feet; other side diameter feet and 1/10ths of inches

B11 NUBIAN®



- 3/8" width only
- Nubian® blade
- · Markings both sides
- · Graduated feet, inches and 1/8ths one side; other side graduated diameter feet and inches with an extra diameter inch subdivided to 64ths left hand



- 3/8" width only
- Nubian® blade
- · Markings both sides
- · Graduated consecutive inches to 1/16ths one side; other side to diameter inches, with an extra diameter inch subdivided to 64ths left hand


B12 NUBIAN®

B14 YELLOW CLAD AND CHROME CLAD®



- 3/8" width
- Yellow clad and Chrome Clad® blade
- · Black and red markings both sides
- Front side graduated in feet and inches to 1/8ths; back side in meters and millimeters numbered in centimeters

B15 CHROME CLAD®



- 10mm width
- · Yellow clad and Chrome Clad® blade
- · Marked both sides
- . One side meters, decimeters and millimeters; other side reads diameter from circumference to 2m of diameter in millimeters





- Rugged, Vinyl-Covered Steel Case
- Chrome Clad® Blade
- Large Easy-Action Winding Drum and Friction Washers
- Nylon Roller Guides the Tape Smoothly in and Out of Case



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C213	037103451408	Boxed	3/8 in	50 ft	B7	None	1.00 lb	1
C213C	037103451514	Boxed	3/8 in	600 in	В3	None	0.93 lb	1
C213CX	037103451538	Boxed	3/8 in	600 in	B4	None	1.00 lb	1
C213D	037103451552	Boxed	3/8 in	50 ft	B5	0C213D	0.90 lb	1
C216	037103451606	Boxed	3/8 in	100 ft	B7	None	1.70 lb	1
C21616THBLK	037103451675	Boxed	3/8 in	100 ft	B2	None	1.60 lb	1

100 ft



C216D

Leader®

Boxed

3/8 in

- Sturdy, Rust-Resistant Steel Case Has A Tough, Black Vinyl Cover
- Chrome Clad® Blade
- Jet-Black Markings Are Bonded to the Steel

037103451699

- Recessed Below the Hard Chrome Surface; Highly Resistant to
- Large Easy Action Winding Drum and Friction Washers
- Nylon Roller Guides the Tape Smoothly in and Out of Case
- Folding End Hook Ring





В5

Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
HC253	037103452016	Boxed	3/8 in	50 ft	B7	None	1.00 lb	1
HC256	037103452061	Boxed	3/8 in	100 ft	В7	None	1.70 lb	1



Challenge[™]

- Challenge(Tm); Nubian® Case, Drum Assembly
- Etched Tape Line is Designed to Perform for Years
- Vinyl Covered Steel Case
- Chrome Clad® Blade
- Easy Action Winding Drum and Friction Washers
- Nylon Rollers Guide the Tape Smoothly in and Out of Case
- P in the Suffix of the Number Denotes Diameter





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
261PTH	037103451309	Boxed	3/8 in	33 ft	B11	0261PTH	0.70 lb	1
263P	037103452092	Royed	3/8 in	50 ft	R11	None	0.80 lb	1



None

1.55 lb

1



Lufkin Hi-Viz® Speedwinder®

- Impact-Resistant, Attractive, Self-Standing Case
- Heavy Duty Yellow Clad Blade Protected By An Abrasion Resistant Coating
- Extends, Rewinds in Less Time Than Conventional Long Steel **Tapes**
- Easy-To-Read Bold Black Markings



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
HYT50	037103458155	Boxed	3/8 in	50 ft	B1	None	0.85 lb	6
HYT100	037103458162	Boxed	3/8 in	100 ft	B1	None	1.50 lb	6
HYT100D	037103460196	Boxed	3/8 in	100 ft	B5	None	1.50 lb	6
HYT15CME	037103459411	Boxed	10 mm, 3/8 in	15 m, 50 ft	B14	None	0.90 lb	6
HYT30CME	037103459428	Boxed	10 mm, 3/8 in	30 m, 100 ft	B14	None	1.20 lb	6
HYT50CME	037103003461	Boxed	10 mm, 3/8 in	50 m, 164 ft	B14	RHY50CME	1.50 lb	6

Lufkin®

Banner[™]

- Professional Tradesman's Quality
- Rugged, Vinyl-Covered Steel Case
- Yellow Clad Tape; 3/8"/10mm Wide and 0.008"/0.2mm Thick
- Large Easy Action Winding Drum and Friction Washers
- Nylon Rollers Guide the Tape Smoothly in and Out of Case
- Bold Graduations with Black and Red Numbers for Accurate Measuring
- H Prefix Denotes Product Blade is Fitted with A Folding Hook Ring



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
HW223	037103458865	Boxed	3/8 in	50 ft	B1	None	1.00 lb	6
HW223D	037103458902	Boxed	3/8 in	50 ft	B5	None	0.90 lb	1
HW223ME	037103458889	Boxed	10 mm, 3/8 in	15 m, 50 ft	В9	None	0.90 lb	6
HW226	037103458940	Boxed	3/8 in	100 ft	B1	None	1.60 lb	6
HW226D	037103458964	Boxed	3/8 in	100 ft	B5	None	1.60 lb	1
HW226ME	037103458988	Boxed	10 mm, 3/8 in	30 m, 100 ft	В9	None	1.60 lb	6
HW227CME	037103459039	Boxed	10 mm, 3/8 in	50 m, 164 ft	B8	None	2.50 lb	1

Lufkin Pro Series Long Steel Tape

- 3:1 Gear Ratio for Fast Blade Retrieval
- Precise, Easy to Read Black and Red Blade Markings
- Premium Steel Blade Resists Kinks



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
PS100S	037103201447	Carded	3/8 in	100 ft	B1	None	1.05 lb	1





- Vinyl Covered Steel Case
- Yellow Clad Blade
- 0.005" Thick Blade
- Large Easy Action Winding Drum with Friction Washers
- Fitted with A Folding Hook Ring



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
HW50	037103458827	Boxed	3/8 in	50 ft	B1	0Y50	0.70 lb	6
HW100	037103458841	Boxed	3/8 in	100 ft	B1	0Y100	1.25 lb	6



Lufkin® Hi-Viz® Universal Lightweight

- High Impact Polystyrene Case, Hi-Viz® Orange
- Yellow Clad Blade 0.005"/0.13mm Thick
- Easy Wind Nylon Drum
- Easy-To-Read Black and Red Markings
- Hook Ring is Retained Neatly in the Contoured Mouth of the Case
- Removable Belt Clip
- All Tapes Are Carded



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
50	037103450685	Carded	3/8 in	50 ft	B1	0Y50	0.50 lb	6
100L	037103451002	Carded	3/8 in	100 ft	B1	0Y100	0.95 lb	6
HV15CME	037103089632	Carded	10 mm, 3/8 in	15 m, 50 ft	B8	RY15CME	0.50 lb	6
HV30CME	037103089656	Carded	10 mm, 3/8 in	30 m, 100 ft	B8	RY30CME	0.94 lb	6

Lufkin[®] Artisan® Diameter and Tree Tapes

- Rugged, Vinyl-Covered Steel Case
- Chrome Clad® and Nubian® Blade
- 0.008" Thick Blade
- Large Easy Winding Drum and Friction Washers
- Nylon Rollers Guide the Tape Smoothly in and Out of Case





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
120TP	037103451101	Boxed	3/8 in	20 ft	B10	None	0.30 lb	1
C120TP	037103451125	Boxed	3/8 in	20 ft	B10	None	0.55 lb	1
120P	037103451088	Boxed	3/8 in	240 in	B12	0120P	0.50 lb	1
C106PM	037103060273	Boxed	10 mm	6.5 m	B15	None	0.60 lb	1
C106TPM	037103060266	Boxed	10 mm	6.5 m	B15	RC106TPM	0.60 lb	1
C106PMCAL	037103206480	Boxed	10 mm	6.5 m	CAL Ring	None	0.60 lb	1



Fiberglass & Synthetic Tape Blade Styles

C1 YELLOW CLAD



- 1/2" width only
- · Yellow clad blade
- · Black and red markings one side only
- · Graduated feet and inches to 1/8ths; numbered with feet and instantaneous foot markings in red and inches in black

C2 YELLOW CLAD




- 1/2" width only
- · Yellow clad blade
- · Black and red markings one side only
- Graduated feet to 1/10ths and 1/100ths; numbered with feet in red and 1/10ths of feet in black

C3 YELLOW CLAD



- 13mm width only
- · Yellow clad blade
- · Black and red markings one side only
- Graduated millimeters, numbered at each centimeter with red instantaneous meter number

C4 YELLOW CLAD




- 1/2"/13mm width only
- · Yellow clad blade
- · Black and red markings on both sides
- Two-sided tapeline; top side in feet, inches, and 1/8ths, numbered at each foot with red instantaneous foot numbers; bottom side graduated in millimeters, numbered centimeters with red instantaneous meter number

C5 WHITE CLAD




- · White clad blade
- 5/8" width
- · Black and red markings one side only
- Graduated feet and inches to 1/8ths, red feet numbers and black inch numbers

C6 WHITE CLAD



- · White clad blade
- 5/8" width
- · Black and red markings one side only
- Graduated feet to 1/10ths and 1/100ths, red feet numbers and black tenths of feet numbers

C7 YELLOW CLAD




- 1/2"/13mm width only
- · Yellow clad blade
- · Black and red markings on both sides
- · Two-sided tapeline; bottom side in metric, graduated in millimeters, numbered in centimeters, with red instantaneous meter number; top side graduated feet to 1/10ths and 1/100ths, numbered with feet in red and 10ths of feet in blade

C11 YELLOW CLAD & WHITE CLAD



- 3/4" width only
- · White on top, yellow on bottom
- · Black and red markings both sides
- Two-sided tapeline; top side feet and inches, graduated to 8ths; bottom decimal feet

C12 YELLOW CLAD & WHITE CLAD



- 3/4" width only
- White on top, yellow on bottom
- · Black and red markings both sides
- · Two-sided tapeline; top side graduated in millimeters, numbered centimeters with meters, bottom in feet and inches





Lufkin Pro Series Fiberglass Tapes

- Patents Pending
- Interchangeable End Hooks for User Convenience
- Ring End Hook Snaps Onto Stake for 1-Person Measurements
- Standard Folding End Hook for General Measuring Needs
- Appraiser's Hook Attaches to Oversized Objects Such as Downspouts
- 3-To-1 Rewind for Fast Blade Retraction
- 3/4" Blade is More Durable; Large Numbers Are Easy to Read
- 2-Sided Blade, Feet & Inches on Top, Feet to 10ths and 100ths
- 62 Fiberglass Strands and Double-PVC Coating for Durability and Strength
- Cushion Grips on Handle and Frame Arms for Comfort

Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Product Weight	Shelf Pack Qty.
PSFE100	037103224811	Carded	3/4 in	100 ft	C11	2.55 lb	2
PSFE200	037103224828	Carded	3/4 in	200 ft	C11	3.79 lb	2
PSFE300	037103224804	Carded	3/4 in	300 ft	C11	4.77 lb	2
PSFM030CME	037103233981	Carded	19 mm, 3/4 in	30 m, 100 ft	C12	2.55 lb	2
PSFM060CME	037103233998	Carded	19 mm, 3/4 in	60 m, 200 ft	C12	3.79 lb	2
PSFM100CME	037103234001	Carded	19 mm, 3/4 in	100 m, 328 ft	C12	4.77 lb	2
PSFE3PCKIT*	037103231635	Carded	-	-	None	0.05 lb	3
* 3 Piece Replacer	ment End Hook Kit						




FM100CME

037103224187

Carded

- Open Four-Arm Frame Design Protects Blade, Does Not Trap Dirt in Case
- Lightweight But Strong Case is Easy to Handle and Rewind
- Two-Material Grip is Comfortable to Use
- Hi-Viz® Orange Case is Easy to Find on the Job Site
- Folding End Hook for True-Zero Measurements
- Yellow Clad Fiberglass Blade Impervious to Moisture

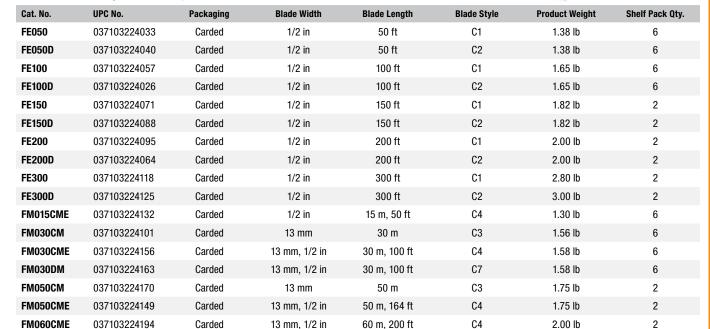

100 m, 328 ft

13 mm, 1/2 in

C4

3.25 lb



2





- Lightweight High Impact ABS Case
- Durable 1/2" Wide Fiberglass Tape is Encapsulated in Flexible Plastic
- Non-Conductive, Easy-To-Read Black, Red Markings, Yellow Background
- Lightweight High Impact Abs Winding Drum for Smooth Tape Recovery
- Blaze Orange Case





- Synthetic Fiber Blade is Non-Conductive
- Steel Case with Vinyl Covering





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Product Weight	Shelf Pack Qty.
HD403	037103202369	Carded	5/8 in	50 ft	C5	1.00 lb	1
HD403D	037103202352	Carded	5/8 in	50 ft	C6	1.00 lb	1
HD406	037103202338	Carded	5/8 in	100 ft	C5	1.40 lb	1
HD406D	037103202321	Carded	5/8 in	100 ft	C6	1.40 lb	1
HDH406	037103202376	Carded	5/8 in	100 ft	C5	1.40 lb	1
HDH406D	037103202383	Carded	5/8 in	100 ft	C6	1.40 lb	1



Oil Gauging Tapes & Plumb Bobs Information

Plumb bobs are not supplied with tapes. The last part of the catalog number denotes the style of the bob the tape is made to accept. Lufkin oil gauging tapes and plumb bobs are manufactured to meet the applicable specifications outlined in the National Institute of Standards and Technology Handbook 44, 2011 Edition, Section 5.52. Manufacturing tolerances for final measurement comply with API MPMS Second Edition, August 2005, Chapter 3, Section 1A, Appendix 1.2.

- 1. Never gauge a tank during an electrical storm.
- 2. Ground yourself and your tools by touching the tank ladder before climbing the ladder. Do not wear gloves when grounding yourself. Gloves prevent proper grounding.
- 3. Ground yourself before opening the gauging hatch by touching the handrail or platform (without gloves on). During and after removal of the gauging cover, stand so that the gas will not be inhaled. Wear a gas mask if toxic gases are present.
- 4. Always maintain contact between the gauging tape and the edge of the hatch from the moment the gauge bob enters the hatch until the gauge bob is removed from the hatch.

OIL GAUGING TAPES

- · Chrome Clad® for dark (heavy oils)
- Nubian® for light (clear oils)
- "Double Duty" oil gauging tapes with both Chrome Clad® and Nubian® (black) for dark (heavy) and light (clear) oils
- Made of heavy gauge 1/2" (13mm) x .012" (0.3mm) steel
- Snap-swivel hook on front end of tape for a plumb bob
- Two arm frames for shorter lengths; four arm frames for 30m/100' and greater
- · Large drums and winding handles for quick and easy rewinding
- · Handle folds over for storage and to lock line at extended position

It takes more than a quality gauging tape, it takes a smart user. Every time you use a Lufkin oil gauging tape, follow proper grounding techniques. Ground your body. Ground your gear. And always use a grounding strap. Lufkin oil gauging tapes come complete with a grounding strap and an ESD handle, and are in full compliance with all current and proposed American Petroleum Institute standards. Achieve a solid ground every time. Use Lufkin oil gauging tapes, and follow proper grounding procedures.

HOW TO MEASURE AN INAGE PLUMB BOB

Tapes cut and fitted with the swivel snap to be used with the 588 and 590 plumb-bobs are known as inage gauging tapes. When the plumb bobs are assembled to the swivel snap the zero point is at the bottom of the plumb bob. When being used, the plumb bob and tape are lowered until the bob contacts the bottom of the tank. When the tape is reeled in, the liquid line is read on the tape line itself, thereby showing you the contents of the tank.



HOW TO MEASURE AN OUTAGE PLUMB BOB

Tapes which have the swivel snap fitted so as to accommodate the 5871/2 plumb bob are known as outage tapes. When the 5871/2 plumb bob is assembled to the tape line the zero point is at the intersection of the swivel snap and the plumb bob. When using outage gauging tapes the tape is lowered into the tank until the plumb bob just penetrates the liquid. The tape is then rewound and the liquid level is read right off the plumb bob. The reading on the plumb bob is added to the tape reading giving the total outage (how much liquid has been removed from the tank).





Oil Gauging Tape Blade Styles

D1 CHROME CLAD® & NUBIAN®




- 1/2" width only
- · Markings one side only
- · Graduated instantaneous feet and inches to 1/8ths

D2 CHROME CLAD® & NUBIAN®



- 1/2" width only
- · Markings one side only
- Graduated in feet to 1/10ths and 1/100ths of an foot; reads right to left

D3 CHROME CLAD® & NUBIAN®



- 1/2"/13mm width only
- · Markings both sides
- Graduated in millimeters on one side; other side instantaneous feet and inches to 1/8ths

D4 CHROME CLAD® & STAINLESS STEEL



- 1/2" width only
- . Markings one side only
- Graduated feet and inches to 1/8ths; instantaneous

D5 NUBIAN®



- 1/2" width only
- Nubian® blade
- · Markings one side only
- · Graduated feet and inches to 1/8ths; instantaneous foot readings

D6 CHROME CLAD®



50 3|40 3|30 3|20 3|10 3|00 2|90 2|80 2|70 2|60 2

- 1/2"/13mm width
- Chrome Clad® blade
- Black and red markings on metric side
- · Metric graduated meters to millimeters; numbered right to left in meters and millimeters
- English side graduated feet and inches to 1/8ths; numbered right to left

D7 NUBIAN®



- 1/2" width only
- Nubian® blade
- Graduated in meters; numbered in millimeters





Lufkin Atlas® Chrome Clad® / Nubian® Double Duty

- Recessed Beneath Multiple Layers of Nickel and Chrome Electroplating
- Provides Greater Resistance to Wear and Corrosion
- All Tapes Read Right to Left
- Heavy-Duty Frame Designed for Years of Rugged Use
- All Frames Include a Grounding Strap
- Plumb Bob Must be Ordered Separately



Cat. No.	UPC No.	Packaging	Bob Cut	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
CN129012SF5	037103459527	Boxed	590	1/2 in	18 ft	D1	0CN129012SF5	1.60 lb	1
CN1290SF590	037103459534	Boxed	590	1/2 in	25 ft	D1	OCN1290SF590	1.60 lb	1
CN1290SME	037103001696	Boxed	590	13 mm, 1/2 in	8 m, 26 ft	D3	None	1.80 lb	1
CN1291SF590	037103459541	Boxed	590	1/2 in	33 ft	D1	OCN1291SF590	1.90 lb	1
CN1293SF5871	037103459763	Boxed	5871/2	1/2 in	50 ft	D1	None	2.30 lb	1
CN1293SF590	037103459558	Boxed	590	1/2 in	50 ft	D1	OCN1293SF590	1.60 lb	1
CN1293SDF590	037103459596	Boxed	590	1/2 in	50 ft	D2	OCN1293SDF59	2.20 lb	1
CN1293SMEF59	037103459602	Boxed	590	13 mm, 1/2 in	15 m, 50 ft	D3	OCN1293SMEF5	2.30 lb	1
CN1294SF5871	037103459770	Boxed	5871/2	1/2 in	66 ft	D1	None	2.70 lb	1
CN1294SF590	037103459565	Boxed	590	1/2 in	66 ft	D1	OCN1294SF590	2.60 lb	1
CN1294SMEF59	037103459619	Boxed	590	13 mm, 1/2 in	20 m, 66 ft	D3	OCN1294SMEF5	2.60 lb	1
CN1295SME590	037103122124	Boxed	590	13 mm, 1/2 in	23 m, 75 ft	D3	OCN1295SME590	2.88 lb	1
CN1295SF590	037103459572	Boxed	590	1/2 in	75 ft	D1	OCN1295SF590	2.90 lb	1
CN1295SME	037103440815	Boxed	5871/2	13 mm, 1/2 in	23 m, 75 ft	D3	None	2.70 lb	1
CN1296SF590	037103459589	Boxed	590	1/2 in	100 ft	D1	OCN1296SF590	3.56 lb	1
CN1296SMEF59	037103459626	Boxed	590	13 mm, 1/2 in	30 m, 100 ft	D3	OCN1296SMEF5	3.60 lb	12
CN1298SME590	037103104243	Boxed	590	13 mm, 1/2 in	38 m, 125 ft	D3	None	4.20 lb	12





- Recessed Beneath Multiple Layers of Nickel and Chrome Electroplating
- Provides Greater Resistance to Wear and Corrosion
- All Tapes Read Right to Left
- Heavy-Duty Frame Designed for Years of Rugged Use
- All Frames Include a Grounding Strap
- Plumb Bob Must be Ordered Separately



Cat. No.	UPC No.	Packaging	Bob Cut	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C129012SF	037103454065	Boxed	590	1/2 in	18 ft	D4	0C129012SF59	1.60 lb	1
C1290SF590	037103454102	Boxed	590	1/2 in	25 ft	D4	0C1290SF590	1.80 lb	1
C1291SF590	037103454140	Boxed	590	1/2 in	33 ft	D4	0C1291SF590	1.90 lb	1
C1293SF590	037103454256	Boxed	590	1/2 in	50 ft	D4	0C1293SF590	2.30 lb	1
C2910MME590	037103063373	Boxed	590GM	13 mm, 1/2 in	10 m, 33 ft	D6	OC2910MME590	1.95 lb	1
C2915MME590	037103091406	Boxed	590GM	13 mm, 1/2 in	15 m, 50 ft	D6	None	2.35 lb	1
C2920MME590	037103003386	Boxed	590GM	13 mm, 1/2 in	20 m, 66 ft	D6	None	2.70 lb	1
C2920MME150M	037103047168	Boxed	150 mm	13 mm, 1/2 in	20 m, 66 ft	D6	None	2.50 lb	1

Lufkin® Atlas® Nubian®

- Ideal for Gauging Clear Oils
- Etched Background
- Blade Protected By Flowed-On Epoxy Coating
- Raised Bright Steel Markings Are Clearly Legible
- All Tapes Read Right to Left, Except 3/8" X 50' Reads Left to Right
- Heavy-Duty Frame Designed for Years of Rugged Use
- All Frames Include a Grounding Strap
- Plumb Bob Must be Ordered Separately

Cat. No.	UPC No.	Packaging	Bob Cut	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
1290SF590	037103454089	Boxed	590	1/2 in	25 ft	D5	01290SF590	1.70 lb	1
1293SF590	037103454201	Boxed	590	1/2 in	50 ft	D5	01293SF590	2.30 lb	1
1293SM590	037103441676	Boxed	590	13 mm	15 m	D7	None	1.90 lb	1

Lufkin® Atlas® Stainless Steel®

- Designed for Use in Highly Corrosive Solutions
- Stainless Steel Blade Resists Corrosion
- Heavy-Duty Frame Designed for Years of Rugged Use
- All Frames Include a Grounding Strap
- Plumb Bob Must be Ordered Separately
- Recommended Plumb Bob: S590
- Blade Style: D4



Cat. No.	UPC No.	Packaging	Bob Cut	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
S1291F590	037103440839	Boxed	590	1/2 in	33 ft	D4	0S1291F590	1.50 lb	1
S1293F590	037103456823	Boxed	590	1/2 in	50 ft	D4	0S1293F590	2.00 lb	1







Inage Oil Gauging Plumb Bobs

- For Use in Heavy OilsCylindrical Shaped
- Tapered Point Tip




::	4	N	
2		ð	ø
ĩ^	DE	₽	Ž

Cat. No.	UPC No.	Packaging	Description	Length	Product Weight	Shelf Pack Qty.
590	037103453204	Boxed	20 oz Plumb Bob, Solid Brass Inage, Cylindrical Shape	6.75 in	1.40 lb	1
590G	037103453235	Boxed	20 oz Plumb Bob, Solid Brass, Graduated in Inches, Blunt Point	6.75 in	1.40 lb	1
590GM	037103453242	Boxed	20 oz Plumb Bob, Solid Brass, Graduated in Millimeters and Centimeters	6.75 in	1.40 lb	1
590GME	037103442895	Boxed	20 oz Plumb Bob, Solid Brass, Metric and English	6.75 in	1.40 lb	1
S590	037103460134	Boxed	20 oz Plumb Bob, Stainless Steel, Cylindrical Shape	6.75 in	1.20 lb	1



Outage Oil Gauging Plumb Bob

- Square Shaped Solid Brass Bob
- Eye Milled From Solid Brass Block (Not Removable)
- Zero Falls Inside Top of Hook Eye






Cat. No.	UPC No.	Packaging	Description	Length	Product Weight	Shelf Pack Qty.
58712	037103453181	Boxed	20 oz Plumb Bob, Solid Brass Outage	6 in	1.27 lb	12
150MM	037103105875	Boxed	570g Plumb Bob, Brass Outage	152 mm	1.27 lb	12



Steel Tape Line Accuracy

Lufkin® steel tapes are made to government standards. Our bench standards for the United States are certified accurate by the United States Department of Commerce, N.I.S.T. Tapes for Canada are made to Canadian government standards.

Temperature standard for steel tapes is 68°F, which equals 20°C. Coefficient of expansion of steel tapes is 0.00000645' per degree F; 0.0000116' per degree C. This amounts to 0.000645' or 0.00774" per degree F. on a 100' tape, and one-half as much on a 50' tape. As a figure that is reasonably accurate and also easy to handle, it is customary on very long runs of pipe to allow 1/10" per 100' for each 10° change.



The above illustration shows, for a 100' tape, the actual length variations of temperature within the range of 20° below to 120° above zero °F. The terminal graduation on the lower edge is at 68°, this being standard temperature. Standard tension for steel tapes 25 to 100' long (10 to 30m) supported entire length on a horizontal, flat surface, is 10 pounds (4.5 kg.); for all tapes over 100', 20lbs., (9kg.), For steel tapes suspended horizontally and supported only at ends, there can be no set or standard tension for accuracy because of weight and other variations.

The following listings are averages of many tests made by the N.I.S.T. of Lufkin® steel tapes supported throughout and supported ends only. These averages are taken from the experience of tests and should be used as a working basis only, and not to replace the test of any individual tape. All tape lengths are 100'.

Tape Width (in)	Kind of Tape	Tension of Accuracy Thru-out (lbs)	Supported Ends Only (lbs)
1/4	Chain Tapes	10	24
1/4	Engineer's (0.12")	10	18
1/4	Engineer's Extra Heavy Tapes	10	24
3/8 & 1/2	Standard Weight Tapes	10	18

NOTE: Temperature and tension need to be taken into account only on precise work. We recommend a government test of tapes to be used for such work or for use as master standard. The N.I.S.T. and Lufkin® have a charge for this test.

Steel Tape Blade Styles

E1 CHROME CLAD® & YELLOW CLAD




- 1/4" and 3/8" widths
- Chrome Clad® and yellow clad blade
- . Markings on one side only
- Graduated to feet, 1/10ths and 1/100ths with a blank space at last end

E2 CHROME CLAD®



- 1/4"/6mm width only
- Chrome Clad® blade
- · Markings on both sides
- · Graduated millimeters one side
- · Graduated feet, inches and 1/8ths other side

E3 CHROME CLAD® & YELLOW CLAD



- 1/4" and 3/8" widths
- · Chrome Clad® blade
- Yellow clad available in 1/4" only
- · Black markings one side only
- · Graduated feet and inches to 1/8ths with instantaneous readings
- 16" centers indicated by a diamond symbol on 3/8" width only

E4 NY-CLAD® YELLOW



- 1/2" width only
- Nylon-clad yellow blade
- · Black and red markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings
- · Numbered with feet and instantaneous foot markings in red and inches in black

E5 NY-CLAD® YELLOW



- 1/2" width only
- Nylon-clad yellow blade
- · Black and red markings one side only
- Graduated feet to 1/10ths and 1/100ths
- Numbered with feet in red and 1/10ths in black

E11 CHROME CLAD®

- 6mm width
- · Black and red markings one side only
- · Graduated meters to millimeters
- · Red meter numbers and black millimeter numbers at each decimeter



E12 CHROME CLAD®

- · Black and red markings one side; black markings other side
- · Graduated meters to millimeters one side
- · Red meter numbers and black millimeter numbers at each decimeter
- Graduated feet to 1/10ths and 1/100ths other side
- Numbered feet and 1/10ths black markings only


E13 CHROME CLAD®



- 1/4" width
- · Black and red markings both sides
- · Graduated meters to millimeters one side
- · Red meter numbers and black millimeter numbers at each decimeter
- · Graduated feet and inches to 1/8ths other side with red feet numbers and black inch numbers

Lufkin Super Hi-Way® Nubian®

- Nominal Thickness 0.017"
- Easy-To-Read Raised Graduations
- Lines Have A Blank Space at Each End
- Extra Foot Before Zero Graduated Right to Left to 1/10ths and 1/100ths
- Balance Marked Every Foot Except Last Foot of Each 100' Length, 100ths



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
09100B	037103455437	Boxed	5/16 in	100 ft	None	None	2.20 lb	1
09200B	037103101266	Boxed	5/16 in	200 ft	None	None	3.60 lb	1
09300B	037103455598	Boxed	5/16 in	300 ft	None	None	5.90 lb	1

Lufkin Pro Series Ny-Clad® Steel Tapes

- Durable Nylon Coating on Blade Resists Wear Under **Extreme Conditions**
- Super Fast 3-To-1 Blade Retraction Saves Time in the Field
- Steel Blade Will Not Stretch Under Normal Use



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
PS1806N	037103236876	Carded	1/2 in	100 ft	E4	None	2.02 lb	4
PS1806DN	037103236883	Carded	1/2 in	100 ft	E5	None	1.98 lb	4
PS1808N	037103236890	Carded	1/2 in	200 ft	E4	None	3.04 lb	2
PS1808DN	037103236906	Carded	1/2 in	200 ft	E5	None	3.14 lb	2
PS1809DN	037103236913	Carded	1/2 in	300 ft	E5	None	4.11 lb	2





- Nominal Blade Thickness 0.019"
- Extra Large Winding Drum Provides Rapid Line Recovery
- Special Hook Ring with Ribbed Face at Zero
- Leather Thong is Provided to Use Through Eye at Rear
- Chrome Clad® Blade





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C2276D	037103454713	Boxed	1/4 in	100 ft	E1	0C2276D	2.90 lb	1
C2276ME	037103454737	Boxed	1/4 in, 6 mm	100 ft, 30 m	E2	0C2276ME	3.00 lb	1
CD2730DMM	037103063700	Boxed	6 mm	30 m	E12	0CD2730DMM	2.75 lb	1
CD2750MME	037103063687	Boxed	1/4 in, 6 mm	164 ft, 50 m	E13	OCD2750MME	3.60 lb	1



- Thickness 0.019" and 1/4"/6mm Wide Blade
- Blank Space at Each End
- Turning Handle Locks Line at Any Position
- Reel is Nickel-Plated, 4-Arm with Rollers in Each Arm for Smooth Winding
- Oversize Drum with Long, One-Piece Winding Handle, Quick Return of Line
- Riveted Clips for Holding Thongs
- Reel Available Separately
- Y1676D is Yellow Clad, Thickness 0.16"





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C1676D	037103454584	Boxed	1/4 in	100 ft	E1	OC1676D	3.00 lb	1
Y1676D	037103459435	Boxed	1/4 in	100 ft	E1	None	2.40 lb	1





- 3/8"/10mm Wide and 0.008" Thick
- Long, Easy-Action Winding Handle That Locks Line in Any Position
- Reel is Nickel Plated, 4-Arm with Rollers in Each Arm for Smooth Winding
- Instantaneous Reading
- Zero Falls at Outer End of Ring
- Reel Available Separately





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Blade Style	Replacement Blade Cat No.	Product Weight	Shelf Pack Qty.
C1286	037103454003	Boxed	3/8 in	100 ft	E3	-	2.20 lb	1
C1286D	037103454027	Boxed	3/8 in	100 ft	E1	0C1286D	2.20 lb	1
C1288	037103454041	Boxed	3/8 in	200 ft	E3	0C1288	3.19 lb	1
C1288BLK	037103124128	Boxed	3/8 in	200 ft	E3	-	3.19 lb	1



- Designed for Engineers and Surveyors Who Prefer a 4-Arm Reel
- Chrome Clad® and Yellow Clad Blade
- Blade 1/4"/6mm Wide and 0.016"/0.4mm Thick
- Subdivided Line Removes Easily From Reel
- Long, Easy-Action Winding Handle That Locks Line in Any Position
- Reel is Nickel Plated, 4-Arm with Rollers in Each Arm for **Smooth Winding**
- Open Design Construction Aids in Drying Line and Clearing Out Dirt
- Pair of 580 Finger Rings and a 579 Engineer's Conversion Rule are Furnished with Tape or Replacement Line
- Reel Available Separately







Lufkin® 81 and 91 Series Reels for Chrome Clad® and

Gauging Tapes

- For 3/8" 10mm and 1/2"/13mm Widths Chrome Clad and **Gauging Tapes**
- Chrome 2 Arm Frame
- Not All Replacement Parts Sold Separately



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
9150L	037103450968	Boxed	1/4 in	200 ft	1.20 lb	1

Lufkin 31 Series Reel for Over 100' Lengths

- For Over 100' Lengths
- Chrome 4 Arm Frame
- Not All Replacement Parts Sold Separately





Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
31200	714994817529	Boxed	5/16 in	300 ft	3.00 lb	1
31300	037103450548	Boxed	1/4 in	100 ft	3.10 lb	1

Lufkin®

11 Series Reel for Peerless Chrome Clad® Tapes

- For 1/4"/6mm Wide 100' and 200' Lengths, Fits Peerless **Chrome Clad Tapes**
- Chrome 4 Arm Frame
- Not All Replacement Parts Sold Separately



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
11100	037103450272	Boxed	1/2 in	50 ft	1.30 lb	1
11200	037103450289	Boxed	5/16 in	200 ft	1.40 lb	1

Derrick Replacement Reel

- For 1/4"/6mm Wide 150 and 200' Lengths
- Fits Western Chrome Clad® Tapes



Cat. No.	UPC No.	Packaging	Fits Product Number	Blade Width	Blade Length	Style of Case or Reel	Product Weight	Shelf Pack Qty.
12200	037103450340	Boxed	Western® Chrome Clad® Tapes	1/4 in	200 ft	4 Arm	1.85 lb	1





Lufkin Western® Replacement Reel

- For 1/4" or 5/16" X 100' Lengths of Steel Tapes Only
- Reel is Nickel-Plated, 2-Arm with Rollers in Each Arm for Smooth Winding
- Oversize Drum with Long, One-Piece Winding Handle, Quick Return of Line



Cat. No.	UPC No.	Packaging	Fits Product Number	Blade Width	Blade Length	Style of Case or Reel	Product Weight	Shelf Pack Qty.
31100	037103450517	Boxed	Fits 100 ft Tapes Only	1/4 in	100 ft	2 Arm	1.40 lb	1



Engineering and Surveying Replacement Reel

- For 1/2" X 75' Chrome Clad® and Gauging Tapes
- Reel is Nickel-Plated, 4-Arm with Rollers in Each Arm for **Smooth Winding**
- Oversize Drum with Long, One-Piece Winding Handle, Quick Return of Line





Cat. No.	UPC No.	Packaging	Fits Product Number	Blade Width	Blade Length	Style of Case or Reel	Product Weight	Shelf Pack Qty.
9175	037103450975	Boxed	Chrome Clad and Gauging Tapes	1/2 in	75 ft	4 Arm	1.30 lb	1



Detachable hook

- Easily Attaches and Detaches From Standard Ring Tape Line
- Heavily Nickel Plated, Zinc Hook
- Serrated Face Grips Firmly and Releases Easily
- On Tapes Measuring From Outer End of Ring, Zero Falls at Inside of Hook
- Can Be Used on Lines 3/8"/10mm Wider

Cat. No.	UPC No.	Packaging	Product Weight	Shelf Pack Qty.
552	037103452832	Boxed	0.04 lb	1



Tape Clamps Handle

- Used for Quickly and Positively Gripping a Steel Tape at Any Point
- Applies Light or Heavy Tension
- Clamp is Applied and Removed By Simply Operating the Handle
- Used Properly, It Will Not Damage a Tape in Any Way
- Made of Chrome-Plated Zinc Alloy



Cat. No.	UPC No.	Packaging	Product Weight	Shelf Pack Qty.
584	037103453143	Boxed	0.20 lb	1



Lufkin Tape Tension Handles

- Use with Steel Tapes for Extremely Accurate Measurements
- Rustproof Brass Construction with Black-Filled Etched Graduations
- Graduations Begin at Snap End, Easy-To-Read When Tension is Applied
- Capacity of 30 Lb X 1/2 Lb and 25Kg X 25Kg



Cat. No.	UPC No.	Packaging	Product Weight	Shelf Pack Qty.
586	037103453150	Boxed	0.60 lb	1

Lufkin Red End® Extension Folding Wood Rules

- Slide Rule Runs Under Friction in T-Slot
- Stops at Each End to Prevents Slide From Falling Out
- Marked Both Sides and Both Edges
- Graduated to 1/16ths of An Inch
- 16" Stud Centers in Red, Regular Outside Markings
- TX46N has Two 6" Extension Slides; an Extension is ready for use on the First Section
- HX46N has a Hook; Zero Falls Inside of Hook, for Distance Measuring
- X46FN has Flat, Inside Markings; Numbering Begins on Inside of Rule



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
TX46N	037103265555	Boxed	5/8 in	6 ft	0.35 lb	6
HX46N	037103265746	Boxed	5/8 in	6 ft	0.39 lb	6
X48N	037103265708	Boxed	5/8 in	8 ft	0.50 lb	6
X46FN	037103265685	Boxed	5/8 in	6 ft	0.35 lb	6

Lufkin® Red End

Red End® Folding Wood Rule

- Marked Both Sides, Both Edges
- 066FN has Inside Markings; Numbering Begins on Inside of Rule; Measurement Lies Close to the Work
- 062CMEN is Marked Both Sides, Reading Left to Right on Both Sides; Rule is Graduated in millimeters with centimeters and meter markings on metric side; English Side is Marked to 1/16ths



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
T066N	037103265609	Boxed	5/8 in	6 ft	0.34 lb	6
066FN	037103265531	Boxed	5/8 in	6 ft	0.34 lb	6
062CMEN	037103265586	Boxed	5/8 in	6 ft	0.39 lb	6





Lufkin Red End® - Two Way Folding Wood Rule

- For Measuring Left to Right, Right to Left
- Marked Both Sides
- Graduated in Feet, Inches and 1/16ths on Both Sides and **Both Edges**
- Flat Inside Markings Lie Close to the Work




Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
966N	037103265562	Boxed	5/8 in	6 ft	0.34 lb	6



Lufkin Red End® Engineer's Folding Wood Rule


- Red Foot Figures
- Regular Outside Markings in Feet, Inches and 1/16ths
- Decimal Points on Engineer's Scale Prevent Reading Errors



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
1066DN	037103265517	Boxed	5/8 in	6 ft	0.35 lb	6
1066DMN	037103265692	Boxed	16 mm, 5/8 in	2 m, 6.5 ft	0.36 lb	6

Lufkin Red End® Plumber's Folding Wood Rule

- For Working with 45° Elbows to Eliminate Figuring and Chance
- Graduated One Side, in Black, Inches to 1/16ths Both Edges
- Other Side in Red, 45° Scale Inches to 1/16ths Upper Edge Only
- Turning Rule From Black to Red Gives Corresponding 45° Elbow Dimension




Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
626LN	037103265753	Boxed	5/8 in	6 ft	0.25 lb	6





Lufkin® Red End® Brick Mason's Folding Wood Rule

- Used By Bricklayers
- Graduated Vertical Inches to 1/16ths, Both Edges
- Brick Mason Scale on Inside, Red Course Counters Numbered Consecutively
- Regular Outside Markings in Black



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
T636N	037103265630	Boxed	5/8 in	6 ft	0.30 lb	6
T656N	037103265647	Boxed	5/8 in	6 ft	0.35 lb	6



Red End® Modular Spacing Folding Wood Rule

- All Sections Have Square Ends
- Every Joint Opens on Even Number
- Inside Marked with 6 Scales in a 16" Module
- Outside is Graduated on Both Edges to 1/16ths
- The First End Section is a Short Section
- Permits Butting the Rule on the First 16" Module



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
646LN	037103265616	Boxed	5/8 in	6 ft	0.35 lb	6



Dovle Log Scale

- Designed for Estimating Board Feet in a Cut Log
- Graduated Inches to 1/16ths Lower Edge
- Outside Markings for 10 and 18' Logs
- Inside Markings for 12', 14' and 16' Logs



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
TT524N	037103265678	Boxed	5/8 in	48 in	0.24 lb	1

Steel Blacksmith's Rule

- 3/4" X 2', 1/32" Thick, 1-Fold, Tempered Steel Rule
- This Brings Rule to a Firm Stop When Opened Straight
- Riveted Joint Has Large Side Washer and a Stop
- Legible, Permanent, Deeply Etched Black Markings
- Lower Edge on One Side Graduated to 1/16ths of an Inch
- Upper Edge on Other Side to 1/8ths
- Lower Edge 75 Circumference Inches to 1/8ths
- For Converting Diameters Directly to Circumference Measurements



Cat. No.	UPC No.	Packaging	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
86	037103456601	Boxed	3/4 in	2 ft	0.14 lb	12





- Used in School Shops and Industrial Plants
- Medium Weight, Tempered Steel Rule
- Hole in One End for Hanging
- Deeply-Etched, Permanent Markings are Black-Filled for Easy
- Large Graduations, Marked Upper Edge Both Sides
- One Side 1/8ths: Other Side 1/16ths
- Opposite Measure From Opposite Ends

Cat. No.	UPC No.	Packaging	Blade Thickness	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
6012IN	037103450739	Boxed	1/32 in	3/4 in	12 in	0.07 lb	6



One-Piece Steel Rules

- Bold Markings, Deeply Etched and Permanent are Black Filled
- Heavier than on Machine-Divided Rules
- Large Graduations, Marked Both Sides, Both Edges
- Upper Edge Graduated in 1/8ths, Lower Edge in 1/16ths
- Opposite Sides Measure From Opposite Ends



Cat. No.	UPC No.	Packaging	Blade Thickness	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
621FT	037103450791	Boxed	1/16 in	1-1/4 in	1 ft	0.30 lb	20
622FT	037103450807	Boxed	1/16 in	1-1/4 in	2 ft	0.50 lb	1
623FT	037103450814	Boxed	1/16 in	1-1/4 in	3 ft	0.80 lb	1
624FT	037103450821	Boxed	1/16 in	1-1/4 in	4 ft	1.00 lb	1
626FT	037103450838	Boxed	1/16 in	1-1/4 in	6 ft	1.50 lb	1

Lufkin Aluminum Yardstick

- Finest Quality Aluminum Yardstick
- Lightweight, Flexible, Rustproof and Sharply Defined Yardstick
- Lies Flat and Has a Hang-Up Hole for Storage
- Easy-To-Read Markings on Straight Parallel Edges
- Fine Graduations One Side Only, Both Edges in Inches to 1/16ths

Cat. No.	UPC No.	Packaging	Blade Thickness	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
1260	037103453808	Boxed	1/32 in	15/64 in	36 in	0.30 lb	6

Lufkin®

Tinner's Steel Circumference Rules

- Standard Rule with Tinners and Other Sheet Metalworkers
- Tempered Medium-Weight Steel
- Hole in One End for Hanging
- Markings are Black for Easy Reading
- One Side Upper Edge Marked Inches to 1/16ths
- Reverse Side has Formulas for Calculating Circumference, Diameter, Area
- Size Tables for Laying Out Measures and Cans

Cat. No.	UPC No.	Packaging	Blade Thickness	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
953FT	037103450982	Boxed	1/16 in	1-1/4 in	3 ft	0.80 lb	1
954FT	037103450999	Boxed	1/16 in	1-1/4 in	4 ft	1.00 lb	1







Metric English Aluminum Meter Stick

- Useful for Making the Transition to the Metric System
- Graduated on Front Side in Inches to 1/16ths on Upper Edge
- Graduated Decimeters, Centimeters and Millimeters Lower Edge
- Other Side Shows Table of Equivalents and Conversions



Cat. No.	UPC No.	Packaging	Blade Thickness	Blade Width	Blade Length	Product Weight	Shelf Pack Qty.
1261ME	037103453815	Boxed	1/32 in	1 in, 27 mm	1 m	0.40 lb	6



Pro Series Measuring Wheels

- Measure as Fast as You Can Walk
- Wheel Calibrated to Counter Accurate for **Estimated Measurements**
- Feet & Inches



Cat. No.	UPC No.	Packaging	Description	Ext. Length	Folded Length	Product Weight	Shelf Pack Qty.
PSMW18	037103195272	Carded	Measuring Wheel, Pro Series, Compact, 8ths	42 in	21 in	1.15 lb	6
PSMW38	037103195289	Carded	Measuring Wheel, Pro Series, Contractor's, 8ths	45.5 in	25 in	3.35 lb	2

Measuring Wheels

- Measure as Fast as You Can Walk
- Wheel Calibrated to Counter Accurate for **Estimated Measurements**



Cat. No.	UPC No.	Packaging	Description	Ext. Length	Folded Length	Product Weight	Shelf Pack Qty.
MW18TP	037103197368	Carded	Executive Measuring Wheel, Feet and Inches in 8ths	26 in	17 in	0.90 lb	6
MW18M	037103142061	Carded	Executive Measuring Wheel, Meters/Decimeters	26 in	17 in	1.00 lb	6
MW38TP	037103197375	Carded	Contractor Measuring Wheel, Feet & Inches in 8ths	41 in	30 in	2.30 lb	2
MW38M	037103142078	Carded	Contractor Measuring Wheel, Meters/Decimeters	41 in	30 in	2.50 lb	3

The Strengths of Our Brands: Innovation, Quality, and Value



CALLEN. ARMSTRONG

Campbell[®]



(G) CRESCENT. GEARWRENCH (K)













Industrial Hand Tools























Apex Tool Group World Headquarters 14600 York Road, Suite A Sparks, MD 21152 www.apextoolgroup.com Customer Service U.S.

TELEPHONE:

North866 907 9706 South866 907 9706 Midwest 866 907 9716 West/SW 866 907 9716 Hardware 919-362-1670

North 800-854-5137 South 800-854-5139 Midwest 800-854-5138 West/SW 800-546-7312 Hardware 877-387-0415 Export 919-387-2402 **Customer Service Canada**

Phone 705-728-3888 Fax 800-403-8665

Distributed By