

duraflo®

PRODUCT CATALOGUE



Innovative
designs for the
construction industry



www.duraflo.com

canplas
an OAlaxis company

Welcome to Duraflo®



Canplas, manufacturer of Duraflo ventilation products, has over 50 years of plastics manufacturing experience. This expertise allows Duraflo to continue as the innovation leader in roof ventilation. Throughout our history Duraflo has listened to you, the customer, to create solutions to meet your building needs. In developing and maintaining an open dialogue with both our internal and external partners, we have created a wide variety of unique products second to none in the marketplace.

canplas
an *OAliaxis* company

Roof Vent Products

- pg. 4

Ridge Vent Products

- pg. 12

Exhaust Vent Products

- pg. 14

Ventilation Calculator

- pg. 19

Roof Flashing Products

- pg. 20

Gable Vent Products

- pg. 24

Siding & Soffit Vent Products

- pg. 26

Index

- pg. 31

For more information on
Duraflo products call
1-800-461-5300

or visit www.duraflo.com

Why Ventilate with **duraflo**®?

3


To Effectively Remove Winter Moisture

Without proper ventilation heat from the home can build in the attic space, then cool and condense, soaking the insulation and ceilings with moisture



To Drastically Remove Summer Heat

Without proper ventilation trapped summer heat builds up in the attic warming the living space below

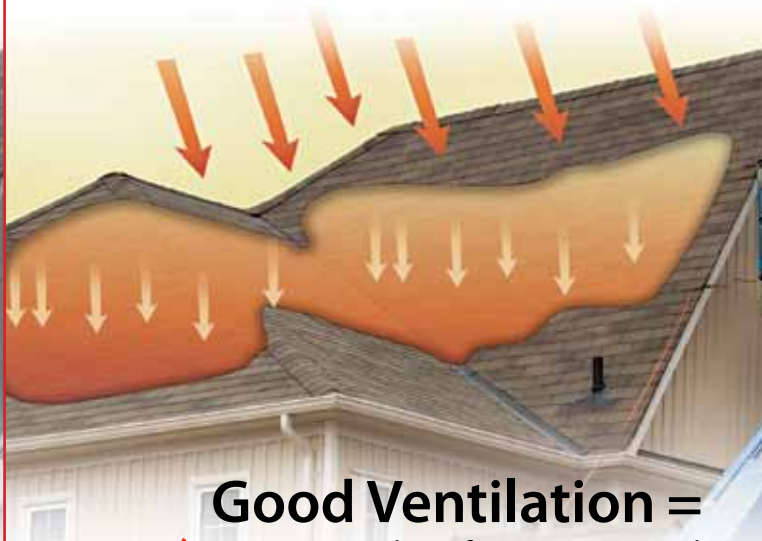

To Protect Shingle Life Span

Proper Ventilation eliminates extreme temperature ranges, assuring the life span of the shingles



Good Ventilation =

- ✓ 1. Proper number of vents positioned correctly along the ridge line
- ✓ 2. Proper soffit ventilation to allow cool air to enter through the soffit replacing the warm air that rises through the roof vents
- ✓ 3. Did you know? Ideally, your attic temperature should approximate the outside temperature

We Know Ventilation!

Roof Ventilation



duraflo® PRO Ventilator

- **Extreme Weather Protection for the home**
- **"Easy Level" Adjustment System reduces installation time**
- **High Performance airflow**

The PRO Ventilator's "Easy Level" features are engineered with the contractor in mind. The lightweight, durable construction and rotating pitch adjustment system are designed to simplify the installation process saving you time and money.

- Rotatable top with locking pitch tabs accommodate 3/12 to 12/12 roof pitches
- 55% lighter than traditional vent
- 48 to 130 Sq. In. NFA Venting
- Crush, dent & fade resistant
- Extreme cold & heat resistant
- UV & Cold impact resistant to -40
- Available in Black, Brown, Grey & Weatherwood
- Patent pending design



MIAMI-DADE COUNTY
APPROVED

3 Tier 130 sq. in. NFA



2 Tier 95 sq. in. NFA



1 Tier 48 sq. in. NFA



Large top cap improves appearance

Unique baffle system wards off wind driven snow & rain

Lower deflectors help eliminate snow infiltration

Centralized rotation point

Lower drip channels allow moisture to exit

Install then adjust to roof pitch with locking tabs

Pitch adjustment stops

3 Tier Model: 130 sq. in. NFA

DESCRIPTION	PART #	SIZE	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	60PRO150BL	21-1/8" x 21-1/8" x 22"	1	8	18
Brown	60PRO150BR		1	8	18
Grey	60PRO150G		1	8	18
Weatherwood	60PRO150WW		1	8	18

2 Tier Model: 95 sq. in. NFA

DESCRIPTION	PART #	SIZE	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	60PRO140BL	21-1/8" x 21-1/8" x 19-1/2"	1	8	16
Brown	60PRO140BR		1	8	16
Grey	60PRO140G		1	8	16
Weatherwood	60PRO140WW		1	8	16

1 Tier Model: 48 sq. in. NFA

DESCRIPTION	PART #	SIZE	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	60PRO130BL	21-1/8" x 21-1/8" x 17"	1	12	12
Brown	60PRO130BR		1	12	12
Grey	60PRO130G		1	12	12
Weatherwood	60PRO130WW		1	12	12

duraflo® PRO Turbo



- **Extreme Weather Protection**
- **No Maintenance Required**
- **High Performance Airflow**
- **Internal Baffle Protection System**
- **Easy Level Installation**

The PROTurbo combines the field tested benefits of the patented WeatherPRO internal baffle system with multi stage, high volume, airflow for superior attic ventilation.

- Pivoting top with locking pitch tabs accommodate 3/12 to 12/12 roof pitches
- 117 sq. In. Net Free Venting Area
- Crush, dent & corrosion resistant
- UV & Cold impact resistant to -40
- Available in Black, Brown, Grey & Weatherwood
- CDN Patents 2,536,023 & 2,803,775
- USA Patent 7,774,023
- CSA Approved

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	60PRO117BL	1	12	9
Brown	60PRO117BR	1	12	9
Grey	60PRO117G	1	12	9
Weatherwood	60PRO117WW	1	12	9


TDI

Texas Department of Insurance

**New Easy
Level Base**



We Know Ventilation!

Roof Ventilation

6

WeatherPRO® Roof Ventilation

duraflo®

Universal


Turbine Ball Replacement



Fits 12"

& 14" bases

Replaces traditional "squeaking" turbines easily without removing existing vent base or shingles.

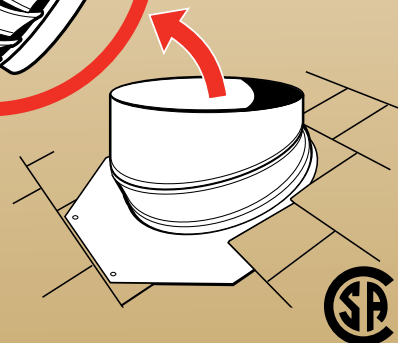

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	6001BL	1	24	4
Brown	6001BR	1	24	4
Grey	6001G	1	24	4
Weatherwood	6001WW	1	24	4

www.duraflo.com

duraflo[®] PRO Slant Back



**The
Intake &
Exhaust
multi task vent**

With the WeatherPRO[®] Series PRO SlantBack you no longer need to worry about extreme weather. The unique baffle system within the WeatherPRO[®] Series wards off wind driven snow and rain.

- Dade County and CSA Approved
- Patented Baffle System and Moisture Control System
- 50 sq. in. of net free area
- Eliminates bird nesting
- Cold impact resistant to -40°
- UV resistant polypropylene
- Can be used as an intake vent, when soffit ventilation is not an option
- Suitable for roof pitches from 3/12 to 14/12
- US Patent 9,243,813

Warm moist air exits in a chimney like fashion eliminating shingle stains

Moisture Control System directs and deflect precipitation away from vent openings (ribs under lid, textured flange, ribbed baffle walls, lateral flange deflectors)

Offset Vent Throat Position

Unique baffle system wards off wind driven snow and rain

Drainage openings allow for water to escape

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	60PRO50SLBL	8	48	17
Brown	60PRO50SLBR	8	48	17
Grey	60PRO50SLG	8	48	17
Weatherwood	60PRO50SLWW	8	48	17



WeatherPRO[®] Roof Ventilation

We Know Ventilation!

Roof Ventilation

8

WeatherPRO® Roof Ventilation


duraflo® PRO75



With the WeatherPRO® Series PRO75 you no longer need to worry about foul weather. The unique baffle system within the WeatherPRO® Series PRO75 wards off driving snow and blistering rain.

- Ideal for most roof pitches
- Eliminates bird nesting
- Cold impact resistant to -40°
- UV resistant polypropylene
- Patent pending
- Suitable for roof pitches from 3/12 to 14/12
- CSA Approved

75 Sq. in. of net free area

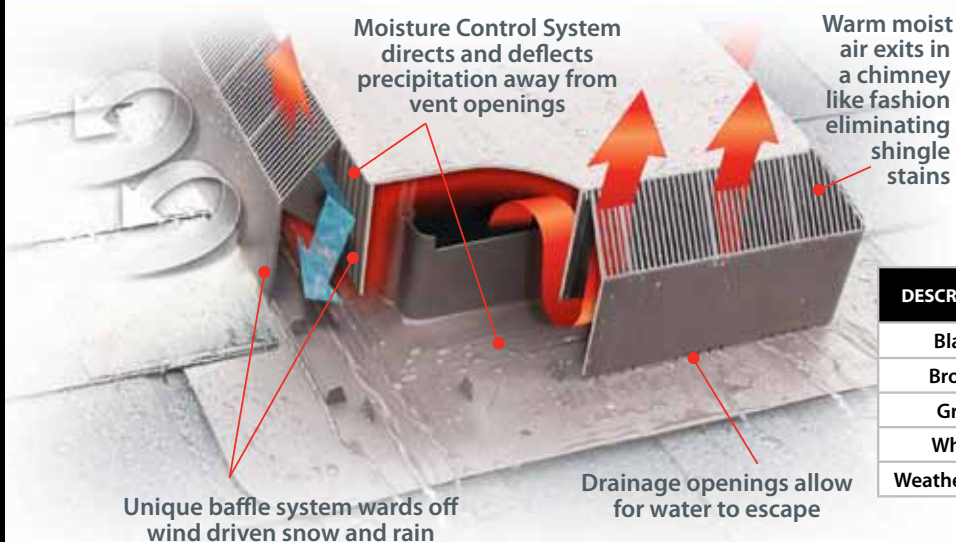

Moisture Control System directs and deflects precipitation away from vent openings

Warm moist air exits in a chimney like fashion eliminating shingle stains

Unique baffle system wards off wind driven snow and rain

Drainage openings allow for water to escape

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	60PRO75BL	4	32	15
Brown	60PRO75BR	4	32	15
Grey	60PRO75G	4	32	15
White	60PRO75W	4	32	15
Weatherwood	60PRO75WW	4	32	15

www.duraflo.com

duraflo® PRO50




With the WeatherPRO® Series PRO50 you no longer need to worry about foul weather. The unique baffle system within the WeatherPRO® Series PRO50 wards off driving snow and blistering rain.

- Ideal for most roof pitches
- Eliminates bird nesting
- Cold impact resistant to -40°
- UV resistant polypropylene
- Suitable for roof pitches from 3/12 to 14/12

CDN. Patent 2,313,601
U.S. Patent 6,767,281

Warm moist air exits in a chimney like fashion eliminating shingle stains

Unique baffle system wards off driving snow and blistering rain

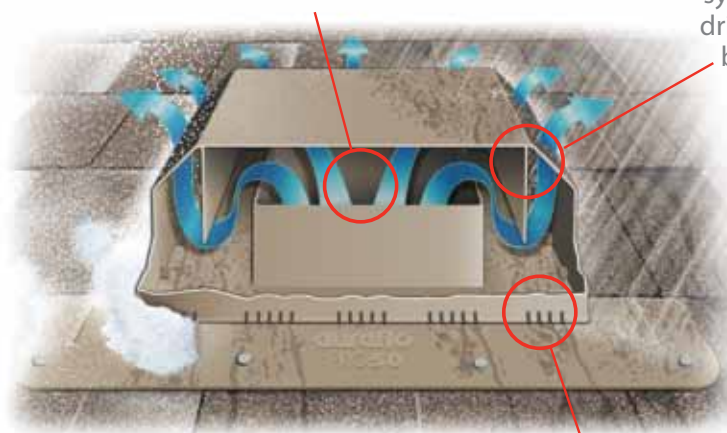

Drainage openings allow for water to escape

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	60PRO50BL	9	108	19
Brown	60PRO50BR	9	108	19
Grey	60PRO50G	9	108	19
White	60PRO50W	9	108	19
Weatherwood	60PRO50WW	9	108	19



MIAMI-DADE COUNTY
APPROVED

TDI


Texas Department of Insurance

We Know Ventilation!

Roof Ventilation

10

Roof Ventilation

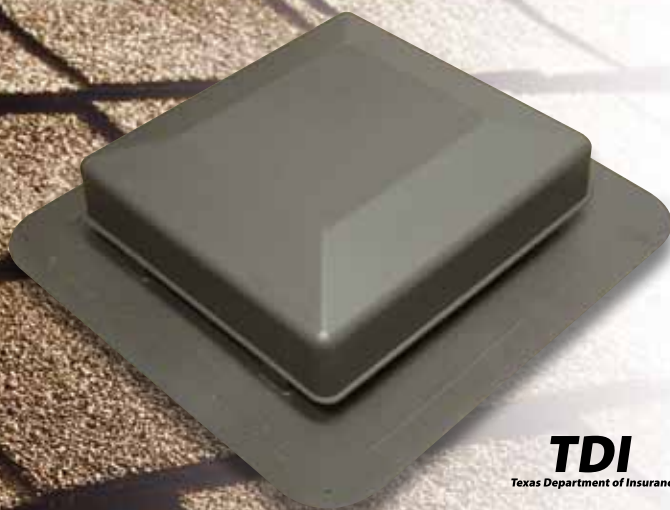

TDI
Texas Department of Insurance



duraflo®

Square Top Roof Vent

An attractive low profile style

- UV resistant polypropylene
- Molded screen to prevent bird nesting
- Angled throat to efficiently deflect water
- 50 & 75 sq. in. of net free area
- Cold impact resistant to -40°
- Suitable for roof pitches from 3/12 to 12/12

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	6075BL	5	80	14
Brown	6075BR	5	80	14
Grey	6075G	5	80	14
Weatherwood	6075WW	5	80	14

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	6050BL	10	160	15
Brown	6050BR	10	160	15
Grey	6050G	10	160	15
Weatherwood	6050WW	10	160	15



TDI
Texas Department of Insurance



duraflo®

6050T Tall Roof Vent

Works and looks great with wood shakes or shingles

- UV resistant polypropylene
- Extended throat for ease of installation with shake and shingle
- 50 sq. in. of net free area
- Cold impact resistant to -40°
- Suitable for roof pitches from 3/12 to 12/12

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	6050TBL	12	216	20
Brown	6050TBR	12	216	20
Grey	6050TG	12	216	20
Weatherwood	6050TWW	12	216	20

duraflo®

Slant Back Roof Vent

Ideal for steep pitched roofs

- Low profile with a slanted back
- Will not scratch, crush or dent
- 61 sq. in. of net free area
- Suitable for roof pitches from 3/12 to 14/12

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
Black	6065BL	12	144	21
Brown	6065BR	12	144	21
Grey	6065G	12	144	21
Weatherwood	6065WW	12	144	21



TDI

Texas Department of Insurance



duraflo®

Shed Light Roof Vent Translucent Skylight Vent

A Skylight for Storage Sheds, Garages and Barns

- 50 & 75 sq. in. of net free area
- Lets in free natural light
- Ventilates hot air and fumes
- Wide flange for ease of installation
- Patent # 6,155,008

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN. (LBS.)
50 sq. in.	5950C	6	96	10
75 sq. in.	5975C	5	80	15
75 sq. in.	5975B	6	96	18




We Know Ventilation!

Ridge Ventilation

12

WeatherPRO® Ridge Ventilation

duraflo® PRO Ridge

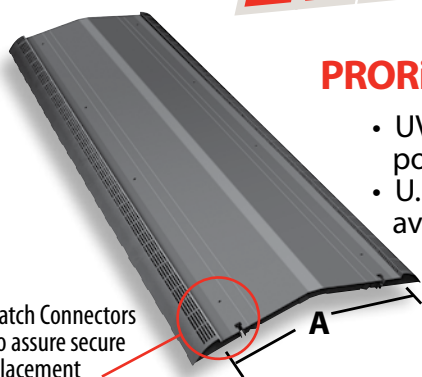


PRORidge SOLID

- UV resistant polypropylene
- U.S. and metric sizes available



DESCRIPTION	PART #	A	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6094BL	12-1/4	12	108	33

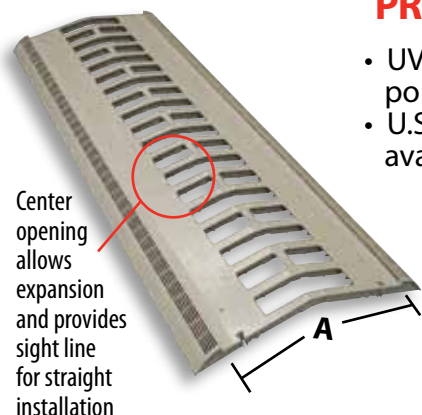

PRORidge

- UV resistant polypropylene
- U.S. and metric sizes available



DESCRIPTION	PART #	A	CTN. QTY	SKID	WT.CTN (LBS.)
Metric - Black	6072METBL	12-7/8	12	108	29
Metric - Brown	6072METBR	12-7/8	12	108	29
Metric - Weatherwood	6072METWW	12-7/8	12	108	29
Imperial - Black	6073BL	11-5/8	12	108	27
Imperial - Brown	6073BR	11-5/8	12	108	27
Imperial - Weatherwood	6073WW	11-5/8	12	108	27




WeatherPRO® baffle system with AirFoil technology

- CSA approved
- 18.3 sq. in./lin. ft. of net free area
- UV resistant polypropylene
- Molded nail supports
- Code regulated insect grill
- U.S. & metric sizes available
- TriFold flexibility for use on pitches 3/12 to 12/12
- Hand nail only
- Patent # 8,069,621



TDI

Texas Department of Insurance

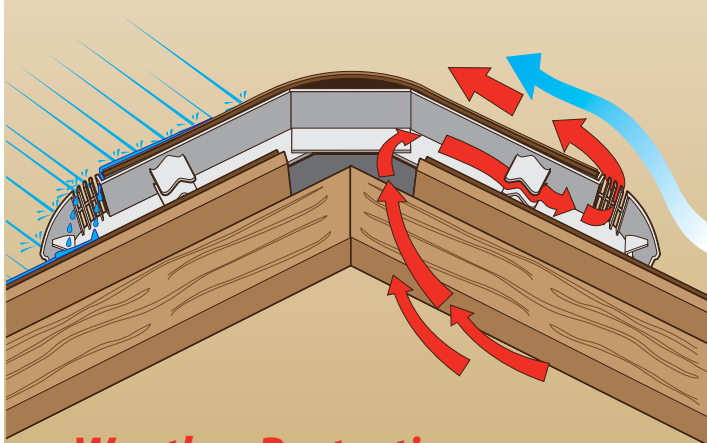

Weather Protection:

WeatherPRO® patented

internal baffles deflect water and snow, allowing it to drain harmlessly out the drainage openings. Designed to allow high airflow while providing excellent defense against weather infiltration.

duraflo[®] Ridge Roll

TDI

Texas Department of Insurance

MIAMI-DADE COUNTY
APPROVED

- Nail gun installation
- Embossed nail line for quick application
- Durable and compression resistant
- Externally baffled for powerful protection against rain, snow & insect infiltration
- Available in Filter and Non- Filter
- Nails Included
- 12.75 sq. in./lin. ft. of net free area
- Length: 25 ft. rolls
- Width: 14"
- Thickness: 5/8"

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6025BL	1	18	10
Black w/filter	6025BLF	1	18	10

Internal
Filter
Model

duraflo[®] Ridge Roll

100% Natural Fiber

- Dade County & TDI approved
- Easy installation
- Nails included
- 15 sq. in./lin. ft. of net free area
- Length: 20 ft. rolls
- Width:
 - 60RVA20MET - 11-1/2"
 - 60RVA208 - 8"
 - 60RVA20US - 10-1/2"
- Thickness: 3/4"

TDI

Texas Department of Insurance

MIAMI-DADE COUNTY
APPROVED

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	60RVA20MET	1	36	7
Black	60RVA208	1	-	6
Black	60RVA20US	1	36	8

We Know Ventilation!


Exhaust Ventilation



duraflo® Gooseneck ROOF EXHAUST VENT

14

Roof Exhaust Ventilation

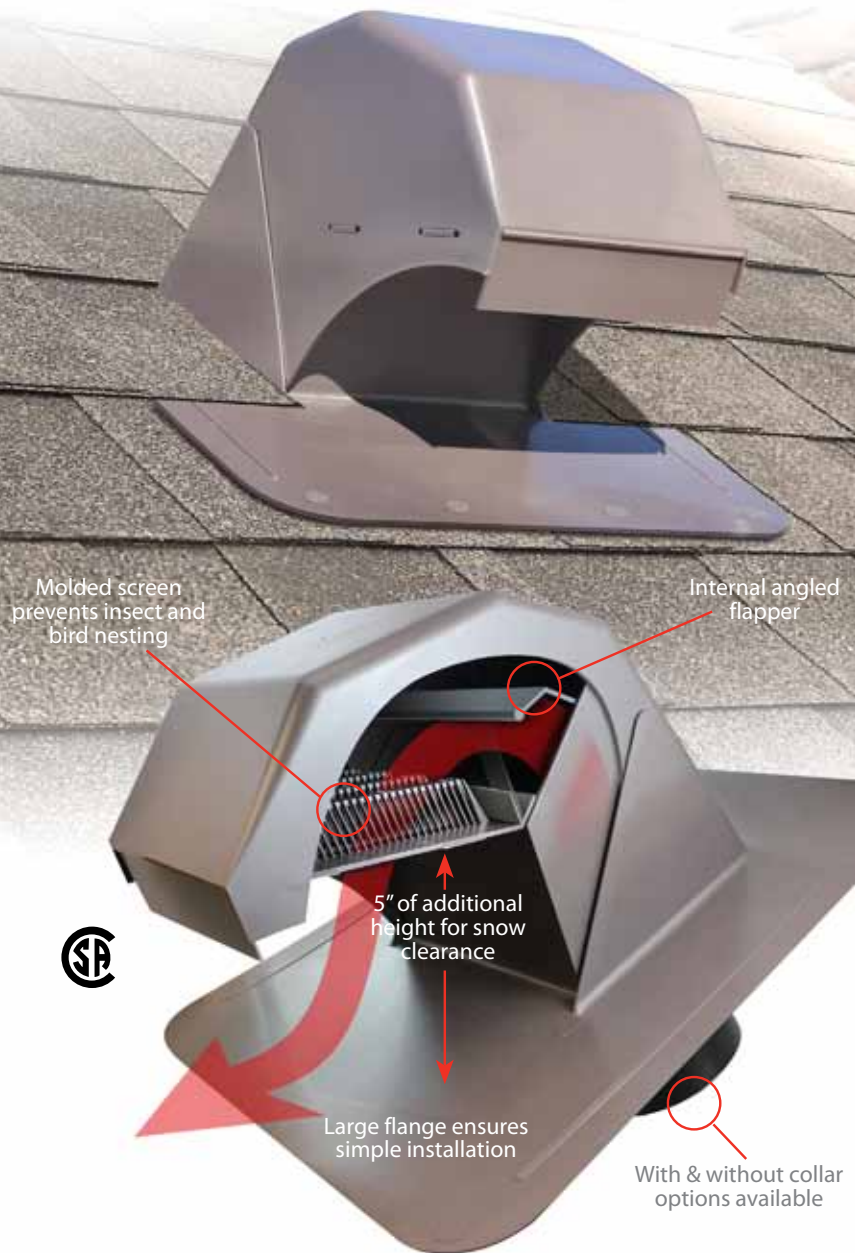

Resistant to:



Constructed for:



For high performance bathroom fans and standard rangehood fans

- Weather protection with 5" of additional height for snow clearance
- Patented design adds additional weather protection, directs and deflects precipitation away from vent openings
- Flapper can still open with low performance bath fans
- Attaches to 4", 5" or 6" duct
- Additional collar available which fits a 6", 7" or 8" duct
- Available in: black, brown, weatherwood and grey
- 20 sq. in. of net free area if used as an intake vent (remove flapper)

60PRO30

GOOSENECK BATHROOM EXHAUST VENT - WITH COLLAR

Can be used with standard rangehood fans

DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	60PRO30BL	1	18	8
Brown	60PRO30BR	1	18	8
Grey	60PRO30G	1	18	8
Weatherwood	60PRO30WW	1	18	8

60PRO31 GOOSENECK BATHROOM EXHAUST VENT - WITHOUT COLLAR

DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	60PRO31BL	1	18	7
Brown	60PRO31BR	1	18	7
Grey	60PRO31G	1	18	7
Weatherwood	60PRO31WW	1	18	7

Can be used with standard rangehood fans

GOOSENECK VENT ADAPTER COLLAR 4", 5", 6"

DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	6030-4BC	8	244	6

www.duraflo.com

duraflo® Gooseneck

ROOF DRYER EXHAUST VENT



15

Roof Exhaust Ventilation

**Ideal for
condominiums,
townhouses,
apartment buildings
and homes with
an upstairs laundry
room**

- Provides weather protection with 5" of additional height for snow clearance
- Attaches to 4", 5" or 6" duct
- Additional collar available which fits a 6", 7" or 8" duct
- Available in 4 colours: black, brown, weatherwood and grey

6032

GOOSENECK ROOF DRYER EXHAUST VENT - WITH COLLAR


DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	6032BL	1	18	7
Brown	6032BR	1	18	7
Grey	6032G	1	18	7
Weatherwood	6032WW	1	18	7

6033 GOOSENECK ROOF DRYER EXHAUST VENT - WITHOUT COLLAR

DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	6033BL	1	18	7
Brown	6033BR	1	18	7
Grey	6033G	1	18	7
Weatherwood	6033WW	1	18	7

GOOSENECK VENT ADAPTER COLLAR 4",5",6"

DESCRIPTION	PART #	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	6030-4BC	8	244	6

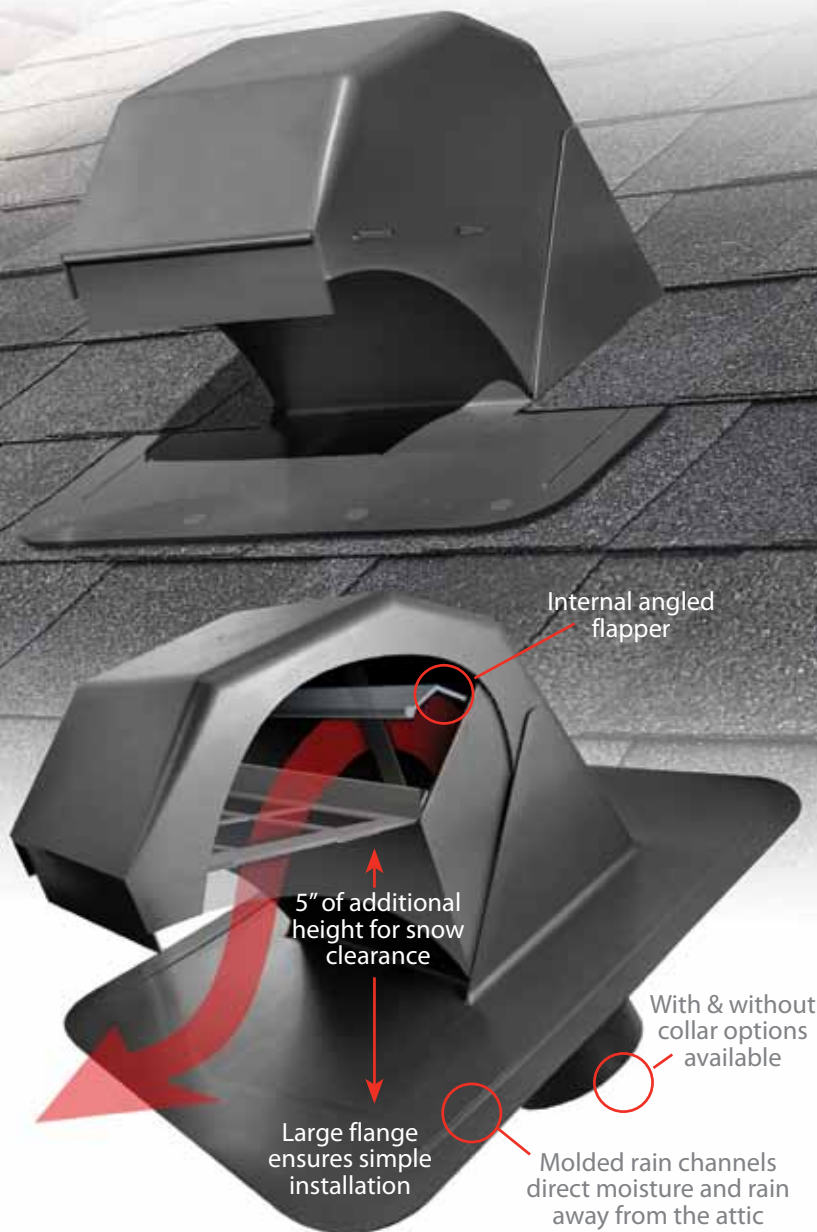

Resistant to:



Constructed for:



We Know Ventilation!

duraflo® Exhaust Ventilation

16

Roof Exhaust Ventilation



Bathroom Exhaust Vent with Flapper & Attached Collar

- Seamless leakproof body
- Exhausts bathroom fan through the roof
- Attaches to 4" or 5" duct
- Code regulated insect grill

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6011BL	6	108	7
Brown	6011BR	6	108	7
Grey	6011G	6	108	7
Weatherwood	6011WW	6	108	7



Bathroom Exhaust Vent with Flapper & Unattached Collar

- Seamless leakproof body
- Collar is detached to allow trades to work independently
- Exhausts bathroom fan through the roof
- Attaches to 4" or 5" duct
- Code regulated insect grill

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6010BL	4	192	5
Brown	6010BR	4	192	5
Grey	6010G	4	192	5



Bathroom Exhaust Vent with Flapper

- Seamless leakproof body
- Exhaust bathroom fan through the roof
- Attaches to 4" or 5" duct
- Code regulated insect grill

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6008BL	4	192	4
Brown	6008BR	4	192	4
Grey	6008G	4	192	4
Weatherwood	6008WW	4	192	4



Roof Dryer Vent with Flapper


- Seamless leakproof body
- Exhausts clothing dryer through the roof
- Ideal for condominiums, town-houses, apartments and 2nd story laundry rooms
- Large grill openings for safe dryer venting

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6012BL	4	192	3
Brown	6012BR	4	192	3

Roof Dryer Vent with Flapper & Attached Collar

- Seamless leakproof body
- Attaches to 4" or 5" duct
- Large grill openings for safe dryer venting

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6013BL	6	108	7
Brown	6013BR	6	108	7
Weatherwood	6013WW	6	108	7

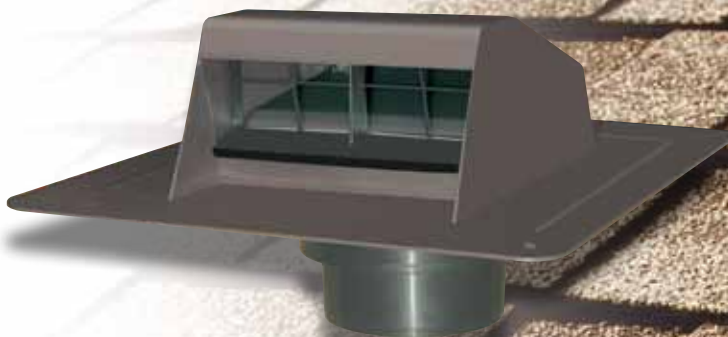

Bathroom Exhaust & Roof Dryer Vent Adapter Collar

- Attaches to 4" or 5" duct


DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6010-1BC	8	576	3



Rangehood Exhaust Vent & Attached Collar

- Seamless leakproof body
- Vents kitchen range hoods and other large exhaust fans through the roof
- Attaches to 6", 7" or 8" duct
- Dual flapper system to prevent back draft and weather infiltration


DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6020BL	2	32	8
Brown	6020BR	2	32	8

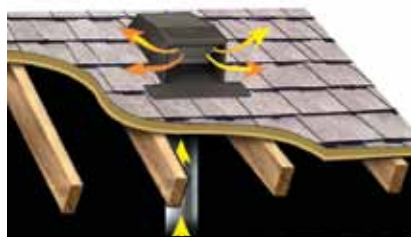

GOOSENECK Rangehood Exhaust Vent Adapter Collar

- Attaches to 6", 7" or 8" duct

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Black	6021-4BC	8	144	7

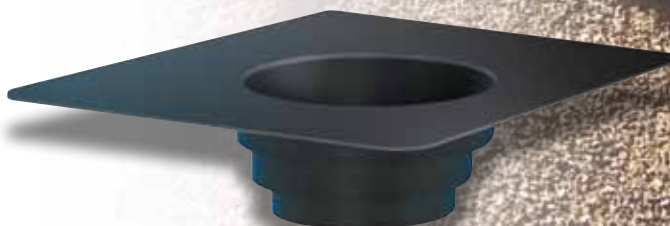

We Know Ventilation!

Exhaust Ventilation

18

Roof Exhaust Ventilation

duraflo® **Adapter Collar** WITH **BUILT-IN FLAPPER**

**Turn a roof vent into a
bathroom exhaust vent!**

Install roof vent
over new adapter
collar

Dual
flapper
design

**Combine
the weather
protection of
PROslantBack
with bathroom
exhaust fans!**

- Built-in flapper prevents back draft
- Large nailable flange works with any roofing system
- Ideal for new home construction and existing homes
- Easily installs from the top of the roof deck or from inside the attic
- Fits 4", 5" or 6" flexible duct
- Available in black only

DESCRIPTION	PART #	SIZE	CTN. QTY.	SKID	WT.CTN. (LBS.)
Black	6035BL	14" x 14"	4	72	5

www.duraflo.com

duraflo[®] Ventilation Calculator

19

HOW MANY VENTS DO YOU NEED?

A home requires an equal amount of intake (soffit) & exhaust (roof) ventilation

Ventilation requirements for your home

VENT	NET FREE AREA OF VENT	NUMBER OF VENTS PER			
		1000 sq. ft.	1500 sq. ft.	2000 sq. ft.	2500 sq. ft.
WEATHERPRO PROVENTILATOR - 3 TIER	130 sq. in.	1	2	3	4
WEATHERPRO PROVENTILATOR - 2 TIER	95 sq. in.	2	3	4	5
WEATHERPRO PROVENTILATOR - 1 TIER	48 sq. in.	4	6	8	10
WEATHERPRO PROTURBO	117 sq. in.	1	2	3	4
WEATHERPRO 60PRO50	50 sq. in.	5	8	10	12
WEATHERPRO 60PRO75	75 sq. in.	4	5	7	8
WEATHERPRO RIDGE VENTS	72 sq. in.	4	5	7	10
WEATHER PRO SLANT BACK	50 sq. in.	5	8	10	12
6050 SQUARE TOP	50 sq. in.	5	8	10	12
6075 SQUARE TOP	75 sq. in.	4	5	7	8
6065 SLANT BACK	61 sq. in.	4	6	8	9
RIDGE ROLL - 20ft	300 sq. in.	16 ft.	24 ft.	32 ft.	40 ft.

Notes:

- Pitches 3/12 to 12/12
- Roof pitches under 4/12 require double the amount of ventilation
- Use this chart to determine how many vents your attic requires
- The included ventilation calculator is only a guide, please consult your local building code for specific ventilation requirements

Ventilation Calculator

We Know Ventilation!

duraflo® Roof Flashings

20

Roof Flashings

duraflo® Thermoplastic Base Flashing



- Suitable for roof pitches from 2/12 to 12/12
- UV resistant polypropylene
- Built in water deflectors
- Cold impact resistant to -40°

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" FLANGE SIZE 15" x 13"				
Black	551101BL	12	384	9
Brown	551101BR	12	384	9
Grey	551101G	12	384	9
Weatherwood	551101WW	12	384	9
PIPE SIZE 2" FLANGE SIZE 15" x 13"				
Black	551102BL	12	384	9
Brown	551102BR	12	384	9
Grey	551102G	12	384	9
Weatherwood	551102WW	12	384	9
PIPE SIZE 3" FLANGE SIZE 16-1/4 x 16-1/4"				
Black	551103BL	12	192	12
Brown	551103BR	12	192	12
Grey	551103G	12	192	12
Weatherwood	551103WW	12	192	12
PIPE SIZE 4" FLANGE SIZE 18" x 16-1/4"				
Black	551104BL	12	192	14
Brown	551104BR	12	192	14
Grey	551104G	12	192	14
Weatherwood	551104WW	12	192	14

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" FLANGE SIZE 15" x 9-1/4"				
Black	551201BL	12	576	6
PIPE SIZE 2" FLANGE SIZE 15" x 9-1/4"				
Black	551202BL	12	576	6
PIPE SIZE 3" FLANGE SIZE 15" x 12"				
Black	551203BL	12	384	9
Brown	551203BR	12	384	9
Weatherwood	551203WW	12	384	9
PIPE SIZE 4" FLANGE SIZE 15-1/2" x 12"				
Black	551204BL	12	384	10
Brown	551204BR	12	384	10

duraflo® StretchFit

PIPE FLASHING



The PermOseal® StretchFit requires no adjustment, no cutting and no tearing!

The new PermOseal® StretchFit flashing by Duraflo® is a breakthrough in flashing seal technology.

- UV resistant polypropylene
- Built in water deflectors
- Fits roof pitches from 2/12 to 12/12
- Available in Black, Brown, Grey and Weatherwood




MODEL:
551222
1.5"-2"
Pipe
Sizes

MODEL:
551224
3"-4"
Pipe Sizes



**StretchFit seal fits
1.5" - 2" and 3" - 4" vent pipe sizes**

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" to 2" FLANGE SIZE 9.25" x 13"				
Black	551222BL	12	576	6
Brown	551222BR	12	576	6
Grey	551222G	12	576	6
Weatherwood	551222WW	12	576	6
PIPE SIZE 3" to 4" FLANGE SIZE 12" x 15.5"				
Black	551224BL	12	384	10
Brown	551224BR	12	384	10
Grey	551224G	12	384	10
Weatherwood	551224WW	12	384	10



We Know Ventilation!

duraflo® Roof Flashings



22

Roof Flashings

**3 Sizes
in 1!**

duraflo®
Multiple 3 in 1
Size
FLASHING

**Cut & Peel for
1.5" to 3" vent
pipe sizes**

- Suitable for roof pitches from 2/12 to 12/12
- UV resistant polypropylene
- Built in water deflectors
- Cold impact resistant to -40°



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" to 3" FLANGE SIZE 12" x 15"				
Black	551233BL	12	384	9
Weatherwood	551233WW	12	384	9
Black Bulk	551233BULKBL	40	640	28

duraflo®
Flexible
BASE FLASHING



**Engineered material stays flexible
in extreme cold conditions**

- Suitable for roof pitches from 2/12 to 12/12
- UV resistant polypropylene
- Built in water deflectors
- Cold impact resistant to -40°

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" FLANGE SIZE 13" x 15"				
Black	551141BL	12	384	11
PIPE SIZE 2" FLANGE SIZE 13" x 15"				
Black	551142BL	12	384	11
PIPE SIZE 3" FLANGE SIZE 16-1/4" x 18"				
Black	551143BL	12	192	17
PIPE SIZE 4" FLANGE SIZE 16-1/4" x 18"				
Black	551144BL	12	192	17

duraflo® Steep Roof Flashing

- Patented one-piece design
- Easy installation with thermoplastic base
- Suitable for pitches from 2/12 to 20/12
- Tear away ring sizing for different pipe sizes
- Double seal, No-Calk® water tight collar

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 1.5" - 3" FLANGE SIZE 11-1/4" x 19"				
Black	5511930	6	180	6
PIPE SIZE 3" - 4" FLANGE SIZE 13" x 20-1/8"				
Black	5511931	6	180	7



duraflo® O-Guard™ Roof Flashing Seal Protector

Protection from harmful UV rays and weather conditions

- Easy installation - slide O-Guard over pipe and flashing
- Does not reduce pipe size
- Unique design protects the seal

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
PIPE SIZE 3"				
Black	5503	12	960	2



We Know Ventilation!



Cathedral Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
22" White	626110-00	90 sq. in.	6	48	26

Octagon Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
22" White	626060-00	58 sq. in.	6	72	20
22" White	626060-00B	58 sq. in.	8	96	25
18" White	626058-00	58 sq. in.	6	72	18
18" White	626058-00B	58 sq. in.	8	96	23

Round Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
22" White	626055-00	55 sq. in.	6	72	19
22" White	626055-00B	55 sq. in.	8	96	24
18" White	626053-00	55 sq. in.	6	72	18
18" White	626053-00B	55 sq. in.	8	96	22

Square Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
18" X 18" White	626045-00	44 sq. in.	6	72	15
18" X 18" White	626045-00B	44 sq. in.	7	84	17
12" X 12" White	626043-00	44 sq. in.	6	72	14
12" X 12" White	626043-00B	44 sq. in.	7	84	16

Rectangular Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
18" X 24" White	626080-00	44 sq. in.	6	72	20
18" X 24" White	626080-00B	44 sq. in.	8	96	26
12" X 18" White	626075-00	44 sq. in.	6	72	18
12" X 18" White	626075-00B	44 sq. in.	7	84	21
22" X 28" White	626120-00	74 sq. in.	6	48	28

Half Moon Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
22" X 34" White	626095-00	111 sq. in.	5	40	24
22" X 34" White	626095-00B	111 sq. in.	6	48	28
18" X 30" White	626093-00	111 sq. in.	5	40	24
18" X 30" White	626093-00B	111 sq. in.	6	48	28

Standard Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
8" X 8" White	620808	21 sq. in.	12	768	5
12" X 12" White	621212	75 sq. in.	12	324	12
8" X 12" White	620812	45 sq. in.	12	576	6
8" X 16" White	620816	60 sq. in.	12	336	8
12" X 18" White	621218	112 sq. in.	12	324	17

Recessed Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
8" X 8" White	620808REC	21 sq. in.	12	768	5
8" X 12" White	620812REC	45 sq. in.	12	576	7
12" X 12" White	621212REC	75 sq. in.	13	351	13
12" X 18" White	621218REC	112 sq. in.	13	351	17

Combined Gable Vents

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
8" X 8" White	620808COMB	21 sq. in.	8	288	7
8" X 12" White	620812COMB	45 sq. in.	6	-	7
12" X 12" White	621212COMB	75 sq. in.	6	162	12
12" X 18" White	621218COMB	112 sq. in.	6	162	16

Combined Vents

Ultimate in gable weather protection

- Can be installed to display raised profile or reversed to show recessed profile
- Inverted rear vents block weather infiltration, directing it downward back out of the vent
- Combined Gable Vents provide air flow while helping to block extreme weather infiltration



We Know Ventilation!

Foundation Vent

All-In-One Block Application

- Standard U.S. Block
- Metric Block
- Queen Brick



DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
Black	649000BL	51 sq. in.	12	288	12
Grey	649000G	51 sq. in.	12	288	12
Brown	649000BR	51 sq. in.	12	288	12

Round Soffit Vent

- 4"
- Flush mount with molded grill



DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
White	646020-00	6.38 sq. in.	60	3840	6

Meter Mount Plate

- 17-5/8" X 15-7/8"



DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
White	645080-00	NA	10	-	22

Dryer Vent Block


- Brick & stucco applications
- Reversible trim ring for easy installation
- Eliminates bird nesting



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641015-00	8	144	6

Dryer Vent

- Siding applications
- Eliminates bird nesting

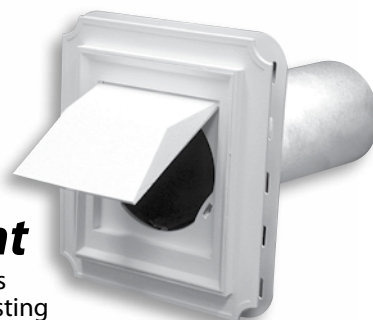

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641010-00	6	96	4
White	641010-00B	25	800	11

6" Wall Vent

- Works as intake or exhaust




DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
Without Collar				
White	646010-00	30	1890	15
With Collar				
White	646025-00	12	756	8


Bathroom Soffit Exhaust Vent

- Easy installation and flush mount finish
- No need to penetrate the roof or wall
- Unique flapper prevents back draft
- Attaches to 4" or 5" duct



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	646015	6	216	4
Brown	646015BR	6	216	4

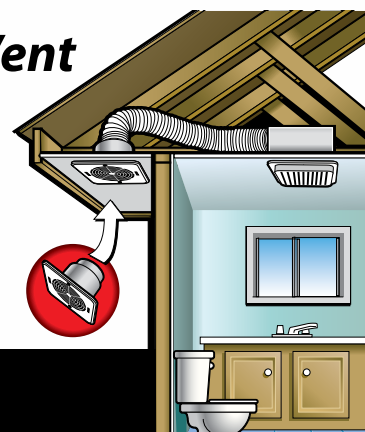


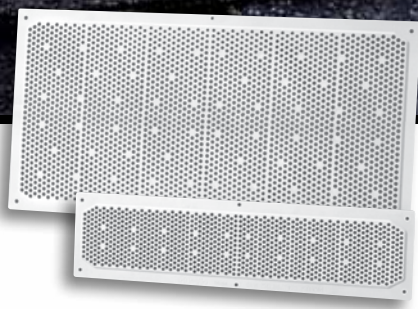

Plastic Soffit Vents

- Installs easily under eaves
- Small louvers guard against weather and insect infiltration
- 2 - 16" x 4" soffit vents = 1-50 sq. in. roof vent
- 2 - 16" x 8" soffit vents = 2-50 sq. in. roof vent

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
16" X 4" White	641604	18.6 sq. in.	36	9720	5
16" X 4" Brown	641604BR	18.6 sq. in.	36	9720	5
16" X 8" White	641608	45.5 sq. in.	36	4860	7
16" X 8" Brown	641608BR	45.5 sq. in.	36	4860	7

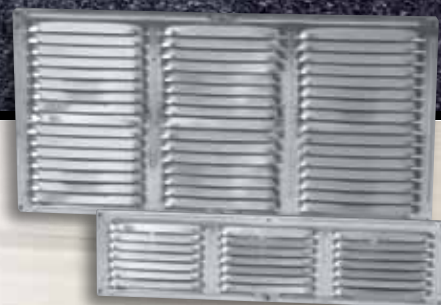


Metal Soffit Vents

- Installs easily under eaves
- Small louvers guard against weather and insect infiltration
- 2 - 16" x 4" soffit vents = 1-50 sq. in. roof vent
- 2 - 16" x 8" soffit vents = 2-50 sq. in. roof vent

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
16" X 4" Mill	61VENT164MF	15.8 sq. in.	24	3840	3
16" X 4" White	61VENT164WH	15.8 sq. in.	24	3840	3
16" X 8" Mill	61VENT168MF	40.5 sq. in.	24	2304	5
16" X 8" White	61VENT168WH	40.5 sq. in.	24	2304	5

8 Ft. Plastic Soffit Strip

- Easy to install
- Used to provide continuous soffit ventilation
- 2" wide

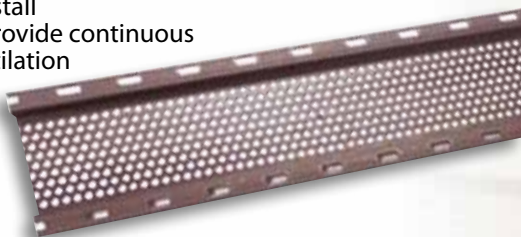

DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
8 Ft. White	648FTWH	69 sq. in.	25	-	13
8 Ft. Brown	648FTBR	69 sq. in.	25	-	13
8 Ft. Black	648FTBL	69 sq. in.	25	-	13

8 Ft. Metal Soffit Strip

- Easy to install
- Used to provide continuous soffit ventilation
- 2" wide



DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
8 Ft. Mill	61VENT8MF	68 sq. in.	50	-	15
8 Ft. White	61VENT8WH	68 sq. in.	50	-	15
8 Ft. Brown	61VENT8BR	68 sq. in.	50	-	15

Mini Louvers

- Plastic
- Molded grill

Available in full box quantities only



DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
1.0"	61PML101	0.20 sq. in.	100	90000	1
1.5"	61PML151	0.43 sq. in.	100	38400	1
2.0"	61PML201	0.66 sq. in.	100	10000	2
2.5"	61PML251	1.31 sq. in.	100	14000	3
3.0"	61PML301	1.77 sq. in.	100	14000	4
4.0"	61PML401	2.85 sq. in.	50	7000	3
5.0"	61PML501	3.80 sq. in.	20	2880	3
6.0"	61PML601	5.20 sq. in.	20	1620	4

Mini Louvers

- Aluminum
- Attached screen

Available in full box quantities only




DESCRIPTION	PART #	NET FREE AREA	CTN. QTY	SKID	WT.CTN (LBS.)
1.0"	61RAA10D	0.20 sq. in.	250	38700	2
1.5"	61RAA15D	0.43 sq. in.	120	15000	2
2.0"	61RAA20D	0.66 sq. in.	65	8125	1
2.5"	61RAA25D	1.31 sq. in.	85	10625	3
3.0"	61RAA30D	1.77 sq. in.	55	6875	2
4.0"	61RAA40D	2.85 sq. in.	30	3750	1
6.0"	61RAA60D	5.20 sq. in.	8	1000	1

We Know Ventilation!



Scalloped Series with reversible trim

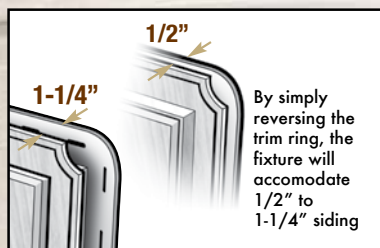

Recessed Electrical Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641040-00	12	2304	3
White	641040-00B	75	2400	16

Jumbo Block

- 13" x 9" mounting size
- Reversible trim ring



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641030-00	12	432	7
White	641030-00B	24	432	15

Surface Series Block

- 4.8" x 4.8" mounting size
- Double 4, 5, 6, 8 & 10
- Triple 3"
- Dutch Lap



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641060-00	12	1440	4
White	641060-00B	30	-	9

Electrical Plug Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641095-00	12	1260	8



Split Block

DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641020-00	12	2304	3
White	641020-00B	75	2400	15

Flush Electrical Block

- Reversible trim ring



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641050-00	12	1680	3
White	641050-00B	35	-	9

Double Walled Recessed Electrical Block

- Reversible trim ring



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641090-00	12	1680	4
White	641090-00B	35	-	10

Mounting Block

- 5.5" x 6.5" mounting size
- Reversible trim ring



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641000-00	12	720	4
White	641000-00B	25	800	10

Electrical Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	641055-00	12	960	9

Pro Light Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642145-00	12	1176	5

Plated Series with reversible trim



Pro Electrical Flush Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642115-00	12	1680	4

The **WeatherPRO®** Series features molded rain channels that incorporate the principals of surface tension. Water cascades down the surface of the wall and is diverted through molded rain channels exiting over the rain flange.

Rain Channels

Pro Recessed Electrical Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642125-00	12	1680	4

Pro Surface Block

• 4.8" x 5.8" mounting size



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642155-00	12	1176	6

Pro Recessed Split Block



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642175-00	12	1680	4

Pro Mounting Block

• 5" x 6" mounting size



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642165-00	12	1176	6

Pro Mini Mounting Block

• 3.5" x 5" mounting size



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	642135-00	12	1680	4

Dryer Vent Plate



DESCRIPTION	PART #	CTN. QTY	SKID	WT.CTN (LBS.)
White	646004-00	6	300	4

Bottom Rain Flange



duraflo® Colour Options

30

Colour Options




Before




After



Roof Vent Colours




BL - Black



BR - Brown



GR - Grey



WW - Weatherwood

Index

PART #	PAGE #	PART #	PAGE #	PART #	PAGE #
5503	23	60PRO150BR	4	61VENT8BR	27
551101BL	20	60PRO150G	4	61VENT8MF	27
551101BR	20	60PRO150WW	4	61VENT8WH	27
551101G	20	6001BL	6	620808	25
551101WW	20	6001BR	6	620808COMB	25
551102BL	20	6001G	6	620808REC	25
551102BR	20	6001WW	6	620812	25
551102G	20	6008BL	16	620812COMB	25
551102WW	20	6008BR	16	620812REC	25
551103BL	20	6008G	16	620816	25
551103BR	20	6008WW	16	621212	25
551103G	20	6010-1BC	17	621212COMB	25
551103WW	20	6010BL	16	621212REC	25
551104BL	20	6010BR	16	621218	25
551104BR	20	6010G	16	621218COMB	25
551104G	20	6011BL	16	621218REC	25
551104WW	20	6011BR	16	626043-00	24
551141BL	22	6011G	16	626043-00B	24
551142BL	22	6011WW	16	626045-00	24
551143BL	22	6012BL	16	626045-00B	24
551144BL	22	6012BR	16	626053-00	24
5511930	23	6013BL	17	626053-00B	24
5511931	23	6013BR	17	626055-00	24
551201BL	20	6013WW	17	626055-00B	24
551202BL	20	6020BL	17	626058-00	24
551203BL	20	6020BR	17	626058-00B	24
551203BR	20	6021-4BC	17	626060-00	24
551203WW	20	6025BL	13	626060-00B	24
551204BL	20	6025BLF	13	626075-00	24
551204BR	20	6030-4BC	14	626075-00B	24
551222BL	21	6032BL	15	626080-00	24
551222BR	21	6032BR	15	626080-00B	24
551222G	21	6032G	15	626093-00	24
551222WW	21	6032WW	15	626093-00B	24
551224BL	21	6033BL	15	626095-00	24
551224BR	21	6033BR	15	626095-00B	24
551224G	21	6033G	15	626110-00	24
551224WW	21	6033WW	15	626120-00	24
551233BL	22	6035BL	18	641000-00	28
551233BULKBL	22	6050BL	10	641000-00B	28
551233WW	22	6050BR	10	641010-00	26
5950C	11	6050G	10	641010-00B	26
5975B	11	6050WW	10	641015-00	26
5975C	11	6050TBL	10	641020-00	28
60RVA20MET	13	6050TBR	10	641020-00B	28
60RVA20US	13	6050TG	10	641030-00	28
60RVA208	13	6050TWW	10	641030-00B	28
60PRO30BL	14	6065BL	11	641040-00	28
60PRO30BR	14	6065BR	11	641040-00B	28
60PRO30G	14	6065G	11	641050-00	28
60PRO30WW	14	6065WW	11	641050-00B	28
60PRO31BL	14	6072METBL	12	641055-00	28
60PRO31BR	14	6072METBR	12	641060-00	28
60PRO31G	14	6072METWW	12	641060-00B	28
60PRO31WW	14	6073BL	12	641090-00	28
60PRO50BL	9	6073BR	12	641090-00B	28
60PRO50BR	9	6073WW	12	641095-00	28
60PRO50G	9	6075BL	10	641604	27
60PRO50W	9	6075BR	10	641604BR	27
60PRO50WW	9	6075G	10	641608	27
60PRO50SLBL	7	6075WW	10	641608BR	27
60PRO50SLBR	7	6094BL	12	642115-00	29
60PRO50SLG	7	61PML101	27	642125-00	29
60PRO50SLWW	7	61PML151	27	642135-00	29
60PRO75BL	8	61PML201	27	642145-00	29
60PRO75BR	8	61PML251	27	642155-00	29
60PRO75G	8	61PML301	27	642165-00	29
60PRO75W	8	61PML401	27	642175-00	29
60PRO75WW	8	61PML501	27	645080-00	26
60PRO117BL	5	61PML601	27	646004-00	29
60PRO117BR	5	61RAA10D	27	646010-00	26
60PRO117G	5	61RAA15D	27	646015	26
60PRO117WW	5	61RAA20D	27	646015BR	26
60PRO130BL	4	61RAA25D	27	646020-00	26
60PRO130BR	4	61RAA30D	27	646025-00	26
60PRO130G	4	61RAA40D	27	648FTBL	27
60PRO130WW	4	61RAA60D	27	648FTBR	27
60PRO140BL	4	61VENT164MF	27	648FTWH	27
60PRO140BR	4	61VENT164WH	27	649000BL	26
60PRO140G	4	61VENT168MF	27	649000G	26
60PRO140WW	4	61VENT168WH	27	649000BR	26
60PRO150BL	4				

WE KNOW VENTILATION

duraflo® *Ventilation Systems*

Duraflo® products provide exceptional protection against weather infiltration. Many of our innovative products, along with our WeatherPRO® Series, are designed with ease of installation in mind. Cold impact resistance, patented baffle systems, UV protection and colour selection make Duraflo products leaders in the construction industry.



Canplas Industries Ltd.
500 Veterans Drive, P.O. Box 1800
Barrie, Ontario
Canada L4M 4V3
1-800-461-5300
Tel: (705) 726-3361
Fax: (705) 726-2186

E-mail: duraflo@canplas.com
www.duraflo.com

canplas®
an OAliaxis company