

MAKING HARD WORK EASIER PRODUCT CATALOG 2016





Since 1948, SENCO has been synonymous with professional results, quality, increased productivity and craftsmanship.

Customers around the world have put SENCO's innovative products to work in a variety of demanding applications, counting on them to perform every day. Today, SENCO continues to pioneer new technologies in all areas of professional fastening solutions.

At SENCO, our mission is to be the undisputed provider of choice for quality fastening solutions that increase productivity and make work safer and easier to perform.

We value input from our users and focus on responsive innovations that make fastening simpler and more efficient

We design and engineer every SENCO fastening system to deliver outstanding results and maximize productivity.

We have a focus on safety because we want everyone who uses our products to have a long and injury free career.

At SENCO, we are dedicated to bringing you only the best in professional fastening systems. We promise to be a true partner in creating fastening solutions.



TABLE OF CONTENTS

See all tools at a glance in the foldout located on pages 90–92.

Auto-Feed Screwdrivers

Auto-reed Screwarivers		
	DS215-18V, DS212-18V, DS312-18V, DS215-XP	3
	DS235-AC, DS232-AC, DS332-AC	4
	DS425AC, DS440AC	5
	DS220, DS320	6
	SG4100, SG2510	7
	Collated Screws	8–11
	Color Matched Metal Fasteners	12-13
	Screw System Accessories	14-15



Hidden Deck System

SHD150XP, Clips, Fasteners	17
Clip Guide by Decking Manufacturer & Size	18
Clip Series, Tools & Accessories	19

Fusion	
F18, F16-S, F16-A, F-15	21
Fasteners	22-23



Finish & Woodworking

3	•
FinishPro23SXP, FinishPro23LXP	25
FinishPro21LXP, LS1XP, FinishPro18Mg, FinishPro18BMg	26
SLP20XP, FinishPro25XP	27
FinishPro32, FinishPro33Mg, SFN30	28
FinishPro35Mg, FinishPro42XP	29
SLS20XP, SLS25XP, SKSXP	30
SLS150Mg, SLS18Mg, SC1XP Senclamp, SC2 Sencor	31
Fasteners	32-37



Framing, Sheathing & Subfloors

	FramePro325XP, FramePro701XP	39
	FramePro325FRHXP, FramePro702XP, FramePro752XP	40
	SCN60XP, SCN65XP, SCN49XP	41
	JoistPro150XP, JoistPro250XP, Mini-Hand Nailer, A20 Hand Nailer	42
	SCP40XP, WC150XP, WC200XP	43
	SNS41, SNS200XP, SQS55XP	44
	Fasteners	45-53
-		

Roofing, Siding & Fencing	Se la compañía de la comp
RoofPro455XP, RoofPro445XP, SCN49XP	55
WC150RXP, BC58, A11	56
Fasteners	57-59

	7	
Pallets & Crating		
PalletPro57FXP, PalletPro100XP, PalletPro130XP		61
DFPXP, F75LXP, F75SXP		62
Fasteners		63-65
Upholstery & Furniture		
SFT10XP Family		67
SFW09, SNS200XP-BST		68
Fasteners		69-71
Flooring		
SHF200, SHFS200, SLS20XP-HF		73
Fasteners		74
Box, Carton & Pallet Conversion Fasteners		Ĩ
Nails, Staples, Screws, Hidden Deck Fasteners		75-77
Air Compressors		
PC0968N PC0969 PC0970		79

· ·	-
PC0968N, PC0969, PC0970	79
PC1130, PC1131, PC0968, PC1280	80
PC1010, PC0947, PC1010N, PC0974	81

Accessories

Air Hoses	83
Plugs & Couplers, Swivel Plugs & Swivel Couplers	84-85
Air Hose & Compressor Accessories	86
Drain Cock, Filters, Regulators & Gauges	86
Oils & Lubricants	87
Safety Glasses & Tool Belt Hooks	87
Battery & Charger Systems, No-Mar Pads	88
Parts Kits	89

Miscellaneous

Fasteners at a Glance	90-91
Tools at a Glance	92-94
Fastener Finish Types	95

DESIGNED TO MAKE YOU AS PRODUCTIVE AS POSSIBLE

DuraSpin® systems increase screw fastening speeds by more than four times versus bulk screwdrivers and loose screws, improving job site productivity by more than 30%. Now we are leading the way to even greater productivity gains with our next generation of tools and fasteners.

APPLICATIONS

Whether you choose an integrated tool or use our full line of kits and accessories, you can customize DuraSpin auto-feed screw systems for a variety of applications including drywall, flooring, decking and industrial projects. Check out our ICC certified collated screws for steel frame construction.

FEATURES

- Patented corner-fit feed system for better screw placement in tight spaces and corners
- Locking depth-of-drive adjustment
- Tool-free adjustable nosepiece
- Easily load 50 screws in less than a second
- Trigger lock, locks in RPM speed
- Long-lasting drive bits with quick-slide release



DS215-18V

2" CORDLESS 18V LI-ION 5000 RPM

ITEM #7W0001N

2 bits included

Features

- High-speed motor designed for drywall applications
- Patented feed system fits into corners
- EZ-Load feature for quick loading
- Includes 2 bits (as shown), drywall nosepiece FC0878, wood nosepiece FB0157, 2 batteries, charger and carrying bag

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Underlayment

SECONDARY APPLICATIONS

PRIMARY APPLICATIONS

Wood Decking, Tile Roofing

to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel,

Subfloor, Metal Framing, Composite

Decking, Cement Board, Sheathing

Cement Board

DS312-18V

3" CORDLESS 18V LI-ION 2500 RPM

ITEM #7Y0001N



AN

Features

- Tool-free screw-length adjustment to set screw length quickly
- Load quickly and prevent misfeeds with patented screw strip guide
- Drive the complete range of SENCO collated screws up to 3"
- Includes 2 bits (as shown), drywall nosepiece FC0895, wood nosepiece FB0159, 2 batteries, charger and carrying bag

Product Reference Chart

DS212-18V

High-torque motor for driving

Drives drill-point fasteners with

into dense material

variable-speed trigger

Depth-of-drive lock ensures

Includes 2 bits (as shown),

wood nosepiece FB0157, 2 batteries, charger and

drywall nosepiece FC0878,

same countersink every time

2" CORDLESS 18V LI-ION 2500 RPM



2 bits included

Features



PRIMARY APPLICATIONS

Metal Framing, Cement Board

- SECONDARY APPLICATIONS
- Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Wood Decking, Sheathing to Steel

DS215-XP

2" 18V 3.0 AH LI-ION 5000 RPM

ITEM #7W0002N

2 bits included

Ð

carrving bag



• Tool-free screw-length adjustment

- to set screw length quickly • Patented feed system fits
- into corners

 Quick-slide button bit change
- Includes 2 bits (as shown), drywall nosepiece FC0878, wood nosepiece FB0157, two 3.0 Ah Li-Ion batteries, charger and carrying bag

ഗ

CREWDRIVER

ഗ

ഗ

PRIMARY APPLICATIONS Drywall to Wood, Drywall to Steel SECONDARY APPLICATIONS

Cement Board, Underlayment

TOOL SPECS	DS215-18V	DS212-18V	DS312-18V	DS215-XP
Speed (RPM)	0-5000	0-2500	0-2500	0-5000
Voltage	18V	18V	18V	18V
Weight	5.9 lbs (2.7 kg)	5.34 lbs (2.41 kg)	6 lbs (27 kg)	5.9 lbs (2.7 kg)
Height	9.5″ (241 mm)	9.5″ (241 mm)	9.5″ (241 mm)	10.1" (257 mm)
Length	15" (381 mm)	15" (381 mm)	16.4" (417 mm)	15" (381 mm)
Width	3.9″ (99 mm)	3.9″ (99 mm)	3.9″ (99 mm)	3.9" (99 mm)
Warranty	1 yr	1 yr	1 yr	1 yr
FASTENER SPECS		Collated screws are lo	ocated on pages 8–11.	
Range	1″-2″*	1″-2″*	1″–3″	1"-2"*
Shank Diameter	#6 - #8	#6 - #10	#6 - #10	#6 - #8
TOOL FEATURES				
Depth-of-Drive	Yes	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes	Yes
Trigger	Variable speed	Variable speed	Variable speed	Variable speed
Power Type	18V 1.5 Ah Compact Li-Ion	18V 1.5 Ah Compact Li-Ion	18V 1.5 Ah Compact Li-Ion	18V 3.0 Ah Li-Ion
Reversible	Yes	Yes	Yes	Yes


All cordless screwdrivers come with (2) 18V Li-Ion batteries (VB0155 or VB0161), charger (VB0156), drywall nosepiece, wood nosepiece and storage bag. *FC0822 nosepiece drives ½" to 2" screws.

DS235-AC

SCREWDRIVERS

AUTO-FEED CORDED

2" CORDED 5000 RPM

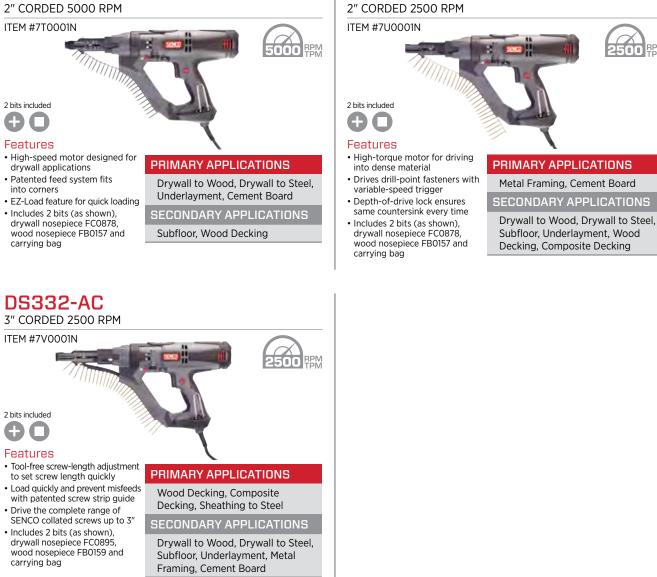

Product Reference Chart

FIDUUCTIEIEIEI			
TOOL SPECS	DS235-AC	DS232-AC	DS332-AC
Speed (RPM)	0-5000	0-2500	0-2500
Current (Amps)	6.0	6.0	6.0
Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Weight	5.7 lbs (2.6 kg)	5.8 lbs (2.6 kg)	5.9 lbs (2.7 kg)
Height	9.5″ (241 mm)	9.5″ (241 mm)	9.5″ (241 mm)
Length	16.4" (417 mm)	16.4" (417 mm)	17.3" (439 mm)
Width	3.4″ (86 mm)	3.4" (86 mm)	3.4" (86 mm)
Warranty	1 yr	1 yr	1 yr
FASTENER SPECS		Collated screws are located on pages 8–11	
Range	1''-2''*	1''-2''*	1″–3″
Shank Diameter	#6 - #10	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable speed	Variable speed	Variable speed
Power Type	Corded	Corded	Corded
Reversible	Yes	Yes	Yes

DS232-AC

All corded screwdrivers come with drywall nosepiece, wood nosepiece and storage bag. *FC0822 nosepiece drives ½" to 2" screws.

4

DS425AC

3" ATTACHMENT KIT WITH 2500 RPM SCREWDRIVER

ITEM #6W0012N



DS440AC

3" ATTACHMENT KIT WITH 4000 RPM SCREWDRIVER

ITEM #6W0011N

Ō

AUTO-FEED ATTACHMENT KITS



Features

- 3 Tools in 1, providing configurations for multiple applications
- · High-torque motor powerful enough for any application
- EZ-Load feature for quick loading
- Prevent misfeeds with patented sliding rail system
- Includes SG2510 screwdriver, DS320 attachment, adaptor, 3 bits (as shown) and storage bag

PRIMARY APPLICATIONS

Wood and Composite Decking, Cement Board, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Metal Framing



- EZ-Load feature for quick loading
- Prevent misfeeds with patented sliding rail system
- Includes SG4100 screwdriver, DS320 attachment, adaptor, 3 bits (as shown) and storage bag

PRIMARY APPLICATIONS

Subfloor, Underlayment,

Wood Decking, Cement Board SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel

3 Tools in 1

Quickly and easily convert your DS425AC or DS440AC auto-feed attachment kit into 3 tools for multiple applications.



1. Use the screwdriver to drive loose screws.

NAME AND A DESCRIPTION OF A

2. Use the attachment for multiple auto-feed applications.



3. Add the extension pole for stand-up applications like subfloor and decking.

TOOL SPECSDS425ACDS440ACSpeed (RPM)0-25000-4000Current (Amps)6.56.5Weight7 lbs (3.2 kg)6.8 lbs (3.1 kg)Height7.5" (191 mm)7.5" (191 mm)Length20.5" (521 mm) 40" (1016 mm) w/ext. pole20.5" (521 mm) 39.5" (1003 mm) w/ext. poleWidth2.5" (64 mm)2.5" (64 mm)Warranty1 yr1 yrFASTENER SPECSCollated screws are located on pages 8-11.Range1"-3"1"-3"TOOL FEATURES#6 - #12TOOL FEATURESYesBelt HookYesYesFriggerVariable with lockVariable with lockPower TypeCordedCordedReversibleYesYes				
Current (Amps) 6.5 6.5 Weight 7 lbs (3.2 kg) 6.8 lbs (3.1 kg) Height 7.5" (191 mm) 7.5" (191 mm) Length 20.5" (521 mm) 40" (1016 mm) w/ext, pole 20.5" (521 mm) 39.5" (1003 mm) w/ext, pole Width 2.5" (64 mm) 2.5" (64 mm) Warranty 1 yr 1 yr FASTENER SPECS Collated screws are located on pages 8-11. Range 1"-3" 1"-3" TOOL FEATURES #6 - #12 #6 - #12 Depth-of-Drive Yes Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	TOOL SPECS	DS425AC	DS440AC	
Weight 7 lbs (3.2 kg) 6.8 lbs (3.1 kg) Height 7.5" (191 mm) 7.5" (191 mm) Length 20.5" (521 mm) 40" (1016 mm) w/ext. pole 20.5" (521 mm) 39.5" (1003 mm) w/ext. pole Width 2.5" (64 mm) 2.5" (64 mm) Warranty 1 yr 1 yr FASTENER SPECS Collated screws are located on pages 8-11. Range 1"-3" 1"-3" TOOL FEATURES #6 - #12 #6 - #12 Depth-of-Drive Yes Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	Speed (RPM)	0-2500	0-4000	
Height 7.5" (191 mm) 7.5" (191 mm) Length 20.5" (521 mm) 40" (1016 mm) w/ext. pole 20.5" (521 mm) 39.5" (1003 mm) w/ext. pole Width 2.5" (64 mm) 2.5" (64 mm) Warranty 1 yr 1 yr FASTENER SPECS Collated screws are located on pages 8-11. Range 1"-3" 1"-3" Shank Diameter #6 - #12 #6 - #12 TOOL FEATURES Justice Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	Current (Amps)	6.5	6.5	
Length 20.5" (521 mm) 40" (1016 mm) w/ext. pole 20.5" (521 mm) 39.5" (1003 mm) w/ext. pole Width 2.5" (64 mm) 2.5" (64 mm) Warranty 1 yr 1 yr FASTENER SPECS Collated screws are located on pages 8-11. Range 1"-3" 1"-3" Shank Diameter #6 - #12 #6 - #12 TOOL FEATURES Junction Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	Weight	7 lbs (3.2 kg)	6.8 lbs (3.1 kg)	
Length40" (1016 mm) w/ext. pole39.5" (1003 mm) w/ext. poleWidth2.5" (64 mm)2.5" (64 mm)Warranty1 yr1 yrFASTENER SPECSCollated screws are located on pages 8-11.Range1"-3"1"-3"Shank Diameter#6 - #12#6 - #12TOOL FEATURESVesYesBelt HookYesYesTriggerVariable with lockVariable with lockPower TypeCordedCorded	Height	7.5" (191 mm)	7.5" (191 mm)	
Warranty1 yr1 yrFASTENER SPECSCollated screws are located on pages 8-11.Range1"-3"Shank Diameter#6 - #12#6 - #12#6 - #12TOOL FEATURESYesDepth-of-DriveYesBelt HookYesTriggerVariable with lockPower TypeCordedCordedCorded	Length			
FASTENER SPECSCollated screws are located on pages 8-11.Range1"-3"1"-3"1"-3"Shank Diameter#6 - #12#6 - #12#6 - #12TOOL FEATURESDepth-of-DriveYesYesYesBelt HookYesYesYesTriggerVariable with lockPower TypeCordedCordedCorded	Width	2.5″ (64 mm)	2.5" (64 mm)	
Range1"-3"Range1"-3"Shank Diameter#6 - #12#6 - #12#6 - #12TOOL FEATURESYesDepth-of-DriveYesPeth HookYesYesYesTriggerVariable with lockPower TypeCordedCordedCorded	Warranty	1 yr	1 yr	
Shank Diameter #6 - #12 #6 - #12 TOOL FEATURES Yes Yes Depth-of-Drive Yes Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	FASTENER SPECS	Collated screws are located on pages 8–11.		
TOOL FEATURES Depth-of-Drive Yes Belt Hook Yes Trigger Variable with lock Power Type Corded	Range	1″–3″	1″-3″	
Depth-of-Drive Yes Yes Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	Shank Diameter	#6 - #12	#6 - #12	
Belt Hook Yes Yes Trigger Variable with lock Variable with lock Power Type Corded Corded	TOOL FEATURES			
Trigger Variable with lock Variable with lock Power Type Corded Corded	Depth-of-Drive	Yes	Yes	
Power Type Corded Corded	Belt Hook	Yes	Yes	
	Trigger	Variable with lock	Variable with lock	
Reversible Yes Yes	Power Type	Corded	Corded	
	Reversible	Yes	Yes	

DS220

2" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #6W0001N



Features

- Prevent misfeeds with patented sliding rail system
- Depth-of-drive lock ensures same countersink every time
- Attaches to your screwdriver with our full line of adapters (sold separately)
- Includes 2" attachment, drywall nosepiece FC0878 and wood nosepiece FB0157

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Metal Framing, Cement Board, Sheathing to Steel

SECONDARY APPLICATIONS

Subfloor, Underlayment, Wood Decking, Composite Decking

Bits and adapters sold separately

DS320

3" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #6W0003N



Features

- Prevent misfeeds with patented sliding rail system
- Perfect for stand-up applications using
- extension pole and adjustable handle • Attaches to your screwdriver with our full
- line of adapters (sold separately) • Includes 3" attachment, extension pole, adjustable handle, drywall nosepiece FC0895 and wood

PRIMARY APPLICATIONS

nosepiece FB0159

Subfloor, Underlayment, Wood Decking, Composite Decking, Cement Board, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Metal Framing

Bits and adapters sold separately

Product Reference Chart

TOOL SPECS	DS220	DS320	
Weight	1.5 lbs (.68 kg)	3.3 lbs (1.5 kg)	
Height	3.3" (84 mm)	3.3" (84 mm)	
Length	21" (533 mm)	21" (533 mm)	
Width	2.5" (64 mm)	2.5" (64 mm)	
Warranty	1 yr	1 yr	
FASTENER SPECS	Collated screws are located on pages 8–11.		
Range 1"-2"*		1″-3″	
Shank Diameter #6 - #12		#6 - #12	
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	

Additional screwdrivers, bits and adaptors sold separately — see pg. 14-15 *FC0822 nosepiece drives $\frac{1}{2}$ " to 2" screws.

Adapters for over 32 screwdriver motors

including DeWALT®, Makita®, HITACHI and SIOUX™.



SG4100

HIGH-PERFORMANCE 4000 RPM SCREWDRIVER

ITEM #6X0004N



2 bits included

Features

- High-speed motor designed for
- drywall applications
- Industrial-grade metal gear housing designed to sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Cement Board

SECONDARY APPLICATIONS

Wood Decking

SG2510

HIGH-PERFORMANCE 2500 RPM SCREWDRIVER



2500 RPM



Features

- High-torque motor for driving into dense materials
- Industrial-grade metal gear housing designed to
- sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Composite Decking, Wood Decking, Cement Board, Sheathing to Steel, Metal Framing

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment

Nosepieces and drive bits for every application:

drywall, wood, wood to metal and metal to metal.



TOOL SPECS	SG4100	SG2510
Speed (RPM)	0-4000	0-2500
Current (Amps)	6.5	6.5
Weight	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)
Height	7.5" (191 mm)	7.5" (191 mm)
Length	12" (305 mm)	12.5" (318 mm)
Width	2.5" (64 mm)	2.5" (64 mm)
Warranty	1 yr	1 yr
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable speed	Variable speed
Power Type	Corded	Corded
Reversible	Yes	Yes

Drywaii to wood Screws					
Sharp point drywall screws for fastening interior drywall to wood					
Finish: Gray Phosphate				TIP	
+ #2 Phillips Dugle Sharp					
Gauge	Length	Thread	Quantity	Item Code	
#6	11⁄4″	Coarse	1000 Tub	06A125P	
#6 11⁄4″		Coarse	4000 Box	06A125PB	
#6	15⁄8″	Coarse 1000 Tub 06A162		06A162P	
#6	15⁄8″	Coarse	4000 Box	06A162PB	
#7	2"	Coarse 1000 Tub 07A20		07A200P	
#8	#8 2½" Coarse 1000 Box 08A25				
Finish: Exterior				LID	
Gauge	Length	Thread	Quantity	Item Code	
#6	1%″	Coarse	1000 Tub	06A162W	

Drywall to Wood Screws

Drywall to Light Steel Screws

	oint, fine-t uge metal	hread drywall screw studs	s for fastening inte	erior drywall to
Finish: Gray Phosphate				ES
		#2 Phillips	Bugle	Sharp
Gauge	Length	Thread	Quantity	Item Code
#6	11⁄4″	Double Thread	1000 Tub	06B125P*
#6	11⁄4″	Double Thread	4000 Box	06B125PB*
#6	15⁄8″	Double Thread	1000 Tub	06B162P*

Gypsum to Heavy Steel Screws

Drywall screws with self-drilling point for fastening drywall or gypsum sheathing to heavy-gauge metal studs

Image: I	Finish: Clear Zinc			ES	
#6 1" Fine 1000 Tub OGC100C* #6 1¼" Fine 1000 Tub OGC125C* #6 1¼" Fine 4000 Box OGC125CB* #6 1¼" Fine 1000 Tub OGC125CB* #6 1¼" Fine 1000 Tub OGC162C* #6 1¼" Fine 4000 Box OGC162CB* #6 1¼" Fine 1000 Tub OGC162CB* #6 2" Fine 1000 Tub OGC162CB* #6 2" Fine 1000 Tub OGC162CCB* #6 1¼" Fine 1000 Box OGC162CCB* #6 1¼" Fine 1000 Box OGC125WK* #6 1¼" Fine 1000 Box OGC125WK* #8 3" 3's Fine 1000 Box OGC125WK* Gauge Length Thread Quantity Item Code Finish: Gray Phosphate Item Code Item Code #6 1¼" Fine 4000 Box OGC125PB*			#2 Phillips	Bugle	Drill
#6 1¼" Fine 1000 Tub 06C125C* #6 1¼" Fine 4000 Box 06C125CB* #6 1¼" Fine 1000 Tub 06C125CB* #6 1¼" Fine 1000 Tub 06C125CB* #6 1¼" Fine 1000 Tub 06C162C* #6 1¼" Fine 1000 Tub 06C162CB* #6 2" Fine 1000 Tub 06C162CB* #6 2" Fine 1000 Tub 06C162CB* #6 1¼" Fine 1000 Box 06C125WK* Gauge Length Thread Quantity Item Code #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 08C300WK Finish: Gray Phosphate Item Code 000 Box 08C300WK Finish: Gauge Length Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	Gauge	Length	Thread	Quantity	Item Code
#6 11/4" Fine 4000 Box O6C125CB* #6 1%" Fine 1000 Tub 06C162C* #6 1%" Fine 4000 Box 06C162C* #6 1%" Fine 4000 Box 06C162C* #6 2" Fine 1000 Tub 06C162C* #6 2" Fine 1000 Tub 06C200C* Finish: Exterior Item Code Mark #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 08C300WK Finish: Gray Phosphate Item Code Item Code Gauge Length Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#6	1″	Fine	1000 Tub	06C100C*
#6 15%" Fine 1000 Tub 06C162C* #6 15%" Fine 4000 Box 06C162CB* #6 2" Fine 1000 Tub 06C162CB* #6 2" Fine 1000 Tub 06C162CB* #6 2" Fine 1000 Tub 06C200C* Finish: Exterior Exterior Item Code Mail #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C162WK* #8 3" ½ Fine 1000 Box 08C300WK Finish: Gray Phosphate Exterior Exterior Exterior Gauge Length Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#6	11⁄4″	Fine	1000 Tub	06C125C*
#6 1%" Fine 4000 Box O6C162CB* #6 2" Fine 1000 Tub 06C200C* Finish: Exterior Fine 1000 Tub 06C200C* Gauge Length Thread Quantity Item Code #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #8 3" ½ Fine 1000 Box 06C162WK* #8 3" ½ Fine 1000 Box 06C162WK* Gray Phosphate Item Code Item Code Item Code #6 1¼" Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#6	11⁄4″	Fine	4000 Box	06C125CB*
#6 2" Fine 1000 Tub 06C200C* Finish: Exterior Exterior Item Code Item Code Gauge Length Thread Quantity Item Code #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #8 3" 3's Fine 1000 Box 06C162WK* #8 3" 3's Fine 1000 Box 08C300WK Finish: Gray Phosphate Item Code Item Code #6 1¼" Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#6	15⁄8″	Fine	1000 Tub	06C162C*
Finish: Exterior Fine Quantity Item Code #6 1¼" Fine 1000 Box 06C125WK* #6 1½" Fine 1000 Box 06C125WK* #8 3" ⅔ Fine 1000 Box 06C162WK* #8 3" ⅔ Fine 1000 Box 08C300WK Finish: Gray Phosphate CC CC CC Gauge Length Thread Quantity Item Code #6 1½" Fine 4000 Box 06C125PB*	#6	15⁄8″	Fine	4000 Box	06C162CB*
Exterior Gauge Length Thread Quantity Item Code #6 1¼" Fine 1000 Box 06C125WK* #6 1¼" Fine 1000 Box 06C125WK* #8 3" ¾ Fine 1000 Box 06C162WK* #8 3" ⅔ Fine 1000 Box 08C300WK Finish: Gray Phosphate Item Code Item Code Gauge Length Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#6	2″	Fine	1000 Tub	06C200C*
#6 11/4" Fine 1000 Box 06C125WK* #6 11/4" Fine 1000 Box 06C162WK* #8 3" 3's Fine 1000 Box 06C162WK* #8 3" 3's Fine 1000 Box 08C300WK Finish: Gray Phosphate Item Code Item Code #6 11/4" Fine 4000 Box 06C125PB*					•
#6 1%" Fine 1000 Box 06C162WK* #8 3" ?s Fine 1000 Box 08C300WK Finish: Gray Phosphate	Gauge	Length	Thread	Quantity	Item Code
#8 3" 3 Fine 1000 Box 08C300WK Finish: Gray Phosphate Image: Comparison of the second sec	#6	11⁄4″	Fine	1000 Box	06C125WK*
Finish: Gray Phosphate Image: Constraint of the system o	#6	1%"	Fine	1000 Box	06C162WK*
Gray Phosphate Item Code Gauge Length Thread Quantity Item Code #6 1¼" Fine 4000 Box 06C125PB*	#8	3″	⅔ Fine	1000 Box	08C300WK
#6 1¼" Fine 4000 Box 06C125PB*					ES
	Gauge	Length	Thread	Quantity	Item Code
#6 1%" Fine 4000 Box 06C162PB*	#6	11⁄4″	Fine	4000 Box	06C125PB*
	#6	1%"	Fine	4000 Box	06C162PB*
#6 2" Fine 4000 Box 06C200PB*	#6	2"	Fine	4000 Box	06C200PB*

Wood to Wood Screws

Finish: Yellow Zirc <th <th="" cols<="" colspa="2" colspan="2" th=""><th>Yellow 2 Gauge #8 #8 #8 #8 #8 #8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:</th><th>Length 1½" 1½4" 2" 2½2" 2½2" 3" 3" 2"</th><th>Thread Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse</th><th>Quantity 1000 Tub 1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Eox 800 Tub</th><th>Item Code 08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y</th></th>	<th>Yellow 2 Gauge #8 #8 #8 #8 #8 #8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:</th> <th>Length 1½" 1½4" 2" 2½2" 2½2" 3" 3" 2"</th> <th>Thread Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse</th> <th>Quantity 1000 Tub 1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Eox 800 Tub</th> <th>Item Code 08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y</th>		Yellow 2 Gauge #8 #8 #8 #8 #8 #8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:	Length 1½" 1½4" 2" 2½2" 2½2" 3" 3" 2"	Thread Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse	Quantity 1000 Tub 1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Eox 800 Tub	Item Code 08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y
Gauge Length Thread Quantity Item Code #8 1½" Coarse 1000 Tub 08F150Y #8 1½" % Coarse 1000 Tub 08F150Y #8 1½" % Coarse 1000 Tub 08F150Y #8 2½" % Coarse 1000 Tub 08F200Y #8 2½" % Coarse 800 Tub 08F250Y #8 2½" % Coarse 1000 Box 08F300Y #8 3" % Coarse 800 Tub 08F300Y #8 3" % Coarse 800 Tub 08F300Y #8 3" % Coarse 800 Tub 08F300Y #10 2" % Coarse 800 Tub 08F300Y #10 2" % Coarse 800 Tub 10F200Y Finish: #2 Square Flat Type 17 Gauge Length Thread Quantity Item Code #8 1¾" Coarse 4000 Box 08L175YB <tr< th=""><th>#8 #8 #8 #8 #8 #8 #0 Finish: Yellow 2 Gauge #8</th><th>1½" 1¾" 2" 2½" 2½" 3" 3" 2"</th><th>Thread Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse</th><th>Quantity 1000 Tub 1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Eox 800 Tub</th><th>Item Code 08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y</th></tr<>	#8 #8 #8 #8 #8 #8 #0 Finish: Yellow 2 Gauge #8	1½" 1¾" 2" 2½" 2½" 3" 3" 2"	Thread Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse 3 Coarse	Quantity 1000 Tub 1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub 1000 Eox 800 Tub	Item Code 08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y		
#8 11/2" Coarse 1000 Tub 08F150Y #8 13/4" % Coarse 1000 Tub 08F150Y #8 2" % Coarse 1000 Tub 08F175Y #8 2" % Coarse 1000 Tub 08F200Y #8 2%" % Coarse 800 Tub 08F250Y #8 2%" % Coarse 800 Tub 08F250YK #8 3" % Coarse 800 Tub 08F300Y #10 2" % Coarse 800 Tub 10F200Y Finish: Yellow Zirc Image: Second Seco	#8 #8 #8 #8 #8 #8 #0 Finish: Yellow 2 Gauge #8	1½" 1¾" 2" 2½" 2½" 3" 3" 2"	Coarse % Coarse % Coarse % Coarse % Coarse % Coarse % Coarse % Coarse % Coarse % Coarse	1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub	08F150Y 08F175Y 08F200Y 08F250YK 08F300Y 08F300YK 10F200Y		
#8 1%" % Coarse 1000 Tub 08F175Y #8 2" % Coarse 1000 Tub 08F200Y #8 2%" % Coarse 800 Tub 08F250Y #8 2%" % Coarse 800 Tub 08F250YK #8 3" % Coarse 800 Tub 08F300Y #8 3" % Coarse 800 Tub 08F300Y #8 3" % Coarse 1000 Box 08F300Y #8 3" % Coarse 800 Tub 08F300Y #10 2" % Coarse 800 Tub 10F200Y Finish: Yellow Zirc Image: Second	#8 #8 #8 #8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:	13/4" 2" 21/2" 21/2" 3" 3" 2"	% Coarse % Coarse	1000 Tub 1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub	08F175Y 08F200Y 08F250Y 08F250YK 08F300Y 08F300YK 10F200Y		
#8 2" % Coarse 1000 Tub 08F200Y #8 2½" % Coarse 800 Tub 08F250Y #8 2½" % Coarse 1000 Box 08F200Y #8 3" % Coarse 1000 Box 08F20Y #8 3" % Coarse 1000 Box 08F300Y #8 3" % Coarse 1000 Box 08F300Y #8 3" % Coarse 1000 Box 08F300Y #10 2" % Coarse 1000 Box 08F300Y Finish: Yellow Zinc 2" % Coarse 800 Tub 10F200Y Flat Item Code #8 1¼" Coarse 4000 Box 08L175YB Finish: Clear Zinc Item Code #2 Square Flat Item Code #2 Square Flat Item Code	#8 #8 #8 #8 #10 Finish: Yellow 2 Gauge #8	2" 2½" 2½" 3" 3" 2"	% Coarse	1000 Tub 800 Tub 1000 Box 800 Tub 1000 Box 800 Tub	08F200Y 08F250Y 08F250YK 08F300Y 08F300YK 10F200Y		
#8 2½" ¾ Coarse 800 Tub 08F250Y #8 2½" ¾ Coarse 1000 Box 08F250YK #8 3" ¾ Coarse 800 Tub 08F250YK #8 3" ¾ Coarse 800 Tub 08F300Y #8 3" ¾ Coarse 800 Tub 08F300YK #10 2" ⅔ Coarse 1000 Box 08F300YK #10 2" ⅔ Coarse 800 Tub 10F200Y Finish: Yellow Zinc W 2 Square Flat Type 17 Gauge Length Thread Guantity Item Code #8 1¼" Coarse 4000 Box 08L175YB Finish: Clear Zinc #2 Square Flat W Type 17 # 2 Square #2 Square Flat Type 17	#8 #8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:	2½" 2½" 3" 3" 2"	% Coarse	800 Tub 1000 Box 800 Tub 1000 Box 800 Tub	08F250Y 08F250YK 08F300Y 08F300YK 10F200Y		
#8 2½" ½ Coarse 1000 Box 08F250YK #8 3" ½ Coarse 800 Tub 08F300Y #8 3" ½ Coarse 1000 Box 08F300YK #10 2" ½ Coarse 1000 Box 08F300YK #10 2" ½ Coarse 800 Tub 10F200Y Finish: Yellow Zinc #2 Square Flat Type 17 Gauge Length Thread Quantity Item Code #8 1¼" Coarse 4000 Box 08L175YB Finish: Clear Zinc #2 Square Flat Type 17	#8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:	2½" 3" 3" 2"	% Coarse % Coarse % Coarse % Coarse % Coarse	1000 Box 800 Tub 1000 Box 800 Tub	08F250YK 08F300Y 08F300YK 10F200Y		
#8 3" ½ Coarse 800 Tub 08F300Y #8 3" ½ Coarse 1000 Box 08F300YK #10 2" ½ Coarse 1000 Box 08F300YK #10 2" ½ Coarse 800 Tub 10F200Y Finish: Yellow Zinc Type 17 Gauge Length 11/1 Thread Quantity Item Code #8 1¼" Coarse 4000 Box 08L175YB Finish: Clear Zinc #2 Square Flat If the Code #2 Square Flat Type 17	#8 #8 #10 Finish: Yellow 2 Gauge #8 Finish:	3" 3" 2"	% Coarse % Coarse % Coarse % Coarse	800 Tub 1000 Box 800 Tub	08F300Y 08F300YK 10F200Y		
#8 3" ½ Coarse 1000 Box 08F300YK #10 2" ½ Coarse 800 Tub 10F200Y Finish: Yellow Zinc ////////////////////////////////////	#8 #10 Finish: Yellow 2 Gauge #8 Finish:	3" 2"	% Coarse % Coarse		08F300YK 10F200Y		
#10 2" 3 Goarse 800 Tub 10F200Y Finish: Yellow Zinc #10 2" 3 Goarse 800 Tub 10F200Y #11 #11 #11 #11 10F200Y 10F200Y #10 #11 #11 #11 10F200Y #11 #11 #11 #11 10F200Y #11 #12 #11 #11 #11 Gauge Length Thread Quantity Item Code #8 1%" Coarse 4000 Box 08L175YB Finish: Clear Zinc #12 Square Flat #11 #2 Square Flat #11 Type 17	#10 Finish: Yellow 2 Gauge #8 Finish:	2"	³ / ₂ Coarse		10F200Y		
Finish: Yellow Zinc Gauge Length Thread Quantity Item Code #8 1½" Coarse 4000 Box 08L175YB Finish: Clear Zinc Image: Clear Since Image: Clear Since Image: Clear Since Image: Clear Since #2 Square Flat Type 17	Finish: Yellow 2 Gauge #8 Finish:	_		£IIIIIE			
Yellow Zinc Image: Constraint of the second sec	Yellow 2 Gauge #8 Finish:	Zinc	#2 Square	Flat	Type 17		
#8 1¾" Coarse 4000 Box 08L175YB Finish: Clear Zinc #2 Square Flat Type 17	#8 Finish:		\bigcirc				
Finish: Clear Zinc #2 Square Flat Type 17	Finish:	Length	Thread	Quantity	Item Code		
Clear Zinc Flat Type 17		1¾″	Coarse	4000 Box	08L175YB		
		nc			Æ		
Gauge Length Thread Quantity Item Code			(#2 Square	Flat	Type 17		
	Gauge	Length	Thread	Quantity	Item Code		
#8 1¼" Coarse 4000 Box 08L125CBLCTS	#8	11⁄4″	Coarse	4000 Box	08L125CBLCTS		
Interior wood screws for harder-engineered lumber and flooring materials							
Finish: Yellow Zinc		Zinc	Funne				
#2 Square Trim Head Share			#2 Square	Trim Head + Nibs	Sharp		
+ Nibs	Gauge	Length	Thread	Quantity	Item Code		
	#8		High Low	4000 Box	08F200YBTHSS		


Underlayment Screws

Trim head screws for underlayment, wood to wood and crating/pallet applications				
Finish: Gray Phosphate		Sourcemann		
		#2 Phillips	Trim Head + Nibs	Sharp
Gauge	Length	Thread	Quantity	Item Code
#7	1″	High Low	4000 Box	07Q100PB
#7	11⁄4″	High Low	4000 Box	07Q125PB
Finish: Gray Ph	osphate	#2 Square	Trim Head + Nibs	Sharp
Gauge	Length	Thread	Quantity	Item Code
#7	11⁄4″	High Low	4000 Box	07Q125PBQ



*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

വ

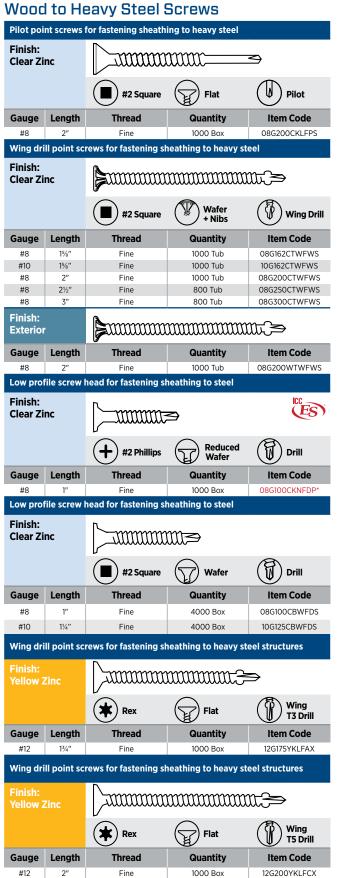

#12


21/2"

Fine

1000 Box

12G250YKLFCX


Wood to Light Steel Screws



Cement Board Screws

Screws f	or fastenir	ng cement board or I	Hardie® board to wo	od
Finish: Exterior				
#2 Square Wafer + Nibs Spo				Spoon
Gauge	Length	Thread	Quantity	Item Code
#8	1¼"	High Low	1000 Tub	08T125W
#8	2"	High Low	1000 Tub	08T200W
Screws for fastening cement board or $\ensuremath{Hardie}^{\ensuremath{\mathbb{S}}}$ board to steel studs				el studs
Finish: Exterior	•			
		#2 Square	Wafer + Nibs	Drill
Gauge	Length	Thread	Quantity	Item Code
#8	1½"	Fine	4000 Box	08T150WBWFDS

Decking and Dock Screws

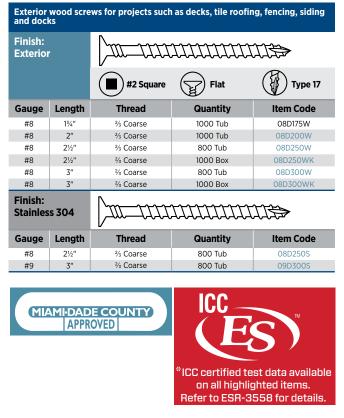


COLLATED SCREWS

Finish: Exterio				
		#2 Square	Trim	Type 17
Gauge	Length	Thread	Quantity	Item Code
#8	21⁄2″	⅔ Coarse	800 Tub	08R250W
^{#8} Finish: Stainles	3" s 304	² / ₃ Coarse		08R300W
Gauge	Length	Thread	Quantity	Item Code
#8	2½″	⅔ Coarse	800 Tub	08R250S
	/ designed er installat			
Exterio	r/Gray	#2 Square	Cupped Pan	Sharp
Gauge	Length	Thread	Quantity	Item Code
#8	2½″	Multi-Thread	800 Tub	08S250W003
#8	3"	Multi-Thread	800 Tub	08S300W003
Finish: Exterior/Tan				1111200
Gauge	Length	Thread	Quantity	Item Code
#8	21⁄2″	Multi-Thread	800 Tub	08S250W592
#8	3"	Multi-Thread	800 Tub	08S300W592
Finish: Exterio	/Red		<i>kannun</i>	111100
Gauge	Length	Thread	Quantity	Item Code
#8	2½″	Multi-Thread	800 Tub	08S250W596
#8	3"	Multi-Thread	800 Tub	08S300W596
Finish: Exterioi	/Brown		<i>Berrin</i>	111120
Gauge	Length	Thread	Quantity	Item Code
#8	2½"	Multi-Thread	800 Tub	08S250W497
#8	3″	Multi-Thread	800 Tub	08S300W497

*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

Metal to Metal Screws

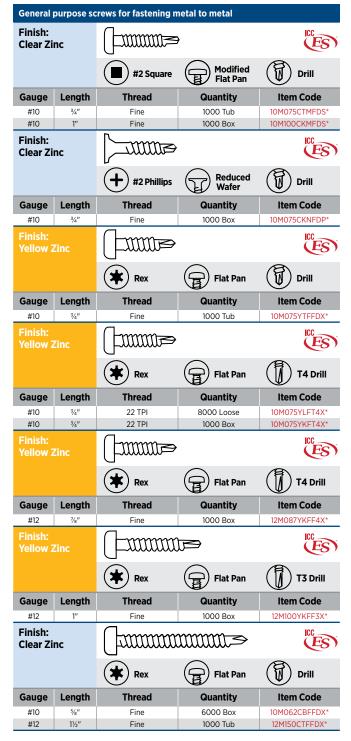


COLLATED SCREWS

COLLATED SCREWS

Self tapping metal framing screw					
Finish: Gray Ph	osphate				
		#2 Phillips	Pan Framing	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
#7	7⁄16″	Double	1000 Tub	07M044PTPDSP	
Finish: Clear Zinc		Jame		ES	
		+ #2 Phillips	Reduced Mod Truss	Sharp	
		<u> </u>	<u> </u>	<u> </u>	
Gauge	Length	Thread	Quantity	Item Code	
Gauge #8	Length	Thread Fine	Quantity 1000 Tub	Item Code 08M050CTRFSP*	
#8	1⁄2″		1000 Tub		
#8	½" ing and-ta	Fine	1000 Tub		
#8 Self drilli Finish:	½" ing and-ta	Fine	1000 Tub		
#8 Self drilli Finish:	½" ing and-ta	Fine pping metal framing	1000 Tub	08M050CTRFSP*	
#8 Self drill Finish: Clear Zi	½" ing and-ta nc	Fine pping metal framing fills #2 Phillips	1000 Tub screws Reduced Mod Truss	OBMOSOCTRFSP*	

Light Metal Framing Screws

Specialty Screws





*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

The New Standard in Professional Auto-Feed Screw Systems

INCREASE JOB SITE PRODUCTIVITY BY **30**%!

4X faster than corded screwdrivers with loose screws^{*}

- DuraSpin Auto-Feed Screw Systems eliminate the need to reach for fasteners and position them on a magnetic screw tip.
- DuraSpin allows for one-handed screw fastening with either hand, freeing the other hand to steady your work.

*DuraSpin Screw Fastening System Time & Motion Stud July, 2001. R.S.MEANS. CONSULTING SERVICES.



PAINTED FASTENERS FOR EXTERIOR METAL ATTACHMENT

SENCO now offers a variety of colors in our new DuraSpin specialty metal to metal collated screws developed for the cargo trailer industry.

BENEFITS

- Increases productivity over loose screws
- Produces perfectly flat seams No unsightly bubbles
- Improved holding power
- No dropped fasteners = no flat tires

FEATURES

1 66

- E1000 Finish
- Square or Rex Drive
- Available in 3/4" or 5/8" collated & 7/8" loose

SENCO

Specialty Metal to Metal Painted Screws

Specialty metal to	o metal screw for securing trailer skir	15		
Finish: E1000				
	#2 Square Pan Framing Drill	Rex Pan Framing Drill	Pan Framing T4 Drill	Rex Pan Framing T4 Drill
	#10 x ³ /4"	#10 x ⁵ ⁄8″	#12 x ⁷ 8″	#12 x ⁷ /8″
Clear	10M075EBMFDS	10M062EBFFDX	12M087ELFF4S	12M087ELFF4X
Black	10M075E000BMFDS	10M062E000BFFDX	12M087E000LFF4S	12M087E000LFF4X
White	10M075E111BMFDS	10M062E111BFFDX	12M087E111LFF4S	12M087E111LFF4X
Charcoal Gray	10M075E001	10M062E001	12M087E001S	12M087E001X
Silver Frost	10M075E002	10M062E002	12M087E002S	12M087E002X
Pewter	10M075E003	10M062E003	12M087E003S	12M087E003X
Brandy Wine	10M075E004	10M062E004	12M087E004S	12M087E004X
Orange	10M075E005	10M062E005	12M087E005S	12M087E005X
Yellow	10M075E006	10M062E006	12M087E006S	12M087E006X
Red	10M075E007	10M062E007	12M087E007S	12M087E007X
AZ Beige	10M075E008	10M062E008	12M087E008S	12M087E008X
Indigo Blue	10M075E009	10M062E009	12M087E009S	12M087E009X
Emerald Green	10M075E010	10M062E010	12M087E010S	12M087E010X
Dove Gray	10M075E011	10M062E011	12M087E011S	12M087E011X
Packaging	4000 box	6000 box	150 Clamshell	150 Clamshell

Painted Screws Color

		۲				0		۲			æ		
Clear	Black	White	Charcoal Gray	Silver Frost	Pewter	Brandy Wine	Orange	Yellow	Red	AZ Beige	Indigo Blue	Emerald Green	Dove Gray

SCREW SYSTEM ACCESSORIES

its					Bits			
ntegrated auto	-feed screw sy	stems — 2 bits	per pack		Screwdriver and at	tachment combinati	ons — 2 bits per pac	:k
Bits Fit		OITEM #	TEM #	000000	Bit Fit	ITEM #		
DS200-AC					SENCO SG2510 a	and Senco SG4100		
DS202-14V DS205-14V	EA0122	EA0123	EA0269		+ DS110	EA0277	EA0278	EA0279
03203-140					+ DS210	EA0277	EA0278	EA0279
DS212-18V					+ DS220	EA0311	EA0312	EA0313
DS215-18V DS232-AC	EA0297	EA0298	EA0299		+ DS310	EA0271	EA0272	EA0273
DS232-AC					+ DS320	EA0314	EA0315	EA0316
DS275-18V					Makita with adap	oters ADP019 and I	MB0174	
DS300-AC	EA0140	EA0141	EA0270		+ DS110	EA0277	EA0278	EA0279
DS312-18V					+ DS210	EA0277	EA0278	EA0279
DS332-AC	EA0300	EA0301	EA0302		+ DS220	EA0311	EA0312	EA0313
5 count packag	ing for the hig	h output profes	sional user*		+ DS310	EA0271	EA0272	EA0273
		li output proie.			+ DS320	EA0314	EA0315	EA0316
DS212-18V DS215-18V DS232-AC	EA0297N	EA0298N	EA0299N			DeWalt, Hitachi, TY oters ADP011 and A	1800 with adapter DP020	ADP014
DS235-AC				从从从 植植物	+ DS110	EA0280	EA0281	EA0282
DS312-18V					+ DS210	EA0280	EA0281	EA0282
DS332-AC		EA0301N			+ DS220	EA0317	EA0318	EA0319
uto-feed attac	hmont kite — 2) hits nor nack		High output	+ DS310	EA0274	EA0275	EA0276
				25 per pack	+ DS320	EA0320	EA0321	EA0322
Bits Fit			E ITEM #		25 count packaging	g for the high output	t professional user*	
DS325AC DS340AC	EA0271	EA0272	EA0273			and Senco SG4100 oters ADP019 and I		
DS425AC DS440AC	EA0314	EA0315	EA0316		+ DS220		EA0312N	EA0313N
					+ DS320		EA0315N	EA0316N

14

Bit Tips						
Loose screwdriver — 10 bits per pack						
Bits Fit	ITEM #	A				
SG2510 SG4100	EA0308					

Bit Tips & Holders

Auto-feed screw system — 5 bit tips and 1 holder per pack						
Bit Tip Holders Fit	ITEM #	8 8				
DS200-AC DS202-14V DS205-14V	WC0067					
DS275-18V DS300-AC	WC0070					
Bit Tips Fit	Bit Tips ITEM #	O Bit Tips ITEM #				
DS200-AC DS202-14V DS205-14V	EA0142	EA0143				
DS275-18V DS300-AC		=				

Adapters

For attaching screwdrivers to attachments					
Screwdriver	Fits Tools		Adapter ITEM #		
SENCO	SG2510	SG4100	MB0173		
JENCO	SG2500	SG4000	ADP015		
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	ADP009		
	FS2200 FS2500	FS4200 FS6200	ADP019		
MAKITA	FS2701		MB0174		
	6805BV	6827	ADP020		
	6820 6821 6823	6824 6825 68261	ADP011		
HITACHI	W6V4 W6VA4 W6VB3	W6VM W8VB2	ADP010		
	WH14DM		ADP017		
SIOUX	Screwdriver internal hex		ADP018		

SCREW SYSTEM ACCESSORIES

Nosepieces

For wood appli	ications		
Fits Tools	Range	ITEM #	
DS200-AC DS202-14V	1″–2″	FA0211	
DS212-18V DS215-18V DS220 DS232-AC DS235-AC	1″–2″	FB0157	
DS312-18V DS320 DS332-AC DS425AC DS440AC	1″-3″	FB0159	

For drywall applications							
Fits Tools	Range	ITEM #					
DS200-AC DS202-14V	1″–2″	FA0198					
DS212-18V DS215-18V DS220 DS232-AC DS235-AC	1″–2″	FC0878					
DS312-18V DS320 DS332-AC DS425AC DS440AC	1″–3″	FC0895					

For metal framing applications						
Fits Tools	Range	ITEM #				
DS212-18V DS215-18V DS220 DS232-AC DS235-AC	1⁄2″–1″	FB0155				
DS212-18V DS215-18V DS220 DS232-AC DS235-AC	½″−2″	FC0822				
DS312-18V DS320 DS332-AC DS425AC DS440AC	½″−3″	FC0887	L			

SCREW SYSTEM ACCESSORIES

Nosepieces & Metal Washers

For lath, plaster, PM, stucco, one-coat and hard-coat applications						
Fits Tools	Fits Tools	Range	ITEM #	N		
SENCO	DS212-18V DS215-18V DS235-AC DS232-AC DS220	1″-2″	FB0167			

Metal Washer

ITEM #	Diameter	Box Count	Fits Screw Series
SWM125A	11⁄4″	1M	06A, 06B, 06C, 07A
		O)	

Nosepieces & Plastic Washers

For building w	For building wrap and EIFS installation						
Fits Tools	Fits Tools	Range	ITEM #				
SENCO	DS212-18V DS215-18V DS235-AC DS232-AC DS220	1″–2″	FB0170				
SENCO	DS312-18V DS320 DS332-AC DS425AC DS440AC	1″–3″	FB0168				

Plastic Washer

Box Count	Fits Screw Series							
	Fits Screw Series							
1M	06A, 06B, 06C, 07A (forms seal around screw)							
SWP175A 134" IM UDA, UBB, UBC, UTA (forms seal around screw)								

Battery Systems

Compatible with all 18V Li-Ion DuraSpin and SENCO FUSION tools							
18V Li-Ion Battery 1.5 amp hour	Fits						
VB0155	DS212-18V DS215-18V DS312-18V DS215-XP All Fusion Models	 1.5 amp hour High-quality reliable cells Longer storage life Charges 80% in 15 minutes 					
18V Li-Ion Battery 3.0 amp hour	Fits						

Charger System

Can be used interchangeably with SENCO VB0155, VB0161 and VB0118 batteries

Battery Charger	For use with	
VB0156	VB0155 VB0161 VB0118	 Battery charge indicators display charge status of your battery Compatible with all SENCO 18V Li-lon batteries

FOR GROOVED DECK BOARDS

The newest generation of hidden deck fasteners, featuring Mantis® technology, provides a hidden fastener solution for grooved decking made from PVC, composites or wood products.

Benefits of SENCO® Hidden Deck Fastening System Include:

- No visible fasteners Unique starter and finish clips ensure an unblemished deck surface.
- Reduced potential for mildew and rot Clips elevate the deck board off joists for proper airflow and drying.
- Uniform installation and appearance Clips automatically space deck boards 3/16" apart to help ensure even spacing.
- High strength steel fasteners Unique coating process for corrosion resistance. Recommended for use with with ACQ and other treated lumber joists.
- 30 year limited warranty against loose deck boards Leading performance in hold down and lateral movement.





HIDDEN DECK CLIP SYSTEM

SHD150XP

MANTIS HIDDEN DECK CLIP NAILER

ITEM #9D0001N



Features

- Designed specifically for installation of Mantis brand deck clips
- Integrated EZ-slide attachment guides and aligns deck clips
- Industrial strength magnet keeps deck clip in place until installed
- Dry-fire lockout
- Rotatable rafter hanger
- Includes wrenches, tool oil, safety glasses and air plug

Product Reference Chart

TOOL SPECS	SHD150XP				
Trigger	Sequential				
Operating Pressure	70–120 psi (4.8–8.3 bar)				
Air Consumption (60 CPM)	2.3 scfm				
Air Inlet	1⁄4″ NPT				
Weight	4.6 lbs (2.08 kg)				
Height	12.25" (311 mm)				
Length	15.13" (384 mm)				
Width	4" (102 mm)				
Main Body Material	Magnesium				
Warranty	5 yrs				
TOOL FEATURES					
Depth-of-Drive	No				
Rafter Hook	Adjustable				
Dry Fire Lockout	Yes				
Exhaust	Adjustable				

Clips

Deck clips and starter clips are designed to fit the most common groove heights in slotted PVC, composite or wood						
Туре	For					
Deck Clips	.380" groove use 385 Deck Clip Series .406" groove use 396 Deck Clip Series .396" groove use TRX Deck Clip Series					
Starter Clips	.380" groove use 385 Starter Clip Series .406" groove use 396 Starter Clip Series .396" groove use TRX Starter Clip Series					
Finish clips are universal						
Finish Clips	HDFC25 Finish Clips fit all board sizes					

Fasteners

Loose screws can be used with any loose screwdriver and #2 square bit					
Туре	For				
Loose Screws	D #2 Square bit				
Reversible fasteners are uniquely eng	ineered to be driven in like a traditional collated nail, but can be l	backed out like a traditional screw using a #1 square bit			
Collated Reversible Fasteners (Driven with SHD150XP)	1 #1 Square bit	א פעעעעעעעעעעעעעעעעעעעע			

HIDDEN DECK CLIP SYSTEM

HIDDEN DECK CLIP SYSTEM

Clip Guide by Decking Manufacturer & Size

All clips are designed for specific groove heights in deck boards. Use the chart below t	o find the series for your k	ooards.	
Clip Style	385	396	TRX
Clip Groove Height	.380"	.406"	.396"
COMPOSITE MANUFACTURERS			
AERT (Moistureshield [®] , ChoiceDek [®] , Modern View™)		•	
EVERNEW [®] LT	•		
FIBERON® (Horizon®, Pro Tect Advantage®, Professional, Veranda®)	•		
LATITUDES® (UFPI) (Captiva™, Capricom®, Wave)	•		
NATURE'S COMPOSITES®		•	
TIMBERTECH [®] (Evolutions [®] , Twin Finish [®] , Terrain)	•		
TREX [®] (Transcend [®] , Enhance [®] , Select [®] , Accents [®])			•
WOLF HOME PRODUCTS® (Island Collection)	•		
GROOVED PVC MANUFACTURERS			
AZEK® (Tropical Collection, Natural Collection)	•		
GOSSEN*/WEATHER READY (American Classic, Trailways, Passport)		•	
DECEUNINCK (Solstice [®] , Clubhouse)		•	
TUFBOARD [®] (Alsek, Bellus, Cierra, ECO, Kinbo)		•	
ROYAL/CENTURY (Royal Deck)		•	
ALTERNATIVE DECKING MANUFACTURER			
NYLODECK®	•		
For any .380" groove height	•		
For any .406" groove height		•	
For any .396" groove height			•

Hidden Deck Clips, Tools & Accessories

385 Series — Groove height = .380"							
Description	Collation	Pack Type	Pieces per Pack	Included	Item Code		
MANTIS 385 Clips w/Screws (50 ft ²)	Loose Screws	Box	90	Includes 5 Starter & 5 Finish Clips	HDL38590		
MANTIS 385 Clips w/Screws (250 ft ²)	Loose Screws	Bucket	450	Starter & Finish Clips Sold Separately	HDL385450		
MANTIS 385 Clips w/Fasteners (50 ft ²)	Collated Fasteners	Box	90	Includes 5 Starter & 5 Finish Clips	HDC38590		
MANTIS 385 Clips w/Fasteners (250 ft ²)	Collated Fasteners	Bucket	450	Starter & Finish Clips Sold Separately	HDC385450		
396 Series — Groove height = .406"							
Description	Collation	Pack Type	Pieces per Pack	Included	Item Code		
MANTIS 396 Clips w/Screws (50 ft ²)	Loose Screws	Box	90	Includes 5 Starter & 5 Finish Clips	HDL39690		
MANTIS 396 Clips w/Screws (250 ft ²)	Loose Screws	Bucket	450	Starter & Finish Clips Sold Separately	HDL396450		
MANTIS 396 Clips w/Fasteners (50 ft ²)	Collated Fasteners	Box	90	Includes 5 Starter & 5 Finish Clips	HDC39690		
MANTIS 396 Clips w/Fasteners (250 ft ²)	Collated Fasteners	Bucket	450	Starter & Finish Clips Sold Separately	HDC396450		
<pre>FRX Series — Groove height = .396"</pre>							
Description	Collation	Pack Type	Pieces per Pack	Included	Item Code		
MANTIS TRX Clips w/Screws (50 ft ²)	Loose Screws	Box	90	Includes 5 Starter & 5 Finish Clips	HDLTRX90		
MANTIS TRX Clips w/Screws (250 ft ²)	Loose Screws	Bucket	450	Starter & Finish Clips Sold Separately	HDLTRX450		
MANTIS TRX Clips w/Fasteners (50 ft ²)	Collated Fasteners	Box	90	Includes 5 Starter & 5 Finish Clips	HDCTRX90		
MANTIS TRX Clips w/Fasteners (250 ft ²)	Collated Fasteners	Bucket	450	Starter & Finish Clips Sold Separately	HDCTRX450		
Fools & Accessories							
Description	Collation	Pack Type	Pieces per Pack	Included	Item Code		
SHD150XP — Pneumatic Installation Tool	_	-	_	-	9D0001N		
SG2510 — Loose Screwdriver	-	_	-	-	6X0002N		
			25	Includes Screws	HDSC38525		
MANTIS 385 Starter Clips w/Screws	-	Clamshell	25	includes sciews	1105050525		
MANTIS 385 Starter Clips w/Screws MANTIS 396 Starter Clips w/Screws	-	Clamshell	25	Includes Screws	HDSC39625		
. ,	- - -						

Installation Tips

It's easy with either loose screws or collated reversible fasteners and the SHD150XP tool. Detailed instructions are included in every pack of Senco Mantis Hidden Deck Clips.



Line up the back of the Starter Clip. Fasten this clip to the ledger board with the screws supplied. Slide the deck board groove into the Starter Clip tab.



Slide the Mantis Clip into the deck board groove. Fasten to the joist using the supplied fasteners.



FLUSH FINISH: Fasten the Finish Clip leg with one hole to the underside of the deck board. Align the deck board edge with the inside of the Finishing Clip leg with two holes, fasten to the rim joist.

OVERHANG FINISH: Fasten the Finish Clip leg with one hole into the underside of the deck board. Fasten the leg with two holes to the rim joist, pulling the deck board tight into the Deck Clip.



For butt joints that are continuous to the length of the joist, a second joist is required. If the butt joint is random, you can secure a second piece of joist (approximately 18" in length) to the joint area.

CORDLESS PNEUMATIC PERFORMANCE. TRIM ALL DAY.

Experience award-winning cordless convenience in an all-day, everyday trim tool. Available in 15, 16 and 18 gauge, Fusion tools from SENCO feature a revolutionary cordless air-power technology.

- Instant shot with no ramp-up time
- No hose, compressor or fuel cell
- Drives like a pneumatic
- For professional finish and trim

In a recent industry-wide test, the Fusion F-15 was named the top cordless nail gun, highlighting its rapid rate of fire, consistent nail-driving performance in any material and its lightweight, slim-handle design.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim

FEATURES

- Rugged aluminum magazine
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- Thumbwheel depth-of-drive
- EZ-Clear feature for quickly clearing jams
- Includes storage bag and charger



F-18

21/8" CORDLESS STRAIGHT BRAD NAILER

ITEM #6E0001N



Features

Thumbwheel depth-of-drive

Nose-mounted LED light

• Rapid-charge battery reaches 80% in just 15 minutes

F-15

21/2" CORDLESS ANGLED FINISH NAILER

ITEM #5N0001N



Features

- Thumbwheel depth-of-drive
- Nose-mounted LED light
- Rapid-charge battery reaches 80% in just 15 minutes

F-16S

18GA

21/2" CORDLESS STRAIGHT FINISH NAILER



Features

- Thumbwheel depth-of-drive
- Nose-mounted LED light
- Rapid-charge battery reaches 80% in just 15 minutes

One Common Battery Platform

SENCO'S 18-Volt Li-Ion Battery System

Designed for long running times with quick recharges, the battery operates at full speed until depleted, so there is no gradual drop in power during use. Special LED fuel gauge displays battery life at the touch of a button.

18V Li-Ion Battery 1.5 amp hour	Fits
VB0155	F-18 F-16S / F-16A F-15
18V Li-Ion Battery 3.0 amp hour	Fits
	= 10
VB0161	F-18 F-16S / F-16A F-15
VB0161 Battery Charger	F-16S / F-16A
	F-16S / F-16A F-15

and DS312-18V models.

F-16A

21/2" CORDLESS ANGLED FINISH NAILER





Features Thumbwheel depth-of-drive

- Nose-mounted LED light
- Rapid-charge battery reaches 80% in just 15 minutes



SENCO's 18-Volt Li-Ion batteries work for all Fusion Finish Nailers and all Cordless Duraspin Auto-Feed Screw Systems. See the complete SENCO Battery Platform in the accessories section on page 80.

21

TOOL SPECS	F-18	F-16S	F-16A	F-15
Weight	6 lbs (2.72 kg)	6 lbs (2.72 kg)	6.2 lbs (2.81 kg)	6.2 lbs (2.81 kg)
Height	13" (330 mm)	13" (330 mm)	13" (330 mm)	13" (330 mm)
Length	11" (276 mm)	11" (276 mm)	13" (330 mm)	13" (330 mm)
Width	3" (76 mm)	3" (76 mm)	3" (76 mm)	3" (76 mm)
Charger		80% in 15 minutes,	100% in 45 minutes.	
Warranty	2 yrs	2 yrs	2 yrs	2 yrs
FASTENER SPECS		Fasteners are locat	ed on pages 22-23	
Gauge	18	16	16	15
Range	⁵ /8″-2 ¹ /8″	³ / ₄ "-2 ¹ / ₂ "	11⁄4″-21⁄2″	11⁄4″-21⁄2″
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	20° Angled Glued Strip	34° Angled Taped Strip
Series	AY, AX	MO	RH	DA
TOOL FEATURES				
Patented Instant Shot Design	Yes	Yes	Yes	Yes
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
EZ-Clear Jam Clearing	Yes	Yes	Yes	Yes
Trigger Actuation	Sequential or Contact	Sequential or Contact	Sequential or Contact	Sequential or Contact
Aluminum Drive Cylinder	Yes	Yes	Yes	Yes
Belt Hook	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible


18 Slight Head Brad Nails

Cabinets, decorative trim, picture frames and molding								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
5⁄8″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY10EAA	
3/4"	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY11EAA	
1″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY13EAA	



18 Straight Strip Brad Nails


Cabinets, decorative trim, picture frames and molding							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
5⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX10EAA
3/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX11EAA
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX13EAA
11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX15EAA
11⁄2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX17EAA
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX18EAA
13⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX19EAA
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX21EAAN
21⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX22EAAN
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201009
11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201259
1½″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A201509
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A202009
⁵ ⁄8-1 ¹ ⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209809*
1-2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209909*
1″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX13EGAR
11⁄4″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX15EGAR
1½″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX17EGAR
2″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX21EGAR



CS-Clamshell, *Variety Pack

6_{GA} Straight Strip Finish Nails

	Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
3⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M	M001000	
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001001	
11⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001002	
11⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001003	
13⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001004	
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001005	
21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001007	
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	1.2M (CS)	A401009	
11⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	1.2M (CS)	A401259	
11⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A401509	
13⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A401759	
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402009	
21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402509	
11⁄4″-21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.8M (CS)	A409809*	
11⁄2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001003GR	
2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001005GR	
21⁄2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001007GR	



CS-Clamshell, PT-Plastic Tub, *Variety Pack


FUSION FASTENERS

Angled Strip Finish Nails*

Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
11⁄4″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH15EAA	
11⁄2″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH17EAA	
13⁄4″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH19EAA	
2″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH21EAA	
2½″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH25EAA	

PT-Plastic Tub


*NOTE: only fits 16 gauge, 20° finish nailers



21⁄2″_

🕈 Angled Strip Finish Nails

Furniture and cabinets, molding and trim, baseboard, chair rails, doors and window casings							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
1″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA13EPBN
11⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA15EPBN
11⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA17EPBN
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA19EPBN
2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA21EPBN
2¼″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	4M	DA23EPBN
21⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	3M	DA25EPB
11⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	0.7M (CS)	A301500
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	0.7M (CS)	A301750
2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	0.7M (CS)	A302000
21⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Taped Strip	0.7M (CS)	A302500
11⁄4″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	4M	DA15EABN
1½″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	4M	DA17EABN
13⁄4″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	4M	DA19EABN
2″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	4M	DA21EABN
2½″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	3M	DA25EAB
2″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	0.7M (CS)	A302009
21⁄2″	Chisel	Brad	Galv	Sencote	34° Angled Taped Strip	0.7M (CS)	A302509
2″	Chisel	Brad	Stainless 304	Sencote	34° Angled Taped Strip	2M	DA21EGBN
21⁄2″	Chisel	Brad	Stainless 304	Sencote	34° Angled Taped Strip	1.2M	DA25EGB
1¼″	Diamond	Brad	Hardened*	Plain	34° Angled Taped Strip	4M	DA15AIA
1½″	Diamond	Brad	Hardened*	Plain	34° Angled Taped Strip	4M	DA17AIA
13⁄4″	Diamond	Brad	Hardened*	Plain	34° Angled Taped Strip	4M	DA19AIA



CS-Clamshell

*Hardened regular galvanized heat treated 15 gauge for steel stud and trim applications

Maximize Your Fusion Cordless Convenience.

SENCO® manufactures 62 varieties of finish nails available in 6 gauges and 12 lengths.

THE DIFFERENCE IS IN THE DETAILS

SENCO has set the industry standard for finish and fine woodworking tools, providing compact, ultra-light, easy-to-use tools designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 15–18 gauge staplers, including the award-winning 21 gauge FinishPro®21LXP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs

SEN

FinishPro 21

FEATURES

- EZ-Clear[™] latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- Comfort grip
- Adjustable depth-of-drive

FinishPro®23SXP

13/8" HEADLESS PINNER

ITEM #8F0001N



Features

- \bullet Powerful ensures complete drives into hard substrates
- Automatically adjusts for different fastener lengths
- Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners
- Includes case, swivel air plug, wrench and tool oil

FinishPro®23LXP

2" HEADLESS PINNER

ITEM #8L0001N



Features

- \bullet Most powerful tool in its class ensures complete drives into hard substrates
- Automatically adjusts for different fastener lengths
- Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners
- Includes case, swivel air plug, wrench and tool oil



Product Reference Chart

TOOL SPECS	FinishPro [®] 23SXP	FinishPro [®] 23LXP		
Trigger	Sequential	Sequential		
Operating Pressure	70–100 psi (4.8–7 bar)	70-110 psi (4.8-7.6 bar)		
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm		
Air Inlet	1⁄4″ NPT	¼″ NPT		
Weight	2.5 lbs (1.1 kg)	2.7 lbs (1.2 kg)		
Height	7.56" (192 mm)	8.89″ (226 mm)		
Length	7.87″ (200 mm)	7.87″ (200 mm)		
Width	1.85" (44 mm)	1.85" (44 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are locat	ed on pages 32–37		
Gauge	23	23		
Range	1/2''-13/8''	1/2"-2"		
Capacity	126	126		
Angle/Collation	Straight Glued Strip	Straight Glued Strip		
Series	A10, CZ	A10, CZ		
TOOL FEATURES				
Depth-of-Drive	No	No		
Belt Hook	Yes	Yes		
Oil-Less	No	No		
Exhaust	Rear	Rear		

FINISH & WOODWORKING

23

FinishPro[®]21LXP

2" PINNER

ITEM #8M0001N



Features

- Powerful ensures complete drives into hard substrates
- Automatically adjusts for different fastener lengths
- · Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners
- Includes case, swivel air plug, wrench and tool oil

FinishPro[®]18Mg

21/8" BRAD NAILER





Features

- Metal cylinder for increased durability
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Narrow nose for tight corners
- · Includes case, swivel air plug and wrench

LS1XP

1" HEADLESS BRAD NAILER


ITEM #8N0001N



Features

- Never-Lube[®] design no lubrication to stain fine woods
- Ergonomic handle for all-day comfort
- Narrow nose for tight corners

FinishPro[®]18BMg





Features

- Oil-free design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Nose mounted LED light illuminates dark work spaces
- Includes case, swivel air plug and wrench

Prod

roduct Reference Chart							
TOOL SPECS	FinishPro®21LXP	LS1XP	FinishPro®18Mg	FinishPro®18BMg			
Trigger	Sequential	Sequential	Selectable	Selectable			
Operating Pressure	70–110 psi (4.8–7.6 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)			
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm	1.6 scfm			
Air Inlet	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT			
Weight	3.15 lbs (1.43 kg)	2.9 lbs (1.3 kg)	2.48 lbs (1.12 kg)	2.8 lbs (1.26 kg)			
Height	8.89" (226 mm)	8.25" (210 mm)	9.75″ (248 mm)	9.8" (248 mm)			
Length	7.87" (200 mm)	9″ (229 mm)	10.5" (267 mm)	10" (255 mm)			
Width	1.85" (44 mm)	2" (51 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)			
Main Body Material	Aluminum	Aluminum	Magnesium	Magnesium			
Warranty	5 yrs	5 yrs	5 yrs	5 yrs			
FASTENER SPECS		Fasteners are locat	ed on pages 32–37				
Gauge	21	18	18	18			
Range	5⁄8″-2″	1⁄2″−1″	5⁄8″-21⁄8″	⁵⁄8″ − 2½″			
Capacity	170	100	110	100			
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip			
Series	ZX	AZ	AX	AX			
TOOL FEATURES							
Depth-of-Drive	No	No	Yes, Tool-Free	Yes, Tool-Free			
Belt Hook	Yes	Fixed	Yes	Yes			
Oil-Less	No	Yes	Yes	Yes			
Exhaust	Rear	Fixed	Rear Adjustable	Rear Adjustable			

18

FINISH & WOODWORKING

SLP2OXP 15/8" BRAD NAILER

ITEM #430101N



Features

- Never-Lube[®] design no oil required
- ${\boldsymbol{\cdot}}$ Drives both slight and medium headed brads
- Muffler ensures quieter operation
- Includes case

FinishPro[®]25XP

21/8" BRAD NAILER

ITEM #760102N

18_G



Features

- Never-Lube® design no oil required
- Drives both slight and medium headed brads
- ${\mbox{ \bullet}}$ Powerful ensures complete drives into hard substrates
- Includes case

Product Reference Chart

i loudot nererenet	onare		
TOOL SPECS	SLP20XP	FinishPro®25XP	
Trigger	Sequential	Sequential	
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	
Air Inlet	¼″ NPT	¼″ NPT	
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)	
Height	8.25" (210 mm)	9.9″ (251 mm)	
Length	9.5″ (241 mm)	9.8" (249 mm)	
Width	2" (50.8 mm)	2.2" (56 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are locat	ed on pages 32–37	
Gauge	18	18	
Range	5%" - 15%"	5⁄8"-21⁄8"	
Capacity	110	110	
Angle/Collation	Straight Glued Strip	Straight Glued Strip	
Series	AX, AY	AX, AY	
TOOL FEATURES			
Depth-of-Drive	No	Yes, Tool-Free	
Belt Hook	No	Yes	
Oil-Less	Yes	Yes	
Exhaust	Fixed	Adjustable	

18GA

FinishPro[®]32 21/2" FINISH NAILER

ITEM #1X0201N



Features

FINISH & WOODWORKING

- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Piston and driver designed for durability
- Reversed safety element for improved line of sight
- Includes case

FinishPro®33Mg

2½" ANGLED FINISH NAILER

ITEM #6F0001N

16



Features

- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Integrated air blower clears debris from work surface
- Metal cylinder for increased durability
- Includes case, swivel air plug and wrench

SFN30

2" ANGLED FINISH NAILER

ITEM #620002N



Features

- Never-Lube® design no oil required
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Ultra-lightweight for ease of use and maneuverability
- Includes case

TOOL SPECS	FinishPro®32	FinishPro®33Mg	SFN30				
Trigger	Sequential	Selectable	Sequential				
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8-8.3 bar)				
Air Consumption (60 CPM)	2.16 scfm	2.22 scfm	2.16 scfm				
Air Inlet	1⁄4″ NPT	¼″ NPT	½″ NPT				
Weight	4.2 lbs (1.9 kg)	3.83 lbs (1.74 kg)	3.6 lbs (1.6 kg)				
Height	10.88" (276 mm)	11.5" (292 mm)	9.62" (244 mm)				
Length	12.16" (307 mm)	12" (305 mm)	12" (305 mm)				
Width	3″ (76 mm)	3″ (76 mm)	3.25″ (82.5 mm)				
Main Body Material	Aluminum	Magnesium	Composite				
Warranty	5 yrs	5 yrs	5 yrs				
FASTENER SPECS	F	asteners are located on pages 32–3	7				
Gauge	16	16	15				
Range	1¼"-2½"	1¼"-2½"	1"-2"				
Capacity	110	110	104				
Angle/Collation	Straight Glued Strip	20° Angled Strip	34° Angled Tape Strip				
Series	A4, MO	RH	DA				
TOOL FEATURES							
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free				
Belt Hook	Yes	Yes	Yes				
Oil-Less	No	Yes	Yes				
Exhaust	Adjustable	Adjustable	Fixed				

FinishPro®35Mg 2½" ANGLED FINISH NAILER

ITEM #6G0001N



Features

- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Integrated air blower clears debris from work surface
- Metal cylinder for increased durability
- Includes case, swivel air plug and wrench

FinishPro®42XP

21/2" ANGLED FINISH NAILER

ITEM #4G0001N



Features

- Never-Lube[®] design no oil required
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- High-strength driver with threaded connection
- Metal cylinder for increased durability
- Includes case, belt hook and contact trigger kit

TOOL SPECS	FinishPro®35Mg	FinishPro®42XP		
Trigger	Selectable	Sequential		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70–120 psi (4.8–8.3 bar)		
Air Consumption (60 CPM)	3.2 scfm	3.87 scfm		
Air Inlet	¼″ NPT	1⁄4" NPT		
Weight	4.2 lbs (1.9 kg)	4.7 lbs (2.1 kg)		
Height	12.25" (311 mm)	11.25" (286 mm)		
Length	13" (330 mm)	13" (330 mm)		
Width	3.5″ (89 mm)	3.5" (89 mm)		
Main Body Material	Magnesium	Magnesium		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are locat	ed on pages 32–37		
Gauge	15	15		
Range	11⁄4″-21⁄2″	11⁄4″-21⁄2″		
Capacity	110	104		
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip		
Series	DA	DA		
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free		
Belt Hook	Yes	Yes		
Oil-Less	Yes	Yes		
Exhaust	Adjustable	Adjustable		

SLS20XP

3/16", 1/4", 3/8" CROWNS, 11/2" FINE/MEDIUM WIRE STAPLER

SEE ITEM # CHART **19** 18 SENCO

Features

- Never-Lube® design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SLS25XP

1/4", 3/8" CROWNS, 11/2" MEDIUM WIRE STAPLER

SEE ITEM # CHART

Features

- Never-Lube® design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SKSXP



Features

- Never-Lube® design no oil required
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Long 1" lip to get into tight spots

SLS20XP, SLS25XP and SKSXP ITEM # Chart

Model	Item Code
SLS20XP-K	490101N
SLS20XP-L	490103N
SLS20XP-L W/CASE	490105N
SLS20XP-L SENCOMATIC	490015N
SLS20XP-M SENCOMATIC	490009N
SLS20XP-M	490107N
SLS20XP-R	490111N
SLS25XP-L	820103N
SLS25XP-M	820107N
SKSXP-L	300120N
SKSXP-M	300152N
SKSXP-N	300184N

Product Reference Chart						
TOOL SPECS	SLS20XP	SLS25XP	SKSXP			
Trigger	Sequential	Contact	Sequential			
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)			
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm			
Air Inlet	1⁄4″ NPT	¼″ NPT	½" NPT			
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)			
Height	8.5" (216 mm)	9″ (229 mm)	9.25″ (238 mm)			
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)			
Width	2" (50.8 mm)	2" (50.8 mm)	3″ (76 mm)			
Main Body Material	Aluminum	Aluminum	Aluminum			
Warranty	5 yrs	5 yrs	5 yrs			
FASTENER SPECS	F	asteners are located on pages 32–3	7			
Gauge	19, 18	18	18, 16			
Crown	3/16", 1/4", 3/8"	1/4", 3/8"	1⁄4", 3⁄8", 7⁄16"			
Range	³ / ₈ "-1 ¹ / ₂ "	³ ⁄8″-1½″	3⁄4″-1½″			
Capacity	168	168	145			
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip			
Series	K, L, M, R	L, M	L, M, N			
TOOL FEATURES						
Depth-of-Drive	Yes	Yes	No			
Belt Hook	No	No	No			
Oil-Less	Yes	Yes	Yes			

SLS150Mg

1/4" CROWN, 1%6" MEDIUM WIRE STAPLER

ITEM #8C0001N



Features

- Ultra-lightweight for ease of use and maneuverability
- Nose-mounted LED light illuminates work surface
- Durable composite magazine
- Reload indicator on magazine
- Includes case and wrench

SC1XP Senclamp[®]

7/16" CROWN, %6" SENCLAMP® FASTENER

ITEM #220101N. CYCLE-THRU MODEL ITEM #4E0002N



Features

- Senclamp[®] fasteners pull permanent fit
- Eliminates milling, dowe cost-adding operations
- The Senclamp high-carbo special webbed design

Product Referen TOOL SPE

Operating Press

Main Body Mate

FASTENER SPE

Air Consumption (60 C

Air Ir Wei

Capacity

Series

Belt Hook

Oil-Less

Angle/Collation

TOOL FEATURES Depth-of-Drive 110

Straight Glued & Taped Strip

L

Yes, Tool-Free

Yes

Yes

Warra

SLS18Mg

1/4" CROWN, 11/2" MEDIUM WIRE STAPLER

ITEM #1W0021N

18



Features

- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- · Reload indicator on magazine
- Includes case, swivel air plug and wrench

SC2 Sencor®



Features

120

Straight Glued & Taped Strip

Y

No


No

No

31

FINISH & WOODWORKING

18GA



80

Straight Glued Strip

Х

No

No

No

doweling, c tions	oint together during driving for a clamping, screwing and other time eel fastener derives added strengt	-consuming,	• Eliminates g	ensures complete drives into hard luing, milling, doweling, screwing a gth for larger butt joints	
erence	Chart				
SPECS	SLS150Mg	SLS1	8Mg	SC1XP Senclamp®	SC2 Sencor
Trigger	Selectable	Selec	table	Sequential	Sequential
Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8-8.3 bar)	80–110 psi (5.5–7.5 bar)	80-110 psi (5.5-7.5
(60 CPM)	2.4 scfm	2.4 :	scfm	3.8 scfm	3.7 scfm
Air Inlet	1⁄4″ NPT	1⁄4″	NPT	3⁄8″ NPT	3⁄8″ NPT
Weight	2.6 lbs (1.8 kg)	2.6 lbs	(1.8 kg)	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg
Height	9.5" (241 mm)	9.5″ (2	41 mm)	9.8" (249 mm)	9.44″ (240 mm
Length	10.25" (260 mm)	10.25" (2	260 mm)	12.7" (322 mm)	12.5" (318 mm
Width	2.5" (63.5 mm)	2.5" (63	3.5 mm)	2.5" (63.5 mm)	2" (50.8 mm)
Material	Magnesium	Magn	esium	Aluminum	Aluminum
Varranty	5 yrs	5 :	yrs	5 yrs	5 yrs
SPECS		Faste	ners are locat	ed on pages 32–37	
Gauge	18	1	8	25	25
Crown	1/4"	1/	4	⁷ /16″	1″
Range	¹ / ₂ "-1 ⁹ / ₁₆ "	3/8"-	-1½"	⁵ /16″- ⁹ /16″	1/4"-1/2"

110

Straight Glued & Taped Strip

L

Yes, Tool-Free


Yes

Yes

FINISH & WOODWORKING FASTENERS

23 **Headless Straight Strip Pins**

Pins fasten the smallest of trim securely leaving a nearly invisible hole								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
1⁄2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ08EAAN	
5⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ10EAAN	
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ11EAAN	
1⁄2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100509	
5⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100629	
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100759	
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101009	
11⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101259	
13⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101379	
1½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101509	
2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A102009	
½″−1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109809*	
1"-2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109909*	




2″_

CS-Clamshell, *Variety Pack

21 **Medium Straight Strip Head Pins**


21 gauge pins offer significantly more holding power than 23 gauge pins while leaving a much smaller indent than an 18 gauge brad									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
5⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX10EAA		
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX13EAA		
13⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX16EAA		
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX18EAA		
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX21EAA		
5⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	ZX10EAANR		
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	ZX13EAANR		
13⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	ZX16EAANR		
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	ZX18EAANR		
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	ZX21EAANR		



CS-Clamshell


18 Straight Strip Brad Nails

Cabinets, decorative trim, picture frames and molding									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
⁵ ⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX10EAA		
3/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX11EAA		
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX13EAA		
11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX15EAA		
11⁄2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX17EAA		
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX18EAA		
13⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX19EAA		
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX21EAAN		
21⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX22EAAN		
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201009		
11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201259		
1½″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A201509		
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A202009		
5⁄8″-11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209809*		
1-2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209909*		
1″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX13EGAR		
11⁄4″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX15EGAR		
11⁄2″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX17EGAR		
2″	Chisel	Medium	Stainless 304	Plain	Straight Glued Strip	1M (CS)	AX21EGAR		



18 Headless and Slight Head Brad Nails

Cabinets, decorative trim, picture frames and molding										
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
1⁄2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ08EAA			
3/4 ''	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ11EAA			
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ13EAA			
5⁄8″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY10EAA			
3/4 ''	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY11EAA			
1″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY13EAA			




16_G

Angled Strip Finish Nails*

Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels										
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
11⁄4″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH15EAA			
11⁄2″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH17EAA			
13⁄4″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH19EAA			
2″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH21EAA			
21⁄2″	Chisel	T-head	Galv	Plain	20° Angled Glued Strip	2M (PT)	RH25EAA			

PT-Plastic Tub


*NOTE: ONLY fits 16 Gauge/20° Finish Nailers



33

¹⁶^{GA} Straight Strip Finish Nails

Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
3/4"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M	M001000		
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001001		
11/4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001002		
11⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001003		
13⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001004		
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001005		
21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001007		
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	1.2M (CS)	A401009		
11⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	1.2M (CS)	A401259		
11⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A401509		
13⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A401759		
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402009		
21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402509		
11⁄4″-21⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.8M (CS)	A409809*		
11⁄2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001003GF		
2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001005GF		
21⁄2″	Chisel	T-head	Stainless 304	Plain	Straight Glued Strip	0.7M	M001007GF		



CS-Clamshell, PT-Plastic Tub, *Variety Pack

FINISH & WOODWORKING FASTENERS

15_{GA} 34°

Furniture and cabinets, molding and trim, baseboard, chair rails, doors and window casings									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
1″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA13EPBN		
11⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA15EPBN		
11⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA17EPBN		
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA19EPBN		
2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA21EPBN		
21⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA23EPBN		
21⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	3M	DA25EPB		
1½″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301500		
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301750		
2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302000		
21⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302500		
11⁄4″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA15EABN		
1½″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA17EABN		
13⁄4″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA19EABN		
2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA21EABN		
21⁄2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	3M	DA25EAB		
2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302009		
21⁄2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302509		
2″	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	2M	DA21EGBN		
2½″	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	1.2M	DA25EGB		
11⁄4″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA15AIA		
11⁄2″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA17AIA		
13⁄4″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA19AIA		

FinishPro 42XP FinishPro 35Mg SFN30 DA15 DA13 DA17 DA19 DA21 DA23 DA25 .072" .072" .072" .072″ .072" .072" .072' Ϋ́Λ ∇D ∇ 11/4 11/2" 13⁄4″ 2" 21/4 21/2'

CS-Clamshell

*Hardened regular galvanized heat treated 15 Gauge for steel stud and trim application

Angled Strip Finish Nails

The Best Finish Nails in the Business.

SENCO® has the finish nails to meet all your finish and trim needs. In addition to offering a wide variety of fastener ranges and gauges, we offer a full line of tools that drive them.




lille




19_{ca} ¼" Crown Medium Wire Staples

Cabinets, drawers, soffits, lattice, casebacks							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
1⁄2″	Chisel	Galv	Sencote	Glued	10M	K08BABN	
5⁄8″	Chisel	Galv	Sencote	Glued	10M	K10BABN	
3⁄4″	Chisel	Galv	Sencote	Glued	10M	K11BAB	
7⁄8″	Chisel	Galv	Sencote	Glued	5M	K12BAB	
1″	Chisel	Galv	Sencote	Glued	5M	K13BABN	



19 AAA 3/16" Crown Medium Wire Staples


Cabinets, drawers, lattice, laminated hardwood flooring							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
1⁄2″	Blunt	Galv	Sencote	Glued	10M	R08BAB	
5⁄8″	Blunt	Galv	Sencote	Glued	5M	R10BAB	
3⁄4″	Blunt	Galv	Sencote	Glued	5M	R11BAB	
1″	Blunt	Galv	Sencote	Glued	5M	R13BAB	




18

1/4" Crown Medium Wire Staples

Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and insulation sheathing						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
3⁄4″	Chisel	Bright	Sencote	Glued	5M	L11BRB
1″	Chisel	Bright	Sencote	Glued	5M	L13BRBN
1″	Chisel	Bright	Sencote	Glued	40M	L13BRBP
11⁄8″	Chisel	Bright	Sencote	Glued	5M	L14BRB
11⁄4″	Chisel	Bright	Sencote	Glued	5M	L15BRB
3⁄8″	Chisel	Galv	Sencote	Glued	10M	L06BAB
7⁄16″	Chisel	Galv	Sencote	Glued	24M	L07BABP
7⁄16″	Chisel	Galv	Sencote	Glued	24M	L07BQBP
1⁄2″	Chisel	Galv	Sencote	Glued	5M	L08BABN
1⁄2″	Chisel	Galv	Sencote	Glued	10M	L08BAB
5⁄8″	Chisel	Galv	Sencote	Glued	5M	L10BABN
5⁄8″	Cross Cut	Galv	Sencote	Glued	5M	L10HABN
3⁄4″	Chisel	Galv	Sencote	Glued	5M	L11BAB
3⁄4″	Cross Cut	Galv ¹	Sencote	Glued	5M	L11HBB
3⁄4″	Cross Cut	Galv	Sencote	Glued	5M	L11HAB
7⁄8″	Chisel	Galv	Sencote	Glued	5M	L12BAB
7⁄8″	Chisel	Galv	Sencote	Glued	5M	L12BQB
1″	Chisel	Galv	Sencote	Glued	5M	L13BABN
1″	Cross Cut	Galv	Sencote	Glued	5M	L13HABN
11⁄8″	Chisel	Galv	Sencote	Glued	5M	L14BAB
1¼″	Chisel	Galv	Sencote	Glued	5M	L15BAB
11⁄2″	Chisel	Galv	Sencote	Glued	5M	L17BAB
5⁄8″	Chisel	Galv	Sencote	Glued	1.2M (CS)	A800629
3⁄4″	Chisel	Galv	Sencote	Glued	0.9M (CS)	A800759
1″	Chisel	Galv	Sencote	Glued	0.9M (CS)	A801009
11⁄4″	Chisel	Galv	Sencote	Glued	0.7M (CS)	A801259
11⁄2″	Chisel	Galv	Sencote	Glued	0.6M (CS)	A801509
1⁄2"-11⁄2"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A809909*
5⁄8″	Chisel	Stainless 304 ²	Plain	Glued	5M	L10BHA
3⁄4″	Chisel	Stainless 304	Plain	Glued	5M	L11BGA
11⁄8″	Chisel	Stainless 304	Plain	Glued	5M	L14BGA






FINISH & WOODWORKING FASTENERS

¹ Galvanized High Tensile, ² Stainless 304 Steel High Tensile CS-Clamshell, *Variety Pack

FINISH & WOODWORKING FASTENERS

18^{6A} _{3/8}" Crown Medium Wire Staples


				-				
Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5⁄8″	Chisel	Bright	Sencote	Glued	5M	M10BRBN		
3/4"	Chisel	Bright	Sencote	Glued	5M	M11BRBN		
1″	Chisel	Bright	Sencote	Glued	5M	M13BRB		
³ /8″	Chisel	Galv	Sencote	Glued	10M	M06BABN		
1⁄2″	Chisel	Galv	Sencote	Glued	10M	M08BAB		
5⁄8″	Chisel	Galv	Sencote	Glued	5M	M10BABN		
3⁄4″	Chisel	Galv	Sencote	Glued	5M	M11BABN		
7⁄8″	Chisel	Galv	Sencote	Glued	5M	M12BAB		
1″	Chisel	Galv	Sencote	Glued	5M	M13BAB		
1¼″	Chisel	Galv	Sencote	Glued	10M	M15BAB		
11⁄2″	Chisel	Galv	Sencote	Glued	10M	M17BAB		




11/4"_

16^{CA} 7/16" Crown Heavy Wire Staples

Cabinets	Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing						
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB	
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB	
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB	
11⁄4″	Chisel	Bright	Sencote	Taped	10M	N15BRB	
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB	
13⁄8″	Step	Bright	Sencote	Taped	10M	N16RRB	
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB	
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB	
13⁄4″	Chisel	Bright	Sencote	Taped	10M	N19BRB	
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB	
1⁄2″	Chisel	Galv	Sencote	Taped	5M	N08BABN	
¹∕₂″	Chisel	Galv*	Sencote	Glued	5M	N08BBBN	
1/2″	Diverg	Galv*	Sencote	Glued	5M	N08FBB	
5⁄8″	Chisel	Galv	Sencote	Glued	5M	N10BAB	
3/4 ''	Chisel	Galv	Sencote	Glued	5M	N11BAB	
3/4 ''	Diverg	Galv*	Sencote	Glued	5M	N11FBB	
7⁄8″	Chisel	Galv	Sencote	Glued	5M	N12BABN	
7⁄8″	Diverg	Galv	Sencote	Glued	5M	N12FABN	
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB	
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB	
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB	
11⁄8″	Diverg	Galv	Sencote	Glued	10M	N14FAB	
1¼″	Chisel	Galv	Sencote	Taped	10M	N15BAB	
1¼″	Diverg	Galv	Sencote	Glued	10M	N15FAB	
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB	
11⁄2″	Chisel	Galv	Sencote	Taped	10M	N17BAB	
11⁄2″	Chisel	Galv	Sencote	Glued	10M	N17BPE	
15⁄8″	Chisel	Galv	Sencote	Taped	10M	N18BAB	
13⁄4″	Chisel	Galv	Sencote	Taped	10M	N19BAB	
13⁄4″	Chisel	Galv	Sencote	Glued	10M	N19BPE	
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB	
2″	Chisel	Galv	Sencote	Glued	10M	N21BPE	
1¼″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB	
11⁄2″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB	
13⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN	
2″	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN	



11/2"




*Galvanized High Tensile

FINISH & WOODWORKING FASTENERS

2 5 ga	Sencor® 1"	Crown	Corrugated Fastener	
	0011001 1	0.0111	oonagatoanaotonon	

Butt and miter joints							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
1⁄4″	Sharp Chisel	Bright	Plain	Glued	8M	X04NRA	
3⁄8″	Sharp Chisel	Bright	Plain	Glued	5M	X06NRA	
1/2"	Sharp Chisel	Bright	Plain	Glued	4M	X08NRA	



SENCOR® CORRUGATED FASTENERS


Sencor corrugated fasteners provide twice the joint strength of ordinary fasteners. Available in 1" crown and ¼", ¾" and ½" lengths to ensure maximum joint strength. Use this fastener for butt and miter joints, truss construction, wooden boxes, pallet repair, cabinet and furniture frames.




25。

Senclamp[®] 7/6" Crown Joint Fastener

Butt and miter joints							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
5/16″	Chisel	Bright	Plain	Taped	3M	Y05BFA	
7/16″	Chisel	Bright	Plain	Taped	3M	Y07BFA	
⁹ / ₁₆ ″	Chisel	Bright	Plain	Taped	3M	Y09BFAN	





SENCLAMP[®] JOINT FASTENERS

Senclamp has a special webbed design that draws the material together as it drives through it. Made from carbon steel, fasteners are available in 7_{16} " crown and 5_{16} ", 7_{16} " and 9_{16} " lengths to best suit your requirements. Designed for a wide range of joint fastening applications, Senclamp secures joints better, faster and for less.

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a wide selection of strip and coil framing and sheathing nailers, including the award winning FramePro[®]325XP.

- Compact to maneuver around wall studs and floor joists easily
- Lightweight and ergonomic to reduce fatigue
- Built tough and powerful enough to drive fasteners into the most demanding substrates

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets

FEATURES

- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability and less wear and tear on the compressor
- Dry fire lock out prevents dry firing and signals user when to reload

· Claw-like safety for precise toe-nailing

FramePro®325XP

3¹/₄" PAPER TAPE FRAMING NAILER

ITEM #4Z0101N



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Efficient internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®701XP

3¹/₂" PAPER TAPE FRAMING NAILER



Features

- Straight-line 34° magazine for better line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists



SENCO's offset full round head nail.

Design allows round ProHead® nails to be collated in a nested shank-to-shank 34° strip.

- Superior holding power
- Fewer partial drives
- Fewer pull-outs
- Superior strip integrity
- Proudly manufactured in Cincinnati, Ohio

39

FRAMING, SHEATHING & SUBFLOORS

FIGURE HEIEIEIGE	onare		
TOOL SPECS	FramePro®325XP	FramePro®701XP	
Trigger	Selectable	Sequential	
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	5.2 scfm	10 scfm	
Air Inlet	3⁄8″ NPT	3%" NPT	
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	
Height	11.9" (302 mm)	13.25" (337 mm)	
Length	17.3" (440 mm)	15.13" (384 mm)	
Width	4.5" (114 mm)	4.17" (106 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are locat	ed on pages 45–53	
Range	2"-3¼"	2"-3½"	
Shank	.113"148"	.113"148"	
Capacity	83	70	
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	
Rafter Hook	Yes	Yes	
Dry Fire Lockout	Yes	Yes	

FRAMING, SHEATHING & SUBFLOORS

FramePro®325XP

3¹/₄" PAPER TAPE FRAMING NAILER

ITEM #4Z0101N



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Efficient internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®701XP

3¹/₂" PAPER TAPE FRAMING NAILER



Features

- Straight-line 34° magazine for better line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists



SENCO's offset full round head nail.

Design allows round ProHead® nails to be collated in a nested shank-to-shank 34° strip.

- Superior holding power
- Fewer partial drives
- Fewer pull-outs
- Superior strip integrity
- Proudly manufactured in Cincinnati, Ohio

39

i i budutt nererense	Gridit		
TOOL SPECS	FramePro®325XP	FramePro®701XP	
Trigger	Selectable	Sequential	
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	5.2 scfm	10 scfm	
Air Inlet	3⁄8″ NPT	3%″ NPT	
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	
Height	11.9" (302 mm)	13.25" (337 mm)	
Length	17.3" (440 mm)	15.13" (384 mm)	
Width	4.5" (114 mm)	4.17" (106 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are locat	ed on pages 45–53	
Range	2"-3¼"	2"-3½"	
Shank	.113"148"	.113"148"	
Capacity	83	70	
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	
Rafter Hook	Yes	Yes	
Dry Fire Lockout	Yes	Yes	

SCN60XP

2¾" COIL NAILER

ITEM #520101N



Features

- High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity
- Lightweight for comfortable all-day use

SCN49XP

21/2" COIL NAILER

ITEM #5J0001N



Features

Well balanced and lightweight

• Dual collation allows choice between wire or plastic collation

Product Reference Chart

TOOL SPECS	SCN60XP	SCN65XP	SCN49XP
Trigger	Contact	Contact	Selectable
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	3.9 scfm
Air Inlet	3⁄8″ NPT	3∕8″ NPT	3⁄8″ NPT
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	5.1 lbs (2.31 kg)
Height	12.38" (314 mm)	14.1" (359 mm)	12" (304 mm)
Length	12.88" (327 mm)	12.88" (327 mm)	12.25" (314 mm)
Width	5.38" (137 mm)	5.38" (137 mm)	5.19" (132 mm)
Main Body Material Aluminum		Aluminum	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	F	asteners are located on pages 45–5	3
Range	2"-2¾"	2"-3½"	11⁄4″-21⁄2″
Shank	.099"113"	.099"131"	.082"113"
Capacity	250-275	225-275	250-375
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded or Plastic Carrier Coil
Series	BK, BL, BT, GD, GL, HR	BJ, BK, BL, BT, GD, GL, HD, HK, HL, KD	BE, BK, BL, BT, ED, EL, GD, GL, SE
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	No	No	No
Dry Fire Lockout	No	No	No

SCN65XP

31/2" COIL NAILER

15°

15°

ITEM #540101N - FLAT SAFETY; 540104N - TOENAIL SAFETY



Features

- High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity
- Light and fast for greater productivity

JoistPro[™]150XP

11/2" METAL CONNECTOR NAILER

ITEM #7L0001N



Features

- Patented nosepiece design exposes nail tip for accurate nail placement into pre-punched metal connector holes
- · Powerful enough to drive through engineered lumber
- Lightweight and well balanced

Mini Hand Nailer

2"-31/2" BULK NAILER

ITEM #PC1195



Features

- Compact and powerful enough to drive 2"-31/2" bulk nails
- Magnetic nose holds nail in place for safe, accurate placement
- Ultra-light at just 1 pound

JoistPro[™]250XP

11/2"-21/2" METAL CONNECTOR NAILER



Features

- Nosepiece probe locates metal connector holes, providing accurate nail placement
- · Powerful enough to drive through engineered lumber
- Lightweight and well balanced

A20 Hand Nailer

2"-7" BULK NAILER





Features

- Drives bulk nails from 2"-7"
- Soft rubber palm pad for comfortable grip
- Magnetic nose holds nail in place for safe, accurate placement
- Includes leather strap for comfort

Product Reference Chart

TOOL SPECS	JoistPro™150XP	JoistPro™250XP	Mini Hand Nailer	A20 Hand Nailer	
Trigger Sequential S		Sequential	_	-	
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	60–110 psi (4–7.6 bar)	50–125 psi (3.5–8.4 bar)	
Air Consumption (60 CPM)	2.3 scfm	4.1 scfm	2-4 scfm	2-4 scfm	
Air Inlet	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT	3⁄8″ NPT	
Weight	4.6 lbs (2.08 kg)	5.9 lbs (2.68 kg)	1 lb (.45 kg)	2.4 lbs (1.1 kg)	
Height	11.97" (302 mm)	14.1" (359 mm)	4" (101 mm)	5.8" (122 mm)	
Length	10.35" (263 mm)	13.8" (350 mm)	2.75" (70 mm)	4" (101 mm)	
Width	4.0" (100 mm)	4.3" (110 mm)	2" (55.6 mm)	3.25" (83 mm)	
Main Body Material	Magnesium	Magnesium	Magnesium Aluminum		
Warranty	5 yrs	5 yrs	1 yr	1 yr	
FASTENER SPECS		Fasteners are locat	ed on pages 45–53		
Range	1½″	1½"-2½"	Bulk nails from 2"-3½"	Bulk nails from 2"-3½" up to 7" with opt. guide tips	
Shank	.131"–.148"	.131"162" —		.113"148"	
Capacity	30	20	1	1	
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	_	-	
Series	KJ, MD	KJ, MD, ND	_	_	
TOOL FEATURES					
Depth-of-Drive	No	Yes	_	_	
Rafter Hook	Yes	Yes	-	-	
Dry Fire Lockout	Yes	Yes	_	_	

42

SCP40XP

 $1\!\%''$ STANDARD PRESSURE PNEUMATIC CONCRETE & STEEL PINNER

ITEM #7J0001N



Features

- 10 times faster than powder-actuated systems
- No licensing required to operate
- Works with conventional air compressors, hoses and fittings
- Operates at extreme temperatures and altitudes

Concrete Pinner

Plaster, stucco & building wrap fastening attachment							
	Fits Tools	Range	ITEM #				
SENCO	SCP40XP	11⁄4″	NPC035	Magnetic washer nosepiece			

Galvanized Metal Washer

ITEM #	Diameter	Box Count	Fits SCP40XP, GT40CP				
SWM125B	1¼″	1M	.109" Dia. Concrete Pins				

WC150XP

1" WIDE CROWN, 11/2" HEAVY WIRE STAPLER

ITEM #4W0001N



Features

Jo.

- Robust firing valve design makes the tool fast, powerful and easy to maintain
- High-strength composite magazine and metal magazine guide prevent wear
- Positive-locking adjustable depth-of-drive ensures consistently flush drives
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams

WC200XP

1" WIDE CROWN, 2" HEAVY WIRE STAPLER



Features

- Robust firing valve design makes the tool fast, powerful and easy to maintain
- High-strength composite magazine and metal magazine guide prevent wear
- Positive-locking adjustable depth-of-drive ensures consistently flush drives
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams

Product Reference Chart

TOOL SPECS	SCP40XP	WC150XP	WC200XP	
Trigger	Selectable	Contact	Contact	
Operating Pressure	80-120 psi (5.5-8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm	
Air Inlet	3⁄8″ NPT	3⁄8″ NPT	3%" NPT	
Weight	7.1 lbs (3.2 kg)	5 lbs (2.3 kg)	5.3 lbs (2.4 kg)	
Height	12.22" (310 mm)	9″ (229 mm)	10" (254 mm)	
Length	18.2" (462 mm)	15.25" (387 mm)	15.25" (387 mm)	
Width	4.5" (114.4 mm)	3.5″ (89 mm)	3.5″ (89 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 45-5	3	
Shank/Crown	.109"/.118" Shanks	1" Crown	1" Crown	
Range	1/2''-11/2''	5⁄8″-11⁄2″	⁷ /8"-2"	
Capacity	42	160	160	
Angle/Collation	Straight Plastic Collated Strip	Straight Glued Strip	Straight Glued and Taped Strip	
Series	W3	Р	Р	
TOOL FEATURES				
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free	
Belt Hook	No	Yes	Yes	
Dry Fire Lockout	Yes	No	No	

16GA

SNS41

%% CROWN, 2" HEAVY WIRE STAPLER

ITEM #3L0003N



Features

FRAMING, SHEATHING & SUBFLOORS

- Durable construction minimizes downtime and operating costs
- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams

7/16" CROWN, 21/2" HEAVY WIRE STAPLER

SENCO

Fast, multidirectional stitching

SQS55XP

ITEM #660101N

SNS200XP

 $\%_{\rm 16}{\rm "}$ CROWN, 2" HEAVY WIRE STAPLER

ITEM #7B0001N



16ga 17g

Features

15

- 15% more powerful than all other construction staplers in its class
- Innovative magazine-removal mechanism maintains a clean, narrow
- line of sight for precise staple placement1" lip length allows access into tight corners
- Convert your SNS200XP and SNS200XP-BST into a vinyl siding stapler

Vinyl Siding Attachment (Sold Separately)

Convert SNS200XP and SNS200XP-BST into vinyl siding stapler						
Fits Tools	ITEM #					
SNS200XP	HC0748					
SNS200XP-BST	HC0748					


Features

Fast — up to 15 staples per second

- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Rugged dependability


Product Reference Chart						
TOOL SPECS	SNS41	SNS200XP	SQS55XP			
Trigger	Contact	Contact	Contact			
Operating Pressure	80–120 psi (5.5–8.3 bar)	70-120 psi (4.8-8.3 bar)	80–120 psi (5.5–8.3 bar)			
Air Consumption (60 CPM)	5.4 scfm	3.5 scfm	6.54 scfm			
Air Inlet	3∕8″ NPT	3⁄8″ NPT	3∕8″ NPT			
Weight	4.6 lbs (2.1 kg)	5.3 lbs (2.4 kg)	5.9 lbs (2.7 kg)			
Height	10.75" (273 mm)	11″ (279 mm)	12" (305 mm)			
Length	15" (381 mm)	15" (381 mm)	14.38" (365 mm)			
Width	3.4" (86 mm)	3.5″ (89 mm)	3.6" (92 mm)			
Main Body Material	Main Body Material Aluminum		Aluminum			
Warranty	Warranty 5 yrs		5 yrs			
FASTENER SPECS	Fa	steners are located on pages 45-	53			
Crown	7⁄16″	7⁄16″	7⁄16″			
Range	1″-2″	1''-2''	11⁄4″-21⁄2″			
Capacity	160	160	130			
Angle/Collation	Straight Glued and Taped Strip	Straight Glued and Taped Strip	Straight Glued and Taped Strip			
Series	N, O	N, O	Q			
TOOL FEATURES						
Depth-of-Drive	Yes, Tool-Required	Yes, Tool-Free	Yes, Tool-Required			
Belt Hook	No	Yes	No			
Dry Fire Lockout	No	No	No			

^{34°} ProHead [®] Smooth Paper Tape Nails									
Framing, sh	Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .113"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	G521APBXN			
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G524APBXN			
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H527APBXN			
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	H527APBXR			
3¼" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H528APBXN			
21⁄2″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2M	K525APBXN			
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K527APBXN			
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K527APBXR			
3¼″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K528APBXN			
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K528APBXR			
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K529APBXN			
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G521ASBXN			
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G524ASBXN			
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	H527ASBXN			
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K527ASBXN			
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	0.5M	K527ASBXR			
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K528ASBXN			
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	0.5M	K528ASBXR			
3½″ x .131″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K529ASBXN			

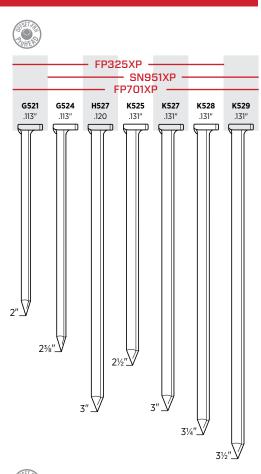

^{34°} ProHead[®] Ring Paper Tape Nails


Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G621APBXN		
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G624APBXN		
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H627APBXN		
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K628APBXN		
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G621ASBXN		
2¾″ x .113″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	0.5M	G624ASBXR		
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G624ASBXN		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	H627ASBXN		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	0.5M	H627ASBXR		
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K627ASBXN		
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K628ASBXN		
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K629ASBXN		

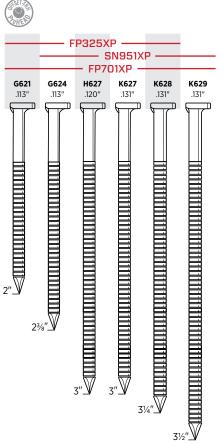

FRAMING, SHEATHING & SUBFLOOR FASTENERS

34°	Smooth Shank Paper	Tape Collated	Nails
Т	Smooth Shank Paper	Tape Collated	Nails

Framing, sheathing, subfloor, decks, trusses and pallets							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
2¼" x .113"	Diamond	Bt. Hardened	Plain	34° Paper Tape Strip	1M	GC23AHAK	
2" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC21APBX	
2¼" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC23APBX	
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC24APBX	
2½" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC25APBX	
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC27APBX	
3¼″ x .120″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC28APBX	
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC27APBX	
3¼″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC28APBX	
3½″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC29APBX	
3½" x .135"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	LC29APBX	
4" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC31APBX	
2½″ x .113″	Diamond	Galv	Sencote	34° Paper Tape Strip	2.5M	GC25AABX	
23⁄8″ x .113″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GC24ASBX	
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HC27ASBX	
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC27ASBX	
3¼″ x .131″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC28ASBX	
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC29ASBX	
3" x .131"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC27AGBK	
3¼″ x .131″	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC28AGBK	

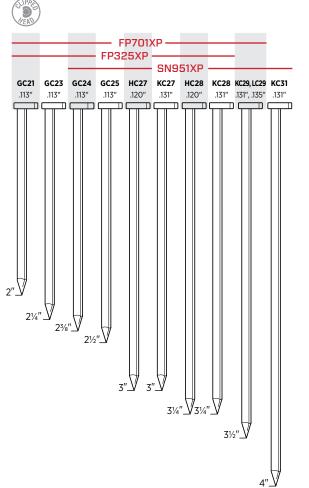


46

^{34°} Ring Shank Paper Tape Collated Nails


Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .113"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	GE21APAX		
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GE24APBX		
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE21ASBX		
23⁄8" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE24ASBX		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HE27ASBX		
23/8" x .113"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	GE24AGBK		

^{34°} Screw Shank Paper Tape Collated Nails


Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3" x .120"	Chisel	Bright	Plain	34° Paper Tape Strip	3.1M	HF27EPAK		
3" x .120"	Chisel	Bright	Sencote	34° Paper Tape Strip	1M	HF27EDB		
3" x .120"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	HF27AGBK		

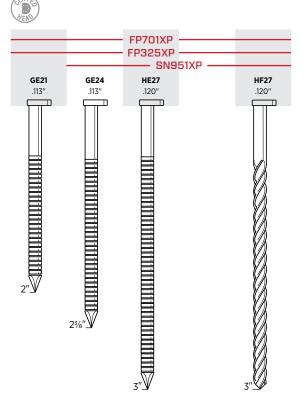

20° Smooth Shank Plastic Collated Nails										
Framing, sh	Framing, sheathing, subfloor, decks, trusses and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2¼" x .113"	Diamond	Bt. Hardened	Plain	20° Plastic Strip	2.8M	GD23AHAS				
2" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD21APBSN				
2¼″ x .148″	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD23APBSN				
2¾" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	4M	GD24APBSN				
21⁄2″ x .113″	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD25APBSN				
21⁄2″ x .131″	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD25APBSN				
3" x .120"	Diamond	Bright	Sencote	20° Plastic Strip	4M	HD27APBSN				
3" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD27APBSN				
3" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	0.5M	KD27APBSR				
3" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD27APBSN				
3¼" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD28APBSN				
3¼" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	0.5M	KD28APBSR				
3¼″ x .148″	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD28APBSN				
3½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD29APBSN				
2" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GD21AABSN				
2¾" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GD24ASBS				
21⁄2″ x .113″	Diamond	Galv	Sencote	20° Plastic Strip	5M	GD25AABSN				
2½″ x .120″	Diamond	Exterior	Sencote	20° Plastic Strip	2.3M	HJ25ADBS*				
2½" x .131"	Diamond	Galv	Sencote	20° Plastic Strip	2.5M	KD25AABS				
3" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD27ASBS				
3¼" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD28ASBS				
3½" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD29ASBS				
2¾" x .113"	Diamond	Stainless 304	-	20° Plastic Strip	1M	GD24AGES				
3¼" x .131"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	KD28AGBS				

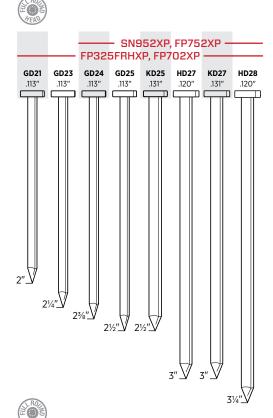

Roof tile nails, drive with FramePro 725XP or SN952XP

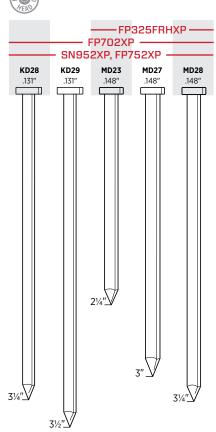


47

Ľ

FRAMING, SHEATHING & SUBFLOOR FASTENERS

^{20°} Rir	ng Shank I	Plastic	Collated	Nails
--------------------	------------	---------	----------	-------

Framing, sheathing, subfloor, decks, trusses and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2¾″ x .113″	Diamond	Hot Dip	Sencote	20° Plastic Strip	0.5M	GL24ASBSR			
2" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL21APBSN			
2¾" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL24APBSN			
2" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL21ASBS			
2¾" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GL24AABSN			
2¾" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	2.5M	M002042			
2¾" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL24ASBS			
3" x .120"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	HL27ASBS			
2¾" x .113"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	GL24AGBS			
3" x .120"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	HL27AGBS			
2½" x .120"	Diamond	Stainless 316	_	20° Plastic Strip	1M	HL25AUES			
3" x .131"	Diamond	Stainless 316	_	20° Plastic Strip	1M	KL27AUES			
3¼″ x .131″	Diamond	Stainless 316	_	20° Plastic Strip	1M	KL28AUES			

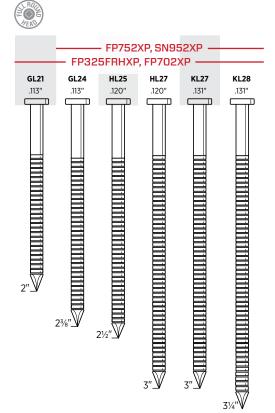

^{20°} Screw Shank Plastic Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
3" x .120"	Diamond	Stainless 316	-	20° Plastic Strip	1M	HK27AUES			


15° Ring Shank Subflooring Nails Superior fastening in subfloor applications

Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2″	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	6.6M	BT21APBF			




^{15°} Smooth Shank Coil Nails

Framing, sh	Framing, sheathing, pallets, sublfoor, decks and trusses									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APB				
23⁄8" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD24APB				
2½" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APB				
2½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APB				
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APB				
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APB				
3¼" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD28APB				
3¼" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APB				
3½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APB				
5" x .148"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APB				
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AAB				
2½" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AAB				
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASB				
3¼" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASB				

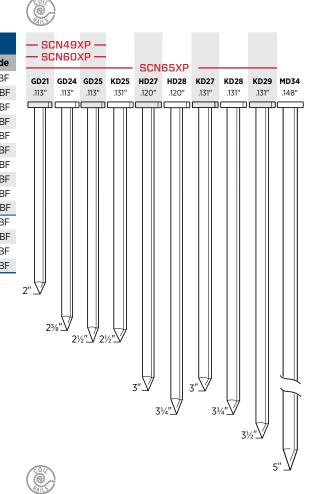


^{15°} Ring Shank Coil Nails

Framing, sheathing, pallets, sublfoor, decks and trusses										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF				
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF				
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF				
2¼" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL23APBF				
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF				
2¼" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF				
2¾" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF				
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF				
2¾" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF				
1¾" x .120"	Diamond	Stainless 304	-	15° Flat Wire Welded Coil	3.6M	HL19AGEH				
3" x .120"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.4M	HL27AGBF				

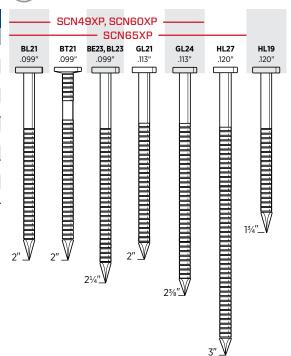

15° Screw Shank Coil Nails

Framing, sh	Framing, sheathing, pallets, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN			
2" x .099"	Chisel	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BK21EPBF			
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN			
2¼" x .099"	Chisel	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BK23EPBF			
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN			



15° Smooth Shank Stiff-Stock Coil Nails

For fastening wood to masonry									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3M	M003011			
2¼" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3M	M003012			


15° Duplex Smooth Shank Coil Nails*


Framing, trusses, crating and concrete forms								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
21⁄8″ x .120″	Diamond	Bright	Plain	15° Flat Wire Welded Coil	5.4M	HR22APAF		
2 ⁷ ⁄8″ x .120″	Diamond	Bright	Plain	15° Flat Wire Welded Coil	3.6M	HR74APAF		

*Requires a special-order modified SCN60XP tool (order XA1739)

5 Drywall Ring Shank Bugle Head Coil Nails

For fastening drywall to wood									
Point	Finish	Coating	Collation	Box Count	Item Code				
Diamond	Galv	Plain	15° Conical Wire Welded Coil	9.6M	BG17AAA				
Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG17AAAQ				
Diamond	Galv	Plain	15° Conical Wire Welded Coil	9.6M	BG18AAA				
Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG18AAAQ				
	Point Diamond Diamond Diamond	PointFinishDiamondGalvDiamondGalvDiamondGalv	PointFinishCoatingDiamondGalvPlainDiamondGalvPlainDiamondGalvPlain	PointFinishCoatingCollationDiamondGalvPlain15° Conical Wire Welded CoilDiamondGalvPlain15° Conical Wire Welded CoilDiamondGalvPlain15° Conical Wire Welded Coil	PointFinishCoatingCollationBox CountDiamondGalvPlain15° Conical Wire Welded Coil9.6MDiamondGalvPlain15° Conical Wire Welded Coil6.4MDiamondGalvPlain15° Conical Wire Welded Coil9.6M				





HK27

.120″



CU/

BG17

.099"

BG18

.099"




Collated Concrete and Steel Pins

0°


For fastening drywall track, wood furring, hat channels, metal washers or ceiling grid to concrete, concrete block and steel

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1⁄2" x .109"/.118"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3050YXS
¾" x .109"	Pinched	Black Oxide	Plain	Straight Plastic Collated Strip	1M	W3075PXC
¾" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3075YXC
1" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3100YXC
1¼" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3125YXC




^{34°} Heat Treated Metal Connector Nails

Joist hanger	Joist hangers, foundation anchors, seismic and hurricane straps and ties								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	KJ17AHBD			
1½″ x .148″	Diamond	Bright	Plain	34° Paper Tape Strip	2M	MD17AHBD			
2½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	KJ25AHBD			
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	MD25AHBD			
2½" x .162"	Diamond	Bright	Plain	34° Paper Tape Strip	1.2M	ND25AHBD			
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	KJ17AEBD			
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	MD17AEBD			
2½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	KJ25AEBD			
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.5M	MD25AEBD			
2½" x .162"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.2M	ND25AEBD			



^{34°} Non-Heat Treated Metal Connector Nails

Standard tensile, non-hardened nails for use in joist hangers, foundation anchors, seismic and hurricane straps and ties										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002261				
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002263				
2½″ x .148″	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	M002265				
2½" x .162"	Diamond	Bright	Plain	34° Paper Tape Strip	1.2M	M002267				
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002262				
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002264				
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.5M	M002266				
2½" x .162"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.2M	M002268				





11/2"

16_{GA} 1" Crown Heavy Wire Staples

Sheathing, house wrap, composite roofing, roofing felt, corrugated containers, foam insulation board, furniture/cabinet frames and butt joints Finish **Collation Box Count** Item Code Length Point Coating 3/8" Galv Plain Glued 10M P06BAA Chisel 1/2" Chisel Galv 10M P08BABT Sencote Taped 5⁄8″ Chisel Galv Sencote Taped 10M P10BAB 5⁄8″ Divergent Galv Sencote Glued 10M P10FAB 5/8" Chisel Galv Coated Glued 10M P10BPE 3⁄4″ Chisel Galv Sencote Taped 10M P11BAB 3/4" Chisel Galv Coated Glued 10M P11BPE 7⁄8″ Chisel Galv Sencote 10M P12BAB Taped 1″ Chisel Galv 10M P13BAB Sencote Taped 1″ Chisel Galv Sencote Glued 10M P13BPE 11/4" Chisel Galv Sencote Taped 10M P15BAB 11/4" Chisel Galv Coated 10M P15BPE Glued 11⁄2″ Chisel Galv Sencote Taped 10M P17BAB 13⁄4″ Chisel Galv Sencote Taped 5M P19BAB 2″ Chisel Galv Sencote 5M P21BAB Taped Outside Stainless 1″ Sencote 5M P13BGBN Taped Chisel 304

*WC150XP Short Staples: order kit YK0786 to drive staples under 5/8"




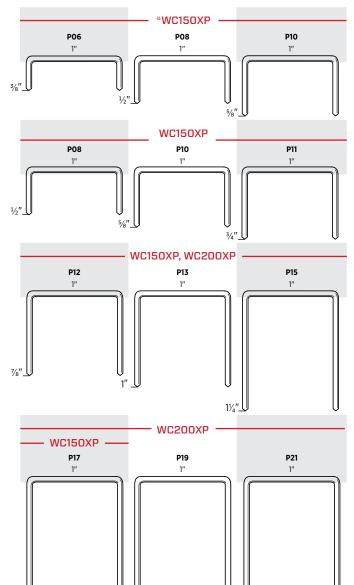

17GA 7/16" Crown Heavy Wire Staples*

5	Sheathing, subfloor, furniture frames and crates											
L	ength	Point	Finish	Coating	Collation	Box Count	Item Code					
	11⁄4″	Chisel	Bright	Sencote	Glued	10M	O15BRBB					
	13⁄8″	Chisel	Bright	Sencote	Glued	10M	O16BRBB					
	11⁄2″	Chisel	Bright	Sencote	Glued	10M	O17BRBB					
	11 1%"	Chisel	Bright	Sencote	Glued	10M	O18BRBB					
	1¾″	Chisel	Bright	Sencote	Glued	10M	O19BRBB					

*These staples drive only from SNS200XP, SNS200XP-BST staplers; SNS41 staplers manufactured after 09/2010; and SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools. order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.

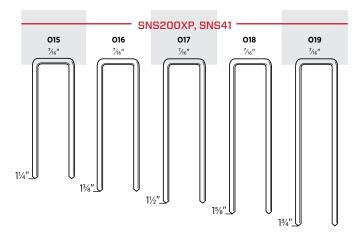



2'

13⁄4

52

16 _{GA}	16 ⁶⁴ 7/16" Crown Heavy Wire Staples											
	Sheathing, soffits, underlayment, lattice, cabinets, casebacks and drawers											
Length	Point	Finish	Coating	Collation	Box Count	Item Code						
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB						
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB						
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB						
11⁄4″	Chisel	Bright	Sencote	Taped	10M	N15BRB						
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB						
13⁄8″	Step	Bright	Sencote	Glued	10M	N16RRB						
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB						
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB						
1¾″	Chisel	Bright	Sencote	Taped	10M	N19BRB						
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB						
1/2"	Chisel	Galv	Sencote	Glued	5M	N08BABN						
1/2"	Chisel	Galv*	Sencote	Glued	5M	NO8BBBN						
1⁄2″	Diverg	Galv*	Sencote	Glued	5M	N08FBB						
5⁄8″	Chisel	Galv*	Sencote	Glued	5M	N10BAB						
3⁄4″	Chisel	Galv	Sencote	Glued	5M	N11BAB						
3⁄4″	Diverg	Galv*	Sencote	Glued	5M	N11FBB						
7⁄8″	Chisel	Galv	Sencote	Glued	5M	N12BABN						
7⁄8″	Diverg	Galv	Sencote	Glued	5M	N12FABN						
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB						
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB						
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB						
11⁄8″	Diverg	Galv	Sencote	Glued	10M	N14FAB						
11⁄4″	Chisel	Galv	Sencote	Taped	10M	N15BAB						
11⁄4″	Diverg	Galv	Sencote	Glued	10M	N15FAB						
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB						
11⁄2″	Chisel	Galv	Sencote	Taped	10M	N17BAB						
11⁄2″	Chisel	Galv	Sencote	Glued	10M	N17BPE						
15⁄8″	Chisel	Galv	Sencote	Taped	10M	N18BAB						
13⁄4″	Chisel	Galv	Sencote	Taped	10M	N19BAB						
13⁄4″	Chisel	Galv	Sencote	Glued	10M	N19BPE						
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB						
2″	Chisel	Galv	Sencote	Glued	10M	N21BPE						
11⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB						
11⁄2″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB						
13⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN						
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN						





*Galvanized High-Tensile Steel

choothing subfle


15

7/16" Crown Heavy Wire Staples

pallets, crate and box assembly, furring and furniture framing											
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1½″	Chisel	Bright	Sencote	Taped	5M	Q17BRB					
1¾″	Chisel	Bright	Sencote	Taped	5M	Q19BRB					
2″	Chisel	Bright	Sencote	Taped	5M	Q21BRB					
2¼″	Chisel	Bright	Sencote	Taped	5M	Q23BRB					
21⁄2″	Chisel	Bright	Sencote	Taped	5M	Q25BRB					
11⁄4″	Chisel	Galv	Sencote	Taped	5M	Q15BAB					
11⁄2″	Chisel	Galv	Sencote	Taped	5M	Q17BAB					
13⁄4″	Chisel	Galv	Sencote	Taped	5M	Q19BAB					
2″	Chisel	Galv	Sencote	Taped	5M	Q21BAB					
21⁄4″	Chisel	Galv	Sencote	Taped	5M	Q23BAB					
21⁄2″	Chisel	Galv	Sencote	Taped	5M	Q25BAB					
1¾″	Chisel	Stainless 304	Sencote	Taped	2.2M	Q19BGBN					
21⁄2″	Chisel	Stainless 304	Sencote	Taped	1M	Q25BGBN					

تطفعا معتباه

w unite f

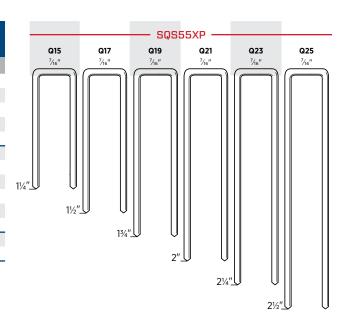

FRAMING, SHEATHING & SUBFLOOR FASTENERS

WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity.

Our new RoofPro™445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability. And our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers and crown staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth-of-drive



RoofPro™455XP

1¾" COIL NAILER

ITEM #3D0101N



Features

- Hardened wear plates and safety for extended reliability and parts life
- Adjustable nail canister accepts entire range of roofing nails
- Metal wear plate in nail canister reduces
 wear and improves nail feed
- Adjustable shingle guide

RoofPro™445XP

1¾" COIL NAILER



Features

- Innovative firing valve reduces air consumption without compromising power or speed
- Bi-metal driver blade reduces wear and improves durability
- Power in, power out feed system improves speed and delivers consistent drives
- Metal wear plate in nail canister reduces wear and helps improve nail feed
- Adjustable and removable shingle guide



Features

- Well balanced and lightweight
- Dual collation allows choice between wire or plastic collation
- High load capacity



i loudot nererende	onart			
TOOL SPECS	RoofPro™455XP	RoofPro™445XP	SCN49XP	
Trigger	Contact	Contact	Selectable	
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	6.54 scfm	3.86 scfm	3.9 scfm	
Air Inlet	½" NPT	¼″ NPT	3∕8″ NPT	
Weight	5.4 lbs (2.5 kg)	5.2 lbs (2.35 kg)	5.1 lbs (2.31 kg)	
Height	10.5" (267 mm)	10.9" (276 mm)	12" (304 mm)	
Length	10.25" (260 mm)	10.6" (269 mm)	12.25" (314 mm)	
Width	4.5" (114 mm)	4.5" (114 mm)	5.19" (132 mm)	
Main Body Material	Aluminum	Aluminum	Magnesium	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 57–59	9	
Range	3⁄4''-13⁄4''	3⁄4″-13⁄4″	11⁄4″-21⁄2″	
Shank	.120″	.120″	.082"113"	
Capacity	120	120	250-375	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded or Plastic Carrier Coil	
Series	HJ, MOO	HJ, MOO	BE, BK, BL, BT, ED, EL, GD, GL, SE	
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free	
Tool-Free Jam Clearing	Yes	Yes	Yes	
Adjustable Exhaust	Yes	No	Yes	

WC150RXP

1" CROWN 11/2" ROOFING STAPLER



Features

- High-strength composite magazine
- EZ-Clear latch virtually eliminates downtime caused by fastener jams
 Hardened wear plates and safety for extended reliability and parts life

BC58

1/2" CROWN 5/8" STAPLE + 1" BUTTON CAP



Features

of tool position

- EZ-Load system for staples and caps
- Ultra-lightweight for ease of use and maneuverability • Side-mounted cap collator holds caps regardless

• Balanced and fast for greater productivity

7/16" CROWN 3/8" HAMMER STAPLER ITEM #PC0700





Features

A11


- Rugged all-steel construction
- Easy to service and maintain
- Comfortable fluted handle with grip

TOOL SPECS	WC150RXP	BC58	A11
Trigger	Contact	Contact	_
Operating Pressure	70–120 psi (4.8–8.3 bar)	60-95 psi (4.1-6.5 bar)	-
Air Consumption (60 CPM)	3.18 scfm	.77 scfm	-
Air Inlet	3%" NPT	½" NPT	-
Weight	5.5 lbs (2.5 kg)	4.1 lbs (2 kg)	2 lbs (.9 kg)
Height	9" (229 mm)	8.5″ (216 mm)	1.75″ (44.4 mm)
Length	15.25" (387 mm)	12.5" (317 mm)	12.3" (312.4 mm)
Width	4" (105 mm)	3.5″ (89 mm)	-
Main Body Material	Aluminum	Aluminum	Steel
Warranty	5 yrs	5 yrs	1 yr
FASTENER SPECS	F	asteners are located on pages 57–5	9
Gauge	16	21	20
Crown	1″	1⁄2″	7⁄16″
Range	5%"-11/2"	5‰″ Galv.	³ / ₈ "
Capacity	160	110	168
Angle/Collation	Straight Glued and Taped Strip	Glued Staple, Laser Welded Cap	Straight Glued Strip
Series	Р	M004092, Button Cap	н
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	No	_
Tool-Free Jam Clearing	Yes	No	Yes
Adjustable Exhaust	No	Yes	-

ROOFING, SIDING & FENCING FASTENERS

15° Smooth Shank Coil Nails

Siding, asphalt and fiberglass shingles and vapor barriers										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
¾″ x .120″	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003101				
%″ x .120″	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003102				
1" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003103				
1¼" x .120"	Diamond	Hot Dip	Plain	15° Flat Wire Welded Coil	7.2M	HJ15ASAP				
1¼" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003104				
1½″ x .120″	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003105				
1¾" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003106				



 $\langle \odot \rangle$

Vinyl Siding Attachment (Sold Separately)

Convert RoofPro™445XP and RoofPro™455XP into vinyl siding nailer						
Fits Tool	Item Code					
RoofPro™445XP	HA0308					
RoofPro™455XP MA0013						

0° Ring Shank Coil Nails

Siding and fencing											
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
17⁄8" x .092"	Diamond	Stainless 304	-	0° Plastic Carrier Coil	3.6M	EL20AGEB					
2¼" x .092"	Diamond	Stainless 304	-	0° Plastic Carrier Coil	3.6M	EL23AGEB					
17⁄8" x .099"	Diamond	Aluminum	-	0° Plastic Carrier Coil	9M	FL20AMEB					


Screw Shank Coil Nails

1

Siding and fencing											
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1½" x .099"	Diamond	Aluminum	-	0° Plastic Carrier Coil	10.8M	FF17AMEB					
1¾" x .099"	Diamond	Aluminum	-	0° Plastic Carrier Coil	9M	FF19AMEB					
17⁄8" x .099"	Diamond	Aluminum	-	0° Plastic Carrier Coil	9M	FF20AMEB					


Smooth Shank Coil Nails

Siding, packaging, fencing, pallets and underlayment									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .099"	Diamond	Bright	Sencote	15° Plastic Carrier Coil	6M	BD17APBC			
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	ED19ASBC			
2" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED21AABH			
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	3.6M	ED21ADBH			
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH			
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH			
2¼" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	3.6M	ED23ADBH			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	ED23ASBC			
2¼" x .092"	Diamond	Exterior	Sencote	15° Conical Wire Welded Coil	7.2M	EJ23ADBH			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EJ23ASBC			



FF17 FF19 FF20 .099" .099" .099" .099" .099" .099"


17/8



ROOFING, SIDING & FENCING FASTENERS


15° Ring Shank Coil Nails

Siding, packaging, fencing, wood shingles, crating and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1¼" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	15M	SE15APB			
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH			
1½" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	12M	SE17APB			
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH			
1¾″ x .082″	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	12M	SE19APB			
11⁄2″ x .092″	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	9M	EL17ADBH			
1¾″ x .092″	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EL19ASBC			
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH			
11/8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH			
11/8" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH			
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	9M	EL21ADBH			
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH			
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EL23ASBC			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH			
2½" x .092"	Diamond	Hot Dip	-	15° Plastic Carrier Coil	3.6M	EL25ASEC			
1¼" x .090"	Diamond	Stainless 304	-	15° Flat Wire Welded Coil	3.6M	EL15AGEH			
1½" x .090"	Diamond	Stainless 304	-	15° Flat Wire Welded Coil	3.6M	EL17AGEH			
2¼″ x .090″	Diamond	Stainless 304	-	15° Plastic Carrier Coil	3.6M	EL23AGEC			
2½" x .090"	Diamond	Stainless 304	-	15° Flat Wire Welded Coil	3.6M	EL25AGEH			
1¾″ x .092″	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH			
1 ⁷ / ₈ " x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AGBH			
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH			
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH			
2½" x .092"	Diamond	Stainless 316	—	15° Flat Wire Welded Coil	3M	EL25AUEH			
1 ⁷ /8″ x .092″	Diamond	Aluminum	_	15° Plastic Carrier Coil	9M	FL20AMEC			

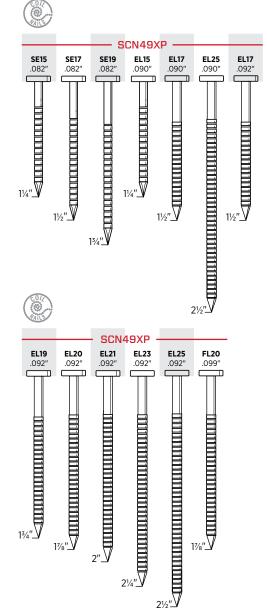

^{15°} Screw Shank Coil Nails

Siding and f	Siding and fencing								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .099"	Diamond	Aluminum	-	15° Plastic Carrier Coil	10.8M	FF17AMEC			
1¾″ x .099″	Diamond	Aluminum	-	15° Plastic Carrier Coil	9M	FF19AMEC			
1 ⁷ /8" x .099"	Diamond	Aluminum	-	15° Plastic Carrier Coil	9M	FF20AMEC			





16 are 11 Crown Heavy Wire Staples


-	Composite roofing, roofing felt, foam insulation board, house wrap, sheathing, corrugated containers, furniture/cabinets and butt joints								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
³ ⁄8″	Chisel	Galv	Plain	Glued	10M	P06BAA			
1⁄2″	Chisel	Galv	Sencote	Taped	10M	P08BABT			
5⁄8″	Chisel	Galv	Sencote	Taped	10M	P10BAB			
5⁄8″	Divergent	Galv	Sencote	Glued	10M	P10FAB			
5⁄8″	Chisel	Galv	Coated	Glued	10M	P10BPE			
3⁄4″	Chisel	Galv	Sencote	Taped	10M	P11BAB			
3⁄4″	Chisel	Galv	Coated	Glued	10M	P11BPE			
7⁄8″	Chisel	Galv	Sencote	Taped	10M	P12BAB			
1″	Chisel	Galv	Sencote	Taped	10M	P13BAB			
1″	Chisel	Galv	Sencote	Glued	10M	P13BPE			
11⁄4″	Chisel	Galv	Sencote	Taped	10M	P15BAB			
11⁄4″	Chisel	Galv	Coated	Glued	10M	P15BPE			
11⁄2″	Chisel	Galv	Sencote	Taped	10M	P17BAB			
1″	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN			

*WC150RXP Short Staples: order kit YK0786 to drive 3/8"-5/8" staples

— Use kit #YK0786 with WC150RXP for 3/8"-5/8" staples




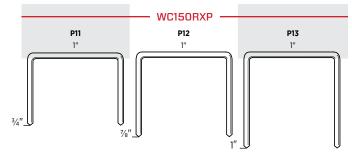




20 A 7/16" Crown Fine Wire Staples

Roofing	Roofing, insulation and vapor barriers							
Length	Length Point Finish Coating Collation Box Count Item Code							
³ ⁄8″	Chisel	Galv	Plain	Glued	5M	H06BAA		



1" Button Cap & $\frac{1}{2}$ " Crown Staples

Roof fel	Roof felt installation and house wrap							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5⁄8″	Chisel	Galv	Plain	Glued	2.2M	M004092		
1″	-	Plastic	-	Laser Weld	2.2M	_		



THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro[™] heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro130 can drive fasteners as long as 5½" and hold up to 225 nails.

APPLICATIONS

Pallets, crates, heavy-duty framing and truss attachment

FEATURES

- Durable drivers and bumpers
- Flexible collation deflectors
- Dust guards for safe operation and extended use

Clinch and sisal anvil staple tools come in 18 and 20 gauge ½" and ½" crowns. Great for hand-held or mounted applications.

APPLICATIONS

Packaging, corrugated box fabrication, shoe making and bedding: basically any time two materials must be stapled and clinched together

FEATURES

- High-capacity magazines
- Extended reach capability
- Tool-free adjustable anvil opening
- Bottom-load magazines



PalletPro™57FXP

21⁄4" COIL NAILER

ITEM #4L0001N



Features

- High load capacity
- Utra-durability driver and piston bumper for long life
- Adjustable nail canister accommodates wide range of nails
- Body protection side steel wear plates reduce abrasion of tool

PalletPro[™]100XP

4" COIL NAILER (SPECIAL ORDER TOOL)



Features

- High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

PalletPro™130XP

5%" COIL NAILER (SPECIAL ORDER TOOL)



Features

- High load capacity
- Includes optional heavy-duty threaded T-handle
 Flexible collation deflector and dust guard for
- improved safety in commercial environments • Strengthened driver and bumper for extended
- use and reliable service

CRATING

ഷ

PALLETS

FIUUULI NEIEIEIILE	onure			
TOOL SPECS	PalletPro™57XP	PalletPro™100XP	PalletPro™130XP	
Trigger	Contact	Contact	Sequential	
Operating Pressure	70–120 psi (4.9–8.4 bar)	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)	
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm	
Air Inlet	3⁄8″ NPT	3∕8″ NPT	3∕8″ NPT	
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)	
Height	11.25" (286 mm)	16.5" (418 mm)	18″ (457 mm)	
Length	11.88" (302 mm)	13.25" (338 mm)	13" (330 mm)	
Width	5.25" (123 mm)	6″ (153 mm)	6.6" (168 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 63–6	5	
Range	1"-2¼"	2¼"-4"	3''-51⁄8''	
Shank	.082"092"	.099"148"	.120"148"	
Capacity	300-350	225-300	120-225	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	
Series	BK, ED, EJ, EL, SE	BE, BK, BL, BT, HK, GD, GL, HD, HL, KD	HD, HK, HL, KD, MD	
TOOL FEATURES				
Tool-Free Jam Clearing	Yes	Yes	Yes	
Depth-of-Drive	No	No	No	
Debris Shield	Yes	Yes	Yes	

PALLETS & CRATING

DFPXP

20 Ga. 1/2" CROWN, 1/2" STAPLE **CLINCH TOOL**

ITEM #8H0001N **20**_G

Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening • Rubber comfort grip reduces vibration, slipping
- and fatigue • Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75LXP

18 Ga. 7/16" CROWN, 5/8" STAPLE **CLINCH TOOL**

ITEM #8J0002N **18**_G

Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening • Rubber comfort grip reduces vibration, slipping
- and fatigue • Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75SXP

18 Ga. 7/16" CROWN, 5/8" STAPLE SISAL ANVIL

ITEM #8J0001N



Features


- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening • Rubber comfort grip reduces vibration, slipping and fatigue
- · Bottom-load magazine for quick reloading

Product Reference	Gnart		
TOOL SPECS	DFPXP	F75LXP	F75SXP
Trigger	Sequential	Sequential	Sequential
Operating Pressure	65–100 psi (4–7 bar)	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm
Air Inlet	1⁄4″ NPT	¼″ NPT	1⁄4" NPT
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)
Height	12.9″ (327 mm)	12.9" (327 mm)	12.9″ (327 mm)
Length	14.9″ (380 mm)	14.9" (380 mm)	14.9" (380 mm)
Width	3″ (75 mm)	3" (75 mm)	3″ (75 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	F	asteners are located on pages 63–6	5
Gauge	20	18	18
Crown	1⁄2"	7⁄16″	7⁄16″
Range	⁵ / ₁₆ "- ⁵ / ₈ "	5/16''-5/8''	⁵ / ₁₆ "- ⁵ / ₈ "
Capacity	230	152	152
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	F	J	J
TOOL FEATURES			
Tool-Free Adjustable Anvil Opening	Yes	Yes	Yes
Bottom-Load Magazine	Yes	Yes	Yes
Extended Reach Capability	Yes	Yes	No

PALLETS & CRATING FASTENERS

15° Smooth Shank Coil Nails


Pallets, crates, fencing, siding and underlayment								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED21AABH		
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	3.6M	ED21ADBH		
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH		
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH		
2¼" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	3.6M	ED23ADBH		



 $\langle \odot \rangle$

^{15°} Ring Shank Coil Nails


Pallets, crat	Pallets, crates, fencing, wood shingles, siding and underlayment								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH			
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH			
1½" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	9M	EL17ADBH			
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH			
11/8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH			
17⁄8″ x .092″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH			
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	9M	EL21ADBH			
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH			
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH			
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH			
11/8" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AGBH			
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH			
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH			



PALLETS & CRATING FASTENERS

15° Smooth Shank Coil Nails


Length	Point	Finish	Coating	Collation	Box Count	Item Code
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD24APBF
21⁄2″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF
2½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF
3″ x .120″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF
3¼" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD28APBF
3¼″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF
3½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF
5″ x .148″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF
2½″ x .113″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF
3" x .131"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	KD27AABF
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF
3¼″ x .131″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	KD28AABF
3¼″ x .131″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF

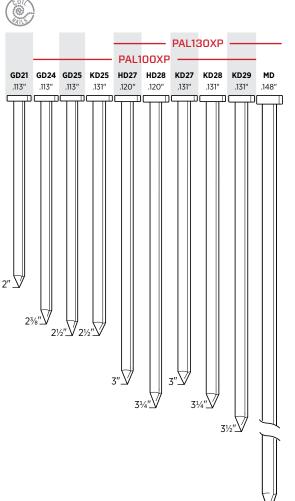

15° **Ring Shank Coil Nails**

Pallets, fran	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF			
2¼" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL23APBF			
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF			
2¼" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF			
2¾" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GL24AABF			
2⅔″ x .113″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF			
3" x .120"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	HL27AABF			
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF			
2⅔″ x .113″	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF			
3" x .120"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.4M	HL27AGBF			



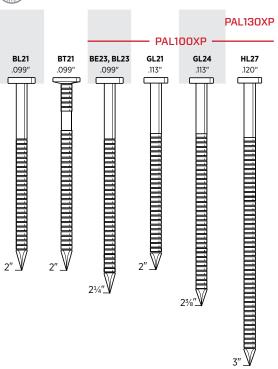


PALLETS & CRATING FASTENERS

5′

PALLETS & CRATING FASTENERS


15° Screw Shank Coil Nails

Pallets, fram	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN			
2" x .099"	Chisel	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BK21EPBF			
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN			
2¼" x .099"	Chisel	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BK23EPBF			
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN			

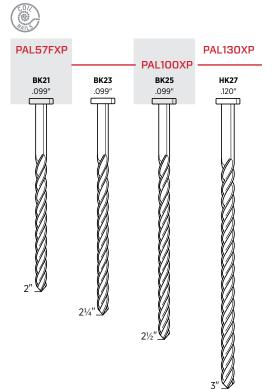


20 _{GA}	1⁄2"	Crown	Fine	Wire	Staples
-------------------------	------	-------	------	------	---------

Packagin	Packaging, set-up boxes and bedding										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
5⁄16″	Chisel	Galv	Sencote	Glued Strip	24M	F05BAAP					
3⁄8″	Chisel	Galv	Sencote	Glued Strip	10M	F06BAA					
3⁄8″	Chisel	Galv	Sencote	Glued Strip	24M	F06BAAP					
1⁄2″	Chisel	Galv	Sencote	Glued Strip	10M	F08BAAN					
1⁄2″	Chisel	Galv	Sencote	Glued Strip	15M	F08BAAP					
3⁄8″	Chisel	Stainless 304	Sencote	Glued Strip	10M	F06BGA					
1⁄2″	Chisel	Stainless 304	Sencote	Glued Strip	10M	F08BGA					



18 A 7/16" Crown Fine Wire Staples

For assembling packaging and joining corrugated materials										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
3⁄8″	Chisel	Galv	Plain	Glued Strip	5M	J06BAA				
1⁄2″	Chisel	Galv	Plain	Glued Strip	5M	J08BAAN				
5⁄8″	Chisel	Galv	Plain	Glued Strip	5M	J10BAAN				



SENCO HAS YOU COVERED. SINCE 1948.

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction

FEATURES

- Lightweight
- Ergonomic
- Variety of configurations



SFT10XP FAMILY

³/16", ³/8", ⁷/16", ¹/2" CROWN, ⁵/8" FINE WIRE STAPLERS

SFTIOXP 22 A 20 A

Features


Heavy-duty steel cap

- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Models and Item Numbers Crown Ga Staple Description Item Code 3/16" 22 A/D Wire Standard 6S0001N ³/16″ 22 A/D Wire 6S0101N Auto 1⁄2″ 22 6S0011N B Wire Standard 3⁄8″ 22 C Wire 6S0021N Standard 3⁄8″ 22 C Wire 6S0121N Auto 6S0031N 3/16" 20 F Wire Standard 20 1/2" F Wire Standard 6S0041N 3/8" 20 G Wire Standard 6S0051N

SFT10XP FAMILY

³/16", ³/8", ⁷/16", ¹/2" CROWN, ⁵/8" FINE WIRE STAPLERS





Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabricAutomatic models have adjustable speed triggers
- **Models and Item Numbers** Crown Ga Staple Description Item Code 22 B Wire Standard 6S0211N 1/2 1⁄2″ 22 B Wire Auto 6S0311N 3/8" C Wire 6S0221N 22 Standard 3/8" 22 C Wire Auto 6S0321N 1/2" 20 F Wire Auto 6S0341N 3/8" 20 G Wire 6S0251N Standard 20 3/8" G Wire Auto 6S0351N 7⁄16″ 20 H Wire Auto 6S0361N

SFT10XP FAMILY

3%6", 3%", 7%6", ½" CROWN, 5%" FINE WIRE STAPLERS

LONG NOSE



Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Models and Item Numbers										
Crown Ga Staple Description Item Code										
3/4" 22 C Wire Standard 6S0421N										

Product Reference Chart

TOOL SPECS	SFT10XP	
Trigger	Sequential, Auto	
Operating Pressure	60-95 psi (4.1-6.5 bar)	
Air Consumption (60 CPM)	.77 scfm	
Air Inlet	¼″ NPT	
Weight	2.1 lbs (0.955 kg)	
Height	6.57" (167 mm)	
Length	8.58" (218 mm)	
Width	1.65" (42 mm)	
Main Body Material	Aluminum	
Warranty	5 yrs	
FASTENER SPECS	Fasteners are located on pages 69-71	
Gauge	22, 20	
Crown	3⁄16", 3⁄8", 7⁄16", 1⁄2"	
Range	1/4''-5/8''	
Capacity	110-92	
Angle/Collation	Straight Glued Strip	
Series	A, B, C, D, E, F, G, H	



Stapling Upholstery for **Over 60 Years**

SENCO[®] offers 18 configurations of upholstery staplers and over 40 combinations of staple length, crown and gauge.

SFW09

3%" CROWN, 5%" FINE WIRE STAPLER

ITEM #4C0001N



22

Features

- Rear exhaust keeps oil off fabric
- Full 1" lip length
- Rear magazine bumper protects fabric
- Rounded steel cap won't snag fabric

SNS200XP-BST

$^{7}\!\!\!\!^{\prime_{16}''}$ CROWN, HEAVY WIRE STAPLER



Features

- Innovative magazine-removal mechanism maintains a clean, narrow line of sight for precise staple placement
- 1" lip length allows access to tight corners
- Durable all-metal magazine construction
- Precision-machined drive track ensures accurate, jam-free staple drives

The SNS200XP-BST is the Benchmark Stapler for the Furniture Industry.


- 20% more powerful than all other staplers in its class to handle the toughest engineered woods.
- Drives both 16 and 17 gauge, $7\!\!\!/_{16}{''}$ crown staples (1" to 2" in length).
- Combination of class-leading power, durability and ergonomics makes it an unrivaled professional tool.



TOOL SPECS	SFW09	SNS200XP-BST	
Trigger	Dual	Contact	
Operating Pressure	60-95 psi (4.1-6.5 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	.77 scfm	5.52 scfm	
Air Inlet	¼″ NPT	3⁄8″ NPT	
Weight	2.1 lbs (0.955 kg)	5.9 lbs (2.67 kg)	
Height	6″ (152 mm)	11" (279 mm)	
Length	9.25" (235 mm)	14" (356 mm)	
Width	1.63" (41 mm)	4" (102 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are locat	ed on pages 69–71	
Gauge	22	17 (O-Wire), 16 (N-Wire)	
Crown	3⁄8″	7⁄16″	
Range	5⁄32''-5⁄8''	1″-2″	
Capacity	110-168	160	
Angle/Collation	Straight Glued Strip	Straight Glued/Taped Strip	
Series	С	N, O	

22₆ ³/₁₆" Crown Fine Wire Staples

Furniture	Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	10M	A04BAAN					
3⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	30M	A06BABN					
3⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	40M	A06BABP					
1⁄2″	Chisel	Galv	Sencote	Straight Glued Strip	20M	A08BAB					
1⁄2″	Chisel	Galv	Sencote	Straight Glued Strip	30M	A08BABP					
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	20M	D10BABN					
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	23M	D10BABPN					



SFT10XP-B -

B06

1⁄2″

1/2"_

B08

1⁄2″

B05

1⁄2″

в04

1⁄2″

1/4"_


22GA


1/2" Crown Fine Wire Staples

Furnitur	Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	Point	Point Finish Coating Collation		Box Count	Item Code						
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	25M	B04BAAPN					
5⁄16″	Chisel	Galv	Plain	Straight Glued Strip	45M	B05BAAP					
5⁄16″	Outside Chisel	Galv	Plain	Straight Glued Strip	9M	B05DAA					
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	40M	B06BAAP					
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	25M	B08BAAP					

³/₈" Crown Fine Wire Staples


Furniture	Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
5⁄32″	Chisel	Galv	Plain	Straight Glued Strip	60M	C02BAAPN				
³ ⁄16″	Chisel	Galv	Plain	Straight Glued Strip	55M	C03BAAPN				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	35M	CO4BAAP				
5⁄16″	Chisel	Galv	Plain	Straight Glued Strip	28M	C05BAAPN				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	50M	C06BAAP				
7⁄16″	Chisel	Galv	Plain	Straight Glued Strip	40M	C07BAAPN				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	35M	C08BAAP				
5⁄8″	Chisel	Galv	Plain	Straight Glued Strip	27M	C10BAAP				
³ ⁄16″	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C03BGAN				
1⁄4″	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C04BGAN				
3⁄8″	Chisel	Stainless 304*	Plain	Straight Glued Strip	10M	C06BHA				
³ ⁄8″	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	C06BGA				
* High-Tensil	e 304 Stainl	less Steel								





21 GA 3/16" Crown Fine Wire Staples


Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	th Point Finish Coating Collation Box Count					Item Code				
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	10M	W10BAB				
3⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	10M	W11BABN				



UPHOLSTERY & FURNITURE FASTENERS


20 GA 3/16" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes											
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	10M	E06BAA					
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	10M	E08BAA					
5⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	E10BAA					




20_{6A} ½" Crown Fine Wire Staples

Upholste	Upholstery, felt, insulation and casebacks										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	10M	F04BAAN					
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	17M	F04BAAP					
5⁄16″	Chisel	Galv	Plain	Straight Glued Strip	24M	F05BAAP					
³ ⁄8″	Chisel	Galv	Plain	Straight Glued Strip	10M	F06BAA					
3/8"	Chisel	Galv	Plain	Straight Glued Strip	24M	F06BAAP					
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	10M	F08BAAN					
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	15M	F08BAAP					
3⁄8″	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	F06BGA					
1⁄2″	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	F08BGA					



20 3/8" Crown Fine Wire Staples

Upholste	Upholstery, felt, insulation and casebacks										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	10M	G04BAAN					
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	G06BABN					
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	5M	G08BAB					
5⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	G10BAB					



20^{cA} 7/16" Crown Fine Wire Staples


Upholstery, felt, insulation and casebacks						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	H06BAA



17_{GA} 7/16" Crown Heavy Wire Staples*

Furniture f	Furniture frames and crates							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
11⁄4″	Chisel	Bright	Sencote	Glued	10M	O15BRBB		
13⁄8″	Chisel	Bright	Sencote	Glued	10M	O16BRBB		
11⁄2″	Chisel	Bright	Sencote	Glued	10M	O17BRBB		
15⁄8″	Chisel	Bright	Sencote	Glued	10M	O18BRBB		
1¾″	Chisel	Bright	Sencote	Glued	10M	O19BRBB		


*Compatible with SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.




16

^{6A} 7/16" Crown Heavy Wire Staples

Cabinets,	Cabinets, casebacks, drawers and upholstery							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB		
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB		
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB		
11⁄4″	Chisel	Bright	Sencote	Taped	10M	N15BRB		
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB		
13⁄8″	Step	Bright	Sencote	Glued	10M	N16RRB		
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB		
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB		
1¾″	Chisel	Bright	Sencote	Taped	10M	N19BRB		
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB		
1⁄2″	Chisel	Galv	Sencote	Glued	5M	N08BABN		
1/2"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN		
1/2"	Diverg	Galv*	Sencote	Glued	5M	N08FBB		
5⁄8″	Chisel	Galv	Sencote	Glued	5M	N10BAB		
3⁄4″	Chisel	Galv	Sencote	Glued	5M	N11BAB		
3⁄4″	Diverg	Galv*	Sencote	Glued	5M	N11FBB		
%″	Chisel	Galv	Sencote	Glued	5M	N12BABN		
7⁄8″	Diverg	Galv	Sencote	Glued	5M	N12FABN		
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB		
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB		
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB		
11⁄8″	Diverg	Galv	Sencote	Glued	10M	N14FAB		
11⁄4″	Chisel	Galv	Sencote	Taped	10M	N15BAB		
11⁄4″	Diverg	Galv	Sencote	Glued	10M	N15FAB		
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB		
11⁄2″	Chisel	Galv	Sencote	Taped	10M	N17BAB		
11⁄2″	Chisel	Galv	Sencote	Glued	10M	N17BPE		
15⁄8″	Chisel	Galv	Sencote	Glued	10M	N18BAB		
13⁄4″	Chisel	Galv	Sencote	Taped	10M	N19BAB		
13⁄4″	Chisel	Galv	Sencote	Glued	10M	N19BPE		
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB		
2″	Chisel	Galv	Sencote	Glued	10M	N21BPE		
11⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB		
11⁄2″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB		
1¾″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN		
2″	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN		





2″

71

*Galvanized High-Tensile Steel

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF2OO and SHFS2OO stand-up flooring tools. With long, ergonomic handles and bases that easily adjust to any floor thickness, you will get your job done in no time. SENCO is committed to creating industry-leading flooring tools to make your job easier.

Tung

SHF200

2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING CLEAT NAILER

ITEM #8D0001N



Features

- Innovative non-marring base that adjusts between $\frac{1}{2}''$ and $\frac{3}{4}''$ flooring without the use of tools
- Safety trigger prevents accidental ejection of fasteners
- Lightweight and well balanced, yet 5% more powerful than competitive flooring nailers
- Extra-long ergonomic handle reduces user fatigue

SHFS200

2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING STAPLER



Features

- Innovative non-marring base that adjusts between $\frac{1}{2}''$ and $\frac{3}{4}''$ flooring without the use of tools
- Safety trigger prevents accidental ejection of fasteners
- Lightweight and well balanced, yet 5% more powerful than competitive flooring nailers
- Extra-long ergonomic handle reduces user fatigue

SLS20XP-HF

³/₆" CROWN, 1" ENGINEERED & HARDWOOD FLOOR STAPLER

ITEM #490021N



Features

- Never-Lube[®] design no oil required
- Front block easily adjusts to floor thickness
- Industry-exclusive safety controls staple placement
- Power-adjusted motor drives staples to consistent and controllable depth


Product Reference Chart

TOOL SPECS	SHF200	SHFS200	SLS20XP-HF	
Trigger	Sequential	Sequential	Sequential	
Operating Pressure	90-110 psi (6.2-7.6 bar)	90–110 psi (6.2–7.6 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	2.52 scfm	2.52 scfm	1.92 scfm	
Air Inlet	¼″ NPT	¼″ NPT	1⁄4″ NPT	
Weight	10.1 lbs (4.58 kg)	11.1 lbs (5.0 kg)	3.2 lbs (1.5 kg)	
Height	21.5" (546 mm)	21.5" (546 mm)	9″ (228 mm)	
Length	17.8″ (452 mm)	17.8″ (452 mm)	13" (332 mm)	
Width	3.1" (78 mm)	3.1″ (78 mm)	3" (76 mm)	
Main Body Material Aluminum		Aluminum	Aluminum	
Warranty 5 yrs		5 yrs	5 yrs	
FASTENER SPECS		Fasteners are located on page 74		
Gauge	16	15.5	19	
Crown	L-Head	1⁄2"	3⁄16″	
Range	1 ½"-2"	1''-2''	⁵ ⁄/8″–1″	
Capacity	107	102	168	
Angled/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	
Series	RW	FL	R	
FLOORING MATERIAL				
Hardwood	Yes	Yes	Yes	
Hardwood Laminate	Yes	Yes	Yes	
Board Thickness 1/2", 5%", 3/4", 3/3/32" (12-26 mm)		½", 5⁄8", 3⁄4" (12–19 mm)	¼″, ⁵⁄₁₀″, ¾″ (6–10 mm)	

FLOORING FASTENERS


16^{CA} L-Head Flooring Cleat Nails

1/2", 5/8", 3/4	½″, 5%″, 3¾, 33/3₂″ Solid hardwood flooring								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
11⁄2″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW17BPE			
13⁄4″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW19BPE			
2″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW21BPE			
2″	Blunt Diamond	Stainless 304	N/A	Straight Glued Strip	1M	RW21BGE			




15.5 ½" Crown Flooring Staples

1/2", 5/8", 3/4"	½", %", ¾" Solid hardwood flooring								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
11⁄2″	Chisel	Galv	Sencote	Straight Glued Strip	5.2M	FL17BAB			
13⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	5.2M	FL19BAB			
2″	Chisel	Galv	Sencote	Straight Glued Strip	5.2M	FL21BAB			



19 March 19

1/4", 5/16", 3/8"	¼", %6", %" Engineered and hardwood floors								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R10BAB			
3⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R11BAB			
1″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R13BAB			



BOX, CARTON & PALLET CONVERSION FASTENERS

Nails

Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code	Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code	Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code
5	180	900	A100509	5	40	200	DA17AIA	N/A	N/A	40	GD21AABF
5	180	900	A100629	5	40	200	DA17EABN	N/A	N/A	48	GD21AABSN
5	180	900	A100759	5	40	200	DA17EPBN	N/A	N/A	40	GD21APBF
5	180	900	A101009	4	40	160	DA19AIA	N/A	N/A	48	GD21APBSN
5	180	900	A101259	4	40	160	DA19EABN	N/A	N/A	45	GD23AHAS
5	180 180	900 900	A101379 A101509	4	40 40	160 160	DA19EPBN DA21EABN	24 N/A	32 N/A	768 40	GD24AGES GD24APBF
5	180	900	A102009	4 N/A	40 N/A	90	DA2IEABN DA2IEGBN	N/A N/A	N/A N/A	40	GD24APBF GD24ASBS
5	180	900	A102809	4	40	160	DA21E9BN	N/A	N/A	40	GD25AABF
5	180	900	A109909	3	72	216	DA23EPB	N/A	N/A	48	GD25AABSN
5	140	700	A201009	3	40	120	DA23EPBN	N/A	N/A	40	GD25APBF
5	140	700	A201257	N/A	N/A	80	DA25EGB	N/A	N/A	72	GE21APAX
5	140	700	A201259	3	40	120	DA25EPB	N/A	N/A	72	GE24AGBX
5	140	700	A201509	3	40	120	DA25EAB	N/A	N/A	72	GE24APBX
5	140	700	A202009	N/A	N/A	24	ED19ASBC	N/A	N/A	72	GE24ASBX
5	140	700	A209809	N/A	N/A	60	ED21AABH	N/A	N/A	40	GL21APBF
5	140	700	A209909	N/A	N/A	60	ED21ADBH	N/A	N/A	45	GL21ASBS
5	96	480	A301500	N/A	N/A	60	ED23AABH	N/A	N/A	40	GL24AABF
5	96	480	A301750	N/A	N/A	24	ED23ASBC	N/A	N/A	48	GL24AABSN
5	96	480	A302000 A302009	N/A	N/A	60	ED23ADBH	N/A	N/A	24	GL24AGBF
5	96 96	480 480	A302500	N/A N/A	N/A N/A	40 40	EJ21ADBH EJ23AABF	N/A N/A	N/A N/A	72 40	GL24AGBS GL24APBF
5	96	480	A302509	N/A N/A	N/A	40	EJ23AABF EJ23ADBC	N/A N/A	N/A	120	GL24APBF GL24ASBSR
5	96	480	A401009	N/A	N/A	40	EJ23ADBC	N/A	N/A	48	H527APBXN
5	96	480	A401259	N/A	N/A	24	EJ23ASBC	N/A	N/A	80	H527APBXR
5	96	480	A401509	N/A	N/A	36	EL15AGEH	N/A	N/A	48	H527ASBXN
5	96	480	A401759	N/A	N/A	42	EL17ADBH	N/A	N/A	48	H528APBXN
5	96	480	A402009	N/A	N/A	36	EL17AGEH	N/A	N/A	48	H627APBXN
5	96	480	A402509	N/A	N/A	126	EL19AGEH	N/A	N/A	48	H627ASBXN
5	96	480	A409809	N/A	N/A	24	EL19ASBC	N/A	N/A	80	H627ASBXR
24	30	720	AX10EAA	N/A	N/A	60	EL19ASBH	N/A	N/A	48	HC27APBX
20	30	600	AX11EAA	N/A	N/A	60	EL20AABH	N/A	N/A	48	HC27ASBX
16	30	480	AX13EAA	6	40	240	EL20AGEB	N/A	N/A	48	HC28APBX
5 12	140	700	AX13EGAR	N/A	N/A	60 42	EL20ASBH	N/A	N/A	40	HD27APBF
5	30 140	360 700	AX15EAA AX15EGAR	N/A N/A	N/A N/A	60	EL21ADBH EL21AGBH	N/A N/A	N/A N/A	48 40	HD27APBSN HD28APBF
10	30	300	AXI7EAA	N/A	N/A	60	EL21AGBH	N/A	N/A	48	HE27ASBX
5	140	700	AX17EGAR	N/A	N/A	60	EL23AABH	N/A	N/A	80	HF27AGBK
10	30	300	AX18EAA	N/A	N/A	60	EL23AGBH	N/A	N/A	80	HF27EPAX
8	30	240	AX19EAA	6	40	240	EL23AGEB	N/A	N/A	80	HF27EDB
5	140	700	AX21EGAR	N/A	N/A	36	EL23AGEC	N/A	N/A	45	HJ25ADBS
6	30	180	AX21EAAN	N/A	N/A	24	EL23ASBC	N/A	N/A	35	HK27APBFN
6	30	180	AX22EAAN	N/A	N/A	60	EL23ASBH	8	32	256	HL25AUES
24	30	720	AY10EAA	6	40	240	EL25AGEH	N/A	N/A	40	HL27AABF
20	30	600	AY11EAA	N/A	N/A	36	EL25ASEC	N/A	N/A	48	HL27AABSN
16	30	480	AY13EAA	6	40	240	EL25AUEH	N/A	N/A	24	HL27AGBF
32	30	960	AZ08EAA	8	32	256	FF17AMEB	N/A	N/A	54	HL27AGBS
24	30 30	720 480	AZ11EAA AZ13EAA	24 8	32	768 256	FF17AMEC	N/A	N/A	24 40	HL27ASBF HL27ASBS
16 N/A	30 N/A	480 30	BD17APBC	24	32 32	768	FF19AMEB FF19AMEC	N/A 8	N/A 32	256	HL27ASBS HL27AUES
N/A N/A	N/A N/A	45	BE23AABF	8	32	256	FF20AMEB	8 N/A	N/A	40	HR22APAF
N/A	N/A	40	BG17AAA	24	32	768	FF20AMEC	N/A	N/A	40	HR74APAF
N/A	N/A	40	BG17AAAQ	6	24	144	FL20AMEB	N/A	N/A	72	K525APBXN
N/A	N/A	40	BG18AAA	N/A	N/A	36	FL20AMEC	N/A	N/A	48	K527APBXN
N/A	N/A	40	BG18AAAQ	N/A	N/A	80	G521APBXN	N/A	N/A	80	K527APBXR
N/A	N/A	35	BK21BPBFN	N/A	N/A	80	G521ASBXN	N/A	N/A	48	K527ASBXN
N/A	N/A	45	BK21EPBF	N/A	N/A	72	G524APBXN	N/A	N/A	48	K528APBXN
N/A	N/A	35	BK23BPBFN	N/A	N/A	72	G524ASBXN	N/A	N/A	80	K528APBXR
N/A	N/A	45	BK23EPBF	N/A	N/A	80	G621APBXN	N/A	N/A	48	K528ASBXN
N/A	N/A	35	BK25BPBFN	N/A	N/A	80	G621ASBXN	N/A	N/A	48	K529APBXN
N/A	N/A	45	BL21APBF	N/A	N/A	72	G624APBXN	N/A	N/A	48	K529ASBXN
N/A	N/A	45	BL23APBF	N/A	N/A	72	G624ASBXN	N/A	N/A	48	K627ASBXN
N/A	N/A	45	BT21PBF	N/A	N/A	80	GC21APBX	N/A	N/A	48	K628APBXN
N/A N/A	N/A N/A	140 140	CZ08EAAN CZ10EAAN	N/A N/A	N/A N/A	80 72	GC23AHAK GC23APBX	N/A N/A	N/A N/A	48 48	K628ASBXN K629ASBXN
N/A N/A	N/A N/A	140	CZIIEAAN	N/A N/A	N/A N/A	72	GC23APBX GC24APBX	N/A N/A	N/A N/A	48 80	KC27AGBK
5	40	200	DA13EPBN	N/A N/A	N/A	72	GC24APBA GC24ASBX	N/A N/A	N/A	48	KC27AGBK KC27APBX
5	40	200	DAI5AIA	N/A	N/A	72	GC25AABX	N/A	N/A	64	KC28AGBK
5	40	200	DA15EABN	N/A	N/A	72	GC25APBX	N/A	N/A	48	KC28APBX
5	40	200	DA15EPBN					N/A	N/A	48	KC28ASBX

BOX, CARTON & PALLET CONVERSION FASTENERS

*N/A indicates not packed in cartons — available in boxes or skids only

BOX, CARTON & PALLET CONVERSION FASTENERS

Nails — continued

Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code	Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code	Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code
N/A	N/A	48	KC29APBX	N/A	N/A	40	MD34APBF	12	32	384	F04BAAN
N/A	N/A	48	KC29ASBX	N/A	N/A	100	ND25AEBD	8	24	192	F04BAAP
N/A N/A	N/A N/A	40 40	KC31APBX KD25APBF	N/A 12	N/A 60	100 720	ND25AHBD RH15EAA	4	24 30	96 300	F05BAAP F06BAA
N/A	N/A	40	KD25APBSN	12	60	720	RH17EAA	4	24	96	F06BAAP
N/A	N/A	40	KD27AABF	12	60	720	RH19EAA	10	24	240	F06BGA
N/A	N/A	45	KD27AABS	12	60	720	RH21EAA	8	30	240	F08BAAN
N/A	N/A	48	KD27AABSN	N/A	N/A	45	RH25EAA	4	24	96	F08BAAP
N/A	N/A	40	KD27APBF	10	51	510	RW17BPE	8	24	192	F08BGA
N/A	N/A	48	KD27APBSN	10	51	510	RW19BPE	10	3	30	F08FAB
N/A	N/A	90	KD27APBSR	10	51	510	RW21BGE	8	30	240	F08GAB
N/A	N/A	24	KD27ASBF	10	51	510	RW21BPE	N/A	N/A	48	FL17BAB
N/A N/A	N/A N/A	40 90	KD27ASBS KD27ASBSR	2 N/A	51 N/A	102 40	RW21BPEP SC19APB	N/A N/A	N/A N/A	40 40	FL19BAB FL21BAB
N/A N/A	N/A	40	KD27A3B3R KD28AABF	N/A N/A	N/A	40	SC21APB	24	20	40	G04BAAN
N/A	N/A	54	KD28AGBS	N/A	N/A	45	SE12ADB	25	32	800	G06BABN
N/A	N/A	40	KD28APBF	N/A	N/A	40	SE12BDB	20	32	640	G08BAB
N/A	N/A	48	KD28APBSN	N/A	N/A	40	SE15APB	20	20	400	G10BAB
N/A	N/A	90	KD28APBSR	N/A	N/A	40	SE15APBH	20	24	480	H06BAA
N/A	N/A	24	KD28ASBF	N/A	N/A	40	SE17APB	15	16	240	J06BAA
N/A	N/A	40	KD28ASBS	N/A	N/A	40	SE17APBH	9	32	288	J08BAAN
N/A	N/A	90	KD28ASBSR	N/A	N/A	40	SE19APB	8	20	160	J10BAAN
N/A	N/A	48	KD29AABSN	N/A	N/A	40	SE19APBH	8	36	288	K08BABN
N/A	N/A	40	KD29APBF	12	60	720	ZX10EAA	9	32	288	K10BABN
N/A	N/A	48	KD29APBSN	5	140	700	ZX10EAANR	6	40	240	K11BAB
N/A	N/A	40	KD29ASBS KJ17AEBD	12 5	48	576	ZX13EAA ZX13EAANR	10 12	40	400	K12BAB
N/A N/A	N/A N/A	100 100	KJ17AEBD KJ17AHBD	12	140 36	700 432	ZX16EAA	12	32 36	384 360	K13BABN L06BAB
N/A	N/A	100	KJ17ANBD KJ25AEBD	5	140	700	ZX16EAANR	N/A	N/A	112	LO7BABP
N/A	N/A	100	KJ25AHBD	12	36	432	ZX18EAA	N/A	N/A	112	L07BQBP
8	32	256	KL27AUES	5	140	700	ZX18EAANR	8	36	288	LO8BAB
N/A	N/A	36	KL28AUES	10	24	240	ZX21EAA	16	36	576	L08BABN
20.0	48	960	M001000	5	140	700	ZX21EAANR	12	36	432	L10BABN
16.0	48	768	M001001	5	50	250	W3050YXS	12	36	432	L10BHA
16.0	48	768	M001002	5	50	250	W3075PXC	12	36	432	L10HABN
12.0	48	576	M001003	5	50	250	W3075YXC	10	36	360	L11BAB
5	96	480	M001003GR	5	50	250	W3100YXC	10	36	360	L11BGA
12 12	48	576	M001004 M001005	5	50	250	W3125YXC	10 10	36	360	L11BRB
5	48 96	576 480	M001005GR					12	36 36	360 432	L11HAB L11HBB
12	48	576	M001007	Staple	S			12	36	360	L12BAB
5	96	480	M001007GR					10	36	360	L12BQB
N/A	N/A	45	M002038	Boxes Per	Cartons	Boxes Per	Item Code	8	36	288	L13BABN
N/A	N/A	45	M002041	Carton	Per Pallet	Pallet	inclin courc	8	36	288	L13BRBN
N/A	N/A	45	M002042	48	24	1152	A04BAAN	8	36	288	L13HABN
N/A	N/A	40	M002101	6	36	216	A06BABN	6	36	216	L14BAB
N/A	N/A	40	M002105	8	24	192	A06BABP	6	36	216	L14BGA
N/A	N/A	100	M002261	12	24	288	A08BAB	6	36	216	L14BRB
N/A	N/A	100	M002262	8	24	192	A08BABP	6	36	216	L15BAB
N/A N/A	N/A N/A	100 100	M002263 M002264	8	24	192 96	BO4BAAPN	6 6	36 36	216 216	L15BRB L17BAB
N/A N/A	N/A N/A	100	M002264 M002265	4 20	24 24	480	B05BAAP B05DAA	6 N/A	36 N/A	192	M004092
N/A N/A	N/A	100	M002265	4	24	96	BO6BAAP	7	32	224	M060BABN
N/A	N/A	100	M002267	4	24	96	BO8BAAP	6	32	192	MO8BAB
N/A	N/A	100	M002268	8	24	192	C02BAAPN	9	32	288	M10BABN
N/A	N/A	24	M003011	8	24	192	C03BGAN	9	32	288	M10BRBN
N/A	N/A	24	M003012	8	24	192	C04BAAP	8	32	256	M11BABN
N/A	N/A	56	M003101	8	34	272	C04BGAN	8	32	256	M11BRBN
N/A	N/A	56	M003102	8	24	192	C05BAAPN	6	32	192	M12BAB
N/A	N/A	56	M003103	4	24	96	C06BAAP	6	32	192	M13BAB
N/A	N/A	48	M003104	20	32	640	C06BGA	6	32	192	M13BRB
N/A	N/A	40	M003105	20	32	640	CO6BHA	N/A	N/A	60	M15BAB
N/A N/A	N/A N/A	40 100	M003106 MD17AEBD	4	24 24	96 96	CO7BAAPN	N/A 6	N/A 32	48 192	M17BAB N08BABN
N/A N/A	N/A N/A	60	MD17AEBD MD17AHAD	4	24	96 96	C08BAAP C10BAAP	6	32	192	N08BBBN
N/A	N/A	48	MD23APBSN	6	36	216	D10BABN	6	32	192	NO8FBB
N/A	N/A	100	MD25AEBD	8	24	192	DIOBABIN	6	32	192	N11BAB
N/A	N/A	100	MD25AHBD	20	32	640	E06BAA	6	32	192	N11BRB
N/A	N/A	36	MD27APBSN	16	32	512	E08BAA	6	32	192	N11FBB
N/A	N/A	36	MD28APBSN	25	32	800	E10BAA	6	32	192	N12BABN

 $^{*}\mbox{N/A}$ indicates not packed in cartons — available in boxes or skids only

Staples — continued

Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code	Boxe Car
5	32	160	N12FABN	n
4	32	128	N13BAB	8
4	32	128	N13BRB	8
4	32	128	N13FAB	8
N/A	N/A	56 56	N14BAB N14BRB	
N/A N/A	N/A N/A	56	N14BRB N14FAB	Scr
N/A	N/A	56	N15BAB	001
N/A	N/A	56	N15BGB	Tubs
N/A	N/A	56	N15BRB	Car
N/A	N/A	56	N15FAB	6
N/A	N/A	56	N16BAB	N/
N/A	N/A	56	N16BRB	e
N/A	N/A	56	N16RRB	N/
N/A	N/A	48	N17BAB	e
N/A	N/A	165	N17BGB	6
N/A	N/A	48	N17BPE	N/
N/A	N/A	48	N17BRB	6
N/A N/A	N/A N/A	48 48	N18BAB N18BRB	6
N/A N/A	N/A N/A	48	N19BAB	E
N/A N/A	N/A	130	N19BGBN	N/
N/A	N/A	40	N19BPE	6
N/A	N/A	40	N19BRB	6
N/A	N/A	40	N21BAB	N/
N/A	N/A	120	N21BGBN	N/
N/A	N/A	40	N21BPE	6
N/A	N/A	40	N21BRB	6
N/A	N/A	56	O15BRBB	N/
N/A	N/A	56	O16BRBB	6
N/A	N/A	48	O17BRBB	e
N/A	N/A	48	O18BRBB	N/
N/A	N/A	48	O19BRBB	6
N/A	N/A	60	P06BAA	6
N/A	N/A	60	PO8BABT	N/
N/A	N/A	60	P10BAB	e
N/A	N/A	60	P10BPE P10FAB	N/
N/A N/A	N/A N/A	60 50	PIOFAB P11BAB	6
N/A	N/A	50	PIIBAB	6
N/A	N/A	40	P12BAB	6
N/A	N/A	40	P13BAB	6
N/A	N/A	60	P13BGBN	6
N/A	N/A	40	P13BPE	6
N/A	N/A	30	P15BAB	e
N/A	N/A	30	P15BPE	6
N/A	N/A	30	P17BAB	e
N/A	N/A	40	P19BAB	N/
N/A	N/A	40	P21BAB	e
N/A	N/A	64	Q15BAB	6
N/A	N/A	64	Q17BAB	e
N/A	N/A	64	Q17BRB	6
N/A N/A	N/A N/A	64 130	Q19BAB Q19BGBN	6
N/A N/A	N/A N/A	64	Q19BGBN	6
N/A	N/A	56	Q21BAB	6
N/A	N/A	56	Q21BRB	6
N/A	N/A	48	Q23BAB	6
N/A	N/A	48	Q23BRB	N/
N/A	N/A	48	Q25BAB	N/
N/A	N/A	100	Q25BGBN	6
N/A	N/A	48	Q25BRB	6
12	32	384	R08BAB	e
12	40	480	R10BAB	e
12	40	480	R11BAB	6
12	40	480	R13BAB	6
10	40	400	W10BAB	6
12	32	384	W11BABN	e
N/A	N/A	72	X04NRA	6
N/A	N/A	72	X06NRA	6
*N/Δ indicates	not packed in	cartons - ava	ilahle	

Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code
na	na	72	X08NRA
8	32	256	Y05BFA
8	32	256	Y07BFA
8	32	256	Y09BFA

Screws

Tubs Per Carton	Cartons Per Pallet	Tubs Per Pallet	Item Code
6	24	144	06A125P
N/A	N/A	72	06A125PB*
6	24	144	06A162P
N/A	N/A	72	06A162PB*
6	24	144	06A162W
6	24	144	06B125P
N/A	N/A	72	06B125PB*
6	24	144	06B162P
6	24	144	06C100C
6	24	144	06C125C
N/A	N/A	72	06C125CB*
N/A	N/A	72	06C125PB*
6	24	144	06C125WK*
6	24	144	06C162C
N/A	N/A	72	06C162CB*
N/A	N/A	72	06C162PB*
6	24	144	06C162WK*
6	24	144	06C200C
N/A	N/A	72	06C200PB*
6			
	24	144	07A200P 07M044PTPDSP
6	24	144	
N/A	N/A	72	07Q100PB*
6	24	144	07Q125QS
6	24	144	07Q125PB*
N/A	N/A	72	07Q125PBQ*
6	24	144	08A250PK*
N/A	N/A	72	08C125PB
6	24	144	08C300WK*
6	24	144	08D175W
6	24	144	08D200W
6	24	144	08D250S
6	24	144	08D250W
6	24	144	08D300W
6	24	144	08F150W
6	24	144	08F150Y
6	24	144	08F175Y
6	24	144	08F200Y
N/A	N/A	72	08F200YBTHSS*
6	24	144	08F250Y
6	24	144	08F300Y
6	40	240	08G100CKNFDP
6	24	144	08G150CTLDSS
6	24	144	08G162CTWFWS
6	32	192	08G200CKLFPS*
6	24	132	08G200CTWFWS
6	24	144	08G200CTWFW
6	24	144	08G250CTWFWS
6	24	144	08G300CTWFWS
N/A	N/A	72	08L125CBLCTS*
N/A	N/A	72	08L175YB*
6	24	144	08M050CTRFDP
6	24	144	08M050CTRFSP
6	24	144	08R250S
6	24	144	08R250S596
6	24	144	08R250W
6	24	144	08R300W
6	24	144	08S250W003
6	24	144	08S250W497
6	24	144	08S250W592
6	24	144	08S250W596

Tubs Per Carton	Cartons Per Pallet	Tubs Per Pallet	Item Code
6	24	144	08S300W003
6	24	144	08S300W497
6	24	144	08S300W592
6	24	144	08S300W596
6	24	144	08T125W
N/A	N/A	72	08T150WBWTDS*
6	24	144	08T200W
N/A	N/A	72	08X125CBACTS*
6	40	240	08X125CKADDS*
6	32	192	08X200CKADDS*
6	24	144	09D300S
6	24	144	10F200Y
1	72	72	10G125CBWFDS*
6	24	144	10G162CTWFWS
6	24	144	10M050CTRFDP
N/A	N/A	72	10M062CBFFDX*
6	40	240	10M075CKNFDP*
6	24	144	10M075CTMFDS
6	40	240	10M075YKFT4X*
N/A	N/A	48	10M075YLFT4X
6	24	144	10M075YTFFDX
6	24	144	10M100CKMFDS*
6	40	240	12G175YKLFAX*
6	32	192	12G200YKLFCX*
6	32	192	12G250YKLFCX*
6	40	240	12M087YKFF4X*
6	40	240	12M100YKFF3X*
6	24	144	12M150CTFFDX

Hidden Deck Fasteners

Boxes Per Carton	Cartons Per Pallet	Boxes Per Pallet	Item Code
8	32	256	HDL38590
8	32	256	HDL39690
8	32	256	HDLTRX90
N/A	N/A	36	HDL385450
N/A	N/A	36	HDL396450
N/A	N/A	36	HDLTRX450
24	32	768	HDSC38525
24	32	768	HDSC39625
24	32	768	HDSCTRX25
24	32	768	HDFC25
8	32	256	HDC38590
8	32	256	HDC39690
8	32	256	HDCTRX90
N/A	N/A	36	HDC385450
N/A	N/A	36	HDC396450
N/A	N/A	36	HDCTRX450

77

 $^{*}N/A$ indicates not packed in cartons – available in boxes or skids only

THE INNOVATION YOU'VE COME TO EXPECT, NOW WITH 200 PSI

Whether you need an air compressor for punch-out jobs or for all-day performance, SENCO offers high quality, reliable options to meet your needs.

FEATURES

Our new line of 200 psi air compressors provides plenty of tank storage and air flow for the job site or professional shop. They're equipped with dual couplers so you can run two hoses simultaneously. They feature an oil-free pump design to reduce maintenance, and integrated control panels provide easy access to couplers, control knobs and highly visible gauges. The newly designed full roll cage protects vital components. These 200 psi options complement SENCO's iconic PC1010N portable finish and trim air compressor. Powerful, but also ultra-quiet and lightweight, the PC1010N features an oil-free pump design, integrated control panel and rugged roll cage.

A full line of hoses and accessories is available for all compressors.



AIR COMPRESSORS

PC0968N 1¾ HP (RUNNING) 4½ GALLON TWIN STACK AIR COMPRESSOR



Features

- 200 max psi
- Heavy-duty induction motor with low 95-volt start
- Rugged roll cage to protect critical components
- Integrated control panel for ease of use

PC0969

 $1\frac{3}{4}$ HP (RUNNING) $4\frac{1}{2}$ Gallon Roll Away Air Compressor



Features

- 200 max psi
- Heavy-duty induction motor with low 95-volt start
- Rugged roll cage to protect critical components
- Integrated control panel for ease of use

PC0970

1³/₄ HP (RUNNING) 15 GALLON VERTICAL ELECTRIC AIR COMPRESSOR



Features

- 200 max psi
- Heavy-duty induction motor with low 95-volt start
- Rugged roll cage to protect critical components
- Integrated control panel for ease of use

200PSI COMPRESSORS

- More stored energy runs air tools longer
- Fast recovery time increases productivity
- Maintains operating pressure longer
- Improves efficiency on the job



Usable Air Per Gallon

Air Compressor Reference Chart

SPECS	PC0968N	PC0969	PC0970		
Motor	Induction	Induction	Induction		
Amps	14	14	14		
Power Source	120 Volts	120 Volts	120 Volts		
SCFM @ 90 PSI	4.9	4.9	4.9		
Max PSI	200	200	200		
Weight	65 lbs (30 kg)	87 lbs (40 kg)	99 lbs (45 kg)		
Height	17.75" (451 mm)	27″ (686 mm)	40" (1016 mm)		
Length	17.25″ (438 mm)	18" (457 mm)	18.75" (476 mm)		
Width	21″ (533 mm)	17" (432 mm)	19.25" (489 mm)		
Warranty	1 yr	1 yr	1 yr		
FEATURES					
Thermal Overload Protector	Yes	Yes	Yes		
Pump	Oil-Free	Oil-Free	Oil-Free		
Pump Up/Recovery Time	105 sec./30 sec.	105 sec./30 sec.	345 sec./85 sec.		
1/4" Quick Connect Coupler	2 (Dual)	2 (Dual)	2 (Dual)		
Regulator	Yes	Yes	Yes		
Individual Tank and Outlet Gauges	Yes	Yes	Yes		
Cold Start Valve	Yes	Yes	Yes		
CSA Approved	Yes	Yes	Yes		

PC1130

1 HP (RUNNING) 2½ GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Cast-iron cylinder for superior pump life
- Lightweight 39 lbs
- Heavy-duty induction motor

PC0968

1 HP (RUNNING) 2½ GALLON TWIN TANK FINISH AND TRIM AIR COMPRESSOR



Features

- Compact twin stack tank design
- Lightweight 38 lbs
- Heavy-duty induction motor

PC1131

2 HP (RUNNING) 4.3 GALLON TWIN TANK AIR COMPRESSOR



Features

- Cast-iron cylinder for superior pump life
- Compact twin stack tank design
- Heavy-duty induction motor

PC1280

1½ HP (RUNNING) 6 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Compact and balanced pancake tank design
- Lightweight 38 lbs
- Dual quick connect couplers

Air Compressor Reference Chart

SPECS	PC1130	PC1131	PC0968	PC1280
Motor	Induction	Induction	Induction	Universal
Amps	13	14	8	12
Power Source	115 Volts	115 Volts	115 Volts	115 Volts
SCFM @ 90 PSI	3.5	4.4	2.2	2.8
Max PSI	125	125	135	150
Weight	39 lbs (17.7 kg)	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)
Height	18.5" (470 mm)	14.5" (368 mm)	13.5" (343 mm)	18" (457 mm)
Length	20.5" (521 mm)	20.5" (521 mm)	16" (406 mm)	17" (432 mm)
Width	8" (203 mm)	16.5" (419 mm)	15" (381 mm)	16.3" (414 mm)
Warranty	1 yr	1 yr	1 yr	1 yr
FEATURES				
Thermal Overload Protector	Yes	Yes	Yes	Yes
Pump	Oil-Lube	Oil-Lube	Oil-Free	Oil-Free
Pump Up/Recovery Time	39 sec./10 sec.	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.
¹ ⁄4" Quick Connect Coupler	1	1	1	2 (Dual)
Regulator	Yes	Yes	Yes	Yes
Individual Tank and Outlet Gauges	Yes	Yes	Yes	Yes
Cold Start Valve	Yes	Yes	No	No
CSA Approved	Yes	Yes	Yes	Yes

PC1010 ½ HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Ultra-quiet 68 dBA
- Ultra-light 20 lbs
- Heavy-duty induction motor

PC1010N

¹/₂ HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Ultra-quiet 68 dBA
- Ultra-light 21 lbs
- Heavy-duty induction motor

Air Compressor Reference Chart

SPECS	PC1010	PC1010N
Motor	Induction	Induction
Amps	4	4
Power Source	115 Volts	115 Volts
SCFM @ 90 PSI	0.7	0.7
Max PSI	135	135
Weight	20 lbs (9.07 kg)	21 lbs (9.53 kg)
Height	13" (330 mm)	12.25" (311 mm)
Length	14" (356 mm)	11.5" (292 mm)
Width	10" (254 mm)	14" (356 mm)
Warranty	1 yr	1 yr
FEATURES		
Thermal Overload Protector	Yes	Yes
Pump	Oil-Free	Oil-Free
Pump Up/Recovery Time	125 sec./30sec	125 sec./30sec.
¹ ⁄4" Quick Connect Coupler	1	1
Regulator	Yes	Yes
Individual Tank and Outlet Gauges	Yes	Yes
Cold Start Valve	No	No
CSA Approved	Yes	Yes

PC0947

2" FINISHPRO®18 BRAD NAILER AND PC1010 COMPRESSOR KIT

18GA

TOOL KITS



Features

- 1 gallon PC1010 compressor
- 2" 18 gauge brad nailer
- Everything you need to get started

PC0974

1" MICRO PINNER AND PC1010 COMPRESSOR KIT



- Features • 1 gallon PC1010 compressor
- 1" 23 gauge micro pinner
- Everything you need to get started

Tool Kit Reference Chart

KIT SPECS	PC0947	PC0974
Compressor	PC1010	PC1010
ΤοοΙ	FinishPro [®] 18	FinishPro [®] 10
Trigger	Contact	Sequential
Tool Operating Pressure	70-95 psi	70-95 psi
Tool Air Inlet	1⁄4″ NPT	1⁄4″ NPT
Tool Weight	3 lbs (1.6 kg)	2.4 lbs (1.1 kg)
Tool Height	9.3" (238 mm)	6.75" (171 mm)
Tool Length	9.75" (248 mm)	8.9" (225 mm)
Kit Warranty	1 yr	1 yr
Coil Hose	¼″ x 25′	¼″ x 25′
Air Fittings	Yes	Yes
Tool Oil and Safety Glasses	Yes	Yes
Variety Pack of Fasteners	18 Ga. Brads	23 Ga. Micro Pins
FASTENER SPECS		
Gauge	18 Ga. Brads	23 Ga. Micro Pins
Range	⁵ /8″-2″	1⁄2″−1″

FILTERS, REGULATORS, LUBRICANTS, PLUGS, **COUPLERS, HOSES,** PART KITS AND MORE

SENCO offers an assortment of accessories that are precision engineered to meet the demanding requirements of professionals. Be sure that your tools and compressors are running at peak performance by using SENCO certified replacement parts, accessories, hoses, oils and lubricants.

(78)

Tool Lubricant

Int

SENCO

18 - E

ENCO

ME (

SENCO



PC0698

101-17 10

Making Hard Work Easier.

Air Hoses

SENCO offers a wide variety of air hoses in various materials, sizes and specifications for your job site.

Quick Couple Rubber Hose

SENCO's premium air hoses:

- · Can handle up to 250 psi working pressure
- 4-to-1 working pressure to burst safety factor • Oil-resistant nitrile tube
- Tough, flexible neoprene cover
- Braided textile reinforcing for max strength and kink resistance • Remains flexible at temperatures from -40° to 200°F

Description	Hose Size	Length	Qty.	ITEM #
Gray without Fittings (Use with LHB-Type Fttings)	1⁄4″	50 ft	1	PC0045
Gray without Fittings (Use with LHB-Type Fttings)	1⁄4″	100 ft	1	PC0046
Gray without Fittings (Use with LHB-Type Fttings)	3⁄8″	50 ft	1	PC0048
Gray without Fittings (Use with LHB-Type Fttings)	3⁄8″	100 ft	1	PC0049
Gray without Fittings (Use with LHB-Type Fttings)	1⁄4″	50 ft	1	PC0059
Gray with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC0060
Gray with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	50 ft	1	PC0062
Gray with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	100 ft	1	PC0063
Gray with Industrial Interchange Plug and Coupler Fittings	1⁄4″	50 ft	1	PC0064
Gray with Industrial Interchange Plug and Coupler Fittings	1⁄4″	100 ft	1	PC1152
Gray with Industrial Interchange Plug and Coupler Fittings	3⁄8″	50 ft	1	PC0065
Bulk Gray without Fittings (Use with LHB-Type Fittings)	1⁄4″	450 ft & up	1	PC0041
Bulk Gray without Fittings (Use with LHB-Type Fittings)	3/8"	450 ft & up	1	PC0042



GRAY WITHOUT FITTINGS PC0045, PC0046, PC0048, PC0049



GRAY WITH MPT ENDS PC0059, PC0060, PC0062, PC0063



GRAY WITH PLUG & COUPLER PC0064, PC1152, PC0065



BULK GRAY HOSE PC0041, PC0042

ProFlex™ Reinforced Polyurethane Red Air Hose

Lightest available non-marring flexible hose

- Flexible in all weather (-48° to 150°F)
 Durable oil and fuel resistant
- Working pressure: 250 psi

Priced by the foot. Not packaged for retail.

٠	MΡ	I-threaded ends	

Description	Hose Size	Length	Qty.	ITEM #
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC0977
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC0978
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	50 ft	1	PC0979
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	100 ft	1	PC0980

PVC Air Hose

- · Made with specially formulated polyvinyl chloride
- Resistant to lubricating oils, chemicals and ultraviolet sunlight

Flexible in temperatures from -20° to 150°F

• Handles up to 300 psi working pressure

MPT-threaded ends

Description	Hose Size	Length	Qty.	ITEM #
PVC with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC0075
PVC with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	50 ft	1	PC0078

Premium Hybrid Polymer Air Hose

• Provides the ultimate in flexibility and memory resistance, even in extreme cold · Offers the best combination of strength and flexibility on the market

Description	Hose Size	Length	Qty.	ITEM #
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC1322

(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.

(SHB) - Standard Hose Barb, requires hose clamps. See page 77 for hose clamps.

(FPT) - Female Pipe Thread (MPT) - Male Pipe Thread



PROFLEX WITH MPT ENDS PC0977, PC0978, PC0979, PC0980





HYBRID WITH MPT ENDS PC1319, PC1320

Plugs & Couplers

Quick connect plugs and couplers are available in the most popular Industrial Interchange styles. Couplers are also available in Universal style.

Universal Couplers — push plug into coupler (no need to pull back on sleeve)						
Туре	Body Size	NPT Size	Pack Qty.	ITEM #		
Female	1⁄4″	1⁄4" FPT	1	PC0900		
Female	1⁄4″	1⁄4" FPT	10	PC0698		
Male	1⁄4″	1/4" MPT	1	PC0901		
Male	1⁄4″	1⁄4″ MPT	10	PC0699		

Plug and coupler hose assembly sets — Industrial Interchange							
Description	Body Size	NPT Size	Pack Qty.	ITEM #			
Connects to Hose with MPT Fittings	1⁄4″	1⁄4" FPT	1	PC0563			
Connects to Hose without MPT Fittings	1⁄4″	1/4" LHB	1	PC0565			

Plugs — Industrial Interchange					
Туре	Body Size	Size	Pack Qty.	ITEM #	
Male	1⁄4″	1⁄4" MPT	2	PC0479	
Male	1⁄4″	1/4" MPT	10	PC0231	
Male	1⁄4″	3%" MPT	2	PC0480	
Male	1⁄4″	3%" MPT	10	PC0413	
Male	3⁄8″	3⁄8" MPT	10	PC0232	
Female	1⁄4″	1⁄4″ FPT	2	PC0477	
Female	1⁄4″	1⁄4″ FPT	10	PC0239	
Female	1⁄4″	3⁄8" FPT	2	PC0478	
Female	1⁄4″	3⁄8″ FPT	10	PC0410	
Push-on Barb	1⁄4″	1⁄4" LHB	1	PC0576	
Push-on Barb	1⁄4″	1/4" LHB	10	PC0235	
Push-on Barb	1⁄4″	¾″ LHB	1	PC0577	
Push-on Barb	1⁄4″	¾″ LHB	10	PC0412	
Push-on Barb	1⁄4″	1/4" SHB	10	PC0243	

Couplers — Industrial In	terchange			
Туре	Body Size	Size	Pack Qty.	ITEM #
Male	1⁄4″	1⁄4" MPT	1	PC0503
Male	1⁄4″	1⁄4" MPT	10	PC0201
Male	1⁄4″	3⁄8″ MPT	1	PC0504
Male	1⁄4″	3⁄8″ MPT	10	PC0380
Female	1⁄4″	1⁄4″ FPT	1	PC0501
Female	1⁄4″	1⁄4″ FPT	10	PC0209
Female	1⁄4″	3⁄8" FPT	1	PC0502
Female	1⁄4″	3⁄8" FPT	10	PC0378
Female	3/8"	3⁄8" FPT	10	PC0210
Push-on Barb	1⁄4″	1/4" LHB	1	PC0505
Push-on Barb	1⁄4″	1/4" LHB	10	PC0205
Push-on Barb	1⁄4″	¾″ LHB	1	PC0506
Push-on Barb	1⁄4″	3%" LHB	10	PC0379
Push-on Barb	1⁄4″	1/4" SHB	10	PC0213

(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.

(SHB) - Standard Hose Barb, requires hose clamps. See page 77 for hose clamps. (FPT) - Female Pipe Thread

(MPT) - Male Pipe Thread

FEMALE COUPLER PC0900, PC0698



MALE COUPLER PC0901, PC0699

PLUG AND COUPLER

PC0565

FEMALE PLUG PC0477, PC0239, PC0478, PC0410



PLUG AND COUPLER PC0563



MALE PLUG PC0479, PC0231, PC0480, PC0413, PC0232




PLUG (PUSH-ON LOCKING BARB) PC0576, PC0235, PC0577, PC0412




MALE COUPLER PC0503, PC0201, PC0504, PC0380,



PC0505, PC0205, PC0506, PC0379









FEMALE COUPLER PC0501, PC0209, PC0502, PC0378, PC0210



Swivel Plugs & Couplers

- Allow easier access when working in corners and tight spaces
- Reduce fatigue
- Help prevent kinks and reduce stress on hose
- Provide strong and simple connection for pneumatic tools

Swivel Plugs — Industrial Interchange						
Туре	Body Size	NPT Size	Pack Qty.	ITEM #		
Male	1⁄4″	1/4" MPT	2	PC1323		
Male	1⁄4″	1/4" MPT	10	PC1324		
Male	1⁄4″	3⁄8" MPT	2	PC1325		

Swivel Couplers — Industrial Interchange					
Туре	Body Size	NPT Size	Pack Qty.	ITEM #	
Male	1⁄4″	1⁄4" MPT	1	PC1326	
Male	1⁄4″	1/4" MPT	10	PC1327	
Female	1⁄4″	1⁄4" FPT	1	PC1328	
Female	1⁄4″	1⁄4" FPT	10	PC1329	

Swivel Couplers — Universal					
Туре	Body Size	NPT Size	Pack Qty.	ITEM #	
Female	1⁄4″	1⁄4" FPT	1	PC1330	
Female	1⁄4″	1⁄4″ FPT	10	PC1331	

Air Hose Accessories

Splicer			
Description	Size	Pack Qty.	ITEM #
Push-On Barbed Hose Splicer	1/4" LHB	2	PC0643
Push-On Barbed Hose Splicer	3%" LHB	2	PC0644

ProFlex Hose Fittings			
Description	Size	Pack Qty.	ITEM #
Brass Hose End	1/4" MPT	1	PC0983
Brass Hose End	3⁄8" MPT	1	PC0984
Brass Hose End and Splicer	1/4" MPT	1	PC0987
Brass Hose End and Splicer	3⁄8″ MPT	1	PC0988

Hose Clamps			
Description	Size	Pack Qty.	ITEM #
Hose Clamp	1⁄4″	1	PC0352
Hose Clamp	3/8"	1	PC0353
Hose Clamp	5⁄8″	1	PC0354
Crimping Pliers	N/A	1	PC0443

(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.

(SHB) - Standard Hose Barb, requires hose clamps. (FPT) - Female Pipe Thread

(MPT) - Male Pipe Thread



MALE SWIVEL PLUG PC1323, PC1324, PC1325



1ALE SWIVEL COUPLER PC1326, PC1327



FEMALE SWIVEL COUPLER PC1328, PC1329



FEMALE SWIVEL COUPLER PC1330, PC1331



PUSH-ON BARBED HOSE SPLICER PC0643, PC0644



BRASS HOSE END PC0983, PC0984



BRASS HOSE END & SPLICER PC0987, PC0988





HOSE CLAMP HOSE CLAMP PC0352 PC0353



CRIMPING PLIERS PC0443

Air Hose and Compressor Accessories

Tripod Manifold				
Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM #
3-Way Round Manifold	3%" FPT	¼" FPT	1	PC0444
3-Way Flat Manifold Industrial Interchange	¼" Plug	1/4" Coupler	1	PC1138



AIR BLOW GUN PC0489

SEALING TAPE PC0349

DRAIN PLUG

PC0357



ACCESSORIES

3-WAY ROUND MANIFOLD PC0444

3-WAY FLAT MANIFOLD PC1138

Blow Gun			
Description	Inlet Thread	Pack Qty.	ITEM #
Air Blow Gun	¼″ FPT	1	PC0489

Teflon® Thread Sealing Tape		
Description	Pack Qty.	ITEM #
1/2" x 260' Sealing Tape	1	PC0349

Drain Plug

Drain Cock			
Description	Size	Qty.	ITEM #
Drains Moisture from Tank, Finger Adjustable	1⁄4" MPT	1	PC0357

Filters, Regulators & Gauges

SENCO's assortment of filters, regulators and gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts and accessories.

Air Regulation Accessories: Regulator with Gauge						
Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM #	
Mini Regulator with Gauge	250	14 SCFM	1⁄4″	1⁄8″	PC0656	
Regulator with Gauge	300	14 SCFM	1⁄4″	1⁄8″	PC0653	
Regulator with Gauge	300	80 SCFM	3⁄8″	1⁄8″	PC0657	
Filter/Regulator with Gauge	150	14 SCFM	1⁄4″	1⁄8″	PC0660	
Filter	150	14 SCFM	1⁄4″	_	PC0655	
In-Line Regulator (Regulate Multiple Tools from One Compressor)	150	-	1⁄4″	1⁄4″	PC0436	
Back-Mount Pressure Gauge	160	-	_	1⁄8″	PC0057	
Back-Mount Pressure Gauge	160	-	—	1⁄4″	PC0051	

(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.

(SHB) - Standard Hose Barb, requires hose clamps. See page 77 for hose clamps. (FPT) - Female Pipe Thread

(MPT) - Male Pipe Thread







REGULATOR WITH GAUGE PC0657



WITH GAUGE



BACK-MOUNT

PC0057

REGULATOR

WITH GAUGE

PC0653







PC0436

BACK-MOUNT PRESSURE GAUGE PRESSURE GAUGE PC0051

IN-LINE REGULATOR

Oils & Lubricants

Oils and Lubricants					
Description	Features	Size	Case Qty.	ITEM #	
Pneumatic Tool Oil (½ pt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	8 oz	12	PC0101	
Pneumatic Tool Oil (1 qt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	32 oz	12	PC0102	
Pneumatic Tool Oil (1 gal)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	128 oz	4	PC0103	
Compressor Pump Oil (1 qt)	 Premium-grade oil with high-quality naphthenic distillate stock Recommended for all oil-splash compressors Protects against corrosion Lubricates to extend part life 	32 oz	12	PC0344	
Moisture Shield Tool Lubricant (1 qt)	 For use in cold weather and/or high-moisture areas Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog 	32 oz	12	PC1295	
Tool Lubricant	 Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog 	4 oz	12	YB0123	





Safety Glasses & Tool Belt Hooks

SENCO's safety glasses offer the ultimate in style and comfort while providing the highest level of eye protection, produced with a strong, lightweight polycarbonate lens that meets or exceeds ANSI Z87.1 and CE EN 166 safety standards.

Safety Glasses		
Description	Qty.	ITEM #
Wrap-Around Safety Glasses*	10-Case	PC1166
Standard Clear Safety Glasses	10-Case	PC1284

*Filters 99% of UVA and UVB rays. For indoor and outdoor use.

Tool Belt Hooks			
Description	Size	Qty.	ITEM #
Attaches to ¼" Air Fitting on Tool	Standard	1	PC0350
Attaches to ¼" Air Fitting on Tool	X-Wide	1	PC0629
Attaches to ¾" Air Fitting on Tool	Standard	1	PC0351
Attaches to ¾" Air Fitting on Tool	X-Wide	1	PC0630
Attaches to Belt and Fits FinishPro [®] 42XP	Standard	1	PC0934





STANDARD PC1284





PC0351

BELT HOOK PC0934

ACCESSORIES

ACCESSORIES

Batterv	Systems

Compatible with all 18V Li-Ion Duraspin II and SENCO FUSION tools					
18V Li-Ion Battery 1.5 Amp Hour	Fits				
VB0155	DS212-18V DS215-18V DS312-18V DS215-XP All Fusion Models	 1.5 amp hour High-quality reliable cells Long storage life Charges 80% in 15 minutes 			
18V Li-Ion Battery 3.0 Amp Hour	Fits				
VB0161	DS212-18V DS215-18V DS312-18V DS215-XP All Fusion	 3.0 amp hour High-quality reliable cells Long storage life 			

Charger System

Can be used interchangeably with SENCO VB0155, VB0161 and VB0118 batteries

Dattery Charger	For use with	
VB0156	VB0155 VB0161 VB0118	 Battery charge indicators display charge status of your battery Compatible with all SENCO 18V Li-lon batteries

No-Mar Pads

No-Mar pads replacement, one per pack.



ITEM #
HF0064
HF0079
HC0463
HC0506
HC0571
HC0729
HF0064
HC0396
HC0401
HF0079
HF0113
HF0110
HF0046, HC0253
HA0170
HF0046, HC0253

No-Mar Pads Fit	ITEM #
GT65DA	HC0626
GT65RHA	HC0625
GT90CH	HA0200
GT90FRH	HA0201
SCN49	HC0536
SFN30, SFN40, SFNI	HF0079
SLS15, SLS18	HC0507
SLS15Mg, SLS18Mg	HC0572
SLS20, SLS20XP (K, L & R CROWNS)	HF0028
SLS20, SLS20XP (M CROWN)	HF0029
SLS25-L, SLS25XP-L	HF0028

*Refer to parts chart to identify desired safety element design.

PARTS KITS

PARTS KITS

Maintaining Your Tools

SENCO repair kits are designed to provide the parts normally needed to properly maintain and service your SENCO tools.



Tool Model	Description	Item Code
FinishPro15, 18, 2N1	Repair Kit	YK0393
FinishPro15Mg, 18Mg	Repair Kit	YK0780
FinishPro18BMg	Repair Kit	YK0868
FinishPro23LXP, 21LXP	Repair Kit	YK0855
FinishPro23SXP	Repair Kit	YK0854
FinishPro25XP	Firing System Kit	YK0281
FinishPro25XP	Piston Stop Kit	YK0282
FinishPro32	Repair Kit	YK0394
FinishPro33Mg	Repair Kit	YK0787
FinishPro35Mg	Repair Kit	YK0788
FinishPro41XP, 42XP	Firing System Kit	YK0361
FinishPro41XP, 42XP	Piston Stop Kit	YK0362
FramePro601, 602, 651, 652	Repair Kit	YK0360
FramePro XP 701, 752, 702, 752	Firing System Kit	YK0243
FramePro XP 701, 752, 702, 752	Piston Stop Kit	YK0244
HN150, HN250	Repair Kit	BA0158
JoistPro150XP	Firing System Kit	YK0823
JoistPro150XP	Piston Stop Kit	YK0824
JoistPro250XP	Firing System Kit	YK0825
JoistPro250XP	Piston Stop Kit	YK0826
JoistPro250XP	Safety Upgrade Kit	YK0869
LS1XP	Repair Kit	YK0858
MW	Repair Kit	YK0371
PAL57FXP	Repair Kit	YK0446
RoofPro™ 455XP	Firing System Kit	YK0424
RoofPro™ 445XP	Repair Kit	YK0865
RoofPro™ 455XP	Piston Stop Kit	YK0425
RoofPro™ 450XP	Repair Kit	YK0426
SC 1	Repair Kit	YK0370
SC 2	Repair Kit	YK0371
SCN48	Repair Kit	YK0769
SCN49	Repair Kit	YK0771
SCN60, SCN65	Repair Kit	YK0366
SFN1, SKS, SPS	Repair Kit	YK0376
SFN1, SKS, SPS	Retrofit Kit	YK0368
SFN30	Repair Kit	YK0368
SFN40	Repair Kit	YK0367
SFT10XP, SFT10XP D/L, SFT10XP LN	Piston Stop Kit	YK0802

Tool Model	Description	Item Code
SFT10XP, SFT10XP D/L, SFT10XP LN	Firing System Kit	YK0803
SFT10XP (AUTO)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
SFN1, SKS, SPS	Firing System Kit	YK0804
SFW09	Repair Kit	YK0775
SFW10XP	Piston Stop Kit	YK0321
SFW10XP	Firing System Kit	YK0322
SHD150XP	Firing System Repair Kit	YK0823
SHD150XP	Piston Bumper Repair Kit	YK0824
SLP20	Repair Kit	YK0373
SLS15, SLS18	Repair Kit	YK0393
SL15MG, SLS18MG	Repair Kit	YK0780
SLS20	Repair Kit	YK0372
SLS25XP	Piston Stop Kit	YK0291
SLS25XP	Firing System Kit	YK0359
SCP40XP	Firing System Kit	YK0444
SCP40XP	Piston Stop Kit	YK0445
SN901XP, SN902XP, FramePro325XP	Firing System Kit	YK0444
SN901XP, SN902XP, FramePro325XP	Piston Stop Kit	YK0445
SN951XP, SN952XP	Firing System Kit	YK0444
SN951XP, SN952XP	Piston Stop Kit	YK0768
SNS40	Repair Kit	YK0374
SNS41	Repair Kit	YK0423
SNS41 (Retrofit Kit)	Cap/Firing Valve	YJ0034
SNS44XP	Firing System Kit	YK0421
SNS44XP	Piston Stop Kit	YK0422
SNS45XP	Firing System Kit	YK0230
SNS45XP	Piston Stop Kit	YK0231
SNS50XP, SQS55XP	Repair Kit	YK0375
SNS200XP-BST	Firing System Kit	YK0838
SNS200XP-BST	Piston Stop Kit	YK0839
SNS200XP	Firing System Kit	YK0840
SNS200XP	Piston Stop Kit	YK0841
SNS200XP	Block-Out Kit	YK0850
SNS200XP	Siding Safety Kit	HC0748
WC150RXP, WC150XP, WC200XP	Repair Kit	YK0783
WC150RXP, WC150XP, WC200XP	Block-Out Kit	YK0786
WC150RXP, WC150XP, WC200XP	Retrofit Kit-Solid Safety	YJ0037

See tool parts chart for complete list of available individual parts. Download SENCO tool parts chart at www.senco.com.

FINISH & WOODWORKING

15 GA - 34º	16 GA	16 GA – 20°	18 GA	21 GA	23 GA
a stranger					v ¥
Pg. 34	Pg. 33	Pg. 33	Pg. 32-33	Pg. 32	Pg. 32
19 GA	18 GA	16 GA	SENCOR	SENCLAMP	
					GENUINE SENCO
Pg. 35	Pg. 35-36	Pg. 36	Pg. 37	Pg. 37	FASTENERS

FRAMING, SHEATHING & SUBFLOORS

;	34º	34º Prohead	20°	COIL	METAL	CONCRETE	15 GA	16 GA	17 GA
N. W.	Contraction of	Constanting of the			THE THE PARTY OF T	HINNI			
P	⁹ g. 45	Pg. 46	Pg. 47-48	Pg. 48-50	Pg. 51	Pg. 51	Pg. 53	Pg. 52–53	Pg. 52

ROOFING, SIDING & FENCING

ROOFING	16 GA WIDE CROWN	BUTTON CAP	20 GA	WIRE WELD	PLASTIC WOUND
HHHHH	THE PARTY OF	And the second second		H	
Pg. 57	Pg. 59	Pg. 59	Pg. 59	Pg. 57–58	Pg. 57–58

FLOORING



PALLETS & CRATING

9 GA	15° SMOOTH	15º RING	15° SCREW	20 GA	18 GA
Pg. 74	Pg. 63-64	Pg. 63-64	Pg. 65	Pg. 65	Pg. 65

UPHOLSTERY & FURNITURE

22 GA	21 GA	20 GA	17 GA	16 GA
Pg. 69	Pg. 69	Pg. 70	Pg. 71	Pg. 71

AUTO-FEED SCREW SYSTEMS






CORROSION RESISTANT FASTENERS ALUMINUM

HOT DIPPED GALVANIZED

18 GA

Pg. 22



304 STAINLESS STEEL

Pg. 57

0° COIL

15 GA	16 GA	18 GA	34°	20	0	O° COIL	-	15° COIL	15 GA
and the second					TTTTT				
Pg. 23 & 34	Pg. 22 & 33	Pg. 22 & 32	Pg. 45	Pg. 47	-48	Pg. 57		Pg. 49, 57, 58 & 63	Pg. 53
16 GA	18 GA	20 G/	A 2	2 GA	#2 F	LAT HEAD	#2	TRIM HEAD	CLEAT
							All Inc		
Pg. 36, 52, 53, 59 & 1	71 Pg. 35	Pg. 65 &	70 F	g. 69		Pg. 9		Pg. 10	Pg. 74

316 STAINLESS STEEL



SENCO FASTENERS AT A GLANCE

FINISH & WOODWORKING

FinishPro23SXP	FinishPro23LXP	FinishPro21LXP	LS1XP	FinishPro18Mg	FinishPro18BMg	SLP20XP
8F0001N	8L0001N	8M0001N	8N0001N	1U0021N	9B0001N	430101N
		Print Party	SENCE			
Pg. 25	Pg. 25	Pg. 26	Pg. 26	Pg. 26	Pg. 26	Pg. 27
FinishPro25XP	FinishPro32	FinishPro33Mg	SFN30	FinishPro35Mg	FinishPro42XP	SLS20XP
760102N	1X0201N	6F0001N	620002N	6G0001N	4G0001N	SEE SPECIFICATIONS
						STATE OF S
Pg. 27	Pg. 28	Pg. 28	Pg. 28	Pg. 29	Pg. 29	Pg. 30
SLS25XP	SKSXP	SLS150Mg	SLS18Mg	SC1XP	SC2	
SEE SPECIFICATIONS	SEE SPECIFICATIONS	8C0001N	1W0021N	220101N	470001N	
C)H35						
Pg. 30	Pg. 30	Pg. 31	Pg. 31	Pg. 31	Pg. 31	
Fasteners: see pages 32-37						-

FRAMING, SHEATHING & SUBFLOORS

FramePro325XP	FramePro701	IXP FramePro3	0325FRHXP FrameF		Pro702XP	Frar	nePro752XP	
4Z0101N	2H0133N	4H010	D1N	2K	0103N		2F0103N	
					The second	EBACI -	A.S.	
Pg. 39	Pg. 39	Pg. 4			g. 40		Pg. 40	
SCN49XP	SCN60XP	SCN65XP	JoistPro	0150XP	JoistPro25	OXP	Mini Hand Nailer	A20 Hand Nailer
5J0001N	520101N	540101N	7L00	01N	6K0001N	1	PC1195	PC0781
							the star	
Pg. 41 & 55	Pg. 41	Pg. 41	Pg.	42	Pg. 42		Pg. 42	Pg. 42
SCP40XP	WC150XP	WC200XP	SNS	541	SNS200	XP	SQS55XP	
7J0001N	4W0001N	4Y0001N	3L00	03N	7B0001N	1	660101N	
				-				-
Pg. 43	Pg. 43	Pg. 43	Pg.	44	Pg. 44		Pg. 44	

Fasteners: see pages 45–53

ROOFING, SIDING & FENCING

RoofPro455XP	RoofPro445XP	SCN49XP	WC150RXP	BC58 Button Cap	A11 Stapling Hammer
3D0101N	8V0001N	5J0001N	4X0001N	4A0001N	PC0700
Pg. 55	Pg. 55	Pg. 41 & 55	Pg. 56	Pg. 56	Pg. 56

Fasteners: see pages 57-59

FLOORING



SENCO TOOLS AT A GLANCE

Fasteners: see page 74

PALLETS & CRATING

PalletPro57FXP	PalletPro100XP	PalletPro130XP	DFPXP	F75LXP	F75SXP
4L0001N	5L0001N	5M0001N	8H0001N	8J0002N	8J0001N
				5	
Pg. 61	Pg. 61	Pg. 61	Pg. 62	Pg. 62	Pg. 62

Fasteners: see pages 63–65

UPHOLSTERY & FURNITURE

SFT10XP, Long Nose, and Double Length Magazine SEE SPECIFICATIONS	SFW09 4C0001N	SNS200XP-BST 7C0001N	•USE• GENUINE
			SENCO [®] FASTENERS
Pg. 67	Pg. 68	Pg. 68	

Fasteners: see pages 69-71

COMPRESSORS

PC0968N	PC0969	PC0970	PC1130	PC1131	PC0968	PC1280	PC1010	PC1010N
							(in the second s	
Pg. 79	Pg. 79	Pg. 79	Pg. 80	Pg. 80	Pg. 80	Pg. 80	Pg. 81	Pg. 81

SCREW SYSTEMS									
DS215-18V	DS212-18V	DS312-18V	DS215-XP	DS235-A	C DS232-AC	DS332-AC			
7W0001N	7X0001N	7Y0001N	7W0002N	7T0001N	7U0001N	7V0001N			
<u> </u>			T		77	J.			
Pg. 3	Pg. 3	Pg. 3	Pg. 3	Pg. 4	Pg. 4	Pg. 4			
DS	425AC		DS440AC		DS22	Pg. 4 Pg. 4 DS220 6W0001N			
6\	W0012N		6W0011N		6W00	DIN			
	£				<u> </u>				
	Pg. 5		Pg. 5		Pg. 6				
		DS320			SG4100	SG2510			
		6W0003N			6X0004N	6X0002N			
	Q								
		Pg. 7	Pg. 7 & 17						
Fasteners: see pages 8 - 13									

FUSION

F-18	F-16S	F-16A	F-15	SHD150XP
6E0001N	6U0001N	5P0001N	5N0001N	9D0001N
Pg. 21	Pg. 21	Pg. 21	Pg. 21	Pg. 17
Fasteners: see pages 22-23				

LI-ION BATTERIES & CHARGERS







HIDDEN DECK



FASTENER FINISH TYPES

CORROSION RESISTANT TYPES

HOT DIPPED GALVANIZED

Hot Dipped Galvanized nails have one ounce per square foot of zinc coating. The zinc coating on the nail acts as a barrier between the base steel and the elements, slowing the corrosion process. Ideal for preservative-treated wood and most exterior applications.

304 STAINLESS STEEL

For moderate environments, 304 Stainless Steel contains 18% chromium and 8% nickel among other elements, making it resist most oxidizing acids and rust. An excellent choice for all types of environments and woods including exotic woods, cedar or redwood. Recommended use: Exposure to wet conditions regularly and more than 5 miles away from a body of water.

316 STAINLESS STEEL

For extreme environments, 316 Stainless Steel contains 16% chromium, 10% nickel, and 2% molybdenum. The addition of molybdenum and a higher nickel content increases the corrosion resistance properties of 316 Stainless Steel. The ultimate choice for highly corrosive environments and works well in all types of woods.

Recommended use; Exposure to extreme corrosive elements (salt, air and moisture) and within 5 miles of the coast.



BEST CORROSION RESISTANCE

ALUMINUM NAILS

Ideal for use in soft woods, particularly cedar and redwood applications to eliminate staining, bleeding, or streaking. Often used for attaching siding and fencing. Aluminum nails are also recommended when installing aluminum siding. Aluminum nails ARE NOT recommended for use in preservative-treated wood or hardwoods.

BRIGHT BASIC

Bright Basic fasteners are an uncoated steel, which is commonly used in application where corrosion protection is not required such as, interior framing, finish and trim. These fasteners are not recommended for the use in treated lumber or exterior applications.

ELECTRO GALVANIZED

Electro-Galvanized fasteners have a thin layer of zinc coating that helps corrosion resistance in mild weather conditions and in areas with lower humidity. Because of its minimal protective properties these fasteners are recommended for interior use in areas such as kitchens and bathrooms.





Looking for more?



Contact Us 4270 Ivy Pointe Blvd. Cincinnati, OH 45245

Phone: 800.543.4596 Fax: 800.543.3299



Visit Us On the web for more information SENCO.com



Find Us Search for your closest SENCO dealer SENCO.com/dealer-locator



Join Us Join our loyalty & rewards program SENCOPROteam.com



Watch Us Check out all of our latest videos & product launches WyouTube.com/SencoBrands



Follow Us On Twitter & Facebook for the latest SENCO news f) @ SENCOBrands

MAKING HARD WORK EASIER