


## DEVICE BOXES


### SINGLE GANG - 1-1/2" AND 2" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.



1100-LUBAR



1100-LLEUBAR



1100-LREU

#### PRODUCT FEATURES


- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in "rework" applications.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

#### 2" X 3" DEVICE BOX - 1-1/2" DEEP - GANGABLE 8.0 CUBIC INCHES, 131 ML


Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
1100-LUBAR	-	Flush	-	U
1100-LLEUBAR	-	-	-	U
1100-LREU	-	Recessed	-	U




1102BAR




1102-LUBAR




1102-LHUBAR




1102-LREU



1102-MSB



1102-MSBU



1102-SB

#### 2" X 3" DEVICE BOX - 2" DEEP - GANGABLE 10.0 CUBIC INCHES, 163 ml

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
1102BAR	-	Recessed	1/2" (4)	U
1102-LUBAR	-	Flush	-	U
1102-LHUBAR	-	-	-	U
1102-LREU	-	Recessed	-	U
1102-MSB	MSBS	-	1/2" (4)	-
1102-MSBU	MSBS	-	-	U
1102-SB	SB	-	1/2" (4)	-




## DEVICE BOXES


### SINGLE GANG - 2" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.



3102-LHU



3102-MSB



3102-MSBU

#### PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in "rework" applications.
- Rugged metallic construction.

#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

**2" X 3" DEVICE BOX - 2" DEEP - GANGABLE**  
**12.0 CUBIC INCHES, 196 ML**

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
3102-LHU	-	-	-	U
3102-MSB	MSBS	-	1/2" (4)	-
3102-MSBU	MSBS	-	-	U

## DEVICE BOXES

### SINGLE GANG - 2-1/2" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.

#### PRODUCT FEATURES


- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in "rework" applications.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




1104-K




1104-LBUBAR




1104-LUBAR




1104-SB




1104-LSBU




1104-LE




1104-LHU




1104-LMSU



1104-LRWUBAR




1104-MSB



1104-MSBUBAR



1104-P \*



X-CUBE

METAL BOXES

#### 2" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 12.5 CUBIC INCHES, 204 ML

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
1104-K	-	Recessed	K(2), 1/2" (2)	-
1104-LBUBAR	-	-	-	U
1104-LUBAR	-	Flush	-	U
1104-SB	SB	-	K(2), 1/2" (2)	-
1104-LSBU	SB	-	-	U
1104-LE	-	-	K(2), 1/2" (2)	-
1104-LHU	-	-	-	U
1104-LMSU	MS	-	-	U
1104-LRWUBAR	RW	Flush	-	U
1104-MSB	MSB	-	K(2), 1/2" (2)	-
1104-MSBUBAR	MSB	-	-	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang metal boxes.			
X-CUBE	5.5 cubic inch, 90ml. For use with 1104 series metal boxes.			

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.

## DEVICE BOXES

### SINGLE GANG - 2-1/2" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.

#### PRODUCT FEATURES


- Plaster ears allow box to be used in "rework" applications.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




2104-LU




KIT-201




2104-LLEU



2104-LNU



2104-MSBU



EZ-101BAR




1104-P \*


#### 2" X 3" DEVICE BOX - 2-1/2" DEEP 12.5 CUBIC INCHES, 204 ML

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
2104-LU	-	Flush	-	U
KIT-201	Contains: one 2104-LU and 1 pair of 820-D F-brackets.			
2104-LLEU	-	-	-	U
2104-LNU	-	-	-	U
2104-MSBU	MSB	-	-	U
EZ-101BAR	-	Flush	1/2"(1)	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.



1504-LLEUBAR



1504-MSBUBAR

#### 2-1/4" X 3" DEVICE BOX - 2-1/2" DEEP 15.0 CUBIC INCHES, 245 ML


Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
1504-LLEUBAR	-	-	-	U
1504-MSBUBAR	MSB	-	-	U

## DEVICE BOXES


### SINGLE GANG - 2-1/2" AND 3" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.




1004



1004-LUBAR



1004-LBU



1004-LHU


#### PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in “rework” applications.
- Rugged metallic construction.


2" X 3" DEVICE BOX - 3" DEEP - GANGABLE 15.0 CUBIC INCHES, 245 ML				
Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
1004	-	Recessed	1/2" (4)	-
1004-LUBAR	-	Flush	-	U
1004-LBU	B	-	-	U
1004-LHU	-	-	-	U

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




3104-LHU




1804-LHU




3104-MSB



3104-MSB-1



3104-MSBU



3104-MSBU-1


2" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 16.0 CUBIC INCHES, 262 ML				
Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
3104-LHU	-	-	-	U
1804-LHU	-	-	-	U
3104-MSB	MSB	-	K(2), 1/2"(2)	-
3104-MSB-1	MSB	-	K(2), 1/2"(2)	-
3104-MSBU	MSB	-	-	U
3104-MSBU-1	MSB	-	-	U

## DEVICE BOXES


### SINGLE GANG - 3" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.



3004-LHU




3004-MSB




3004-MSB-1

#### PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in “rework” applications.
- Rugged metallic construction.



3004-MSBU



3004-MSBU-1

#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

#### 2" X 3" DEVICE BOX - 3" DEEP - GANGABLE 18.0 CUBIC INCHES, 294 ML


Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
3004-LHU	-	-	-	U
3004-MSB	MSB	-	1/2"(4)	-
3004-MSB-1	MSB	-	1/2 (16)(4)	-
3004-MSBU	MSB	-	-	U
3004-MSBU-1	MSB	-	-	U

## DEVICE BOXES


### TWO GANG - 2 1/2" DEEP

#### APPLICATION


- Device boxes are used to house wiring devices such as switches or outlets.



2104-LU-2



2104-LLEU-2



2104-MSBU-2



1104-P\*

#### PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Plaster ears allow box to be used in “rework” applications.
- Rugged metallic construction.


#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.


#### 2" X 3" DEVICE BOX - 2-1/2" DEEP - PRE-GANGED 12.5 CUBIC INCHES, 204 ML PER GANG

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
2104-LU-2	-	Flush	-	U
2104-LLEU-2	-	-	-	U
2104-MSBU-2	MSB	-	-	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.



4204-MSB



4204-MSBU

#### 2" X 3" DEVICE BOX - 2-1/2" DEEP - POWER/COMMUNICATION 12.5 CUBIC INCHES, 204 ML PER GANG

Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
4204-MSB	MSB	-	K(4), 1/2" (4)	-
4204-MSBU	MSB	-	K(2), 1/2" (2)	U




## DEVICE BOXES


### MULTI-GANG - 2 1/2" DEEP

#### APPLICATION

- Device boxes are used to house wiring devices such as switches or outlets.



2104-LLEU-3BAR



2104-MSBU-3



1104-P \*


#### PRODUCT FEATURES

- Rugged metallic construction.


#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

2" X 3" DEVICE BOX - 2-1/2" DEEP - 3 GANG 12.5 CUBIC INCHES, 204 ML PER GANG				
Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
2104-LLEU-3BAR	-	-	-	U
2104-MSBU-3	MSB	-	-	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			



2104-LLEU-4BAR

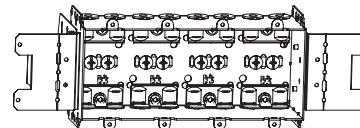

2104-MSBU-4



1104-P \*


2" X 3" DEVICE BOX - 2-1/2" DEEP - 4 GANG 12.5 CUBIC INCHES, 204 ML PER GANG				
Catalogue Number	Bracket	Ears	Knockouts	Cable Clamps
2104-LLEU-4BAR	-	-	-	U
2104-MSBU-4	MSB	-	-	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			

*\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.*




## OCTAGON BOXES

1/2" DEEP - 4" ROUND



56111BAR



OBEXBAR

### APPLICATION

- Ceiling pans are used in the installation of ceiling or wall lighting fixtures.
- Extension ring provide a means for adding additional cubic capacity.

### PRODUCT FEATURES

- Raised ground screw.
- Self tapping screws which virtually eliminate stripping.
- Rugged metallic construction.

### COMPLIANCE

- All Hubbell ceiling pans are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

**4" ROUND CEILING PAN (PANCAKE BOX) - 1/2" DEEP  
5.0 CUBIC INCHES, 81 ML**

Catalogue Number	Description	Raised Ground Screw	Knockouts
56111BAR *	Ceiling Pan	Yes	1/2" (4)
OBEXBAR	Extension Ring (5.0)	-	-


*\*Maximum load 25 pounds. Not for use with ceiling fan.*

## OCTAGON BOXES

### 1-1/2" AND 2-1/8" DEEP

#### APPLICATION

- Octagon boxes are used in the installation of ceiling or wall lighting fixtures.
- Extension rings provide a means for adding additional cubic capacity or as an outlet box for surface conduit.

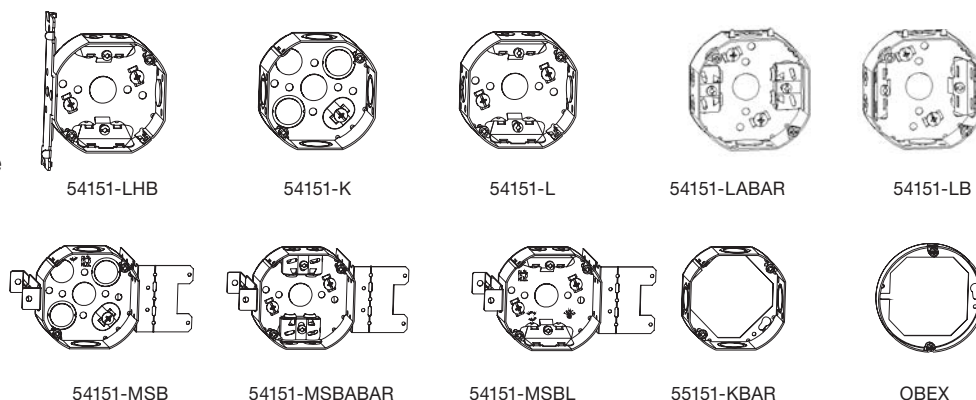

#### PRODUCT FEATURES


- Combination screw heads provide for faster installation.
- Self-tapping screws which virtually eliminate stripping.
- Rugged metallic construction.

#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

#### 4" OCTAGON BOX - 1-1/2" DEEP 15.0 CUBIC INCHES, 245 ML

Catalogue Number	Bracket	Raised Ground Screw	Knockouts	Cable Clamps
54151-LHB	SB	no	1/2"(2)	L
54151-K	-	yes	K(6), 1/2"(2)	-
54151-L	-	no	1/2"(3)	L
54151-LABAR	-	no	1/2"(3)	A
54151-LB	B	no	1/2"(2)	L
54151-MSB	MSB	yes	K(4), 1/2"(2)	-
54151-MSBABAR	MSB	no	1/2"(1)	A
54151-MSBL	MSB	no	1/2"(1)	L
55151-KBAR	Extension Ring (15.0)	-	K(4)	-
OBEX	Extension Ring (5.0)	-	-	-

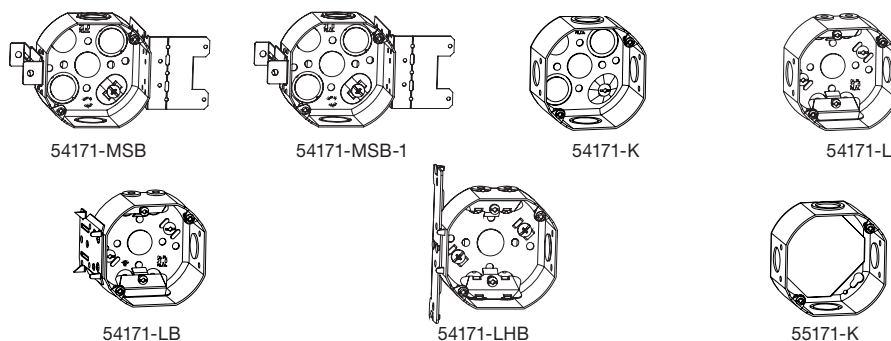

#### 4" OCTAGON BOX - 2-1/8" DEEP 21.0 CUBIC INCHES, 344 ML


Catalogue Number	Bracket	Raised Ground Screw	Knockouts	Cable Clamps
54171-MSB	MSB	yes	K(4), 1/2"(4)	-
54171-MSB-1	MSB	yes	K(4), 1/2"(4)	-
54171-K	-	yes	K(4), 1/2"(4)	-
54171-L	-	no	1/2"(3)	L
54171-LB	B	no	1/2"(2)	L
54171-LHB	SB	no	1/2" (2)	L
55171-K	Extension Ring (21.0)	-	K(2), 1/2"(2)	-

## CEILING FAN BOX

2 - 1/8" DEEP

### APPLICATION

- Used for the installation of ceiling fans.



54171-LF

### PRODUCT FEATURES

- Combination screw heads provide for faster installation.
- Self-tapping screws which virtually eliminate stripping.
- Rugged metallic construction.

4" CEILING FAN BOX - 2-1/8" DEEP 21.0 CUBIC INCHES, 344 ML, MAX LOAD CAPACITY IS 35 LBS. (15.6kg)				
Catalogue Number	Bracket	Raised Ground Screw	Knockouts	Cable Clamps
54171-LF*	-	no	1/2"(3)	L

\*Supplied with two No. 10-32 machine screws and star washers.

### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

OCTAGON BOX COVERS

4" DIAMETER

APPLICATION


- Covers are used to close an outlet box.
- Switches or receptacles may be installed into octagon boxes by using covers 54-C-64, 54-C-65 or 54-C-94.

PRODUCT FEATURES

- Rugged metallic construction.

COMPLIANCE

- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

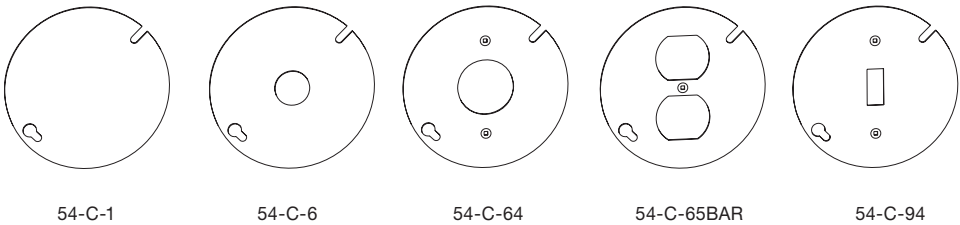


4" ROUND COVERS			
Catalogue Number	Description	Opening	Knockouts
54-C-1	Flat Cover	blank	-
54-C-6	Flat Cover	-	1/2"(1)
54-C-64	Flat Cover	1.40" receptacle	-
54-C-65BAR	Flat Cover	duplex receptacle	-
54-C-94	Flat Cover	toggle switch	-

## SQUARE BOXES


### 1-1/2" AND 2-1/8" DEEP

#### APPLICATION


- Boxes are installed in ceiling or wall junctions.
- Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.




52151-K




52151-KSB



52151-MSB



52151-MSBS



53151-K


#### PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping.
- Rugged metallic construction.


#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.


4" SQUARE BOXES - 1-1/2" DEEP 21.0 CUBIC INCHES, 344 ML			
Catalogue Number	Bracket	Raised Ground Screw	Knockouts
52151-K	-	yes	K(6), 1/2"(6), 3/4"(2)
52151-KSB	SB	yes	K(4), 1/2"(6), 3/4"(2)
52151-MSB	MSB	yes	K(2), 1/2"(6), 3/4"(2)
52151-MSBS	MSBS	yes	K(2), 1/2"(6), 3/4"(2)
53151-K	Extension Ring (21.0)	-	K(6), 1/2"(4)




52171-1




52171-K



52171-KSB



52171-MSB



53171-K

4" SQUARE BOXES - 2-1/8" DEEP 30.0 CUBIC INCHES, 491 ML			
Catalogue Number	Bracket	Raised Ground Screw	Knockouts
52171-1	-	yes	1/2"(2), 3/4"(2), 1"(4)
52171-K	-	yes	K(6), 1/2"(6), 3/4"(2)
52171-KSB	SB	yes	K(4), 1/2"(6), 3/4"(2)
52171-MSB	MSB	yes	K(2), 1/2"(6), 3/4"(2)
53171-K	Extension Ring (30.0)	-	K(6), 1/2"(4)

## SQUARE BOXES

1-1/2 AND 2-1/8" DEEP

### APPLICATION


- Boxes are installed in ceiling or wall junctions or stove and dryer receptacles.
- Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.

### PRODUCT FEATURES


- Self-tapping screws virtually eliminate stripping.
- Rugged metallic construction.

### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




72151-K




73151-KBAR

#### 4-11/16" SQUARE EXTENSION RINGS - 1-1/2" DEEP 30.0 CUBIC INCHES, 491 ML


Catalogue Number	Bracket	Raised Ground Screw	Knockouts
72151-K	-	yes	K(6), 1/2"(6), 3/4"(2)
73151-KBAR	Extension Ring (30.0)	-	K(6), 1/2"(4)




72171-MSB




72171-K



72171-KSB



72171-1



73171-KBAR

#### 4-11/16" SQUARE BOXES - 2-1/8" DEEP 42.0 CUBIC INCHES, 688 ML

Catalogue Number	Bracket	Raised Ground Screw	Knockouts
72171-MSB	MSB	yes	1/2"(6), 3/4"(2), K(2)
72171-K	-	yes	K(6), 1/2"(6), 3/4"(2)
72171-KSB	SB	yes	K(4), 1/2"(6), 3/4"(2)
72171-1	-	yes	1/2"(2), 3/4"(2), 1"(8)
73171-KBAR	Extension Ring (42.0)	-	K(6), 1/2"(4)

# SQUARE COVERS

## 4" COVERS

### APPLICATION


- Covers are used to close an outlet box.
- Raised device covers are used for mounting switches or receptacles.

### PRODUCT FEATURES


- Self-tapping screws virtually eliminate stripping.
- Rugged metallic construction.
- 52 series covers are designed for use with 52 series boxes.

### COMPLIANCE


- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




52-C-0



52-C-00




52-C-1




52-C-6BAR

#### 4" SQUARE COVERS - FLAT


Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
52-C-0	flat	-	-	one device	-
52-C-00	flat	-	-	two devices	-
52-C-1	flat	-	-	blank	-
52-C-6BAR	flat	-	-	-	1/2"(1)




52-C-3




52-C-10




52-C-13




52-C-14




52-C-14-5/8




52-C-15




52-C-16



52-C-17



52-C-18



52-C-18-5/8

#### 4" SQUARE COVERS - RAISED COVER

Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
52-C-3	raised cover	1/2"	3.7 (60)	one device	-
52-C-10	raised cover	3/16"	1.2 (19)	one device	-
52-C-13	raised cover	1/2"	3.5 (57)	one device	-
52-C-14	raised cover	3/4"	5.1 (83)	one device	-
52-C-14-5/8	raised cover	5/8"	4.3 (70)	one device	-
52-C-15	raised cover	7/8"	6.1 (99)	one device	-
52-C-16	raised cover	1-1/4"	8.5 (139)	one device	-
52-C-17	raised cover	1/2"	6.3 (103)	two devices	-
52-C-18	raised cover	3/4"	9.7 (158)	two devices	-
52-C-18-5/8	raised cover	5/8"	7.8 (127)	two devices	-

## SQUARE COVERS

### 4" COVERS

#### APPLICATION


- Covers are used to close an outlet box.
- Raised device covers are used for mounting switches or receptacles.

#### PRODUCT FEATURES


- Self-tapping screws virtually eliminate stripping.
- Rugged metallic construction.
- 52 series covers are designed for use with 52 series boxes.

#### COMPLIANCE


- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




52-C-49-1/2




52-C-49-3/4




52-C-49-1



52-C-49-1-1/4




52-C-50-1-1/2




52-C-51-2

#### 4" SQUARE COVERS - TILE COVER


Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
52-C-49-1/2	tile cover	1/2"	3.4 (55)	one device	-
52-C-49-3/4	tile cover	3/4"	5.3 (86)	one device	-
52-C-49-1	tile cover	1"	6.8 (111)	one device	-
52-C-49-1-1/4	tile cover	1-1/4"	8.6 (140)	one device	-
52-C-50-1-1/2	tile cover	1-1/2"	10.0 (163)	one device	-
52-C-51-2	tile cover	2"	14.0 (229)	one device	-




8361




8362




8363




8364



8365



8366



8367

#### 4" SQUARE COVERS - SURFACE COVER

Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
8361	surface cover	3/8"	4.6 (75)	toggle switch	-
8362	surface cover	3/8"	4.6 (75)	2.625" receptacle	-
8363	surface cover	3/8"	4.6 (75)	1.40" receptacle	-
8364	surface cover	3/8"	4.6 (75)	1.625" receptacle	-
8365	surface cover	3/8"	4.6 (75)	duplex receptacle	-
8366	surface cover	3/8"	4.6 (75)	2.156" receptacle	-
8367	surface cover	3/8"	4.6 (75)	2 toggle switches	-



## SQUARE COVERS

### 4" AND 4-11/16" COVERS

#### APPLICATION


- Covers are used to close an outlet box.
- Raised device covers are used for mounting switches or receptacles.

#### PRODUCT FEATURES


- Self-tapping screws virtually eliminate stripping.
- Rugged metallic construction.
- 72 series covers are designed for use with 72 series boxes.

#### COMPLIANCE


- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




8368



8371




8372




8375

#### 4" SQUARE COVERS - SURFACE COVER (cont'd)

Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
8368	surface cover	3/8"	4.6 (75)	2 GFCI/ Styleline	-
8371	surface cover	3/8"	4.6 (75)	2 duplex receptacles	-
8372	surface cover	3/8"	4.6 (75)	1 GFCI	-
8375	surface cover	3/8"	4.6 (75)	1 toggle, 1 duplex	-




72-C-1




72-C-6-K

#### 4-11/16" SQUARE COVERS - FLAT


Catalogue Number	Description	Depth	Capacity	Opening	Knockouts
72-C-1	flat	-	-	blank	-
72-C-6-K	flat	-	-	concentric knock-out	K(1)




72-C-10




72-C-15



72-C-13



72-C-17



72-C-14

#### 4-11/16" SQUARE COVERS - RAISED COVER

Catalogue Number	Description	Depth	Capacity in <sup>3</sup> (ML)	Opening	Knockouts
72-C-10	raised cover	3/16"	1.2 (19)	one device	-
72-C-13	raised cover	1/2"	3.5 (57)	one device	-
72-C-14	raised cover	3/4"	5.1 (83)	one device	-
72-C-15	raised cover	7/8"	6.1 (99)	one device	-
72-C-17	raised cover	1/2"	6.3 (103)	two devices	-

## UTILITY BOXES

### 1-1/2" AND 1-7/8" DEEP

#### APPLICATION


- Utility boxes are used for convenience outlets, switch boxes or small junction boxes.
- They are popular for exposed work applications (surface mounted wiring).

#### PRODUCT FEATURES


- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.



2018




2018-SB




2018-SBS

#### 2-1/8" X 4" UTILITY BOXES - 1-1/2" DEEP


Catalogue Number	Bracket	Capacity in <sup>3</sup> (ML)	Raised Ground Screw	Knockouts
2018	-	11.5 (188)	yes	1/2"(10)
2018-SB	SB	11.5 (188)	yes	1/2"(7)
2018-SBS	SBS	11.5 (188)	yes	1/2"(7)




2020



2020-RBAR




2020-SB




2020-SBS

#### 2-1/8" X 4" UTILITY BOXES - 1-7/8" DEEP


Catalogue Number	Bracket	Capacity in <sup>3</sup> (ML)	Raised Ground Screw	Knockouts
2020	-	14 (229)	yes	1/2"(10)
2020-RBAR	Extension Ring	14 (229)	-	1/2"(8)
2020-SB	SB	14 (229)	yes	1/2"(7)
2020-SBS	SBS	14 (229)	yes	1/2"(7)




1110



1110-RBAR



1110-SB



1111

#### 2-1/2" X 4" UTILITY BOXES - 1-7/8" DEEP


Catalogue Number	Bracket	Capacity in <sup>3</sup> (ML)	Raised Ground Screw	Knockouts
1110	-	16.5 (270)	yes	1/2"(10)
1110-RBAR	Extension Ring	16.5 (270)	-	1/2"(8)
1110-SB	SB	16.5 (270)	yes	1/2"(7)
1111	-	16.5 (270)	yes	1/2" (10)

## UTILITY BOXES

1-7/8" AND 2-1/8" DEEP

### APPLICATION


- Utility boxes are used for convenience outlets, switch boxes or small junction boxes.
- They are popular for exposed work applications (surface mounted wiring).




1110-HV

### PRODUCT FEATURES


- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened.
- Rugged metallic construction.



1151BAR



1199



1198

### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

#### 2-1/2" X 4" HIGH VOLTAGE (347V) UTILITY BOXES - 1-7/8" DEEP

Catalogue Number	Description	Capacity in <sup>3</sup> (ML)	Raised Ground Screw	Knockouts
1110-HV	-	16 (262)	yes	1/2"(10)

#### 2-1/2" X 4" UTILITY BOXES - 2-1/8" DEEP

Catalogue Number	Description	Capacity in <sup>3</sup> (ML)	Raised Ground Screw	Knockouts
1151BAR	One Toggle Opening	18.5 (303)	no	1/2"(4)
1199	Duplex Receptacle Opening	18.5 (303)	no	1/2"(4)
1198	GFCI Opening	18.5 (303)	no	1/2"(4)

## UTILITY BOX COVERS

### APPLICATION


- Utility box covers are used to close a utility box.
- Covers may also be used as single-gang wall plates.

### PRODUCT FEATURES


- Covers are designed to match the contours of the box.
- Cover corners are rounded.
- All covers have captive screws.
- Self-tapping ground screws which virtually eliminate stripping.
- Mounting screws are included with covers.

### COMPLIANCE

- All Hubbell covers are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




20-C-1



20-C-3




20-C-4




20-C-5

#### 4" x 2-1/8" UTILITY BOX COVERS


Catalogue Number	Description	Opening
20-C-1	cover	duplex receptacle
20-C-3	cover	1.40" receptacle
20-C-4	cover	blank
20-C-5	cover	toggle switch



11-C-1




11-C-2



11-C-3BAR




11-C-4




11-C-4HV




11-C-5



11-C-5HV



11-C-10




11-C-10HV

#### 4" x 2-1/2" UTILITY BOX COVERS

Catalogue Number	Description	Opening
11-C-1	cover	duplex receptacle
11-C-2	cover	1.625" receptacle
11-C-3BAR	cover	1.40 receptacle
11-C-4	cover	blank
11-C-4HV	cover	blank
11-C-5	cover	toggle switch
11-C-5HV	cover	toggle switch
11-C-10	cover	GFCI
11-C-10HV	cover	GFCI

## STEEL STUD BOXES

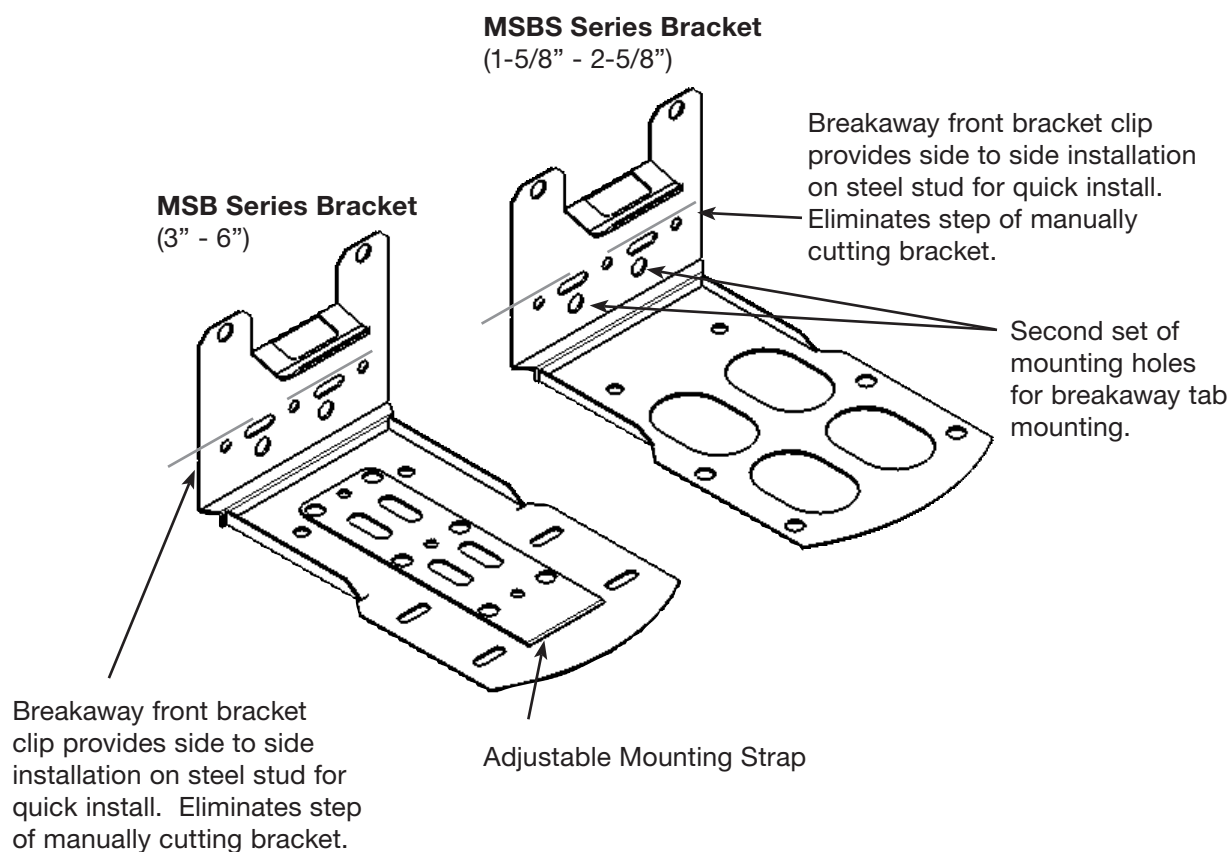

### Adjustable Mounting Strap

Our steel stud box features a unique adjustable mounting strap and clip-on tab that makes it easier than ever to position and hold boxes in place.

Our box is simply the fastest and easiest box to install on any size steel stud.

## STEEL STUD DEVICE BOXES

### SINGLE GANG - 2" AND 2-1/2" DEEP

#### APPLICATION


- Steel stud boxes are used in Commercial, Residential and Industrial construction.

#### PRODUCT FEATURES


- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Rugged metallic construction.

#### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




1102-MSB




1102-MSBU

#### 2" X 3" DEVICE BOX - 2" DEEP - GANGABLE 10.0 CUBIC INCHES, 163 ML

Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
1102-MSB	MSBS	1-5/8", 2-3/8"	1/2" (4)	-
1102-MSBU	MSBS	1-5/8", 2-3/8"	-	U




3102-MSB




3102-MSBU

#### 2" X 3" DEVICE BOX WITH EXPANDED SIDES - 2" DEEP - GANGABLE 12.0 CUBIC INCHES, 196 ML

Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
3102-MSB	MSBS	1-5/8", 2-3/8"	1/2" (4)	-
3102-MSBU	MSBS	1-5/8", 2-3/8"	-	U



1104-MSB



1104-MSBUBAR



1104-P \*

#### 2" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 12.5 CUBIC INCHES, 204 ML

Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
1104-MSB	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
1104-MSBUBAR	MSB	2-3/8", 3-5/8"	-	U
1104-P*	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.

## STEEL STUD DEVICE BOXES

### 2-1/2" DEEP

#### APPLICATION


- Steel stud boxes are used in Commercial, Residential and Industrial construction.

#### PRODUCT FEATURES


- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




2104-MSBU



2104-MSBU-2

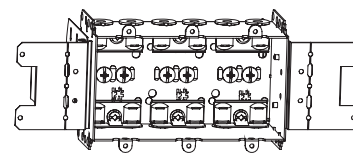

2104-MSBU-3

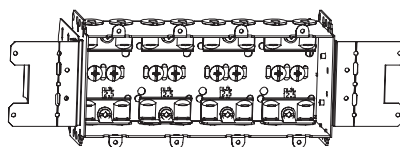


2104-MSBU-4




1104-P \*


2" X 3" DEVICE BOX - 2-1/2" DEEP 12.5 CUBIC INCHES, 204 ML PER GANG				
Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
2104-MSBU	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-2	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-3	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-4	MSB	2-3/8", 3-5/8"	-	U
1104-P *	Partition - For use with 1104 series and 2104, 2, 3, 4 gang boxes.			




3104-MSB



3104-MSB-1



3104-MSBU



3104-MSBU-1

2" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 16.0 CUBIC INCHES, 262 ML				
Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
3104-MSB	MSB	1-5/8", 2-3/8"	K(2), 1/2"(2)	-
3104-MSB-1	MSB	1-5/8", 2-3/8"	-	-
3104-MSBU	MSB	1-5/8", 2-3/8"	-	U
3104-MSBU-1	MSB	1-5/8", 2-3/8"	-	U

## STEEL STUD DEVICE BOXES

### SINGLE GANG - 2-1/2" AND 3" DEEP

#### APPLICATION


- Steel stud boxes are used in Commercial, Residential and Industrial construction.

#### PRODUCT FEATURES


- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Rugged metallic construction.

#### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.



3004-MSB




3004-MSBU



3004-MSBU-1

#### 2" X 3" DEVICE BOX - 3" DEEP - GANGABLE 18.0 CUBIC INCHES, 294 ML


Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
3004-MSB	MSB	2-3/8", 3-5/8"	1/2" (4)	-
3004-MSBU	MSB	2-3/8", 3-5/8"	-	U
3004-MSBU-1	MSB-1	2-3/8", 3-5/8"	-	U



1504-MSBUBAR

#### 2-1/4" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 15.0 CUBIC INCHES, 245 ML

Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
1504-MSBUBAR	MSB	2-3/8", 3-5/8"	-	U



1204-MSB-HV

#### 2-1/4" X 3" DEVICE BOX - 2-1/2" DEEP - GANGABLE 15.7 CUBIC INCHES, 257 ML

Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
1204-MSB-HV	MSB	2-3/8", 3-5/8"	1/2" (2)	-




# STEEL STUD POWER/COMMUNICATION BOXES


2-1/2" DEEP

## APPLICATION

- Steel stud boxes are used in Commercial, Residential and Industrial construction.



4204-MSB



4204-MSBU

## PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Gangable device boxes offer the option of constructing a box to hold two or more devices.
- Rugged metallic construction.

2" X 3" POWER AND COMMUNICATION DEVICE BOX - 2-1/2" DEEP - GANGABLE 12.5 CUBIC INCHES, 204 ML PER GANG				
Catalogue Number	Bracket	Stud Sizes	Knockouts	Cable Clamps
4204-MSB	MSB	2-3/8", 3-5/8"	K(4), 1/2"(4)	-
4204-MSBU	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	U

## COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

## STEEL STUD OCTAGON AND SQUARE BOXES

### APPLICATION


- Steel stud boxes are used in Commercial, Residential and Industrial construction.

### PRODUCT FEATURES


- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Rugged metallic construction.

### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.



54151-MSB




54151-MSBABAR




54151-MSBL

#### 4" X 4" OCTAGON BOXES - 1-1/2" DEEP 15.0 CUBIC INCHES, 245 ML

Catalogue Number	Raised Ground Screw	Stud Sizes	Knockouts	Cable Clamps
54151-MSB	yes	2-3/8", 3-5/8"	K(4), 1/2"(2)	-
54151-MSBABAR	no	2-3/8", 3-5/8"	1/2"(1)	A
54151-MSBL	no	2-3/8", 3-5/8"	1/2"(1)	L




54171-MSB




54171-MSB-1

#### 4" X 4" OCTAGON BOXES - 2-1/8" DEEP 21.0 CUBIC INCHES, 344 ML

Catalogue Number	Raised Ground Screw	Stud Sizes	Knockouts	Cable Clamps
54171-MSB	yes	2-3/8", 3-5/8"	K(4), 1/2"(4),	-
54171-MSB-1	yes	1-5/8", 2-5/8"	K(4), 1/2"(4),	-



52151-MSB



52151-MSBS


#### 4" X 4" SQUARE BOXES - 1-1/2" DEEP 21.0 CUBIC INCHES, 344 ML

Catalogue Number	Raised Ground Screw	Stud Sizes	Knockouts	Cable Clamps
52151-MSB	yes	2-3/8", 3-5/8"	K(2), 1/2"(6), 3/4"(2)	-
52151-MSBS	yes	2-3/8", 3-5/8"	K(2), 1/2"(6), 3/4"(2)	-

## STEEL STUD SQUARE BOXES

### APPLICATION

- Steel stud boxes are used in Commercial, Residential and Industrial construction.



52171-MSB


### PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning.
- Rugged metallic construction.

4" X 4" SQUARE BOXES - 2-1/8" DEEP 30.0 CUBIC INCHES, 491 ML				
Catalogue Number	Raised Ground Screw	Stud Sizes	Knockouts	Cable Clamps
52171-MSB	yes	2-3/8", 3-5/8"	K(2), 1/2"(6), 3/4"(2)	-

### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.



72171-MSB

4-11/16" X 4-11/16" SQUARE BOXES - 2-1/8" DEEP 42.0 CUBIC INCHES, 688 ML				
Catalogue Number	Raised Ground Screw	Stud Sizes	Knockouts	Cable Clamps
72171-MSB	yes	2-3/8", 3-5/8"	K(2), 1/2"(2)	-

STEEL STUD FOOT EXTENDER

APPLICATION

- Use with existing MSB foot to facilitate 6" steel stud installation.



7902

PRODUCT FEATURES

- Rugged metallic construction.

COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.


STEEL STUD FOOT EXTENDER					
Catalogue Number	Bracket	Capacity	Stud Sizes	Knockouts	Cable Clamps
7902	Foot Extender	-	-	-	-

METAL BOXES


## 347 VOLT BOXES AND COVERS

### APPLICATION


- 347 Volt boxes are used for the installation of 347 Volt switches for commercial and industrial lighting.



1204-1-HV



1204-2-HV



1204-MSB-HV




1204-HVP

### PRODUCT FEATURES

- All 347 Volt boxes have tapped holes with vertical spacing of 3.531" to accommodate 347 Volt switches.
- 1204 series boxes feature 2.25" spacing between gangs. Use Hubbell wallplates with HV suffixes.
- HV version of MBD and MBS series boxes feature 1.812" spacing between gangs. Use wallplates with HVR suffixes

2-1/4" x 3" DEVICE BOX - 2-1/2" DEEP 15.7 CUBIC INCHES, 257 ML PER GANG - GANGABLE		
Catalogue Number	Description	Knockouts
1204-1-HV	Device Box	1/2"(2)
1204-2-HV	2-Gang Device Box	1/2"(2)
1204-MSB-HV	Device Box	1/2"(2)
1204-HVP	Partition	-




1110-HV


### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.


2-1/4" x 4" UTILITY BOX - 1-7/8" DEEP 16.0 CUBIC INCHES, 262 ML		
Catalogue Number	Description	Knockouts
1110-HV	Utility Box	1/2"(2)



11-C-4HV



11-C-5HV



11-C-10HV

2.665" x 4.275" UTILITY BOX COVERS - HV		
Catalogue Number	Description	Opening
11-C-4HV	Cover	Blank
11-C-5HV	Cover	Toggle Switch
11-C-10HV	Cover	GFCI


## 347 VOLT MASONRY BOXES

### APPLICATION


- Masonry boxes are used for the flush installation of devices in masonry construction.

### PRODUCT FEATURES


- 2, 3, and 4-gang masonry boxes allow for the installation of partitions. The following partitions are available:
  - Partition MBS-P is designed for use with MBS-2, MBS-3 and MBS-4 boxes.
  - Partition MBD-P is designed for use with MBD-2, MBD-3 and MBD-4 boxes. Once these partitions are installed, the masonry box meets Canadian Electrical Code requirements allowing the installation of devices connected to different power sources within the same box.




MBS-1-HV



MBS-2-HV




MBS-3-HV




MBS-4-HV

#### 2-1/4" x 4" MASONRY BOXES - 2-3/8" DEEP 20.25 CUBIC INCHES, 331 ML PER GANG


Catalogue Number	Description	Knockouts
MBS-1-HV	Masonry Box	1/2"(2)
MBS-2-HV	2-Gang Masonry Box	1/2"(4)
MBS-3-HV	3-Gang Masonry Box	1/2"(6)
MBS-4-HV	4-Gang Masonry Box	1/2"(8)




MBD-1-HV



MBD-2-HV



MBD-3-HV



MBD-4-HV

#### 2-1/4" x 4" MASONRY BOXES - 3-3/8" DEEP 22.5 CUBIC INCHES, 368 ML PER GANG

Catalogue Number	Description	Knockouts
MBD-1-HV	Masonry Box	1/2"(4)
MBD-2-HV	2-Gang Masonry Box	1/2"(8)
MBD-3-HV	3-Gang Masonry Box	1/2"(12)
MBD-4-HV	4-Gang Masonry Box	1/2"(16)

### COMPLIANCE

- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

## STANDARD MASONRY BOXES

### APPLICATION


- Masonry boxes are used for the flush installation of devices in masonry construction.

### PRODUCT FEATURES


- 2, 3, and 4-gang masonry boxes allow for the installation of partitions. The following partitions are available:
  - Partition MBS-P is designed for use with MBS-2, MBS-3 and MBS-4 boxes.
  - Partition MBD-P is designed for use with MBD-2, MBD-3 and MBD-4 boxes.
 Once these partitions are installed, the masonry box meets Canadian Electrical Code requirements allowing the installation of devices connected to different power sources within the same box.

### COMPLIANCE


- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




MBS-1-K




MBS-2-K




MBS-3-K



MBS-4-K



MBS-5-K




MBS-6-K




MBS-P

#### MASONRY BOXES - 2-1/2" DEEP 14.0 CUBIC INCHES PER GANG


Catalogue Number	Description	Width	Height	Concentric Knockouts	
				1/2 (16), 3/4 (21), 1 (27)	1/2 (16), 3/4 (21)
MBS-1-K	Masonry Box	2"	3-3/4"	1	7
MBS-2-K	2-Gang Masonry Box	3-13/16"	3-3/4"	1	11
MBS-3-K	3-Gang Masonry Box	5-10/16"	3-3/4"	1	15
MBS-4-K	4-Gang Masonry Box	7-7/16"	3-3/4"	1	19
MBS-5-K	5-Gang Masonry Box	9-1/4"	3-3/4"	1	23
MBS-6-K	6-Gang Masonry Box	11-1/16"	3-3/4"	1	27
MBS-P	Partition	11-1/16"	3-3/4"	-	-




MBD-1-K




MBD-2-K




MBD-3-K



MBD-4-K



MBD-5-K



MBD-6-K



MBD-P

#### MASONRY BOXES - 3-1/2" DEEP 21.0 CUBIC INCHES, 344 ML

Catalogue Number	Description	Width	Height	Concentric Knockouts	
				1/2 (16), 3/4 (21), 1 (27)	1/2 (16), 3/4 (21)
MBD-1-K	Masonry Box	2"	3-3/4"	1	9
MBD-2-K	2-Gang Masonry Box	2"	3-3/4"	1	15
MBD-3-K	3-Gang Masonry Box	2"	3-3/4"	1	21
MBD-4-K	4-Gang Masonry Box	2"	3-3/4"	1	27
MBD-5-K	5-Gang Masonry Box	2"	3-3/4"	1	33
MBD-6-K	6-Gang Masonry Box	2"	3-3/4"	1	39
MBD-P	Partition	-	3-3/4"	-	-

## CONCRETE RINGS

### APPLICATION


- Concrete rings are used with poured deck (floor) in high-rise construction.
- These boxes are installed on wooden or steel forms. After the forms are removed, the box is flush with the concrete.

### PRODUCT FEATURES

- Flat sides provide excellent contact for locknuts.
- External ears are used to nail the ring to the wood form.
- Ears on inside of box are for fixtures.
- Waxed fixture ears prevent concrete from interfering with the threads.
- The top-cover is removable for before-pour work.
- Rugged metallic construction.

### COMPLIANCE

- All Hubbell concrete rings are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

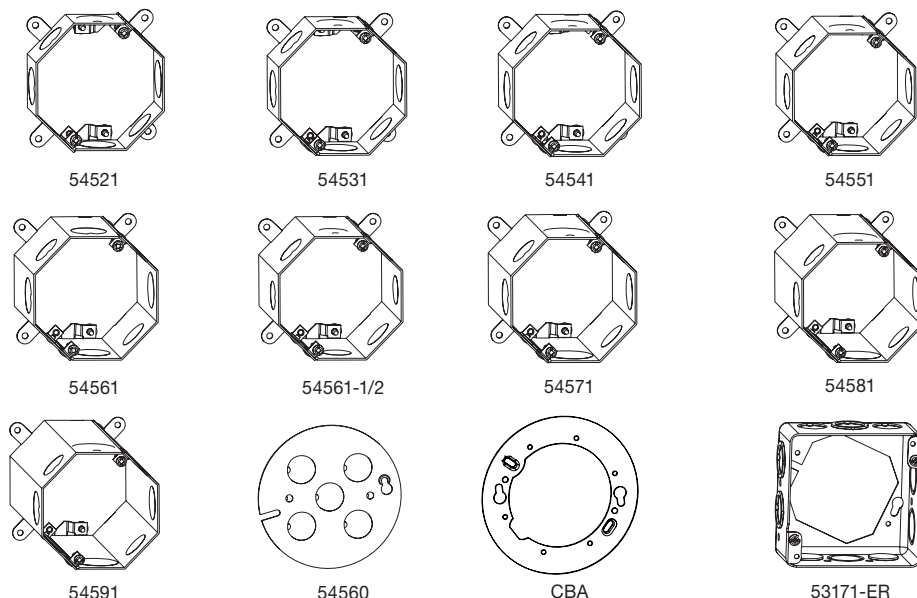

#### CONCRETE RINGS

Each concrete ring is supplied with one 54560 cover.

Catalogue Number	Description	Diameter	Depth	Capacity in <sup>3</sup> (ML)	Knockouts
54521	Ring	4"	1-1/2"	18 (294)	1/2"(4), 3/4"(4)
54531	Ring	4"	2"	24 (393)	1/2"(4), 3/4"(4)
54541	Ring	4"	2-1/2"	30 (491)	1/2"(4), 3/4"(4)
54551	Ring	4"	3"	36 (589)	1/2"(4), 3/4"(4)
54561	Ring	4"	3-1/2"	42 (688)	1/2"(4), 3/4"(4)
54561-1/2	Ring	4"	3-1/2"	42 (688)	1/2"(8)
54571	Ring	4"	4"	48 (786)	1/2"(4), 3/4"(2), 1"(2)
54581	Ring	4"	5"	60(983)	1/2"(4), 3/4"(2), 1"(2)
54591	Ring	4"	6"	72 (1179)	1/2"(4), 3/4"(2), 1"(2)
54560	Cover	4"	-	-	1/2"(5)
CBA *	Adaptor	4"	-	-	-
53171-ER	Extension ring (30.0) - for concrete rings only				


\* CBA Adapter - use for mounting and aligning octagonal extension rings.




## POWER/COMMUNICATION BOXES

### APPLICATION

- Power/Communication boxes are designed for the installation of receptacles and communications devices (telephone jacks, cable connectors, etc.) within the same box.



4204-MSB



4204-MSBU



1104-P \*

### PRODUCT FEATURES

- Rugged metallic construction.
- Unique adjustable mounting strap and patented clip-on tab allows for easy positioning.

### COMPLIANCE

- 4204 series boxes include the 1104-P partition.
- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

#### POWER/COMMUNICATION BOXES 12.5 CUBIC INCHES, 204 ML PER GANG

Catalogue Number	Description	Width	Height	Depth	Knockouts	Cable Clamps
4204-MSB	2-Gang Box	2	3	2-1/2	K(4), 1/2"(4)	-
4204-MSBU	2-Gang Box	2	3	2-1/2	K(2), 1/2"(2)	U
1104-P *	Partition	-	3	2-1/2	-	-

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box.

## PREGANGED BOXES AND COVERS

### APPLICATION


- Pre-ganged boxes are used for the installation of multiple devices.

### PRODUCT FEATURES


- GSB series boxes feature 1.812" spacing between gangs.
- All GBC covers have tapped holes with vertical spacing of 3.281" to accommodate standard devices.
- Rugged metallic construction.

### COMPLIANCE


- The LVP partition can be installed in GSB series boxes.
- All Hubbell boxes are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




GSB-2




GSB-3



GSB-4




GSB-5




GSB-6




LVP




GBC-2




GBC-3



GBC-4



GBC-5



GBC-6

BOÎTES PRÉ-GROUPÉES								
Catalogue Number	Description	Width	Height	Depth	Cubic inches	# of Gangs	1/2" Knockouts	Use with
GSB-2	Box	7	4	2	52	2	16	GBC-2 or 3
GSB-3	Box	8-13/16	4	2	66	3	18	GBC-3 or 4
GSB-4	Box	10-5/8	4	2	80	4	24	GBC-4 or 5
GSB-5	Box	12-7/8	4	2	93	5	26	GBC-5 or 6
GSB-6	Box	14-1/4	4	2	107	6	28	GBC-6
LVP	Partition	-	4	2	-	-	-	-

## VAPOUR/AIR BARRIERS

### APPLICATION


- Vapour barriers prevent unwanted penetration of exterior air and help maintain the existing interior environment from elements outside of the structure.

### PRODUCT FEATURES


- Made from durable polyethylene material.
- Designed to fit snugly into boxes for easy cable entry and sealing of openings.

### COMPLIANCE


- CSA not applicable.




VB-1



VB-2




VB-3




VB-54

#### VAPOUR/AIR BARRIERS - Low Density Polyethylene

Catalogue Number	Description
VB-1	For 2" x 3" device boxes, up to 3" deep
VB-2	For 4" square and 2 gang device boxes up to 3" deep
VB-3	For 3 gang device boxes up to 3" deep
VB-54	For octagonal boxes up to 2-1/8" deep



1004-VB



5254-VB


#### VAPOUR/AIR BARRIERS - High Density Polyethylene

Catalogue Number	Description
1004-VB	For 2" x 3" device boxes up to 3" deep
5254-VB	For 4" square and 2 gang device boxes up to 3" deep


## DOOR SWITCHES AND BOXES

### COMPLIANCE

- All Hubbell boxes and switches are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.



DS-30




DS-55



DS-BO



DS-PL



S-30



S-55

### DOOR SWITCHES AND BOXES

1-11/32" x 3-11/16" x 1-1/2" DEEP, 4.5" CUBIC INCHES, 73ML

Catalogue Number	Description	Knockouts	AMP	Volt	Switch	Mounting Screws
DS-30	Box, Switch and plate assembly	1/2" (3)	3	125 volt AC	Open (light on when door is closed)	Yes
DS-55	Box, Switch and plate assembly	1/2" (3)	3	125 volt AC	Closed (light on when door is open)	Yes
DS-BO	Box only	1/2" (3)	-	-	-	-
DS-PL	Plate only	-	-	-	-	Yes
S-30	Switch only	-	3	125 volt AC	Open (light on when door is closed)	-
S-55	Switch only	-	3	125 volt AC	Closed (light on when door is open)	-

## BAR HANGERS

### APPLICATION


- Adjustable bar hanger allows box to be placed between ceiling joists.

### PRODUCT FEATURES

- Boxes can be located anywhere along length of the bar.

### COMPLIANCE

- All Hubbell accessories are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

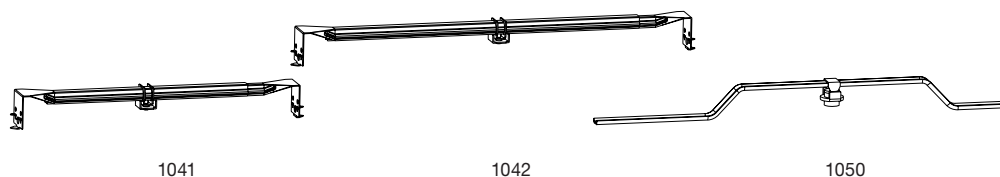

BAR HANGERS - FOR USE WITH OCTAGONAL AND SQUARE BOXES		
Catalogue Number	Description	Load Cap
1041	Adjustable Bar Hanger, 11-1/2" to 18-1/2"	50 lbs. (22.7kg)
1042	Adjustable Bar Hanger, 16-1/2" to 26-1/2"	50 lbs. (22.7 kg) up to 22-1/2", 25 lbs. (11.35 kg) up to 26-1/2"
1050	18" Bar, 1/2" Offset	50lbs. (22.7 kg)



1060

BAR HANGERS - FOR USE WITH device boxes		
Catalogue Number	Description	Load Cap
1060	16" Bar, Grooved for box ears	-

## STEEL BOX ACCESSORIES

### COMPLIANCE


- All Hubbell accessories are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.




66




66SS




820-D



LRW



7901



SBEX



7902

ACCESSORIES		
Catalogue Number	Description	Load Cap
66	Protector Plate. Meets requirements of CEC rule 12-616.	
66SS	Protector Plate for steel stud	
820-D	Device Box Supports (patent pending)	
LRW	Rework bracket, for use with 2" x 3" device boxes with plaster ears	
7901	Rework bracket, for use with octagonal boxes.	10 lbs. (5 kg)
SBEX	2" x 3" Device Box Extension, adjustable depth up to 7/8"	
7902	Steel Stud Foot Extender, adds to MSB foot to facilitate 6" steel stud installation	