FULL LINE PRODUCT CATALOG





INTERIOR FRAMING • EXTERIOR FRAMING • FLOOR FRAMING INTERIOR FINISHING • METAL LATH/ACCESSORIES • CLIPS/CONNECTORS

THE INDUSTRY'S MOST COMPLETE PRODUCT LINEUP. AIMED AT CHANGING THE BUILDING LANDSCAPE.

Comprehensive is the word. On the following pages, you'll find all things ClarkDietrich. Framing for drywall, curtain wall, doors, windows and floors. Connectors, lath, beads and trim. Bridging, bracing and backing. The list of our products goes on, but there's much more to it than that.

We refer to ourselves as ClarkDietrich Building Systems for a reason. The future of building will be shaped by the inter-relationships of various products and the thinking behind them. Because of this, we create cold-formed steel building products that compose systems—systems backed by intelligent design tools and fully capable engineering services.

This systems approach means our products work better together in achieving strength, fire and sound ratings. It's also an approach that leads to enhanced performance on the job—during installation and long after. We can reinforce your efforts to design and build more intelligently with a versatile engineering services team and smarter installation and design techniques. Furthermore, we offer the efficiencies of a single supplier with unmatched reach through 14 plants and 5 engineering offices—as well as nationwide product availability. This availability includes the expansive product lineup of accessory leader, Vinyl Corp., a wholly owned subsidiary and forward-thinking ally of ClarkDietrich.

Regardless of your project's size or complexity, ClarkDietrich has the resources to help you achieve your vision. And this comprehensive, full line catalog is a great start. Here you'll find select details about every product in our portfolio, including key advantages and technical information, to guide your specifications.

At the end of the day, a full product line is only as strong as the company that stands behind it. You can count on the expertise, service and full support of ClarkDietrich now, and far into the future.

Need help with product selection, ordering, scheduling, delivery, or anything else? Call us at 800-543-7140, or on the West Coast at 800-365-5284.

Need Product Submittals? Use SubmittalPro® at clarkdietrich.com.



	Overview	1-8
	Engineering Services	4
	Clip Express™	4
	Contact Information & Locations	5
	How To Use This Catalog	6-7
	LEED" and Sustainability	8
	Interior Framing	9-33
	Drywall Framing	10-14
	Sound Rated Systems	15-18
	Head-of-Wall Deflection Systems	19-20
	Door and Window Framing	21-22
	Bridging, Bracing and Backing	23-27
	Shaftwall	28-31
	Area Separation Wall	32-33
	Exterior Framing	34-47
	Curtain Wall Framing	35-37
	Door and Window Framing	38-40
	Head-of-Wall Deflection Systems	41-43
	Bridging and Bracing	44-46
	Load-Bearing	47
	Floor Framing	48-53
	Interior Finishing	54-68
	Paper-Faced Beads and Trims	55-57
TENTS	Metal Beads and Trims	58-62
	Vinyl Beads and Trims	63-68
	Metal Lath and Accessories	69-84
	Metal Lath	70-73
	Corner and Casing Beads	74-75
	Control and Expansion Joints	76-77
	Weep and Sill Screeds	78-79
	Veneer Plaster Beads and Trims	80-81
	Vinyl Corner and Casing Beads	82
	Vinyl Expansion Control Joints	83
	Vinyl Weep and Sill Screeds	84
	Clips and Connectors	85-102
	Curtain Wall and Bypass Connections	86-87
	Head-of-Wall Deflection Connections	88
	Rigid Connections	89-92
	Bridging, Bracing and Backing	93-95
	Gusset Plates	96
	Floor Joist Framing Connections	97-98
	Roof and Truss Connections	99-100
		101-102
		103-105
	Trademarks and Warranty	106
	Code Approvals	107

TABLE OF CONTENTS

Support and Services

CLARKDIETRICH ENGINEERING SERVICES

Smarter engineering and technical expertise. It's support that extends beyond the structure itself.

From the initial design phase to jobsite installation, we are all about providing inventive, yet practical and handson know-how to help you think outside the box—or to help you just get it done.

ClarkDietrich Engineering Services is a full-service consulting firm that believes strongly in value engineering and customer input. Our engineering fees and lead times are competitive, and our customer service exceeds the industry standard with consistent point-ofcontact through our regional project managers.

We offer Building Information Modeling (BIM) services that include specialty engineering collaborative design. We support the BIM movement by offering add-on tools that allow our products, and the rich data attached to them, to quickly be imported into digital designs. Our team is also comprised of LEED®-certified professionals to consult on sustainable building design.

- Electronically sealed shop drawings and calculations
- Preliminary sizing and pre-bid engineering pricing
- Reference plan on large projects
- Detailed wall sections, full elevation opening design and C-stud truss design

Our technical services team provides immediate response to questions ranging from general installation to detailed specification requirements, and can deliver one-day turnaround on technical sizing. We are experts on industry standards such as AISI and ASTM, and a proud member of SFIA. Our team also supports our online product submittal system, SubmittalPro[®], and our design/engineering software is available as a free download from www.clarkdietrich.com.

- Product support and typical member sizing
- Framing detail recommendations
- Compliance and industry standards, such as AISI, ASTM and SFIA
- Engineering software and product submittal support
- LEED requirements support

CLIP EXPRESSSM

Connections you can count on.

We know that having the right products, at the right time, and at the right price, is absolutely essential to getting the job done. ClarkDietrich Clip Express is your single source for the widest and most cost-effective array of rigid, deflection, bridging and general-purpose clips, connectors, supports and framing hardware for commercial and residential light-gauge steel framing.

With Clip Express, you get fully engineered, rigorously tested and precision-formed connectors each and every time. Many of our connectors were developed by, or in conjunction with, framing installers in order to deliver high-performance products for significant installed savings.

While you may find a cheaper price than ClarkDietrich, you won't find a lower overall cost or better value. We offer unmatched reach through numerous plants and engineering offices—and nationwide product availability.

And because staying on schedule is crucial, we ship most orders the same day they are received. We'll get it there when, how and where you need it. Our nationwide manufacturing and service facilities see to that.

- Industry's widest product selection available from one source
- Fast delivery options meet your deadlines
- Backed by the largest light-gauge framing and engineering company in the world
- Expert field representatives for comprehensive product, installation and sales training



Throughout this catalog, when you see this icon next to a product entry, you know the product is part of our Clip Express program.

Our nationwide presence means we're there for you. On any project.

With 13 manufacturing plants and 5 engineering offices strategically located throughout the U.S., ClarkDietrich is always near by. You can be assured that your product will be delivered on time, and that you can call on us for support any and every step of the way.



Carlsbad, CA Riverside, CA Sacramento, CA Bristol, CT Dade City, FL McDonough, GA Roswell, GA Kapolei, HI Rochelle, IL Crown Point, IN Baltimore, MD Warren, OH Baytown, TX Dallas, TX West Chester, OH

ClarkDietrich Building Systems Manufacturing and Sales Locations:

CALIFORNIA Riverside
P 951.360.3500
F 951.360.3333
CALIFORNIA Sacramento
P 951.360.3500

F 951.360.3333 CONNECTICUT Bristol P 866.921.0023

F 860.584.6899 FLORIDA Dade City

P 352.518.4400 F 352.518.4450

GEORGIA McDonough P 678.304.5500 F 678.304.5555

HAWAII Kapolei P 951.360.3500 F 951.360.3333 ILLINDIS Rochelle

P 800.659.0745 F 513.645.0750 MARYLAND Baltimore P 410.477.4000 F 410.477.1550

OHIO Warren-East P 330.372.5564 F 330.372.4055

OHIO Warren-West P 330.372.4014 F 330.372.1945

TEXAS Baytown P 281.383.1617

F 281.573.1679

TEXAS Dallas P 214.350.1716 F 214.350.7252

FLORIDA Miami Vinyl Corp. P 305.477.6464

F 305.477.4108

ClarkDietrich Engineering Services

Toll-Free Phone: 877.832.3206 Toll-Free Fax: 877.832.3208 Email: engineering@clarkdietrich.com Technical Services: 888.437.3244

CENTRAL Crown Point, INSOUTHEAST Roswell, GANORTHEAST Bristol, CTWEST Carlsbad, CASOUTHEAST McDonough, GA

- Manufacturing, engineering and technical services
- ★ Corporate office
- Vinyl Corp.

OVERVIEW

How To Use This Catalog

This catalog is designed to help you select the right products or systems for your construction applications. Divided into six major sections, it is the most comprehensive manual in the industry.

For your convenience, a comprehensive index containing our complete product and system offering is also located at the back of the catalog. Search by common names and product names to help you quickly find exactly what you're looking for.

Structural properties and load tables are available on our website at clarkdietrich.com.

HOW TO IDENTIFY OUR PRODUCTS

ClarkDietrich has adopted standard nomenclature established by the American Iron and Steel Institute (AISI) for identifying each of its products. Coding of each member consists of four parts, in this order:

- A number which identifies the web depth of the member to two decimal places: 600 = 6.00," 1000 = 10.00," 550 = 5.50," 362 = 3.625," etc.
- A letter that identifies the type of member, such as S = Stud/ Joist, T = Track, U = U-channel, and F = Furring channel.
- A number that defines the flange dimension in inches to two decimal places: 162 = 1.625," 200 = 2.00," 125 = 1.25," etc.
- A number following a hyphen that denotes the minimum delivered thickness in mils (33mils = 33/1000 inches which is approximately 0.0329"). Minimum delivered thickness is 95% of design thickness.

NOTE REGARDING PRODUCT SUBSTITUTION

Care should be taken when substituting materials in place of ClarkDietrich building materials. There is a misconception within the construction industry regarding the substitution of one manufacturer's products or materials for those of another manufacturer. The assumption is that all studs of a given size and steel thickness are interchangeable. It may be possible that the substitution can safely be made, but the decision should not be made until the structural properties of the products or materials involved are compared by a qualified engineer.

YIELD STRENGTH (FY/PSI OR KSI)

ClarkDietrich products are manufactured with steel having a yield point of 33ksi for 18 and 20 gauge material. A yield point of 50ksi is standard for 16 gauge and heavier material. KSI = kips/square inch; kip = 1,000 lbs.

PROTECTIVE COATINGS

ClarkDietrich offers a wide variety of protective coatings to meet the specific requirements of a project.

Non-structural products are coated to meet the minimum requirements of ASTM C645, with a G40 or a protective coating with an equivalent corrosion resistance including coatings listed in Table 1 of ASTM A1003. Performance coatings meet the metallic equivalency requirement of C645 by satisfying section 9.1.3 of ASTM A1003 (75 hours in an ASTM B117 salt spray test). Non-structural products may also be ordered with enhanced coatings for special applications.

Structural framing products are available with a variety of protective coatings that meet the CP60 coating protection level requirements of AISI S200 and ASTM C955. These coatings may include G60, A60, AZ50 or GF30, all of which satisfy the above referenced standards. G90 coatings are an enhanced option that can be requested for highly corrosive environments. ClarkDietrich can supply a specific or enhanced coating to meet specific project requirements when requested. The buyer is solely responsible to assure that product is ordered to properly satisfy the applicable code or specification.

STEEL THICKNESS

The steel thickness of a product or component is referenced in terms of gauge or mils. The mil thickness measures the uncoated base metal material, and is a key contributor to the strength of the product.

Note: All products comply with ASTM standards and federal specifications as shown in the Code Approvals and Performance Standards in the back of this catalog. Minimum thickness is 95% of the design thickness, per AISI code. One mil is equivalent to 1/1000 (0.001) of an inch. So, a 20 gauge stud measuring the minimum uncoated base metal at 0.030 inches is 30mils thick.

ClarkDietrich thickness identification by color coding

ciar Abie trich this	clarkbiethen unchless identification by color couning								
Member mils	Thickness gauge		Design thickness	Min. thickness	Color code				
18	25		0.0188"	0.0179"	None				
27	22		0.0283"	0.0269"	Black				
30	DW20		0.0312"	0.0296"	Pink				
33	20		0.0346"	0.0329"	White				
43	18		0.0451"	0.0428"	Yellow				
54	16		0.0566"	0.0538"	Green				
68	14		0.0713"	0.0677"	Orange				
97	12		0.1017"	0.0966"	Red				
118	10		0.1242"	0.1180"	Blue				
ClarkDietrich Pro Drywall framing		kness							
Member gauge	Mils	ksi	Design thickness	Min. thickness	Color code				
ProSTUD 25	15	70	0.0158	0.0150	None				
ProSTUD 20	19	65	0.0200	0.0190	Pink				
ProSTUD 30	30	33	0.0312	0.0296	White				
ProSTUD 33MIL	33	33	0.0346	0.0329	White				
ProTRAK 25 and 20 =	50ksi ProTF	RAK 30mil and	d 33mil = 33ksi						

PRODUCT LABELING

Skids are easily identified with master skid labels that display product, gauge, size, length, piece count, yield strength and any special skid markings specified at the time of order. Individual inkjet labeling (including company name, product, size, length, gauge, coating and yield strength) or embossing is also provided on many of our structural framing members. UPC bar coding is also available for certain products.

METRIC SPECIFICATIONS

At your request, ClarkDietrich will provide "soft" metric conversions on its products and systems to help specifiers match metric design sizes. In addition, some products are available with hard metric dimensions from selected manufacturing facilities.

STANDARDS & SPECIFICATIONS

All structural properties are developed in accordance with the American Iron and Steel Institute's "Specification for the Design of Cold-Formed Steel Structural Members."

GENERAL NOTES

The data contained in this catalog is intended to be used as a general guideline only and does not replace the judgments and designs of a qualified architect and/ or engineer. This catalog does not provide load data necessary for building design. Load capacities, limiting heights, physical and structural properties and span data for ClarkDietrich structural framing can be found at www.clarkdietrich.com.

Product, application renderings and photographs are provided as a tool to show the general intent of the framing or finishing application only. These renderings or photographs may or may not be applicable to a specific project. They do not replace or supersede the architect or engineer of record, ASTM guidelines, national or local building codes or approved industry standards.

ClarkDietrich Building Systems reserves the right to change or modify the information contained in this catalog without prior notice or obligation. The information in this catalog supersedes all previously published data. Products and systems may be improved and/or changed after this catalog is printed.

PRODUCT AVAILABILITY

Most products manufactured by ClarkDietrich are readily available in all markets, but there can be exceptions. Please contact your ClarkDietrich Sales Representative to make sure the product you need is available in your market area.

SFIA

ClarkDietrich is a proud member of the Steel Framing Industry Association (SFIA).

ClarkDietrich LEED[®] INFORMATION AND REQUIREMENTS



ClarkDietrich LEED Request Form online at clarkdietrich.com

The future of building is all about the future of the environment.

ClarkDietrich products are manufactured from 100% recyclable cold-formed steel and contain both pre- and post-consumer recycled content. Steel is infinitely durable, providing strength throughout the lifetime of the structure. Due to our nationwide manufacturing locations, our products are often within a 500 mile radius of your project. But most importantly, our LEED®certified professionals offer advanced knowledge of sustainable building practices. Which can help sustain your business.

LEED Credit MR 2 (Construction Waste Management)

ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable. This attribute can help when diverting construction debris from the waste stream. Recycling construction waste contributes to LEED Credits MR 2.1 and 2.2. The specific contribution will vary by project and must be determined by the contractor. (Up to 2 pts.)

LEED Credit MR 4 (Recycled Content)

ClarkDietrich produces cold-formed steel framing products with a minimum recycled content of 34.9%, of which 24.3% is post-consumer and 9.4% is pre-consumer. These minimum values are based on resources from Steel Recycling Institute. Recycled content of materials contributes to LEED Credits MR 4.1 and 4.2, and possibly an Innovation in Design Credit if the project's overall recycled content exceeds 30%. If a higher content is desired, ClarkDietrich can provide this information if mill certifications are requested at time of order. (Up to 3 pts.)

LEED Credit MR 5 (Regional Materials)

LEED Credit MR 5 requires the jobsite to be within a 500 mile radius of the manufacturing plant and from the point of extraction of raw materials. With nationwide manufacturing locations, ClarkDietrich plants, as well as our steel sources, often fall within the required 500 mile radius. Each product must be tracked from the mill to the project location and then these values must be weighted by recycled content percentages. If you wish to report MR 5 Credits, please submit a LEED request through clarkdietrich.com or contact ClarkDietrich Technical Services at 888-437-3244 for procedures. (Up to 2 pts.)

ClarkDietrich Building Systems

ClarkDietrich Building Systems, Inc. is an active member of the U.S. Green Building Council with LEED Accredited Professionals on staff. ClarkDietrich is committed to supplying quality products and continually looking for new ways to develop greener building products and sustainable business practices. In total, ClarkDietrich products can help your project qualify for up to 7 LEED Credits under LEED for New Construction and Major Renovations (LEED-NC Ver. 2.2 and 3.0).



ClarkDietrich plant locations: Riverside, CA

Sacramento, CA Bristol, CT Dade City, FL McDonough, GA Kapolei, HI Rochelle, IL Baltimore, MD Warren, OH Baytown, TX Dallas, TX

Pub. No. CD-Full Line 6/14

INTERIOR FRAMING

Interior framing that stands up to any test. Including yours.

The inherent properties of steel make it a superior alternative to wood for interior framing: it's light, strong, versatile and noncombustible. With corrosion-resistant coatings, steel also adds durability and sustainability to your buildings. All of which means that steel is a perfect solution for a variety of nonload-bearing applications, such as partition walls, ceilings and column fireproofing in all types of low- to high-rise commercial structures—as well as residential dwellings. At the heart of our interior framing line is our ProSTUD® Drywall Framing System. It's not only been extensively field-tested for quality and ease of installation, but it also features a number of technological advances to enhance strength and versatility.

ClarkDietrich truly stands alone as a single source for a full range of interior framing products.

- Cost-effective, labor-saving solutions
- Drywall, shaftwall, and area separation wall
- Door and window framing solutions
- Sound-rated systems
- Head-of-wall deflection systems
- Bridging, bracing and backing
- Absolute code compliance



ProSTUD[®] Drywall Framing System



Developed, tested, and approved by pros—in the field. The ProSTUD® Drywall Framing System can be called many things. Strong. Versatile. Fast. And without a doubt—revolutionary. But it was also developed, tested and approved by pros in the field who demanded nothing less than achieving absolute ease of use. Its performance has also been proven by the most extensive laboratory evaluations available.

THE INDUSTRY'S PRODUCT OF CHOICE

Gauge equivalent (EQ) drywall framing must meet the minimum performance requirements of conventional drywall framing as defined by the Steel Framing Industry Association (SFIA) and the Steel Stud Manufacturers Association (SSMA). For interior drywall framing members, bending strength (or allowable moment) is the criteria most important to the strength of a wall or ceiling. ProSTUD employs modern roll-forming and steel-making technology that enhances the shape and strength with greater efficiency. ProSTUD—the product of choice—exceeds the performance of conventional drywall framing for allowable moment and screw connection strength.

LIFE SAFETY

Life Safety is the primary concern and duty of all construction and design professionals. ProSTUD features a number of technological advances to enhance its stiffness and strength, contributing to its allowable moment performance. When it comes to fire-rated systems, ProSTUD is UL-approved for the most common UL design assemblies including V450, U419, V438 and chase wall assemblies.

SOUND PERFORMANCE

ProSTUD also has exceptional sound performance in over 50 tested sound assemblies—more testing than any other manufacturer in the industry.

ProSTUD Drywall Framing and ProTRAK[®] Drywall Track were created specifically to work as a system. This means they work better together for you in achieving strength, fire *and* sound ratings. It's also an approach that leads to enhanced performance on the job—during installation and long after.

- High-strength steel combined with low-profile flange stiffening grooves and double offset web planking increases strength and provides greater limiting heights
- Diamond embossed web creates stiffness, reducing flange fade and screw spinout during drywall installation
- Strong, lightweight stud and track cuts and handles easier than conventional flat steel studs
- Flange grooves provide sight line for drywall alignment and aid in positioning screws at drywall joints to maintain the 3/8"edge requirement
- Web and leg enhancements in ProTRAK provide straight and rigid legs, making it the best choice for framing walls, headers, soffits, and bulkheads
- Nationwide availability



ProSTUD®



		Thickness				Web width	Flange (in)
Product code	Product name	Gauge I		Mils Design thickness (in)		(in)	
	ProSTUD 25	25	15	0.0158	50	1-5/8,	
PROS	ProSTUD 20	20	19	0.0200	65	2-1/2,	4 4/4
PRUS	ProSTUD 30MIL	20 DW	30	0.0312	33	3-5/8,	1-1/4
	ProSTUD 33MIL	20 STR	33	0.0346	33	4, 6	


All material G40 EQ (CP60 available as special order). See other ProSTUD product options at clarkdietrich.com.

ProTRAK®



				Web	1		
Product code	Product name			Design thickness (in)	ksi	width (in)	Leg (in)
	ProTRAK 25	25	15	0.0158	50	1-5/8,	1-1/4,
PROT	ProTRAK 20	20	19	0.0200	50	2-1/2,	1-1/2,
PRUI	ProTRAK 30MIL	20 DW	30	0.0312	33	3-5/8,	2, 2-1/2,
	ProTRAK 33MIL	20 STR	33	0.0346	33	4, 6	3

All material G40 EQ (CP60 available as special order).







iProSTUD.com

Going mobile? With your smartphone in hand, you can perform a fast, easy search, view ProSTUD limiting heights and even email submittal documents.

#6 Screw Pullout Values



#6 Screw Shear (Bearing) Values



Interior Contour Track®

A high-performance solution for intricate, dramatic architecture.

ClarkDietrich Interior Contour Track® flexible framing products are low-cost, high-performance framing solutions for nonload-bearing curves, bends, variable radii and arches for dramatic and distinctive ceilings, walls and bulkheads.

- Easily hand bends or forms to the desired curve, bend, radius or arch
- One product for both curves and arches
- Use with wood or steel studs

Contour Track answers the demands of today's customers wanting more elaborate and complex contoured architecture including dramatic sweeping soffits and bulkheads, curved or rounded walls, wavy ceilings, barrel vaults, arched and contoured openings, round or oval columns, and elliptical and eyebrow curves.

Product		Thickness				
code	Gauge	Mils	Design thickness (in)	Size (in)		
				2-1/2		
CNTB	25	18	0.0188	3-5/8		
				6		
				2-1/2		
CETB	20	26	0.0273	3-5/8		
				6		

Use only in nonload-bearing applications.

PUNCHED WEBS

Contour Track is permanently locked into place by securing it to the primary supporting structure using the prepunched holes conveniently placed throughout the web.

EXPANDABLE RIBBON TECHNOLOGY

Contour Track flexible framing products feature expandable ribbon technology that expands and contours to your desired curve, bend or radius. The ribbon technology offers curving flexibility, while maintaining or holding its shape during installation.



HINGED SUPPORT LEG

The other leg of the ClarkDietrich Contour Track features prepunched, easy-to-cut guide holes when contour track is used in arches or extreme radius conditions like column framing. In these conditions, the ribbons are quickly removed with snips and the trim holes are partially cut to provide maximum flexibility and versatility.

- INTERLOCKING TRACK

Contour Track flexible framing members bend both ways and easily form challenging compound curves. S-curves are easily made by overlapping and interlocking one 2" web section. Screw attach, then hand-bend to the desired effect.

IT ALL ADDS UP TO:

Faster, Easier and Safer Installation



GROMMETS





2-Piece Grommet



Snap-In Bushing

CORNER ANGLE



Corner Angle (90°)



Splayed Corner Angle (120°/135°)

FURRING CHANNEL CLIP



In a ceiling assembly, furring channel clips can be used to suspend U-channel from the overhead structure. Drywall furring channel is commonly clipped or wire-tied perpendicular to the underside of the U-channel at appropriate intervals for screwattaching drywall.

Grommets snap easily into stud knockouts and are used to protect electrical wiring and plumbing lines from contacting metal. Grommets are commonly used in construction when metal conduit is not required

Corner angle is a multipurpose 90° or 120°/135° galvanized angle used in dozens of framing applications. Some of the most common applications include lapped framing conditions, soffit framing, floor and ceiling runner, chase wall construction and laminated gypsum

drywall partitions. Custom sizes, beads, and lengths are available.

by building code.

Product code	Size (in)	Description	Pcs./Carton
CDOM	3/4	For 1-5/8" and 2-1/2" studs	100
GROM	1-1/2	For 3-1/2" and wider studs	100

		Thickr	ness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)	
				5/8 x 2		
				7/8 x 1-3/8	10	
CAN 90°	25	18	0.0188	1-1/2 x 1-1/2		
				2 x 2		
				3 x 3		
CANW 135°	25	18	0.0188	1-1/2 x 1-1/2	10	
CAINW 155	20	10	0.0100	2 x 2	10	
HCN (Hemmed) 90°	25	18	0.0188	2 x 2	10	
				5/8 x 2		
				7/8 x 1-3/8		
CAE 90°	20	30	0.0312	1-1/2 x 1-1/2	10	
				2 x 2		
				3 x 3		
CAEW 135°	20	20	0.0312	1-1/2 x 1-1/2	10	
CAEVV 130	20	30	0.0312	2 x 2	10	

Product code	Pcs./Bucket
MFCC	500

Z-FURRING



ClarkDietrich Z-furring is used to furr out interior masonry or poured concrete wall substrates and to support rigid polystyrene, mineral, or fiberglass batt insulation while providing a uniform plane for gypsum panel attachment. Z-furring should be installed vertically with the 3/4" flange against the substrate. The type of fastener and spacing will vary based on application. Install gypsum wallboard parallel or perpendicular to Z-furring.

		Thickness				
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)	
ZFN1		18			1	
ZFN2	25		0.0188	1-1/2	8' 6," 10', 12'	
ZFN3				2	0 0, 10, 12	
ZFN4				2-1/2		
ZFE1				1		
ZFE2	20	30	0.0312	1-1/2	0 6 10 10	
ZFE3		30	0.0312	2	8' 6," 10,' 12'	
ZFE4				2-1/2		

Heavier gauges available on request.

FURRING CHANNEL



7/8" Furring Channel*



1-1/2" Furring Channel*

a hat-shaped corrosion-resistant framing component used to furr out masonry walls and ceiling assemblies. In concrete wall applications, furring channel is installed vertically to the wall surface using concrete nails or powder-actuated fasteners. Gypsum panels are then screwattached to the furring channels. In ceiling applications, furring channels can be attached directly to the underside of the building structure using tie wire, screws or powder-actuated fasteners.

ClarkDietrich furring channel is

		Thickness				
Product code			Design thickness (in)	Size (in)	Length (ft)	
FCN	25	18	0.0188	7/8	10; 12'	
FCE	20	30	0.0312			
FCM	18	43	0.0451			
FCM	16	54	0.0566			
FCND	25	18	0.0188		401.401	
FCED	20	30	0.0312	1-1/2		
FCMD	18	43	0.0451		10; 12'	
FCMD	16	54	0.0566			

*Hemmed leg furring channel (as shown) is only available in 25 gauge.

ProSTUD[®] 3-5/8" SOUND ASSEMBLIES

Partition type	Assembly description	STC Rating / Test Report				
Fartition type	Assembly description	ProSTUD 25 (15mil)	ProSTUD 20 (19mil)	ProSTUD 30mil	ProSTUD 33mil	
	3-5/8" ProSTUD @ 24" o.c. 1 layer 5/8" Type X GWB on each side	43 TL09-539	38 TL13-190	36 TL13-201	36 TL13-197	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation 1 layer 5/8" Type X GWB on each side	48 TL09-540	41 TL13-189	37 TL13-202	37 TL13-196	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation 1 layer 5/8" Type X GWB on one side 2 layers 5/8" Type X GWB on the other side	49 TL13-167	44 TL13-188	40 TL13-203	42 TL13-195	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation 2 layers 5/8" Type X GWB on each side	54 TL09-538	45 TL13-187	42 TL13-204	45 TL13-194	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation RC-Deluxe w/ 1 layer 5/8" Type X GWB on one side 1 layer 5/8" Type X GWB on the other side	53 TL13-183	48 TL13-191	48 TL13-205	48 TL13-198	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation RC-Deluxe w/ 2 layers 5/8" Type X GWB on one side 1 layer 5/8" Type X GWB on the other side	59 TL09-543	54 TL13-192	52 TL13-206	54 TL13-199	
	3-5/8" ProSTUD @ 24" o.c. 3-1/2" R-13* unfaced insulation RC-Deluxe w/ 2 layers 5/8" Type X GWB on one side 2 layers 5/8" Type X GWB on the other side	62 TL13-181	59 TL13-193	56 TL13-207	58 TL13-200	

Notes:

- Sound assemblies are certified by Western Electro-Acoustic Laboratories.
- NVLAP accredited for ASTM E90 & E413, ISO Certified.
- See STC test reports at www.clarkdietrich.com/ProSTUD for detailed requirements of construction of wall assembly.
- * Values are the same for R-11 insulation.
- Contact ClarkDietrich Technical Services at 888-437-3244 for questions about ProSTUD sound assemblies.

Resilient Channels for Walls and Ceilings

ClarkDietrich resilient channel is one of the most efficient lowcost methods developed to reduce transmission of airborne sound through partition and ceiling assemblies. The resilient channel dampens sound waves effectively, dissipating the energy and reducing sound transmission by suspending gypsum wallboard 1/2" from the stud or joist. Sound absorption can be maximized by utilizing sound attenuation blankets within the wall or floor cavity.

• Lab-certified STC-rated up to 61

- Single- and double-leg channels
- Choose from five channels; RC Deluxe[™] has extrawide screw surface for easy attachment
- Available in 12' lengths
- Possible LEED[®] benefits under IEQ9 due to increased STC values. For more information on our STC assemblies, visit our website at clarkdietrich.com

RC Deluxe™ RESILIENT CHANNEL



Made of 21mil steel, RC Deluxe is one of the most effective, low-cost methods of improving sound transmission loss through wood and steel frame partitions. It is the preferred resilient channel in many applications because of its extra-wide 1-1/2" screw flange.

Thickness Size Product Length Design code (in) Gauge Mils thickness (in) RCSD 25 21 0.0221 1-1/2 12

Sound assemblies are certified by Western Electro-Acoustic Laboratories. NVLAP accredited for ASTM E90 & E413, ISO Certified. Additional test reports available through ClarkDietrich Technical Services. *Values are the same for R-11 insulation.

**Visit iProSTUD.com for current STC ratings.

RC-1 PRO RESILIENT CHANNEL



Made of 25 gauge steel, RC-1 Pro is used as a crossfurring member for resilient attachment of gypsum. Knurled face makes wallboard application easier. Resilient channel should be installed perpendicular to the framing members with the attachment flange of the RC Deluxe installed along the bottom edge. Channel is prepunched for screw attachments to wood or steel framing members. Nails are not recommended.

Resilient channel should be installed perpendicular to the framing members with the attachment flange of the RC-1 Pro installed along the bottom edge. Channel is prepunched for screw attachments to wood or steel framing members. Nails are not recommended.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
RCUR	25	18	0.0188	1-1/4	12

Sound assemblies are certified by Western Electro-Acoustic Laboratories. NVLAP accredited for ASTM E90 & E413, ISO Certified. Additional test reports available through ClarkDietrich Technical Services. *Values are the same for R-11 insulation.

**Contact our technical services department for current STC information.

RC-1 ProPlus HEAVY-DUTY RESILIENT CHANNEL



Made of 22mil steel, RC-1 ProPlus is used as a crossfurring member for resilient attachment of gypsum. Knurled face makes wallboard application easier.

RC-1 ProPlus single-leg resilient channel is typically used for applications with multiple layers of

gypsum board. Resilient channel should be installed perpendicular to the framing members with the attachment flange of the RC-1 ProPlus installed along the bottom edge. Channel is prepunched for screw attachments to wood or steel framing members. Nails are not recommended.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
RCUR	23	22	0.0232	1-1/4	12

Sound assemblies are certified by Western Electro-Acoustic Laboratories. NVLAP accredited for ASTM E90 & E413, ISO Certified.

Additional test reports available through ClarkDietrich Technical Services. *Values are the same for R-11 insulation.

**Contact our technical services department for current STC information.

RC-2 PRO DOUBLE-LEG RESILIEN<u>T CHANNEL</u>



Made of 25 gauge steel, RC-2 Pro double-leg resilient channel is typically used for ceiling applications. It is used as a cross-furring member for resilient attachment of gypsum. Knurled face makes wallboard application easier. Resilient channel should be installed perpendicular to the framing members. Channel is prepunched for screw attachments to wood or steel framing members.

Resilient channel should be installed perpendicular

to the framing members. Channel is prepunched for

screw attachments to wood or steel framing members.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
RCDN	25	18	0.0188	1-1/4	12

Sound assemblies are certified by Western Electro-Acoustic Laboratories. NVLAP accredited for ASTM E90 & E413, ISO Certified. Additional test reports available through ClarkDietrich Technical Services.

*Values are the same for R-11 insulation.

**Contact our technical services department for current STC information.

RC-2 ProPlus HEAVY-DUTY DOUBLE-LEG RESILIENT CHANNEL



Made of 22mil steel to provide a stiffer resilient channel, RC-2 ProPlus heavy-duty doubleleg resilient channel is typically used for ceiling applications with multiple layers of gypsum board. It is used as a cross-furring member for resilient attachment of gypsum. Knurled face makes wallboard application easier.

		Thicknes	S		
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
RCDE	23	22	0.0232	1-1/4	12

Sound assemblies are certified by Western Electro-Acoustic Laboratories. NVLAP accredited for ASTM E90 & E413, ISO Certified. Additional test reports available through ClarkDietrich Technical Services.

*Values are the same for R-11 insulation.

**Contact our technical services department for current STC information.

RESILIENT SOUND ISOLATION CLIP





The RSIC-1[®] resilient sound isolation clip is used in conjunction with drywall furring channel to fasten gypsum wallboard to various wall and floor-ceiling designs and applications, while simultaneously providing acoustical separation (decoupling). This significantly reduces the amount of impact and sound that filters from surrounding rooms—reducing the noise transfer by 75 to 100%.

Product code	Pcs./Bucket
RSIC-1	200
 UL Classified R16638 	NSSIFIC

U.S. Patent No. 6,267,347 of MTEC, LLC. C The RSIC-1 clip is a registered trademark of MTEC, LLC. UL and UL Classified are registered trademarks of Underwriters Laboratories, Inc.

Installation of Resilient Furring Channel to Steel or Wood Framing Members

Note: These guidelines are for ClarkDietrich Building System's single leg RC Deluxe[™] and RC-1 Pro, and double leg RC-2 Pro. Details of construction for a specific assembly to achieve the required fire or sound or acoustic rating shall be obtained from fire test reports, sound, or acoustic tests, engineering evaluations, or listings from recognized sound or acoustic laboratories.

Install resilient furring channels at right angles (perpendicular) to the framing members. The resilient furring channel shall be positioned with the slotted hole(s) directly over the framing member. The resilient furring channel shall be attached to the framing member using the screw hole provided in the mounting flange. If no screw hole is provided or located at the framing member, attach through the mounting flange.

No more than two layers of up to 5/8 in. (16mm) gypsum panel products should be installed to resilient furring channel.

Resilient furring channels should not be spaced greater than 24 in. (610mm) on-center when installed on wall framing members. For ceiling framing members spaced 24 in. (610mm) on-center, install resilient furring channels at 16 in. on-center maximum. For ceiling framing members spaced 16 in. (406mm) on-center, install resilient furring channels at 24 in. (610mm) on-center maximum.

In the case of wall framing members, resilient furring channels should be installed with the mounting flange of the resilient furring channel down, except at the floor or starter row where the mounting flange may be installed with the flange up, to accommodate fastening to the framing members. In the case of two-legged resilient furring channel, attach only the lower mounting flange to the wall framing members, except as noted. **Note 1:** By keeping the mounting flange down, the weight of the gypsum panel products will pull the resilient channel away from the stud improving the sound rating.

Note 2: Two-legged resilient furring channels may be attached to the wall and ceiling framing members using both legs. Alternately attach the legs of the resilient furring channel to the framing members. This method of attachment may reduce the sound rating performance of the assembly. Verify acceptability with the approving authority prior to installation.

For walls, install the first (lowest) row of resilient furring channel no more than 2 in. (51mm) off of the floor and the last (highest) row of resilient furring channel not more than 6 in. (152mm) from the ceiling. For ceilings, the first row and last row of resilient furring channel shall be located not more than 6 in. (152mm) from the adjacent wall. (Measurements are to the center of the face of the resilient furring channel.)

Attach resilient furring channel to framing members with screws only. For steel framing, Type-S x 3/8 in. (9.5mm) pan-head framing screws may be used. For wood framing members, Type-W or Type-S screws (minimum 1-1/4 in. (32mm) long) may be used. It is not recommended that nails be used. Install the screws in the holes provided in the mounting flange (whenever possible).

Splicing of resilient furring channel members shall be done by "nesting" the ends of the resilient furring channel members directly over the framing member and screwing through the mounting flanges into the framing member. (An acceptable alternative would be to butt the resilient furring channel members over the framing member leaving a minimum 1/16 in. (1.6mm) gap between resilient furring channels.)

Gypsum panel products shall be attached to the resilient furring channel using a screw length to ensure that the screw point does not make contact with the framing member. (This will minimize the potential of the screws hitting the wall studs and "short-circuiting" the sound resistance effectiveness of the resilient furring channels.)

HEAD-OF-WALL (H-O-W) DEFLECTION SYSTEMS

It's a real challenge these days meeting head-of-wall codes for fire stop and life safety issues while maintaining the ability to absorb vertical movement in low-, mid- and high-rise buildings. ClarkDietrich has the head-of-wall deflection products and systems you need for interior wall assemblies subjected to movement—including seismic disturbances.

MaxTrak[®] SLOTTED DEFLECTION TRACK



MaxTrak[®] is a head-of-wall deflection track that is used for framing exterior curtain walls and nonload-bearing interior walls where vertical deflection occurs and serves as a connecting member that isolates the cold-formed steel framing system from the movement of the primary structure.

		Thickness		Web	Leg	Standard
Product code Gauge	Design Mils thickness (in)		width (in)	length (in)	Standard length (ft) 10	
				2-1/2		
				3-5/8		
MAX	X 20	33	0.0346	4	2-1/2	10
				6		
				8		
				2-1/2		
				3-5/8		
MAX	18	43	0.0451	4	2-1/2	10
				6		
				8		

Positive attachment with total allowable vertical movement of 1-1/2" (±3/4")

- One-piece system reduces cost of materials and labor
- UL Classified R26034
- IAPMO #0145

CULUS

DEEP LEG DEFLECTION TRACK



This traditional assembly allows for the deflection of floor beams or floor decks above interior partitions. The single, long leg track assembly requires 1-1/2" cold-rolled channel (CHN2) and 1-1/2" x 1-1/2" 16 gauge EasyClip™ Clip Angles (U-Series™), installed continuously throughout the upper-most punchouts (must be a maximum of 12" from the top track), to align the studs vertically within the plane of the wall.

Product		Thickness		Web	Leg	Standard
code	Gauge	Mils	Design thickness (in)	width (in)	length (in)	length (ft)
	20	33	.0346	3-5/8		
	20	33	.0346	6	-	
	18 43 .0451 3-5/8	3-5/8				
	18	43	.0451	6	2	
TSC	16	54	.0566	3-5/8		10
150	16	54	.0566	6	2	
	14	68	.0713	3-5/8	_	
	14	68	.0713	6		
	12	97	.1017	3-5/8		
	12	97	.1017	6		
	20	33	.0346	3-5/8		
	20	33	.0346	6		
	18	43	.0451	3-5/8		
	18	43	.0451	6		
TSE	16	54	.0566	3-5/8	3	10
IUL	16	54	.0566	6	5	10
	14	68	.0713	3-5/8		
	14	68	.0713	6		
	12	97	.1017	3-5/8		
	12	97	.1017	6		

Custom sizes available upon request.

UL and UL Classified are registered trademarks of Underwriters Laboratories, Inc.

clarkdietrich.com

DoubleTrack[™] (OVERTRACK) SYSTEM



system is a two-piece top track assembly that allows for the deflection of floor beams or floor decks along interior partitions. A custom-made long leg outer track is installed to the underside of the floor deck. A wall assembly is constructed on the floor then slid into place. The wall assembly is designed to allow a "gap" at the top for deflection.

ClarkDietrich Fast Top™ clips are

used in head-of-wall deflection

conditions for in-fill curtain wall

assemblies to provide for vertical

movement. These clips are used

with, deflection track. They also

make a positive attachment and

eliminate the need to install bridging continuously throughout the uppermost punchouts. Attach to the underside of structural members, concrete decks or floor assemblies. Studs must be cut less than full height to enable vertical movement up to 2-1/2" (1-1/4" up and down).

in place of, or in combination

ClarkDietrich DoubleTrack™

		Thickness					
Product code	Gauge	Mils	Design thickness (in)	Web width (in)	Leg length (in)	Standard length (ft)	
OTSB	20	20	0.0212	3-3/4	1-1/4	10	
0156	20	30	0.0312	6-1/8	1-1/4		
OTSC	20	30	0.0312	3-3/4	2	10	
0150	20	30	0.0312	6-1/8	2	10	
OTSE	20	30	0.0312	3-3/4	3	10	
OTSE	20	30	0.0312	6-1/8	3	10	

Custom sizes available on request.

Fast Top™ CLIP



FTC3



FTC5

Thickness Web Leg Standard Packaging Pcs./Carton Product Design thickness (in) length (in) length (ft) width Gauge code Mils (in) FTC3 14 68 0.0713 4 1-1/2 3-1/4 25 FTC5 14 68 0.0713 4 1-1/2 4-3/4 30

FTC3 includes 55 FastClip™ deflection screws per box. FTC5 includes 110 FastClip deflection screws per box.

U.S. Patent No. 6,688,069

RedHeader RO™

Rough openings made easy.

Interior door and window framing is a whole lot easier with RedHeader RO.™ RedHeader RO can cut your labor time in half. It's designed to replace conventional boxed or lay-in headers and built-up jambs and provide better results in half the time. One-piece headers and jambs eliminate the additional studs, tracks, and screws required to frame conventional rough openings. Headers and jambs are also pre-cut to specified lengths to eliminate field cutting. The adjustable Drop 'N Lock™ clip makes field adjustments a snap and provides a flat surface for a smooth drywall finish.



RedHeader RO HEADER



Headers are prepunched, and pre-cut to the length specified on your order. Header depth is 1/8" narrower than jamb depth to accommodate fit into Drop 'N Lock Clip. Header lengths should be ordered 1/2" shorter to fit inside our Drop 'N Lock clips.

	Thickness						_
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)
					3-1/2		
	20	33	0.0346	33	3-7/8	3	1
					5-7/8		
HEAD					3-1/2		
	10	40	0.0451	22	3-7/8	2	1
	18	43	0.0451	33	5-7/8	3	I
				7-7/8			

All material CP60.

RedHeader RO JAMB



As part of the RedHeader RO system, the jamb eliminates capped members, allowing drywall screws to drive through only one thickness of material. Plus, the open jamb does not require pre-insulating.

Product code	Thickness						_
	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)
		3-5/8					
	20	33	0.0346	33	4	3	7/8
					6		
JAMB					3-5/8		
	10	40	0.0451	22	4	2	7/0
	18	43	0.0451	33	6	3	7/8
					8]	

All material CP60.

RedHeader RO Drop 'N Lock™ CLIP



Prepunched slots allow for vertical field adjustments before fully attaching the clip, through the prepunched holes, to the RedHeader RO jamb stud. The "box-style" clip design makes it easy to drop the header into place and allows for one-man installation, even on large header spans. The clip is the same width as the jamb stud, reducing material buildup at this connection eliminating additional corner bead and taping costs.

	Thickness						
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Height (in)	Pcs./Box
DNLC333			3-5/8 3		3-5/8	3	24
DNLC334				3	24		
DNLC336	20	33	0.0346	33	33 6	3	24
DNLC338					8	3	16

All material G90.

HEAVY-DUTY STUD (HDS®) FRAMING SYSTEM

Ultimate load capacity for headers and jambs.

The ClarkDietrich HDS® Framing System provides outstanding bending strength in two directions and superior axial strength. Plus, it reduces material, labor costs and installation time by up to 50%. The superior strength and carrying capacity of the HDS means higher performance with fewer members, like eliminating box beam headers, nesting track and stud for posts and jambs. It also means improved finish quality by eliminating excessive material and screw head buildup around doors and windows.

The HDSC header bracket is a unique, prepunched clip that turns a twoperson curtain wall header installation into a one-person job.

- Use for curtain wall headers, jambs and sills; drywall headers and jambs; load-bearing jambs, and more.
- Openings up to 15' wide
- Eliminates multi-member built-up truss chords and webs
- Improves drywall finishing around doors and windows



HDS HEADER/JAMB



This highly innovative, multipurpose HDS Framing System provides cost-effective, member-reducing framing solutions for headers, jambs and posts.

	Thickness							
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)	
HDS3	20, 18	22.42	0.0346.	0.0346, 00	33	3-5/8, 4	3	1-1/16
HD23	20, 18	33, 43	0.0451	33	6, 8	3	2-1/4	
HDS5	16, 14, 12	54, 68, 97	0.0566, 97 0.0713, 0.1017	FO	3-5/8, 4	3	1-1/16	
0000	10, 14, 12	04, 08, 97		50	6, 8	3	2-1/4	

HDSC HEADER BRACKET



The HDSC header bracket is the perfect complement to the HDS Framing System. This simple, yet innovative header bracket turns a two-person curtain wall header installation into a one-person job. This unique, prepunched clip also eliminates surface head fastener buildup that can create finishing challenges.

		C: (;)		
Product code	Gauge	Mils	Design thickness (in)	Size (in)
			3-1/2 x 3-1/16 x 2	
HDSC	14	68	0.0710	3-7/8 x 3-1/16 x 2
HDSC	14 68		0.0713	5-7/8 x 3-1/16 x 2
			7-7/8 x 3-1/16 x 2	

Sold in pairs.



Spazzer[®] 9200 SPACER AND BRIDGING BAR





The TradeReady[®] Spazzer[®] 9200 bar is a pre-notched, 20 gauge, galvanized steel spacer and bridging bar. It facilitates rapid erection of studs into a rigid, accurately laid out gridwork that has excellent resistance to stud rotation and displacement. Hanging drywall is also faster and easier because the Spazzer 9200 bar eliminates the bow that often occurs in tall interior studs.

Product	Thickness			Size	Packaging	
code	Gauge	Mils	Design thickness (in)	(in)	Pcs./Box	Pcs./Skid
SPZD	20	33	0.0346	7/8 x 7/8 x 50	N/A	1350

- Eliminates stud spacing layout at deck
- Improves drywall installation speed
- Automatically positions and rigidly holds studs on 16" or 24" centers without fasteners
- Eliminates clip angles and the labor required to install them
- U.S. Patent Nos. 5,784,850 and 6,021,618

U-CHANNEL



Combined with the deep-leg track assembly and EasyClip[™] clip angles (U-Series[™]) or SwiftClip[™] (LS-Series), the U-channel creates a traditional assembly that allows for the deflection of floor beams or floor decks above interior partitions. The single, long leg track assembly requires 1-1/2" U-channel and 1-1/2" x 1-1/2" 16 gauge EasyClip or SwiftClip clip angles, installed continuously throughout the uppermost punchouts to align the studs vertically within the plane of the wall.

Product code	Member	Gauge	Mils	Design thickness (in)	Size (in)
CHN1	075U50-54	16	54	0.0566	3/4
CHN2	150U50-54	16	54	0.0566	1-1/2

Available in 10, 16' and 20' lengths.

SwiftClip[™] LS-Series[™] SUPPORT CLIP



SwiftClip LS-Series[™] support clips are used in multiple construction projects, specifically in conjunction with studs and track. The L-shaped clips fit between the stud flanges, so that shorter length clips do not need to be ordered. These labor timesavers include prepunched holes for quicker screw attachments, and are punched to accommodate for U-channel lateral bracing connections.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
LS543				1-1/2 x 1-1/2 x 3-1/4	300
LS545				1-1/2 x 1-1/2 x 5-1/2	200
LS547	16	54	0.0566	1-1/2 x 1-1/2 x 7-1/4	150
LS549				1-1/2 x 1-1/2 x 9-1/4	100
LS541				1-1/2 x 1-1/2 x 11-1/4	100
LS683				1-1/2 x 1-1/2 x 3-1/4	300
LS685		68	0.0713	1-1/2 x 1-1/2 x 5-1/2	200
LS687	14			1-1/2 x 1-1/2 x 7-1/4	100
LS689				1-1/2 x 1-1/2 x 9-1/4	100
LS681				1-1/2 x 1-1/2 x 11-1/4	50
LS973				1-1/2 x 1-1/2 x 3-1/4	200
LS975				1-1/2 x 1-1/2 x 5-1/2	100
LS977	12	97	0.1017	1-1/2 x 1-1/2 x 7-1/4	100
LS979				1-1/2 x 1-1/2 x 9-1/4	50
LS971				1-1/2 x 1-1/2 x 11-1/4	50

FastBridge™ CLIP





The ClarkDietrich FastBridge™ Clip is used to secure 1-1/2" U-channel [or Cold Rolled Channel-(CRC)] to structural wall studs when used in load-bearing or curtain wall applications. The wall stud friction fit design allows for as little as one screw for the connection to the U-channel. Do not use in studs over 8" wide.

Product code	Gauge	Mils	Design thickness (in)	Packaging Pcs./Bucket
FB43	18	43	0.0451	200

EasyClip[™] U-Series[™] CLIP ANGLE



ClarkDietrich EasyClip U-Series clip angles are used to secure U-channel to wall studs for lateral bridging or for miscellaneous rigid connections. U-channel is passed through the stud knockout and an EasyClip U-Series clip is screwattached or welded to provide a rigid connection. These clips are prepunched for faster, more accurate fastener placement. Do not use in bridging applications when the stud width exceeds 6."

		Thickness			Destructions
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
U543				1-1/2 x 1-1/2 x 3-3/8	400
U545	16 54	0.0566	1-1/2 x 1-1/2 x 5-3/4	200	
U547	10	54	0.0500	1-1/2 x 1-1/2 x 7-3/4	100
U549				1-1/2 x 1-1/2 x 9-3/4	100
U683				1-1/2 x 1-1/2 x 3-3/8	200
U685	4.4	60	0 0740	1-1/2 x 1-1/2 x 5-3/4	170
U687	14	68	0.0713	1-1/2 x 1-1/2 x 7-3/4	100
U689				1-1/2 x 1-1/2 x 9-3/4	100
U973				1-1/2 x 1-1/2 x 3-3/8	200
U975	12	07	0 1017	1-1/2 x 1-1/2 x 5-3/4	130
U977		97	0.1017	1-1/2 x 1-1/2 x 7-3/4	100
U979				1-1/2 x 1-1/2 x 9-3/4	80

EasyClip B-Series™ CLIP ANGLE



CLIP



ClarkDietrich EasyClip B-Series[™] clip angles are used to secure U-channel to wall studs in backto-back framing applications and for various miscellaneous rigid connections. The shorter length of the B-Series clip enables it to be installed inside the C-shape. It can also be used to secure lateral bridging on single studs where the clip is preferred to be inside the C-shape. Do not use in lateral bridging when stud width exceeds 6."

		Thickness		_	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
B543				1-1/2 x 1-1/2 x 3	400
B545	10	E A	0.0566	1-1/2 x 1-1/2 x 5-1/4	200
B547	16	54		1-1/2 x 1-1/2 x 7-1/4	100
B549				1-1/2 x 1-1/2 x 9-1/4	100
B683			0.0713	1-1/2 x 1-1/2 x 3	200
B685	14	<u></u>		1-1/2 x 1-1/2 x 5-1/4	170
B687	14	68		1-1/2 x 1-1/2 x 7-1/4	100
B689				1-1/2 x 1-1/2 x 9-1/4	100
B973				1-1/2 x 1-1/2 x 3	200
B975	10	97	0.1017	1-1/2 x 1-1/2 x 5-1/4	130
B977	12	97	0.1017	1-1/2 x 1-1/2 x 7-1/4	100
B979				1-1/2 x 1-1/2 x 9-1/4	80

EasyClip™ X-Series™ CLIP ANGLE





ClarkDietrich EasyClip X-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging. U-Channel is passed through the stud knockout and an EasyClip X-Series clip is screwattached or welded to provide a rigid connection. X-Series clip angles and U-channel should not be used in lateral bridging when stud width exceeds 6."

Product		Thickness			Destructions	
code			Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
X543				2 x 2 x 3-3/8	200	
X545	16	54	0.0566	2 x 2 x 5-3/4	170	
X547		54	0.0500	2 x 2 x 7-3/4	100	
X549				2 x 2 x 9-3/4	100	
X683		68	0.0713	2 x 2 x 3-3/8	200	
X685	14			2 x 2 x 5-3/4	100	
X687	14			2 x 2 x 7-3/4	100	
X689				2 x 2 x 9-3/4	80	
X973				2 x 2 x 3-3/8	100	
X975	12	97	0.1017	2 x 2 x 5-3/4	100	
X977		97	0.1017	2 x 2 x 7-3/4	60	
X979				2 x 2 x 9-3/4	60	

FLAT STRAPPING



Properly spaced horizontal steel bracing provides resistance to stud rotation and minor axis buckling under wind and axial loads. Block and strapping is typically used when wall studs exceed 6". Field cut, blocking is used if knockouts do not align. It's also used as bridging when framing members are unpunched.

		Thickness		Size Av		
Product code	Gauge	Mils	Design thickness (in)	Min. width (in)	Max. width (in)	Length (ft)
	20	33	0.0346	2	12	10
DTN3	18	43	0.0451	2	12	10
	16	54	0.0566			
DTN5	14	68	0.0713	2	2 12	10
	12	97	0.1017			

DTN3 has a yield strength of 33,000psi. DTN5 has a yield strength of 50,000psi.

Danback[®] WOOD BACKING PLATE



Just snap, flex and screw. It's that fast.

Danback[®] is a heavy-duty, flexible wood backing system used to support cabinets, shelves, handrails, wall-mounted sinks and counters, and all other wallmounted fixtures. Danback provides superior connection shear and pullout strength to support and meet even some of the heaviest loading conditions. The patented hinge design actually flexes around the stud and snaps into place for a perfect fit—every time.

Product code	Width (in)	Length (in)	Packaging Pcs./Skid
D16F*			
D24F*	E 1/0	40	250
D16C**	5-1/8	48	250
D24C**	-		

- Reduces installation time up to 90%
- Available for 16" and 24" o.c. framing
- Eliminates cutting, notching, ripping and routing
- Made with Dricon® fire-retardant treated wood
- · Complies with all national building codes

Dricon® is a registered trademark of Arch Wood Protection, Inc. Danback® is a registered trademark of Daniel W. Tollenaar. U.S. Patent No. 6,705,056 of Daniel W. Tollenaar.

*F = fire-treated plywood. D16 = 16" o.c. spacing. D24 = 24" o.c. spacing. Trimables available for off-module spacing in small bucket or bulk quantities.

**FSC-certified lumber available on request, which can contribute to LEED® points on your project. Contact ClarkDietrich LEED professionals at 888-437-3244 for more information. FSC chain-of-custody # BV-COC-008121.



FastBack[™] BACKING CLIP





The FastBack™ backing system features a universal design that works with studs in either direction—concealing fasteners on the face of the product. The system creates an interlocked design between the stud and track for baseboard backing installations; and a cutaway design allows backing and bracing to be installed all the way to the floor.

Product code	Width (in)	Length (in)	Packaging Pcs./Carton
FBBC	1-1/4	5-1/8	100
FBBC	1-1/4	10-1/4	100

U.S. Patent No. 7,882,676 is owned by Jeffery Thomas Ellis.



BACKING PLATE



ClarkDietrich backing plate is a general multipurpose flat stock that is used for backer plate to support shelves, cabinets, fixtures or handrails when applied to metal framing. Backing plate should not be used as tension strapping or cross bracing. Diagonal Tension Strapping should be used in those applications.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
			2		
				3	
				4	
BPN	25	18	0.0188	6	10
				8	
				10	
				12	
				2	
				3	
				4	
BPE	20	30	0.0312	6	10
				8	
				10	
				12	

Katz[™] BLOCKING



Katz[™] bridging maintains accurate member spacing to prevent bowing or flexing of nonloadbearing framing. It can also be used as backing between studs in areas where cabinets or fixtures are to be attached. Use standard 24" o.c. frame spacing.

	Thickness				
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
KATZ	25	18	0.0188	3-5/8 x 1	24

16" available by special order.

NOTCHED TRACK



Notched track is used for bracing and bridging of joists and exterior walls. It's also ideal for use in hospitals and schools as mechanical backing to support equipment.

D. I. I.	Thickness			147:1-1		
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Leg (in)	
	18 43	40	0.0454	4		
NOTC		0.0451	6	1, 1-1/4, 1-1/2		
NOTC	16	54	0.0566	4	1, 1-1/4, 1-1/2	
	10	54		6		

Available West Coast only.

ClarkDietrich Shaftwall Systems

Tested, approved assemblies with unprecedented flexibility. What makes the ClarkDietrich shaftwall construction system unique is that it has been tested with almost every gypsum board and shaftliner manufacturer in the country. Other systems are only tested with one type of gypsum board and shaftliner. Unlike competing systems, the ClarkDietrich CT-stud and J-tabbed track system provide maximum flexibility, allowing you to choose from a variety of board manufacturers. This unprecedented flexibility means quick availability of product at economical costs.

Shaftwall System consists of 1" shaftliner panels supported by 2-1/2", 4" or 6" CT-studs and faced on one side with varying layers of fire code board.

Stairwall Systems are designed to enclose stairwalls, and are finished on both sides with varying layers of fire code board.

LIFE SAFETY & FIRE-RESISTANT PROTECTION

Shaftwall systems are nonload-bearing, fire-rated wall assemblies that provide critical, life safety, fire-resistant protection for elevator shafts, stairwells, vertical chases and mechanical enclosures. Shaftwalls in elevators and stairwells provide the only means of evacuation from the building in an emergency—making them one of the most important wall assemblies in a building. Vertical chases and mechanical enclosures keep vital communication, power, water, fresh air and exhaust systems intact when a fire occurs.

CONSTRUCTION METHODS

Cavity shaftwalls are constructed utilizing one of two methods: masonry/CMU or light-gauge steel and gypsum. Gypsum drywall shaftwall construction has become the preferred and most widely used shaftwall assembly. These shaftwalls are lightweight, install faster, and provide lower in-place costs. They also significantly reduce structural framing and foundation costs, and are easy, quick and clean to install.

Masonry shaftwalls in high-rise buildings historically weigh between 20 and 45 lbs. per square foot, compared to gypsum assemblies that weigh between 10 and 13 lbs. per square foot. In addition to substantial weight reduction, gypsum shaftwall assemblies can be installed from the exterior of the shaft at each floor, eliminating the need for scaffolding.





Shaftwall

CT SHAFTWALL/STAIRWELL STUD



Engineered to maintain shaftwall integrity, ClarkDietrich CT cavity shaftwall studs are punched with 1" circular knockouts at 12" o.c. for easy installation of conduit or other mechanical service lines.

Independent laboratory tests have demonstrated that the slotting in the web improves resistance to thermal and noise transmissions effectively.

		Stud		
Product code	Gauge	Mils	Design thickness (in)	depth (in)
CTN2	25	21	0.0230	2-1/2
CTE2	20	33	0.0346	2-1/2
CTN4	25	21	0.0230	4
CTE4	20	33	0.0346	4
CTE6	20	33	0.0346	6

For installations requiring compliance with NER506, special order products are required.

J-TABBED TRACK/J-RUNNER



ClarkDietrich J-tabbed track is used at the floor and ceiling in shaftwall assemblies. CT-studs and gypsum shaftliner panels are friction fit between the top and bottom J-tabbed track. J-tabbed tracks have unequal legs with the longer leg (available in 2-1/4" and 3") installed against the shaft. The leg provides a backstop for easy installation of the shaftliner. Threeinch leg track is typically used as jamb struts around closure details, including duct and door openings, abutments and intersections.

ClarkDietrich J-tabbed track is punched with fold-up tabs every 12," permitting faster, more efficient installation.

	Thickness			Size	
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Leg (in)
		2-1/2	2-1/4		
	25	25 21 0	0.0230	2-1/2	3
TTN (2,3)*	25		0.0230	4	2-1/4
					3
				0.4/0	2-1/4
				2-1/2	3
TTE (0.0)*	00	20	0.0040	4	2-1/4
TTE (2,3)*	20	33	0.0346	4	3
				0	2-1/4
				6	3

*2 designates 2-1/4" leg; 3 designates 3" leg. Note: Revised ICC Report pending.


USG Shaftwall Systems

USG SHEETROCK[®] brand shaftwall systems.


These systems are nonload-bearing gypsum panel partitions designed to construct elevator shafts, mechanical shafts, stairwells, air returns and horizontal membranes. SHEETROCK brand shaftwall systems have been comprehensively tested for 1- to 4-hour fire resistance ratings (UL Design No. U415) only when all of the system components are used together. Substitutions of any of the components are not recommended.

Metal framing members for the system consist of USG CH-studs, USG J-runners, USG E-studs and USG jamb struts. Each steel component is formed to produce a strong, highly efficient member.

Available Eastern U.S. only. USG SHEETROCK® is a registered trademark of USG Corporation.

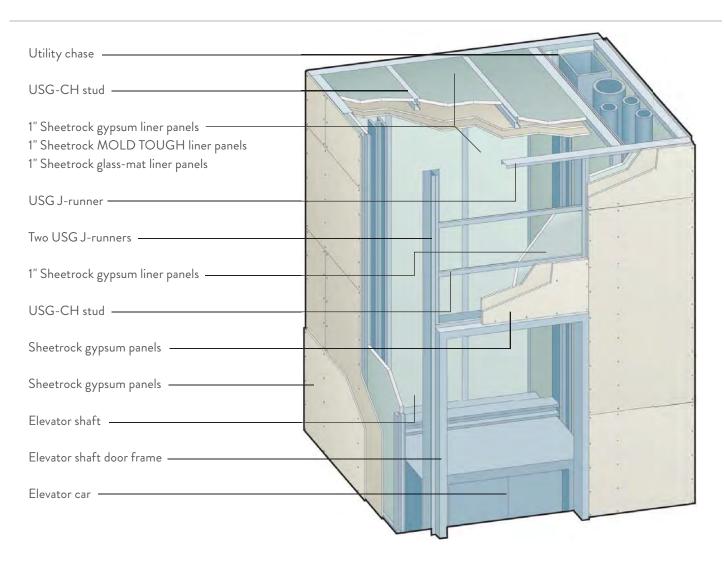


USG CH-STUD



USG CH-studs are nonload-bearing members installed between abutting liner panels. They have 1" holes for easy installation of horizontal pipe and conduit.

Product code	Gauge	Mils	Design thickness (in)	Depth (in)
USG CHN2	25	18	0.0188	2-1/2
USG CHN4			0.0100	4
USG CHE2		34		2-1/2
USG CHE4	20		0.0359	4
USG CHE6				6

USG E-STUD




USG E-studs are 2-1/2," 4" or 6" wide, used simply to cap panels at intersections with exterior walls or back-to-back on studs in unusually high partitions.

Product code	Gauge	Mils	Design thickness (in)	Depth (in)
USG ESN2	25	18	0.0400	2-1/2
USG ESN4			0.0188	4
USG ESE2		34		2-1/2
USG ESE4	20		0.0359	4
USG ESE6				6

INTERIOR FRAMING


USG J-RUNNER



USG J-runner is used at the floor and ceiling in shaftwall systems. CH-studs and shaftliner panels are friction-fitted between the top and bottom J-track.

	Thickness				Size	
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Leg (in)	
USG JRN2	24	23	0.0239	2-1/2	2	
USG JRN4			0.0239	4		
USG JRE2				2-1/2		
USG JRE4	20	34	0.0359	4	2	
USG JRE6				6		

USG JAMB STRUT



USG jamb struts are used in jamb framing for fire-rated elevator doors.

	Thickness			Size	
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Leg (in)
USG JSN2	24	23	0.0239	2-1/2	3
USG JSN4	24			4	
USG JSE2		34		2-1/2	
USG JSE4	20		0.0359	4	3
USG JSE6				6	

ClarkDietrich Area Separation Wall Systems

Fire-resistance protects lives and property.

Area separation walls are nonload-bearing, 2-hour rated vertical wall assemblies that provide fire-resistant protection between adjacent living units in apartment buildings, condominiums and townhouses. They are also referred to as party walls, firewalls, multi-family walls and H-stud assemblies.

Assembled between two independent walls, area separation walls form a commonly shared party wall that extends from the foundation through the roofline. The walls are assembled with two 1"-thick gypsum panel liners vertically installed between 2" H-studs spaced 24" o.c. At the top and bottom of the walls, C-runners (or H-tracks) are installed back-to-back between vertically stacked panels. Overall stacked area separation wall assemblies cannot exceed 50 feet.

A photo of an area separation wall system after a fire is shown below. Although this was a tragic event, it clearly proves the effectiveness of the system. It performed as designed by maintaining the integrity of the firewall, protecting the lives and property of the adjacent units.



H-STUD



ClarkDietrich H-studs are 2" wide vertical members used to secure two 1" thick pieces of gypsum shaftliner in area separation wall assemblies. H-studs are inserted into C-runners and slid over gypsum panel liner edges, repeating until the desired wall length is achieved. Once the wall is plumbed, it is secured with aluminum burn clips.

		Thickness		Si	ze
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Length (ft)
					8
HSN	25	18	0.0188	2-1/16	10
					12

Two-hour fire-rated assembly and ICC approved.

C-RUNNER



ClarkDietrich C-runner (or H-track) is used to secure H-stud and gypsum shaftliner panels in area separation wall assemblies. Attached to the foundation with powder-actuated fasteners, C-runner is also used as top track to cap the H-stud and gypsum shaftliner panels, with a second track screwed back-to-back to the lower runner, to hold the next assembly level.

	Thickness			Size	
Product code	Gauge	Mils	Design thickness (in)	Width (in)	Length (ft)
HRN1	25	18	0.0188	2-1/8	8 10

Two-hour fire rated assembly and ICC approved.



ALUMINUM BURN CLIP



ClarkDietrich aluminum burn clips are used as part of the H-stud area separation wall assembly and are designed to melt when exposed to fire. The clips hold the area separation wall assemblies in place at the floor, roof and truss line between adjacent units. In a fire, the aluminum burn clips on the fire-ridden side of the wall will melt, allowing the wall structure for that side to collapse.

Product code	Thickness (in)	Size (in)	Packaging Pcs./Bucket	
AB	0.050	2 x 2 x 2-1/2	E00	
AB63*	0.063	2 x 2 x 2-1/2	500	

*AB63 meets requirements of ICC-ES Legacy Report 92-19.

EXTERIOR FRAMING

From low-rise to high-rise, count on exterior framing that stands tall.

The high strength-to-weight ratio of light-gauge steel framing maximizes design flexibility and delivers superior structural integrity for a variety of criteria, including high wind and seismic loads. It's also easily insulated for energy conservation and provides noncombustible support for fire-rated construction.

Light-gauge steel is an ideal exterior framing material for all types of low- to high-rise commercial structures, including educational, institutional, multi-family and multi-use. Because of its strength, ease of installation and cost-effectiveness, steel is also an excellent choice for residential construction. While light-gauge steel is commonly stick-framed, it is also highly suited for prefabricated panel construction, providing additional economy in today's highly competitive construction industry.


- Used as primary framing up to nine stories
- Economically combined with structural steel or concrete
- Ideal support for brick-veneer, stucco and E.I.F.S.
- Curtain wall, axial load-bearing wall and head-of-wall deflection systems
- Door and window framing
- Bridging and bracing systems
- Conventional or specialty load-bearing headers

NOTE: This catalog does not provide load data (load capacities, limiting heights, physical and structural properties and span data) necessary for building design. Contact ClarkDietrich at 888-437-3244 for technical assistance.



C-STUDS







C-Studs (C-Series™)

they are subjected to.

joist applications.

Light-gauge C-shaped framing members for axial loadbearing walls, curtain walls, tall interior partitions, floor joists and roof truss assemblies.

ClarkDietrich CWN™ 1-3/8" Flange Curtain wall studs have a 1-3/8" flange and 3/8" return and are used to support the exterior skin or cladding material (metal,

stone, tile, glass, etc.) and the wind loads

ClarkDietrich CSJ™ 1-5/8" Flange

return and are considered the industry

provide the vertical strength necessary

for demanding load-bearing structural

Studs/joist have a 1-5/8" flange and a 1/2"

standard. CSJ members are the most widely

applications and sufficient strength for many

used and specified framing members. They

Two of the key differences between the various C-stud/Joist framing members are the flange and return dimensions. The flange is typically the bearing surface for cladding materials and a key contributor to the loadbearing capacity of the member.

Product code*	Member	Thickness gauge (mils)	Depth (in)	Flange (in)	Return (in)
	250S137-x		2-1/2	1-3/8	3/8
CM/ND (00.8, 10, acuse)	362S137-x	20 (33),	3-5/8		
CWN3 (20 & 18 gauge) CWN5 (16 & 14 gauge)	400S137-x	18 (43), 16 (54),	4		
Gring (10 & 14 gauge)	600S137-x	14 (68)	6		
	800S137-x	11(00)	8		

Thickness Flange Product Depth Return Member gauge (mils) code* (in) (in) (in) 250S162-x 2-1/2 350S162-x 3-1/2 362S162-x 3-5/8 20 (33) 400S162-x 4 18 (43). CSJ3 (20 & 18 gauge) 550S162-x 5-1/2 1-5/8 1/2 16 (54) CSJ5 (16, 14 & 12 gauge) 600S162-x 6 14 (68). 800S162-x 8 12 (97) 1000S162-x 10 1200S162-x 12 1400S162-x 14

ClarkDietrich CSW™ 2" Flange

Wide studs/joist have a 2" wide flange and a 5/8" return that provides a larger bearing surface for attaching sub-flooring or sheathing materials. This framing member is also used in axial load-bearing wall assemblies.

Product code*	Member	Thickness gauge (mils)	Depth (in)	Flange (in)	Return (in)
	362S200-x		3-5/8		
	400S200-x	20 (33), 18 (43),	4		
0014/0 (00.8.40	600S200-x		6		
CSW3 (20 & 18 gauge) CSW5 (16, 14 & 12 gauge)	800S200-x	16 (54),	8	2	5/8
CSW5 (16, 14 & 12 gauge)	1000S200-x		10		
	1200S200-x	12 (97)	12		
	1400S200-x		14		

ClarkDietrich CSE[™] 2-1/2" Flange Thickness Product Depth Flange (in) Return Member gauge Extra-wide studs/joist have a 2-1/2" wide code* (in) (in) (mils) flange and a 5/8" return and are used in floor 362S250-x 3-5/8 400S250-x 4 joist assemblies and heavy loading conditions. 20 (33), 600S250-x 18 (43) 6 CSE3 (20 & 18 gauge) 800S250-x 8 2-1/2 5/8 16 (54) CSE5 (16, 14 & 12 gauge) 14 (68) 1000S250-x 10 12 (97) 1200S250-x 12 1400S250-x 14

ClarkDietrich CSS™ 3" Flange

Super-wide studs/joist have a 3" flange and a 5/8" return and are used in very heavy loading and long spanning conditions.

Product code*	Member	Thickness gauge (mils)	Depth (in)	Flange (in)	Return (in)
	600S300-x		6		
0000 (40	800S300-x	18 (43),	8		
CSS3 (18 gauge) CSS5 (16, 14 & 12 gauge)	1000S300-x	16 (54), 14 (68),	10	3	5/8
CSSS (10, 14 & 12 gauge)	1200S300-x	12 (97)	12		
	1400S300-x	12 (01)	14		

*20 and 18 gauge are standard as 33ksi yield strength. 16, 14 and 12 gauge are standard as 50ksi yield strength. x = mil thickness identifier

KNOCKOUTS/KNOCKOUT PATTERN

ClarkDietrich light-gauge C-studs for axial load-

pipes, electrical conduit and wall bridging.

3/4" x 4" knockout.

bearing and curtain wall framing are prepunched with

knockouts at regular intervals. These punchouts are


specifically designed to allow for rapid installation of

Standard knockout sizing is 1-1/2" x 4" in members

3-1/2" and wider. Members smaller than 3-1/2" are

order. If specified, members will be punched with a

unpunched unless otherwise specified at time of



wider studs wide studs

GROMMETS



2-Piece Grommet



Snap-In Bushing

STRUCTURAL TRACK



ClarkDietrich structural track is a U-shaped framing component used as top and bottom runners to secure wall studs. Structural track is also used as end support closures for joists at exterior or foundation walls, head and sill plates of wall openings and solid blocking. Track is normally ordered in corresponding size and gauge to the wall studs.

Grommets are commonly used when metal conduit is not required

by building code.

			l.e.r.		
Product code	Member	Gauge	Mils	Design thickness (in)	Leg length (in)
TSA	x-T100-y		20, 18, 33, 43, 16, 14, 12 54, 68, 97		1
TSB	x-T125-y			-	1-1/4
TSF	x-T150-y	20, 18,		2-1/2, 3-1/2,	1-1/2
TSC	x-T200-y	16, 14, 12		3-5/8, 4, 5-1/2, 6, 8, 10, 12, 14	2
TSD	x-T250-y			0, 10, 12, 11	2-1/2
TSE	x-T300-y			-	3

Knockouts are punched 12" o.c. from the lead edge

West Coast, the first knockout is punched 24" o.c.

from the lead edge). Caution must be exercised when

installing studs so knockouts align for bridging. Based on stud length, the distance the knockout falls from

the tail end of the stud may not be the same from the

Description

For 1-5/8" and 2-1/2" studs

For 3-1/2" and wider studs

lead end. To align punchouts, make sure to use the

same end in the same direction consistently.

with additional knockouts every 24" o.c. (on the

x = Part depth. Tracks are available to match all stud and joist depths.

Size (in)

3/4

1-1/2

Product code

GROM

y = Mil thickness of steel.



Pcs./Carton

100

Grommets snap easily into stud
knockouts and are used to protect
electrical wiring and plumbing
lines from contacting metal.

CORNER ANGLE



ClarkDietrich heavy-gauge corner or utility angle is commonly used for a variety of applications including: concrete pour stop, connection strut or angle, roof ridge angles and corner reinforcement.

Product		Thickness		Size*	1 .1*
code	Gauge	Mils	Design thickness (in)	(in)	Length* (ft)
CAE	20	33	0.0346		
	18	43	0.0451		
CAM	16	54	0.0566	2 x 2	10
CAIM	14	68	0.0713		
	12	97	0.1017		
CAE	20	33	0.0346		
	18	43	0.0451		
CAM	16	54	0.0566	3 x 3	10
CAIM	14	68	0.0713		
	12	97	0.1017		

*Other sizes available on request.


HEAVY-DUTY FURRING CHANNEL



ClarkDietrich heavy-duty furring channel is a high-performance framing component used in ceiling, exterior wall and roof applications. With two standard depths—7/8" and 1-1/2"—heavyduty furring channel provides greater resistance to deflection and bending. In roof applications, heavy-duty furring is used as purlins to provide connection points for roof sheathing.

D. L. J.			Thickness		C :	
Product code	Member	Gauge	Mils	Design thickness (in)	Size (in)	Length (ft)
FOM	087F125-43	18	43	0.0451	7/8	10.10
FCM	087F125-54	16	54	0.0566	1/6	10, 12
FCMD	150F125-43	18	43	0.0451	1 1/0	10, 12
FOND	150F125-54	16	16 54 0.0566		1-1/2	10, 12

CUSTOM SHAPES AND MISCELLANEOUS ANGLES

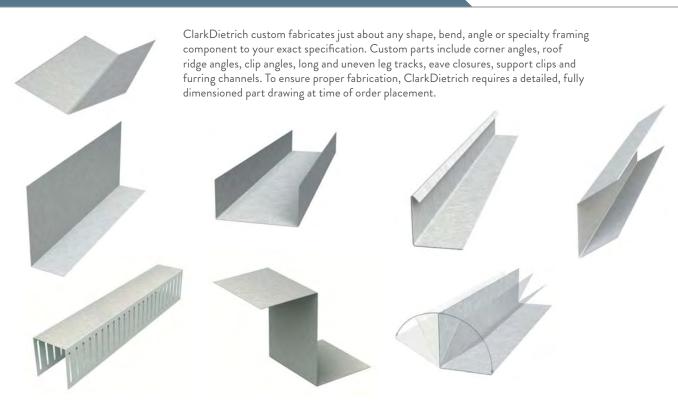

RedHeader RO™

Rough openings made easy.


RedHeader RO[™] can cut your labor time in half. It's designed to replace conventional boxed or lay-in headers and built-up jambs and provide better results in half the time. One-piece headers and jambs eliminate the additional studs, tracks, and screws required to frame conventional rough openings. Headers and jambs are also pre-cut to specified lengths to eliminate field cutting. The adjustable Drop 'N Lock[™] clip makes field adjustments a snap and provides a flat surface for a smooth drywall finish. Save on framing time, save on drywall finishing time, and use about half the materials that conventional rough opening framing methods require.



RedHeader RO HEADER



Unpunched headers are pre-cut to the length specified on your order. Header depth is 1/8" narrower than jamb depth to accommodate fit into Drop 'N Lock clip. Header lengths should be ordered 1/2" shorter to fit inside our Drop 'N Lock clips. RedHeader RO Extra-Duty headers have a longer 3-1/2" flange for wider spans.



Typical boxed header with: (2) 1-5/8" flange studs & (2) tracks w/ (4) screws at 16" o.c.

Standard headers

		Thick	ness					
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth* (in)	Flange (in)	Return (in)	
					3-1/2			
	18	43	0.0451	33	3-7/8	3	1	
	10	10 45	0.0401	55	5-7/8	5	'	
					7-7/8			
					3-1/2			
	16	54	0.0566	50	3-7/8	3	1	
	10	54	0.0000	50	5-7/8	5		
HEAD					7-7/8			
TIEAD					3-1/2		1	
	14	68	0.0713	50	3-7/8	3		
	14	00	0.07 15	50	5-7/8	5	'	
					7-7/8			
1					3-1/2			
	12	97	0.1017	50	3-7/8	3	1	
	12	31	0.1017	50	5-7/8	5	ſ	
					7-7/8			

All material CP60.

*Header width is 1/8" less than jamb depth to fit inside Drop 'N Lock clip.

Extra-Duty headers


		Thickness					
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth* (in)	Flange (in)	Return (in)
					3-1/2		
	16	54	0.0566	50	3-7/8	3-1/2	1
	10	54	0.0500		5-7/8		I
					7-7/8		
					3-1/2	_	
HEAD	14	68	0.0713	0.0713 50 3-7/8	3-1/2	1	
TILAD	14	00	0.0713 50	5-7/8	5-1/2		
					7-7/8		
					3-1/2		
	12	97	0.1017	50	3-7/8	3-1/2	1
	١Z	31	0.1017	50	5-7/8	J-1/2	1
					7-7/8		

All material CP60.

*Header width is 1/8" less than jamb depth to fit inside Drop 'N Lock clip.

RedHeader ROJAMB





(1) RedHeader RO jamb stud: No track or screws required to build up sections



As part of the RedHeader RO system, the jamb eliminates capped members, allowing drywall screws to drive through only one thickness of material. Plus, the open jamb does not require pre-insulating. RedHeader RO Extra-Duty jambs have a longer 3-1/2" flange for wider spans.

Standard jambs

		Thickness					
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)
					3-5/8		
	18	43	0.0451	33	4	3	7/8
		40	0.0401	00	6	0	110
					8		
					3-5/8		
16	54	0.0566	50	4	3	7/8	
	10	04	0.0000	00	6	0	110
JAMB					8		
0/ IVID					3-5/8		
	14	68	0.0713	50	4	3	7/8
	14	00	0.0713	50	6	5	1/0
					8		
					3-5/8		
	12	97	0.1017	50	4	3	7/8
	١Z	31	0.1017	50	6	3	1/0
					8		

All material CP60.

Extra-Duty jambs

		Thickness					
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)
					3-5/8		
	16	54	0.0566	50	4	3-1/2 7/	7/8
	10	54	0.0000	50	6		110
					8		
					3-5/8	_	
JAMB	14	68	0.0713	50	4	3-1/2	7/8
JAIVID	14	00	0.0713	50	6	5-1/2	110
					8		
					3-5/8	_	
	12	97	0.1017	50	4	3-1/2	7/8
	١Z	31	0.1017	50	6	5-1/2	1/0
					8		

All material CP60.

RedHeader RO Drop 'N Lock™ CLIP



Prepunched slots allow for vertical field adjustments before fully attaching the clip to the RedHeader RO jamb stud. The narrower header and clip width reduce material buildup that pushes the gypsum board out, eliminating additional corner bead and taping costs.

-	Thickness								
Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Height (in)	Pcs./Box		
DNLC683							3-5/8	3	24
DNLC684	14	68	0.0713	50	4	3	24		
DNLC686	14	00	0.0713	50	6	3	24		
DNLC688					8	3	16		

All material G90.

CLIP

HEAVY-DUTY STUD (HDS®) FRAMING SYSTEM

Ultimate load capacity for headers and jambs.

The ClarkDietrich Heavy-Duty Stud (HDS®) Framing System provides outstanding bending strength in two directions and superior axial strength. Plus, it reduces material, labor costs and installation time by up to 50%.

The superior strength and carrying capacity of the HDS means higher performance with fewer members, like eliminating box beam headers, nesting track and stud for posts and jambs. It also means improved finish quality by eliminating excessive material and screw head buildup around doors and windows.

- Use for curtain wall headers, jambs and sills; drywall headers and jambs; load-bearing jambs, and more.
- Openings up to 15' wide
- Eliminates multi-member built-up truss chords and webs
- Improves drywall finishing around doors and windows



HDS HEADER/JAMB



This highly innovative, multipurpose HDS Framing System provides cost-effective, member-reducing framing solutions for headers, jambs and posts.

se			Thickness					
	Product code	Gauge	Mils	Design thickness (in)	ksi	Depth (in)	Flange (in)	Return (in)
bs	HDS3	20, 18	33, 43	0.0346,	33	3-5/8, 4	3	1-1/16
	HD33	20, 10	33, 43	0.0451		6, 8	3	2-1/4
	HDS5	16, 14, 12	54, 68, 97	0.0566, 0.0713,	50	3-5/8, 4	3	1-1/16
	през	10, 14, 12	54, 66, 97	0.1017	50	6, 8	3	2-1/4

HDSC HEADER BRACKET



The HDSC header bracket is the perfect complement to the HDS Framing System. This simple, yet innovative header bracket turns a two-person curtain wall header installation into a one-person job. This unique, prepunched clip also eliminates surface head fastener buildup that can create finishing challenges.

		Size (in)		
Product code	Gauge	Mils	Design thickness (in)	Size (in)
				3-1/2 x 3-1/16 x 2
HDSC	14	68	0.0713	3-7/8 x 3-1/16 x 2
HD3C	14		0.0713	5-7/8 x 3-1/16 x 2
				7-7/8 x 3-1/16 x 2

Sold in pairs.

CLIP

MaxTrak[®] SLOTTED DEFLECTION TRACK



MaxTrak[®] is a head-of-wall deflection track that is used for framing exterior curtain walls and nonload-bearing interior walls where vertical deflection occurs and serves as a connecting member that isolates the cold-formed steel framing system from the movement of the primary structure.

Draduat and	Product code Thic		Web width (in)	Log log ath (in)	Standard
Product code	Gauge	Mils	web width (in)	Leg length (in)	length (ft)
75025	18	43			
75026	16	54	2-1/2	2-1/2	10
75027	14	68			
75035	18	43			
75036	16	54	3-5/8	2-1/2	10
75037	14	68			
75045	18	43			
75046	16	54	4	2-1/2	10
75047	14	68			
75065	18	43			
75066	16	54	6	2-1/2	10
75067	14	68	-		
75085	18	43			
75086	16	54	8	2-1/2	10
75087	14	68			

• Positive attachment with total allowable vertical movement of 1-1/2" (±3/4")

- One-piece system reduces cost of materials and labor
- UL Classified R26034
- IAPMO #0145



MaxTrak 2D SLOTTED DEFLECTION & DRIFT TRACK



MaxTrak 2D is a head-of-wall deflection track that is used for framing exterior curtain walls and nonload-bearing interior walls where vertical deflection and horizontal drift occurs—and serves as a connecting member that isolates the cold-formed steel framing system from the movement of the primary structure.

Product code	Thic	kness			Standard	
Product code	Gauge	Mils	Web width (in)	Leg length (in)	length (ft)	
75125	18	43				
75126	16	54	2-1/2	2-1/2	10	
75127	14	68				
75135	18	43				
75136	16	54	3-5/8	2-1/2	10	
75137	14	68				
75145	18	43				
75146	16	54	4	2-1/2	10	
75147	14	68				
75165	18	43				
75166	16	54	6	2-1/2	10	
75167	14	68				
75185	18	43				
75186	16	54	8	2-1/2	10	
75187	14	68				

• Total allowable vertical movement of 1-1/2" (±3/4")

• Total allowable horizontal movement (drift) of 4" (±2")

• Slots in web (for seismic design) are 4" long, spaced at 8" o.c.

clarkdietrich.com

DEEP LEG DEFLECTION TRACK



This traditional assembly accommodates the deflection of floor beams or floor decks at the head-of-wall. The single long leg track assembly requires 1-1/2" cold-rolled channel and 1-1/2" x 1-1/2″ 16 gauge EasyClip[™] clip angles (U-Series[™]) installed continuously throughout the upper-most punchouts to align the studs vertically within the plane of the wall. Deflection track details must be designed for the specific conditions of a building to accommodate the required deflection and end reactions of the studs. Deflection tracks cannot be used in axial load-bearing stud conditions or above continuous window spandrels.

Product		Th	ickness	Size
code	Member	Gauge	Design thickness (in)	(in)
	362T200-33	20	0.0346	3-5/8
	600T200-33	20	0.0340	6
	362T200-43	18	0.0451	3-5/8
	600T200-43	10	0.0431	6
TSC	362T200-54	10	0.0566	3-5/8
150	600T200-54	16	0.0566	6
	362T200-68	14	0.0713	3-5/8
	600T200-68	14	0.0713	6
	362T200-97	12	0.1017	3-5/8
	600T200-97	12	0.1017	6
	362T300-33	20	0.0346	3-5/8
	600T300-33	20	0.0346	6
	362T300-43	18	0.0451	3-5/8
	600T300-43	10	0.0451	6
TSE	362T300-54	16	0.0566	3-5/8
ISE	600T300-54	10	0.0000	6
	362T300-68	14	0.0712	3-5/8
	600T300-68	14	0.0713	6
	362T300-97	12	0 1017	3-5/8
	600T300-97	12	0.1017	6

Custom sizes available on request.

DoubleTrack[™] (OVERTRACK) SYSTEM



system is a two-piece assembly that accommodates deflection of exterior curtain walls. A custommade deep leg outer track is installed to the underside of the floor deck. A wall assembly is constructed on the floor and slid into place, with a "gap" at the top for deflection. DoubleTrack deflection assemblies cannot be used in axial load-bearing stud conditions or above continuous window spandrels.

ClarkDietrich DoubleTrack™

Product		Thickne	SS	Web width	L L	Standard
code*	Gauge	Mils	Design thickness (in)	(in)	Leg length (in)	length (ft)
	20	33	0.0346	3-3/4		
	20	33	0.0340	6-1/8		
	18	43	0.0451	3-3/4		
	10	43	0.0451	6-1/8		
OTSC	16	54	0.0566	0.0566 3-7/8 2	2	10
0150	10	54	0.0500	6-1/4	2	
	14	68	0.0713	3-7/8		
	14	00		6-1/4		
	12	97	0.1017	3-7/8		
	12	51	0.1017	6-1/4		
	20	20 33	0.0346	3-3/4		
	20	55	0.0340	6-1/8		
	18	43	0.0451	3-3/4		
	10	40	0.0401	6-1/8		
OTSE	16	54	0.0566	3-7/8	3	10
UTUL	10	54	0.0000	6-1/4	5	10
	14	68	0.0713	3-7/8		
	14	00	0.0713	6-1/4		
	12	97	0.1017	3-7/8		
	12	51	0.1017	6-1/4		

*C = 2" legs; E = 3" legs.

Custom sizes available on request.

Fast Top™ CLIP





ClarkDietrich Fast Top[™] clips are used in head-of-wall deflection conditions for in-fill curtain wall assemblies to provide for vertical movement. These clips are used in place of, or in combination with, deflection track. They also make a positive attachment and eliminate the need to install bridging continuously throughout the uppermost punchouts. Attach to the underside of structural members, concrete decks or floor assemblies.

	Thickness			Web	Lee	Standard	
Product code	Gauge	Mils	Design thickness (in)	width (in)	Leg length (in)	length (ft)	Packaging Pcs./Carton
FTC3	14	68	0.0713	4	1-1/2	3-1/4	25
FTC5	14	68	0.0713	4	1-1/2	4-3/4	30

FTC3 includes 55 FastClip[™] deflection screws per box. FTC5 includes 110 FastClip deflection screws per box. U.S. Patent No. 6,688,069

Spazzer[®] 5400





ClarkDietrich TradeReady® Spazzer® 5400 spacer bar is a galvanized steel spacer and bridging bar, engineered to facilitate the rapid erection of exterior curtain wall framing, load-bearing walls and high interior partitions constructed of structural studs. Proprietary prepunched slots provide excellent torsional and lateral stud restraint.

			Thickness			Packaging	
Ţ	Product code	Gauge	Mils	Design thickness (in)	Size (in)	Pcs./Bundle	Pcs./Skid
·	SPZS	16	54	0.0566	1-1/4 x 1-1/4 x 50	N/A	680

• Fast, easy and efficient

- Reduces labor up to 40%
- Eliminates clip angles, bridging clips and welding
- Pre-notched at 12," 16" and 24" intervals so no layout is required
- U.S. Patent No. 6,708,460 and other patents pending.

Spazzer BAR FLY CLIP



The Spazzer fly clip is a secure, fast and efficient way to finish a wall section. This prepunched clip eliminates the need for cutting and bending when using the Spazzer 5400 spacer bar.

ure,	Product code	Size (in)	Packaging Pcs./Carton
ish a	SFLY	1 x 1-1/4 x 1	100

Spazzer Bar Guard™



Used to secure the Spazzer 5400 spacer bar when used in loadbearing applications.

00	Product code	Size (in)	Packaging Pcs./Carton
	SPBG	3-1/4 x 1-5/8	100

Spazzer SNAP-IN GROMMET



 Used to secure the Spazzer 5400
 Product code
 Size (in)
 Packaging Pcs./Carton

 spacer bar when used in curtain wall applications.
 SPGR
 1-1/2 x 4
 100







U-CHANNEL



ClarkDietrich U-channel, combined with EasyClip[™] clip angles (U-Series[™]) and screws, is one of the most common bridging methods used to provide resistance to stud rotation and minor axis bending under wind and axial loads. 1-1/2" U-channel is passed through the stud knockout and secured. Lateral bracing is typically installed at a maximum of 48" o.c., but consult ClarkDietrich's Technical Design Guide for proper spacing.

Product code	CSSBI reference	Gauge	Mils	Design thickness (in)	Size (in)
CHN1	075U50-54	16	54	0.0566	3/4
CHN2	150U50-54	16	54	0.0566	1-1/2

Available in 10, 16' and 20' lengths.

Caution: EasyClip clip angles must be used with screws to brace cold-formed framing properly. U-channel does not provide proper bracing if it is not adequately attached to the framing member.

SwiftClip[™] L-Series[™] SUPPORT CLIP



LS-Series Support Clip



SwiftClip[™] L-Series[™] support clips are used in multiple construction projects, specifically in conjunction with structural studs and track. The L-shaped clips fit between the stud flanges, so that shorter length clips do not need to be ordered. These labor time-savers include prepunched holes for quicker screw attachments, and are punched to accommodate for CRC lateral bracing connections.

LE-Series Support Clip



LA-Series Support Clip

		Thickn	ess			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Common application	Packaging Pcs./Bucket
LS543	16	54	0.0566		CRC/Openings	300
LS683	14	68	0.0713	1-1/2 x 1-1/2 x 3-1/4	Openings	300
LS973	12	97	0.1017		Openings	200
LS545	16	54	0.0566		CRC/Openings/Joists	200
LS685	14	68	0.0713	1-1/2 x 1-1/2 x 5-1/2	Openings/Joists	200
LS975	12	97	0.1017		Openings/Joists	100
LS547	16	54	0.0566		CRC/Openings/Joists	150
LS687	14	68	0.0713	1-1/2 x 1-1/2 x 7-1/4	Openings/Joists	100
LS977	12	97	0.1017		Openings/Joists	100
LS549	16	54	0.0566		Joists	100
LS689	14	68	0.0713	1-1/2 x 1-1/2 x 9-1/4	Joists	100
LS979	12	97	0.1017	1	Joists	50
LS541	16	54	0.0566		Joists	100
LS681	14	68	0.0713	1-1/2 x 1-1/2 x 11-1/4	Joists	50
LS971	12	97	0.1017		Joists	50
LS5413	16	54	0.0566		Joists	50
LS6813	14	68	0.0713	1-1/2 x 1-1/2 x 13-1/4	Joists	50
LS9713	12	97	0.1017		Joists	25
LE543	16	54	0.0566		Fixed/Joists/Trusses	100
LE683	14	68	0.0713	1-1/2 x 3 x 3-1/4	Fixed/Joists/Trusses	100
LE973	12	97	0.1017		Fixed/Joists/Trusses	50
LE545	16	54	0.0566		Fixed/Joists/Trusses	100
LE685	14	68	0.0713	1-1/2 x 3 x 5-1/2	Fixed/Joists/Trusses	100
LE975	12	97	0.1017	1	Fixed/Joists/Trusses	50
LE547	16	54	0.0566		Fixed/Joists/Trusses	100
LE687	14	68	0.0713	1-1/2 x 3 x 7-1/4	Fixed/Joists/Trusses	50
LE977	12	97	0.1017		Fixed/Joists/Trusses	50
LA543	16	54	0.0566		Joists/Trusses	100
LA683	14	68	0.0713	3 x 3 x 3-1/4	Joists/Trusses	100
LA973	12	97	0.1017]	Joists/Trusses	50
LA545	16	54	0.0566		Joists/Trusses	100
LA685	14	68	0.0713	3 x 3 x 5-1/2	Joists/Trusses	50
LA975	12	97	0.1017		Joists/Trusses	50
LA547	16	54	0.0566		Joists/Trusses	50
LA687	14	68	0.0713	3 x 3 x 7-1/4	Joists/Trusses	50
LA977	12	97	0.1017	1	Joists/Trusses	50

CLIP

EasyClip[™] U-Series[™] CLIP ANGLE





ClarkDietrich EasyClip[™] U-Series[™] clip angles are used to secure U-channel to wall studs for lateral bridging or for miscellaneous rigid connections. U-channel is passed through the stud knockout and an EasyClip U-Series clip is screwattached or welded to provide a rigid connection. These clips are prepunched for faster, more accurate fastener placement. Do not use in bridging applications when the stud width exceeds 6."

Product		Thic	kness	Size	D I .	
code	Gauge	Mils	Design thickness (in)	(in)	Packaging Pcs./Bucket	
U543				1-1/2 x 1-1/2 x 3-3/8	400	
U545	16	54	0.0566	1-1/2 x 1-1/2 x 5-3/4	200	
U547	10	54		1-1/2 x 1-1/2 x 7-3/4	100	
U549				1-1/2 x 1-1/2 x 9-3/4	100	
U683			0.0713	1-1/2 x 1-1/2 x 3-3/8	200	
U685	14	68		0.0712	1-1/2 x 1-1/2 x 5-3/4	170
U687	14	00		1-1/2 x 1-1/2 x 7-3/4	100	
U689				1-1/2 x 1-1/2 x 9-3/4	100	
U973				1-1/2 x 1-1/2 x 3-3/8	200	
U975	12	97	0.1017	1-1/2 x 1-1/2 x 5-3/4	130	
U977	12	97	0.1017	1-1/2 x 1-1/2 x 7-3/4	100	
U979				1-1/2 x 1-1/2 x 9-3/4	80	

DIAGONAL TENSION STRAPPING/SHEARWALL BRACING



ClarkDietrich diagonal tension strapping, combined with gusset plate components, provides shearwall (racking restraint) for light-gauge, load-bearing framing under wind and seismic loads. Straps should be positioned diagonally in an X-configuration from the bottom to top track—on both sides of the wall. At a minimum, double studs at the ends of the X-brace serve as compression studs, which must be anchored to the foundation.

		Thickness	Size Available		
Product code	Gauge	Mils	Design thickness (in)	Min. width (in)	Max. width (in)
	20	33	0.0346	2	12
	18	43	0.0451	2	12
DTNC*	16	54	0.0566	2	12
	14	68	0.0713	2	12
	12	97	0.1017	2	12

*20 and 18 gauge are 33,000psi yield strength. 16, 14 and 12 gauge are 50,000psi yield strength.

Caution: Racking loads are first transferred to the roof/floor decking and then to the shearwalls (X-bracing). The X-bracing relies on a proper foundation to resist uplift and shear forces. For the system to function properly, the load path from the roof or floor deck, to the shearwalls, to the foundation must be complete.

FLAT STRAPPING



Properly spaced horizontal steel bracing provides resistance to stud rotation and minor axis buckling under wind and axial loads. Block and strapping is typically used when wall studs exceed 6". Field cut, blocking is used if knockouts do not align. It's also used as bridging when framing members are unpunched.

		Thickness		Size A		
Product code	Gauge	Mils	Design thickness (in)	Min. width (in)	Max. width (in)	Length (ft)
DTN3	20	33	0.0346	2	12	10
DTN3	18	43	0.0451	2	12	10
	16	54	0.0566			
DTN5	14	68	0.0713	2	2 12	10
	12	97	0.1017			

DTN3 has a yield strength of 33,000psi. DTN5 has a yield strength of 50,000psi.

GUSSET PLATES FOR SHEARWALL BRACING





ClarkDietrich gusset plate components, combined with diagonal tension strapping, provide shearwall (racking restraint) for light-gauge, load-bearing framing under wind and seismic loads.

		Thickne	SS		Packaging Pcs./Bucket	
Product code	Gauge	Mils	Design thickness (in)	Plate size (in)		
		54	0.0566	6 x 6		
	16			6 x 12	25	
GP				12 x 12		
GP				6 x 6	25	
	12 97	97	0.1017	6 x 12		
				12 x 12		

HEAVY-DUTY STUD (HDS[®]) FRAMING SYSTEM



The HDS® framing system is a new, high-performance, cost-effective, multipurpose, heavy-duty framing stud for headers, jambs, posts and built-up tube truss chords and webs. The superior strength and carrying capacity mean higher performance with fewer members. The HDS framing system eliminates box beam headers, nesting track and stud for posts and jambs.

Product code		Thickne	SS		Depth	Flange	Return
	Gauge	Mils	Design thickness (in)	ksi	(in)	(in)	(in)
	20 33		0.0346	33			
	18	43	0.0451	33	2 5/0		4 4/46
HDS	16	54	0.0566	50	3-5/8, 6	3	1-1/16, 2-1/4
	14	68	0.0713	50	0		∠-1/4
	12	97	0.1017	50			

Patent pending.

L-HEADER



ClarkDietrich L-headers are prefabricated, light-gauge 90° L-sections that are used in loadbearing wall framing. They slide easily into place and eliminate the labor-intensive process of built-up field-assembled headers. Install as single, one header one side, or double, two headers, one on both sides.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Leg length (in)	
	18	43	0.0451		
	16	54	0.0566	1-1/2 x 6	
	14	68	0.0713		
	18	43	0.0451		
LHDR	16	54	0.0566	1-1/2 x 8	
	14	68	0.0713		
	18	43	0.0451	1-1/2 x 10	
	16	54	0.0566		
	14	68	0.0713		

Custom lengths available on request.

TradeReady® HEADER



The TradeReady® load-bearing one-piece header drastically reduces labor costs when compared to standard box beam headers constructed with C-shaped members. Pre-engineered to fit standard door and window openings, the TradeReady headers are easy and fast to install.

		Thickness	147 11		
Product code	Gauge	Mils	Design thickness (in)	Wall stud size (in)	Leg length (in)
TDHA	14	68	0.0713	3-5/8 6	8
TDHB	14	68	0.0713	3-5/8 6	12


Standard lengths are 82" and 118." Custom sizes available on request. U.S. Patent No. 5,689,922

You can have confidence in the strength of steel under your feet.

Floor framing made from cold-formed steel is stronger and more versatile. Its high strength-to-weight ratio provides strong loading capacity and maximum spanning capability. It can be used with all traditional flooring materials such as plywood, OSB, concrete-filled steel deck or one of the many varieties of fiber-reinforced cement board. It doesn't squeak when you walk across it.

What's more is that ClarkDietrich's exclusive TradeReady[®] Floor System is designed with large extruded openings in the joists to accommodate electrical, mechanical, plumbing and technology lines. These prepunched openings also eliminate drilling and soffit framing during installation. For all of these reasons, steel floor framing has become the standard for low- and mid-rise commercial structures such as hotels, apartments, condominiums and assisted living, as well as residential homes.

- Available in a variety of web sizes, flanges, gauges and yield strengths
- Pre-spaced joist tabs
- Greater spanning capabilities
- Prepunched openings
- Full system of joist components, accessories, hangers and connectors

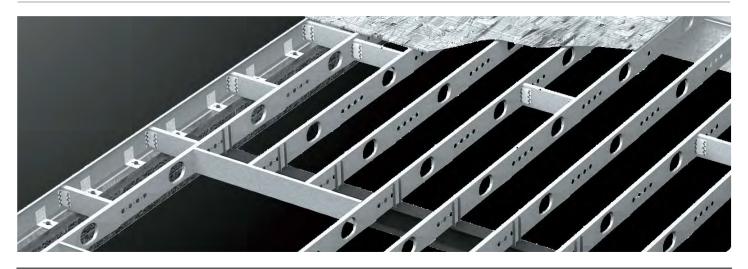

THE ClarkDietrich TradeReady® FLOOR SYSTEM

The revolutionary TradeReady Steel Joist System features a tabbed rim track to strengthen the joist against web crippling loads, and to provide greater versatility and strength for ledger applications. In conjunction with other floor sheathing products, this system provides one of the most cost-effective systems for non-combustible low- and mid-rise structures.

- · Prepunched openings eliminate drilling/cutting joist webs, and soffit framing
- · Sustainable alternative to wood joists, offering long-term price stability
- · Pre-spaced joist tabs eliminate layout, and joist hangers
- Greater spanning capabilities for design flexibility
 - Wider o.c. spacing for fewer joists

TradeReady[®] STEEL JOIST



ClarkDietrich TradeReady® steel joists clear spans up to 33 feet, and are one of the primary components of the TradeReady floor system. Large extruded holes accommodate HVAC, mechanical, plumbing, electrical and sprinkler runs. The joist also features a series of smaller holes for electrical and technology lines. Hole sizes range from 4-1/4" oval to 10" round, based on member depth.

They offer consistent quality, predictable performance and high strength-to-weight ratio.

		Thickness	5	Depth	Flange	Return
Product code*	Gauge	Mils	Design thickness (in)	(in)	(in)	(in)
	18	43	0.0451,	7-1/4	1-3/4	5/8
TDJ3 (18 gauge)	16	54	0.0566,	8	1-3/4	5/8
TDJ5 (16, 14 & 12 gauge)	14	68	0.0713,	9-1/4	1-3/4	5/8
	12	97	0.1017	11-1/4	1-3/4	5/8
	18	43	0.0451,	10	2	5/8
TDW3 (18 gauge) TDW5 (16, 14 & 12 gauge)	16 14	54 68	0.0566, 0.0713,	12	2	5/8
1DW5 (10, 14 & 12 gauge)	14	97	0.1017	14	2	5/8

*18 gauge is standard as 33ksi yield strength.

16, 14 and 12 gauge are standard as 50ksi yield strength.



UL and UL Classified are trademarks of Underwriters Laboratories, Inc. UL listed assemblies L564, G535, G536, G551, G553 and G560.

TradeReady Joist

Hole size (in)	Hole shape	Web width (in)
4-1/4 x 7		7-1/4 TDJ, 8 TDJ
6-1/4 x 9	\bigcirc	9-1/4 TDJ, 10 TDW, 11-1/4 TDJ
8 Diam.	\bigcirc	12 TDW
10 Diam.		14 TDW

TradeReady RIM



Another major component of the TradeReady floor system, the standard 16'-long rim drastically reduces framing time and effort. Rims have pre-formed, prepunched attachment tabs at 12", 16", 19.2" or 24" o.c. spacing to eliminate layout time—and ensure fast, proper fastener placement. Embossed stiffening ribs on each side of the tabs provide additional reinforcement, for a significant reduction of web stiffeners (squash blocks) and support clips in a majority of applications.

			Thickn	ess		Flange Length	
Product code	Tab spacing (in)	Gauge	Mils	Design thickness (in)	Depth (in)	Top (in)	Bottom (in)
TD12	12				7-1/4		
IDIZ	12		18, 43,	0.0566,	8	- 1-1/4	2-1/2
TD16	16	18,			9-1/4		
IDIO	10	16,	54,		10		
TD19	19	14,	68,		11-1/4		
1019	19	12	97	0.1017	12		
TD24	24				14		

U.S. Patent Nos. 6,301,854; 6,691,478; 6,418,694; 6,691,487; 6,761,005; 7,240,459 Canadian Patent No. 2319346

Mexican Patent No. 243294

TradeReady[®] STRUCTURAL BLOCKING





TradeReady® Floor System, TradeReady structural blocking is pre-cut to fit securely between the underside of the floor joists to prevent joist rotation. Prepunched for quick attachment, it's an economical alternative to cross bracing, X-bracing or strapping. For easy attachment, install continuous row of blocking every 8' o.c. maximum, and staggered.

The third component of the

		Thickness				
Product code	Gauge	Mils	Design thickness (in)	Depth (in)	Effective length (in)	Packaging Pcs./Bundle
TDSB					12	
TDSB	10	43	0.0454	2-1/2	16	10
TDSB	TDSB 18		0.0451	2-1/2	19.2	
TDSB					24	

Note: TDSB blocking is not required if sheathing is applied to the joists top and bottom.

Caution: To prevent joist rolling, TDSB blocking must be tied into the structure or otherwise braced against lateral movement.

EasyClip[™] QuickTwist[™] WEB STIFFENER





EasyClip[™] QuickTwist[™] web stiffeners are used to provide reinforcement of joist webs to prevent crippling. Web reinforcement is often required by design to enhance the load capacity of joists. The unique design of QuickTwist allows the installer to insert the stiffener on the inside of the joist after the joist is installed. This stiffener eliminates the need to pre-insert traditional web stiffeners prior to joist installation. The one-piece assembly is easily rotated in-place for a tight fit.

D.L.	Product code Size (in)		Thick	ness	11 1 1 .*	
			Mils	Design thickness (in)	Height* (in)	Packaging
					7-1/4	
					8	
					9-1/4	Dependent on
QTWS	3-1/2	-1/2 12	97	0.1017	10	order quantity
					11-1/4	order quartity
					12	
					14	
					7-1/4	
	8	8				
					9-1/4	Dependent on
QTWS	6	12	97	0.1017	10	order quantity
					11-1/4	
					12	
					14	

*Dimension is nominal size. Actual product is shorter to fit inside joist.

LIGHT-GAUGE C-JOIST FRAMING



ClarkDietrich C-joist components provide an economical, lightweight alternative to open web trusses, bar joists, engineered lumber, cast-in-place or hollow core floor assemblies. Plus, they're pre-cut to save time. Depending on loads and spans, C-joists are typically spaced at 12," 16," 19.2" or 24" o.c. Joist-togirder attachments are normally supported with joist hangers, EasyClip E-Series™ or S-Series™ support clips. Web stiffeners may be required at supports and other point loads.

Product			Thick	kness	Depth	Flange	Return
code*	Member	Gauge	Mils	Design thickness (in)	(in)	(in)	(in)
	800S162-x	18	43	0.0451	8		
CSJ	1000S162-x	16	54	0.0566	10	4 5/0	4/0
CSJ	1200S162-x	14	68	0.0713	12	1-5/8	1/2
	1400S162-x	12	97	0.1017	14		
	800S200-x	18	43	0.0451	8		
CSW	1000S200-x	16	54	0.0566	10	2	5/8
0.511	1200S200-x	14	68	0.0713 12	2	5/6	
	1400S200-x	12	97	0.1017	14		
	800S250-x	18	43	0.0451	8		
CSE	1000S250-x	16	54	0.0566	10	2-1/2	5/8
CSE	1200S250-x	14	68	0.0713	12	Z-1/Z	0/C
	1400S250-x	12	97	0.1017	14		
	800S300-x	18	43	0.0451	8		
CSS	1000S300-x	16	54	0.0566	10	2	1
635	1200S300-x	14	68	0.0713	12	3	I
	1400S300-x	12	97	0.1017	14		

*18 gauge is standard as 33ksi yield strength. 16, 14, and 12 gauge are standard as 50ksi yield strength.

STRUCTURAL TRACK



Structural track, usually in the same gauge as the joist, is used as rim or band enclosures.

		٦	hickness		_	
Product code	Member	Gauge	Mils	Design thickness (in)	Depth (in)	Flange (in)
	800T125-x	18	43	0.0451	8	
TSB	1000T125-x	16	54	0.0566	10	1-1/4
130	1200T125-x	14	68	0.0713	12	1-1/4
	1400T125-x	12	97	0.1017	14	

18 gauge is standard as 33ksi yield strength. 16, 14, and 12 gauge are standard as 50ksi yield strength.

Depth of TSB is measured to the inside of the flanges.

WEB STIFFENER



ClarkDietrich web stiffeners are used to provide reinforcement of joist webs to prevent crippling. Web reinforcement is often required by design to enhance the load capacity of joists. When installing between the joist flanges, a web stiffener must be installed by sliding it in from the end of the joist.

Product		Thickne	SS	Size	Length
code	Gauge	Mils	Design thickness (in)	(in)	(in)
WS	14	68	0.0713	4	5-3/4 to 13-3/4

DIAGONAL TENSION STRAPPING



Block and strap bridging helps prevent joist rotation and lateral movement. Solid blocking, a fieldcut track or joist section, is welded or screw-attached between the first and last two outer joist bays—at a maximum of 8' o.c. along the strap—over all interior supports and adjacent to floor openings. Two-inch-wide corrosion-resistant strapping is also screw-attached or welded to the bottom of every joist flange. For sub-floor or decking without lateral support, install strap on the top flange of the joist.

Product		Т	hickness	Size Avai	ilable (in)	Length	
code	Gauge	Mils	(in) width	Max. width	(ft.)		
DTNO	20	33	0.0346	0	40	40	
DTN3	18	43	0.0451	2	12	10	
	16	54	0.0566				
DTN5	14	68	0.0713	2	12	10	
	12	97	0.1017	T			

DTN3 has a yield strength of 33,000psi. DTN5 has a yield strength of 50,000psi. Packaging may vary by region.

EasyClip[™] E-Series[™] SUPPORT CLIP





ClarkDietrich EasyClip™ E-Series™ support clips are used for rigid standoff connections. The 4" wide leg provides extra length to achieve standoff connections up to 3." These support clips are commonly used in bypass wall conditions, a variety of floor framing applications including solid and ladder blocking attachments and joist-to-joist connections, and to secure rafter framing to the primary structure. EasyClip E-Series support clips are prepunched for faster and more accurate fastener placement.

Product		Thickness		Size	Destructions
code	Gauge	Mils	Design thickness (in)	(in)	Packaging Pcs./Bucket
E543				4 x 1-1/2 x 3	100
E545				4 x 1-1/2 x 5	100
E547	16	54	0.0566	4 x 1-1/2 x 7	100
E549				4 x 1-1/2 x 9	50
E541				4 x 1-1/2 x 11	50
E683				4 x 1-1/2 x 3	100
E685				4 x 1-1/2 x 5	100
E687	14	68	0.0713	4 x 1-1/2 x 7	80
E689				4 x 1-1/2 x 9	50
E681				4 x 1-1/2 x 11	50
E973				4 x 1-1/2 x 3	50
E975				4 x 1-1/2 x 5	50
E977	12	97	0.1017	4 x 1-1/2 x 7	50
E979				4 x 1-1/2 x 9	50
E971				4 x 1-1/2 x 11	40

EasyClip S-Series™ SUPPORT CLIP





ClarkDietrich EasyClip S-Series[™] support clips are commonly used for rigid connections in window and door framing, joist, bypass or other miscellaneous connections to secure one framing member to another, or to secure framing members to the structural frame. This highperformance multi-use utility clip is ideal for corner reinforcements, stair openings and numerous support applications. EasyClip S-Series clips are prepunched for faster and more accurate fastener placement.

Product		Thickness		Size	D I .
code	Gauge	Mils	Design thickness (in)	(in)	Packaging Pcs./Bucket
S543				1-1/2 x 1-1/2 x 3	400
S545				1-1/2 x 1-1/2 x 5	200
S547	16	54	0.0566	1-1/2 x 1-1/2 x 7	100
S549				1-1/2 x 1-1/2 x 9	100
S541				1-1/2 x 1-1/2 x 11	100
S683				1-1/2 x 1-1/2 x 3	200
S685				1-1/2 x 1-1/2 x 5	200
S687	14	68	0.0713	1-1/2 x 1-1/2 x 7	100
S689				1-1/2 x 1-1/2 x 9	100
S681				1-1/2 x 1-1/2 x 11	100
S973				1-1/2 x 1-1/2 x 3	200
S975				1-1/2 x 1-1/2 x 5	150
S977	12	97	0.1017	1-1/2 x 1-1/2 x 7	100
S979				1-1/2 x 1-1/2 x 9	80
S971				1-1/2 x 1-1/2 x 11	70

TENSION BRACING



Tension bracing is used to prevent joist compression, flange lateral movement, and rotation. These tension ties are an alternative to traditional block and strapping. Traditionally used with wood framing, ties can also be used with conventional C-joists.

As a general rule, floor bracing or bridging is installed at 8' o.c. maximum.

Product		Thickness		Size	Paskasing
code	Gauge	Mils	Design thickness (in)	(in)	Packaging Pcs./Bundle
T20				3/4 x 20	
T27	20	33	0.0346	3/4 x 27	50
T36				3/4 x 36	



CLIP

BRIDLE HANGER





Bridle hangers are commonly used to attach light-gauge C-joists to structural steel beams, wood ledgers or masonry block. Connections can be made with screws, powder-actuated fasteners, drill-in concrete anchors or welding. Single- and double-wide hangers are also available in other widths and depths. The MB hanger can also be sloped to a maximum of 45°. Skew only: MB series can be skewed to a maximum of 45°maximum allowable download is 62% of table load.

		Thickness				
Product code	Gauge	Mils	Design thickness (in)	Depth (in)	Width (in)	Packaging Pcs./Carton
				8		
CDBV	14	68	0.0713	10	2	25
CDBV	14	00	0.0715	12	2	25
				14		
				8		
CDMB	12	97	0.1017	10	2	25
CDIVID	12	51	0.1017	12	2	20
				14		

MB: Slope 0° to 30°, maximum allowable download is 100% of table load. Slope 31° to 45°, maximum allowable download is 80% of table load.

INTERIOR FINISHING

Occupants never see the effort put into building the wall. They only see the finish.

ClarkDietrich offers an unmatched selection of interior finishing products—all designed for durability and finesse.

Paper-faced metal beads and trims combine galvanized metal with high-grade paper tape to provide costeffective, problem-free, compound-embedded drywall finishing. Our products allow the joint compound applied to the underside to seep through perforations in the paper to provide superior adhesion and bonding to gypsum. Corner and edge cracking are virtually eliminated because beads float with the gypsum, independent of framing movement or settling.

- Smoothest finish available
- Tape-on products provide superior adhesion and bonding
- Enhanced paintability

Traditional metal drywall beads and trims provide crisp, clean and straight protection for gypsum wallboard construction. Available in a wide selection of products and sizes, metal is the versatile choice for almost any drywall finish condition. Metal beads and trims can be nailed, screwed, stapled or clinched in place and finished with joint compound. They are low-cost, easily applied and provide high-quality, long-lasting professional finishes.

- Strong; dent- and impact-resistant
- Precision manufactured ensuring straight, sharp and crisp edges and corners
- Corrosion-resistant

Vinyl beads and trims are designed to provide superior, long-lasting interior finishes for drywall and veneer plaster. Vinyl offers architects, interior designers and contractors much more flexibility to create dramatic, sweeping arches, curvatures and distinctive architectural details. Vinyl also provides superior expansion and contraction properties as the products become embedded in the substrate prior to coating and, therefore, actually move with the building through temperature changes.

- Durable; impact-, corrosion- and ignition-resistant
- Superior expansion and contraction properties
- Excellent paint adhesion, no priming required

Platinum[®] PAPER-FACED TAPE-ON BEADS

Goldline[®] paper-faced tape-on beads combine galvanized metal corner and edge protection with high-grade paper tape to provide cost-effective, problem-free outside drywall corner finishing. They're available in a number of different widths to suit most wallboard applications. Wider flange beads are used to cover imperfect corners, while shorter flanges are used to achieve maximum efficiency.

- Substantially reduces joint compound consumption and eliminates one finish coat
- Does not require nails, staples, screws or crimps
- Impervious to "scuffing" and "fluffing-up"
- Will not be damaged by sanding
- Superior adhesion, bonding and paintability

Notes:

GOLDLINE® and PLATINUM® are registered trademarks of Bailey Metal Products, Ltd.

 $\mathsf{GOLDLINE}^{\circledast}$ Trims are covered under the following patents:

- USA 5,836,122 and 5,613,335
- Canada 2,212,854
- Australia 695482
- New Zealand 302378

PLATINUM® Trims (separate patent) are covered under the following:


- USA 7,214,434 B2
- Canada 2,417,325
- Australia 2004202648
- New Zealand 533606

PAPER-FACED METAL OUTSIDE CORNER, TAPE-ON BEAD

Platinum[®] superior 90° outside corner drywall finishing tape-on bead virtually eliminates corner cracks, edge chips and nail pops. Applied using joint compound, the beads don't require mechanical fasteners. Helps reduce labor and material costs by reducing the amount of joint compound needed, and also eliminating one pass of finishing.

Product	USG	Cruda		Dimens	ions (in)		Standard
code	reference	Style	Α	В	С	D	length (ft)
P1WO	B1W	Standard Leg	1/2	3/4	7/8	7/8	
P1UO	B1EL	Equal Leg	3/4	3/4	3/4	3/4	
P1XW	B1XW	Extra Wide	7/8	5/8	5/8	3/4	8, 10
P1XU	B1XW EL	Extra Wide Equal	7/8	7/8	5/8	5/8	
P1SU	B1 Super Wide	Super Wide Equal	1-1/8	1-1/8	5/8	5/8	

Other lengths are available.




PAPER-FACED METAL OFF-ANGLE CORNER, TAPE-ON BEAD



Platinum off-angle tape-on bead, also known as splayed or 120/135° corner bead, is used to provide a strong, smooth finish for outside off-angle drywall intersections. Applied in the same manner as 90° paper bead, the result is a clean, crisp, durable off-angle corner that will not crack or chip.

Product	USG	Cruda		Dimens	ions (in)		Standard
code	reference	Style	Α	В	С	D	length (ft)
P100	B1 OS	Off-Angle	1/2	3/4	5/8	5/8	8, 10

Other lengths are available.



PAPER-FACED INSIDE CORNER, TAPE-ON BEAD



Platinum tape-on inside 90° paperfaced corner bead provides very straight and precise inside corners. The rigid, steel-reinforced inside corners provide a durable guide to achieve exceptionally straight and sharp inside corners. Embed in joint compound and press firmly into place. Remove excess compound with a drywall knife.

Product	USG	Stude		Dimens	ions (in)		Standard
code	reference	Style	Α	В	С	D	length (ft)
P2I	B2	Standard Angle	3/8	3/8	5/8	5/8	8, 10



PAPER-FACED METAL OFF-ANGLE INSIDE CORNER, TAPE-ON BEAD



Platinum off-angle tape-on 120/135° inside (or reverse splayed) bead is used to achieve a crisp, clean, straight-finished inside offangle drywall finish. This bead can be used for inside corner angles between 120° and 135°. As with all tape-on beads, off-angle bead is applied using joint compound. No mechanical fasteners are required.


Standard	Dimensions (in)				Style	USG	Product
D length (ft)	D	С	В	Α	Style	reference	code
5/8 8, 10	5/8	5/8	5/8	5/8	Off-Angle	B2 OS	P201
						в	A
						2	
						~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	

#### PAPER-FACED 3/4" BULLNOSE OUTSIDE CORNER, TAPE-ON BEAD



Platinum[®] 3/4" tape-on bullnose corner bead is used to create a smooth, rounded look to standard drywall corners. It adds contemporary styling and a sense of openness to any room. Apply in the same manner as all other tape-on beads. Gypsum boards must be cut back 3/4" to accommodate the bullnose and ensure a flush fit.

Product	USG	Stude	D	imensions (in	n)	Standard
code	reference	Style	А	В	С	length (ft)
P1BO	SLOC	Standard	7/8	3/4	7/8	8, 10



#### PAPER-FACED 3/4" BULLNOSE OFF-ANGLE OUTSIDE CORNER, TAPE-ON BEAD



Platinum off-angle bullnose tapeon bead (also known as splayed bullnose or 120/135° bullnose corner bead), is used to provide a rounded, bullnose finish for off-angle drywall intersections. It is applied in the same manner as 90° paper bead. Gypsum board must be cut back 3/4" to accommodate the bullnose and ensure a flush fit.

Product	USG	Ca. J.	[	Dimensions (ir	i)	Standard	
code	reference	Style	А	В	С	length (ft)	
P0BO	SLOC OS	Off-Angle	1	3/4	1	8, 10	



#### PAPER-FACED 3/4" BULLNOSE OUTSIDE CORNER, NAIL-ON BEAD



Platinum 3/4" nail-on bullnose corner bead is used to create a smooth, rounded look to standard drywall corners. Nailon bullnose adds contemporary styling and a sense of openness to any room. Nails or mechanical fasteners are used to secure the bead to the wallboard.

Product	USG	Style	D	Dimensions (in)		
code	reference	Style	Α	В	С	length (ft)
P1BN	SLOC N	Standard	5/8	3/4	5/8	8, 10

#### PAPER-FACED 3/4" BULLNOSE OFFSET OUTSIDE CORNER, NAIL-ON BEAD

A



Platinum off-angle nail-on bullnose bead, also known as splayed bullnose or 120°/135° bullnose corner bead, is used to provide a rounded bullnose finish for outside off-angle drywall intersections. Nails or mechanical fasteners are used to secure the bead to the wallboard.

Product	USG	Style		Standard		
code	reference	Style	Α	В	С	length (ft)
P00B	SLOC NOS	Off-Angle	5/8	3/4	5/8	8, 10



#### PAPER-FACED INNER COVE, TAPE-ON TRIM



Platinum® tape-on inner cove 90° paper-faced bead provides subtle, rounded inside or inner corners. Inner cove tape-on beads are embedded in joint compound and pressed firmly into place. Excess compound is removed with a drywall knife or wiped clean with a rag.

Product	USG	C. 1	Dimensions (in)			Standard
code	reference	Style	A	В	С	length (ft)
P2BI	SLIC	Standard	5/8	3/4	5/8	8, 10





Platinum L-trims are used to finish the ends of wallboard where it abuts dissimilar surfaces, such as suspended ceilings, beams, plaster, masonry or untrimmed door and window jambs. Applied in the same manner as all other tape-on beads joint compound embeds the paperfaced bead to the wallboard paper.

Product	USG	C. 1		Dimensions (in)		Standard
code	reference	Style	А	В	С	length (ft)
	B4	3/8	7/16	1-11/16	1-1/4	
P4L	B4	1/2	9/16	15/16	1-1/4	10
	B4	5/8	11/16	1-1/16	1	
в						

#### PAPER-FACED METAL REVEAL, TAPE-ON TRIM



Platinum reveal trims are used to finish wallboard terminations when the board abuts other building materials—such as suspended ceilings, beams and untrimmed door and window jambs—to create a clean step inset or reveal. Helps create aesthetic architectural detailing around light fixtures, ceilings, walls and soffits, without mechanical fasteners.

Product	USG	C. 1		Dimens	sions (in)		Standard	
code	reference	Style	А	В	С	D	length (ft)	
DOD	B4 NB Reveal (1/2")	1/2 x 1/2	1/2	1/2	1-3/16	7/8	10	
PGR	B4 NB Reveal (5/8")	5/8 x 5/8	5/8	5/8	15/16	7/8	10	

#### 103 Deluxe[®] CORNER BEAD



ClarkDietrich 103 Deluxe® corner bead is considered the premier drywall finishing corner bead product. This product combines a unique manufacturing process, with specially enhanced steel to provide consistent, high-quality finishing, and solid protection at drywall corners, every time. Nail, staple, screw or clinch into place.

Product	Size			
code	Width (in)	Length		
		6' 9"		
		6' 10"		
CBU		7' 0"		
CBU (dull finish)	1-1/4 x 1-1/4	8' 0"		
(duii fiffish)		9' 0"		
		10' 0"		
		12' 0"		

#### Quicksilver™ CORNER BEAD



Quicksilver[™] corner bead is a hot-dipped, highly durable galvanized bead that offers superior corrosion protection. This bead is ideal for humid, moisture-prone conditions and high-traffic areas subject to more than normal abuse. Quicksilver corner bead provides a high-quality finish and solid protection at drywall corners.

Product	Size		
code	Width (in)	Length	
		6' 9"	
		6' 10"	
CRC		7' 0"	
CBS (obiny finish)	1-1/4 x 1-1/4	8' 0"	
(shiny finish)		9' 0"	
		10' 0"	
		12' 0"	

#### CLINCH-ON PRODUCTS, CO. CORNER BEAD/DULL



Clinch-On corner bead is recognized as the premier product for providing sturdy metal reinforcement on 90° drywall corners. Knurled and perforated flanges offer superior compound adhesion for smooth, straight finishes. Corner bead attachments are accomplished by nailing, stapling, screwing or clinching through the flanges.

Product	Size		
code	Width (in)	Length	
		6' 0"	
		6' 9"	
		6' 10"	
CBCO	1-1/4 x 1-1/4	7' 0"	
(dull gray)	1-1/4 X 1-1/4	8' 0"	
		9' 0"	
		10' 0"	
		12' 0"	

Not available in all geographic areas.

#### CLINCH-ON PRODUCTS, CO. CORNER BEAD/HOT-DIPPED



Clinch-On hot-dipped corner bead offers the identical roll-formed precision as its counterpart. Hotdipped galvanized metal corner bead (meets ASTM C1047) provides enhanced corrosion protection and sturdy reinforcement at exposed 90° corners. Flanges are knurled and perforated to ease joint compound adhesion and nail attachment.

Product	Size			
code	Width (in)	Length		
		6' 9"		
		7' 0"		
CBCS	1-1/4 x 1-1/4	8' 0"		
CBCS (shiny)	1-1/4 X 1-1/4	9' 0"		
		10' 0"		
		12' 0"		

Not available in all geographic areas.

#### SPLAYED CORNER BEAD



ClarkDietrich's 120/135° corner bead, also referred to as splayed or off-angle bead, provides a clean, crisp finished look at off-angle intersections. Specially enhanced steel for corrosion protection and superior compound adhesion, it's easy to attach and finish.

#### **BULLNOSE 90° CORNER BEAD**



ClarkDietrich bullnose corner bead is used to create a smooth, rounded look to standard drywall corners. Of rugged steel construction, bullnose 90° corner bead is designed for superior compound adhesion. Just nail, screw or staple in place. Available with a galvanized finish meeting ASTM C1047 or with a prime-painted surface for shadowfree finishing.

Product	Size		
code	Width (in)	Length (ft)	
CB12	1-1/4 x 1-1/4	8	
(dull finish)	1-1/4 X 1-1/4	10	

Product	Si	ze
code	Radius (in)	Length
		7' 0"
		8' 0"
OPP	0/4	8' 6"
CBB	3/4	9' 0"
		10' 0"
		10' 6"

#### BULLNOSE SPLAYED 135° CORNER BEAD



ClarkDietrich splayed or off-angle bullnose is used to create a smooth rounded look at 135° corners. Bullnose adds contemporary styling, but also performs with corrosion protection and durability. Available with a galvanized finish conforming to ASTM C1047 or prime-painted surface for shadow-free finishing.

Product	Size		
code	Radius (in)	Length	
		8' 0"	
		8' 6"	
CBBW	3/4	9' 0"	
		10' 0"	
		10' 6"	

#### BULLNOSE KERFED BEAD



ClarkDietrich kerfed bullnose has a distinctive shortened back flange allowing for insertion into grooved door jambs and window trims. This feature provides for efficient, clean installation, as well as the smooth round appearance associated with bullnose trims. Roll-formed from galvanized steel, it conforms to ASTM C1047 for added durability and protection from corrosion.

Product	Size		
code	Radius (in)	Length (ft)	
		7	
	3/4	8	
	3/4	9	
		10	
CBBK	4.4/0	7	
		8	
	1-1/2	9	
		10	

#### 2-WAY INSIDE 3/4" BULLNOSE CORNER CAP 90°





ClarkDietrich vinyl 2-way 3/4" corner caps provide the ideal component to transition bullnose corner beads to a crisp finish where inside corners intersect at 90°. Examples of applications include windows, closets, doorways, skylights, etc. Easy to install, this component provides a cost-effective alternative to time-consuming mitering of corners.

Product code	Carla	Size radius (in)	Packaging	aging
Product code	Style	Size radius (in)	Pcs./Box	Cartons/Skid
M285	Plastic 2-way corner cap	3/4	50	25

#### 3-WAY 3/4" BULLNOSE CORNER CAP 90°





ClarkDietrich 3-way 3/4" bullnose 90° corner caps provide the ideal solution to finish corners quickly and efficiently at 3-way intersections. Features extended tabs for easier alignment and a professional finish. Works well with both metal and vinyl bullnose corner beads, eliminating the need for special corner bead applications and mitering.

Product code	Style	ct code Style Size radius (in)	Packa	ackaging	
Froduct code	Style	Size radius (in)	Pcs./Box	Cartons/Skid	
M385	Plastic 3-way corner cap	3/4	50	25	

#### **BULLNOSE TO 90° TRANSITION CAP**





ClarkDietrich bullnose corners to 90° transition caps simplify installation of baseboard or crown molding corners into 3/4" bullnose systems. Quick and easy to install, this product eliminates corner gaps and the need for time-consuming caulking and filling. Use with metal or vinyl 3/4" bullnose corner bead for transition onto baseboard or crown molding up to 4-1/2" wide.

Product code Style		Packaging		
Product code	Style	Radius (in)	Pcs./Box	Cartons/Skid
M859	Bullnose to 90° transition cap	3/4	50	25

#### METAL J-TRIM



ClarkDietrich metal J-trim is a strong, reveal-type galvanized steel casing that provides maximum corrosion protection and neat finished edges to drywall terminations around door and window openings. It also delivers a clean trim line at intersections or where gypsum panels abut dissimilar surfaces, such as columns and window mullions. Hemmed edges allow quick installation and do not require joint compound.

Product	S	ize
code	Width (in)	Length (ft)
M400	2/9	8
101400	3/8	10
M401	1/2 8	8
101401		10
M402	E/0	8
	5/8	10

#### METAL U-TRIM/SPACKLE J



ClarkDietrich U-trim, or Spackle J, provides maximum protection and clean finished edges on gypsum panels around door and window openings, and when wallboard abuts dissimilar surfaces, such as suspended ceilings, beams, plaster, masonry and concrete. It's easily installed by sliding trim over the edge of the board and nailing/ screwing through the knurled (long) flange—which also enhances compound adhesion.

Product	Si	ze
code	Width (in)	Length (ft)
M20A -	8	8
	1/2	10
	5/8 8	8
	8\C	10

#### METAL L-TRIM



ClarkDietrich metal L-trim provides a clean finished edge at door and window openings or when wallboard abuts dissimilar surfaces, such as suspended ceilings, beams, plaster, masonry and concrete. Installed after the gypsum panels are already in place—unlike Spackle J which must be installed during gypsum panel installation—L-trim is easily attached with screws or nails. A hemmed front flange provides rigidity.

Product code	Si	ze	
	Width (in)	Length (ft)	
M20B	1/2	8	
	1/2	10	
	E/0 8		
	5/8	10	

#### 093 ZINC CONTROL JOINT



joint is applied between abutting gypsum panels, and is used to relieve stresses of expansion and contraction of drywall and veneer plaster systems in large ceiling and wall expanses over 30' in length. It's typically installed from door header to ceiling, from floor to ceiling in long partition runs, and from wall to wall in large ceiling areas—and for interior or exterior applications.

ClarkDietrich 093 zinc control

Product code	Si	ze
	Grounds (in)	Length (ft)
ZNCJ	3/32	10

**Note:** Where fire and sound control are prime considerations, an approved seal must be installed behind the control joint.

#### Mini-Bead™ 800 AND 900 CORNER BEAD



ClarkDietrich Mini-Bead[™] 800 and 900 are fine-mesh corner beads used to provide corner reinforcement. Mini-Bead 800 has 1/16" grounds for one-coat veneer plaster and 90 keys per linear foot for excellent bonding and strong corners. Mini-Bead 900 has 3/32" grounds for two-coat veneer plaster systems.

Product code		Size	
Product code	Grounds (in)	Width (in)	Length (ft)
MB80 (galvanized)	1/16	1-1/4	8
MB90 (galvanized)	3/32	1-1/4	10
ZB80 (zinc)	1/16	1-1/4	10
ZB90 (zinc)	3/32	1-1/4	10

Note: Zinc Mini-Beads should be used in exterior finish systems.

#### VINYL CORP.

The finest accessories. The best customer experience. For years, these have remained the hallmarks of Vinyl Corp.'s business. Today, as a wholly owned subsidiary of ClarkDietrich, Vinyl Corp. continues to lead the way with innovations for stucco, plaster, drywall, veneer and EIFS/ DEFS PB and PM applications.

At Vinyl Corp., quality begins with products derived from superior ingredients. In fact, a commitment to using only lead-free virgin vinyl compounds means you can count on over 1,000 vinyl wall and ceiling accessories that function without question and meet or exceed all applicable specifications. You'll find that we have listened to building professionals across the walls and ceilings industry spectrum, to ensure our exacting manufacturing tolerances create products that are easy to fit and form every time, every job.

Vinyl Corp. works equally as hard to maintain a reputation for customer service. From 24-hour turnaround on orders, to inhouse expertise, to comprehensive technical support materials, Vinyl Corp. excels at keeping projects moving forward.

See all that we have to offer at vinylcorp.com.



#### VINYL CORNER BEAD



Vinyl corner bead is a rigid, easyto-apply 90° corner reinforcement that nails or staples into place. Multiple perforations along the flanges enhance bonding. The pronounced nose provides a ground and screed to help achieve precise finishing depth. It's easily cut, dentresistant, rustproof and maintains shape, with no sharp edges or burrs when field cut.

Product code	Si	ze
Product code	Width (in)	Length (ft)
VLCB	4 4 / 4 4 4 / 4	8
VLCB	1-1/4 x 1-1/4	10

#### VINYL SPLAYED CORNER BEAD 120/135°





ClarkDietrich 120/135° corner or splayed bead is used to finish offangle interior corners from 120– 135°. Designed to provide straight, rustproof, dent-resistant corners, its flexibility allows a flush fit on many unusual outside wallboard intersections. Multiple perforations along the flanges enhance joint compound bonding.

Product code	Siz	e
Product code	Width (in)	Length (ft)
VLSB	1-1/4 x 1-1/4	8
	1-1/4 X 1-1/4	10

#### VINYL ARCHWAY CORNER BEAD





ClarkDietrich vinyl archway corner bead fits almost any arch, curve or radius to provide rigid corner and edge protection. The notched single flange adapts to virtually any radius condition. Multiple perforations along flanges and notches enhance joint compound bonding. In addition to nails or staples, use an adhesive to secure arch tabs to gypsum board.

	S	ize
Product code	Width (in)	Length (ft)
VLAB	1-1/4 x 1-1/4	8
		10

#### VINYL BULLNOSE 90° CORNER BEAD





ClarkDietrich vinyl bullnose corner bead is used to create a smooth, rounded look to standard drywall corners. Vinyl bullnose adds contemporary styling and a sense of openness to any room. Ideal in children's play areas, it easily installs with nails, screws or staples. It's also rustproof and dent-resistant.

Product code	Size	
Product code	Radius (in)	Length (ft)
VBCB 90° Bullnose	3/4	8
		10
	1-1/2	8
		10

#### VINYL BULLNOSE SPLAYED 120/135° CORNER BEAD





ClarkDietrich vinyl bullnose splayed corner bead is used to finish off-angle interior corners from 120-135° when a rounded "bullnose" look is desired. This durable trim product is dent-resistant, rustproof and easily finished. Multiple elongated perforations along both flanges enhance joint compound bond.

Product code	Size	
Product code	Radius (in)	Length (ft)
VBSB	3/4	8
		10
	1-1/2	8
		10

#### VINYL BULLNOSE KERFED CORNER BEAD





Vinyl bullnose kerfed corner bead has a distinctive shortened back flange, allowing for insertion into grooved door jambs and window trims. Provides for efficient, clean installation, as well as a smooth, rounded appearance. It's dentresistant, rustproof and maintains shape with no sharp edges or burrs when field cut. A cost-effective alternative to expensive wood trims.

Product	Size		
code	Radius (in)	Length (ft)	
VBKB	3/4	8	
		10	
	1-1/2	8	
		10	

#### VINYL BULLNOSE ARCHWAY CORNER BEAD





ClarkDietrich vinyl bullnose archway corner bead provides a rounded, contemporary look to archways, curves or just about any radius. Notched flanges enable it to be arched to an inside or outside radius. Secure each tab on the archway bead with adhesive or staples before application of joint compound.

Product	Si	ze
code	Radius (in)	Length (ft)
	3/4	8
VBAB	3/4	10
VDAD	1-1/2	8
	1-1/2	10

### VINYL 2-WAY INSIDE 3/4" BULLNOSE CORNER CAP 90°





ClarkDietrich vinyl 2-way 3/4" corner caps provide the ideal component to transition bullnose corner beads to a crisp finish where inside corners intersect at 90°. Examples of applications include windows, closets, doorways, skylights, etc. Easy to install, this component provides a cost-effective alternative to time-consuming mitering of corners.

Product code		Packaging		
Product code	Style	Radius (in)	Pcs./Box	Cartons/Skid
M285	Plastic 2-way corner cap	3/4	50	25

### VINYL 3-WAY 3/4" BULLNOSE CORNER CAP 90°





ClarkDietrich 3-way 3/4" bullnose 90° corner caps provide the ideal solution to finish corners quickly and efficiently at 3-way intersections. Features extended tabs for easier alignment and a professional finish. Works well with both metal and vinyl bullnose corner beads, eliminating the need for special corner bead applications and mitering.

Product code	Curla	Radius (in)	Packaging	
Product code	Style	Radius (in)	Pcs./Box	Carton/Skid
M385	Plastic 3-way corner cap	3/4	50	25

#### VINYL 3/4" BULLNOSE TO 90° TRANSITION CAP





ClarkDietrich bullnose to 90° transition caps simplify installation of baseboard or crown molding corners into 3/4" bullnose systems. Quick and easy to install, they eliminate corner gaps and the need for time-consuming caulking and filling. Use with metal, vinyl or paper-faced 3/4" bullnose corner bead for transition onto baseboard or crown molding up to 4-1/2" wide.

Product code	C. 1	Radius (in)	Packaging	
Product code	Style	Radius (in)	Pcs./Box	Carton/Skid
M859	Bullnose to 90° transition cap 3/4"	3/4	50	25



## VINYL J-BEAD



provides a finished edge at gypsum board stops around door and window openings and at ceiling intersections. Requires no joint compound. Rigid vinyl is not a thermal transmitter and helps stop condensation where gypsum board terminates at exterior metal surfaces, such as window frames and mullions. Rustproof and dent-resistant.

ClarkDietrich vinyl J-bead

Product code	Si	ize
Product code	Width (in)	Length (ft)
	1/2	8
VLJB		10
VLJB	F/0	8
	5/8	10

#### VINYL MUDABLE J-BEAD





and protect exposed ends of gypsum panels that abut other substrates like masonry, glass and metal frames. Raised shoulder and extensive perforations along flange ensure excellent finishing compound adhesion and flush finish. Moistureand thermal-resistant properties make this ideal around bathtubs, showers, windows and skylights. Rustproof, dent-resistant, easy to cut and install.

Mudable J-bead is used to cover

	Si	ize
Product code	Width (in)	Length (ft)
	1/2	8
VLMJ		10
	5/8	8
		10

#### VINYL L-STOP BEAD



ClarkDietrich L-stop bead creates a clean detail at gypsum panel terminations into doors, windows and ceilings. Easily attaches with nails, screws or staples to studs through bead flange. Multiple perforations along 1-1/4" flange and raised shoulder enhance strong compound adhesion and provide for a flush finish. Rustproof, dent-resistant and easy to field cut without distorting profile or leaving sharp edges and burrs.

Product code	Si	ze
Product code	Width (in)	Length (ft)
	1/2	8
VLLS		10
VLL5	F/0	8
	5/8	10

# VINYL Rip Bead[™] L-TRIM



ClarkDietrich Vinyl Rip Bead™ L-trim produces an exceptional finish at intersection of gypsum panels to ceiling grid, window returns and dissimilar wall types. A tear-away strip provides a protective edge and guide for drywall finishing knives. Once joint compound is applied, finished and painted, remove the tear-away strip to form a crisp, clean edge.

Product code	Size		
Product code	Width (in)	Length (ft)	
VLZL	1/2	8	
	1/2	10	
	5/8	8	
	5/6	10	

#### VINYL PARTITION END CAP FOR 1/2" OR 5/8" BOARD





Vinyl partition end caps quickly finish doorways, knee walls and wall ends, providing a finished face. Designed with a special factory punched "T" slotted flange, they can be easily cut to form arches or curves. Instead of installing two corner beads, you install a single piece, using less compound. Easy to cut, rustproof and dent-resistant.

B I I I	Size		
Product code	Width (in)	Length (ft)	
PEC50	2-1/2	10	
(1/2")	3-5/8		
PEC58	2-1/2	10	
(5/8")	3-5/8		

#### VINYL 093 DRYWALL CONTROL JOINT






between abutting gypsum panels to relieve stresses of expansion and contraction of drywall in large ceiling and wall expanses over 30'. Typically installed from door header to ceiling, from floor to ceiling in long partition runs, and from wall to wall in large ceiling areas. Remove plastic tape (protects 1/4" opening x 7/16" deep reveal) after compound is applied and finished.

Vinyl 093 control joint is applied

Product	Size	
code	Width (in)	Length (ft)
VCJT	3/32	10

**Note:** Where sound transmission is a consideration, an approved seal must be provided behind the control joint.





**BULLNOSE "J" BEAD** 


Vinyl Corp. bullnose "J" bead is designed to cover the raw edges of wallboard with a 3/4" radius bead. The perforated flange accepts joint compound or veneer plaster for a flush finish.

# BULLNOSE "J" BEAD

Product code	Board thickness (in)	Size	Pcs./Box
BJB50	1/2	1" perforated flanges,	50
BJB58	5/8	3/4" back leg	50







Vinyl Corp. bullnose "J" bead for surface application is designed to be applied after the wallboard is installed. Cover the raw edges of wallboard with a 3/4" radius bead. The perforated flange accepts joint compound or veneer plaster for a flush finish.

Product code	Board thickness (in)	Size	Pcs./Box
BJB50S	1/2	4" perforeted florage	50
BJB58S	5/8	1" perforated flanges	50


#### Durable beauty starts beneath the surface.

Whether using conventional or veneer plaster, having the right trims, control joints and corner reinforcements is an integral part of the wall system's appearance and long-term performance. ClarkDietrich's history in the manufacturing of metal lath and accessories gives us unique knowledge of this trade and the product quality it requires.


Metal lath and accessories create a strong mechanical bond with plaster, stucco and veneer, providing superior strength and reinforcement. Expanded mesh and rigid pronounced edges provide excellent keying and exacting grounds for superior bonding and finishing to minimize cracks and shadowing. Products can be readily shaped to enable ornamental contours not possible with other materials. Applications include interior and exterior walls, ceilings, soffits, fascia and ceramic tile underlayment for both commercial and residential construction.

- Flat diamond mesh, self-furring dimpled and V-groove and high rib lath
- Wide selection of beads, screeds, joints and trim, in metal and vinyl
- Strength, flexibility, impact resistance
- Fire resistance: two hours for partitions, four hours for ceilings and columns
- Extremely difficult to penetrate, providing security against break-through

General notes/limitations: Metal lath products should not be used with magnesium oxychloride cement stuccos or stuccos containing calcium chloride additives. In ceiling assemblies, certain precautions concerning construction, insulation and ventilation are necessary for good performance.

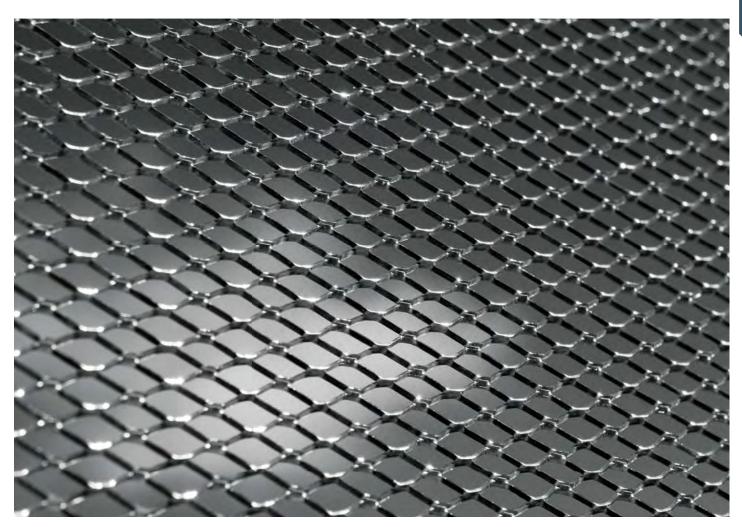

#### GALVANIZED Junior™ MESH LATH (F)




ClarkDietrich Junior™ diamond mesh lath is used as a substrate for Portland cement or gypsum plaster stucco on either interior or exterior walls, ceilings, soffit and fascia surfaces, and can be used under ceramic tile in wall, ceiling and floor applications. It's useful in all generalpurpose applications and is the best lath available for ornamental work and contoured surfaces, as well as spray-applied fireproofing.

	W/-:-L+	Size	
Product code	Weight (Ibs/yard²)	Width (in)	Length (in)
LAM (O)	1.75	27	97
	2.5		
	3.4		

O = Paper is offset a minimum of 2" on one long edge and end to ensure proper lath-to-lath laps and a minimum 1" paper overhang on the opposing short edge.

Note: Grade D Asphalt paper-backed (APB) lath is available for this product.

#### SELF-FURRING DIMPLED LATH (SFD)




ClarkDietrich self-furring lath is manufactured with approximately 1/4" deep dimples that raise diamond mesh away from solid surfaces to enable thorough plaster or stucco penetration into and behind the lath for superior mechanical bonding. The dimples are spaced every 4–6" over the rectangular sheet. This lath is to be used in manufactured stone installations, per ASTM 1780.

Product code	Weight (Ibs/yard²)	Size	
		Width (in)	Length (in)
LAD (O)	1.75	27	97
	2.5		
	3.4		

O = Paper is offset a minimum of  $2^{"}$  on one long edge and end to ensure proper lath-to-lath laps and a minimum 1" paper overhang on the opposing short edge.

Note: Grade D Asphalt paper-backed (APB) lath is available for this product.

#### SELF-FURRING V-GROOVE MESH LATH (SFV)




Self-furring v-groove mesh lath is manufactured with five, approximately 1/4" deep embossed "V" ribs, spaced 6" o.c. along the length of the sheet. The Vs allow thorough penetration into and behind the lath for superior mechanical bonding. Use over solid surfaces like concrete, cement board, spray fireproofing, masonry, sheathing and to replaster over old surfaces. Fasteners installed into the v-groove assure adequate spacing, per ASTM C1063.

	147 1 1	Size	
Product code	Weight (Ibs/yard²)	Width (in)	Length (in)
1.0\/	1.75		
LAV (O)	2.5	27	97
(0)	3.4		

O = Paper is offset 2" on one long edge and end to ensure proper lath-to-lath laps and a minimum 1" paper overhang on the opposing short side.

**Note:** Grade D Asphalt paper-backed (APB) lath is available for various applications requiring a moisture barrier.

#### 3/8" HIGH RIB LATH



ClarkDietrich 3/8" high rib lath is the most rigid of all laths and provides the added support required when framing is more than 16" o.c. but does not exceed 24" o.c. Commonly used for soffits and ceilings under steel or wood joist construction and metal-reinforced concrete floors. 3/8" V-shaped ribs run the length of the sheet at 3-7/8" intervals and inverted 3/16" intermediate ribs.

	W/ 1 L	Size	
Product code	oduct code (lbs/yard²)	Width (in)	Length (in)
LAR	3.4	27	97

### SPRAY RIB LATH




A more rigid lath than diamond mesh lath. Spray rib lath is the same 3/8" rib lath except it's made with strips of 50 lb. brown kraft paper backing (between ribs), to help prevent loss of plaster over open framing or when spray-applied via the use of the plaster pump.

Product code		S	ize
	Weight (Ibs/yard²)	Width (in)	Length (in)
LARS	3.4	27	97

Available West Coast only.

### UTILITY LATH



ClarkDietrich utility lath is a superior multipurpose expanded steel product widely used for ceramic tile and floor leveling, and for plaster and stucco repair and remodel. It is available in both the Junior™ mesh style as well as selffurring dimpled product. The selffurring product is manufactured with 1/4" deep dimples that raise the mesh away from solid surfaces for superior mechanical bonding.

Product code	Width (in)	Length (in)
LAMU – Junior Mesh (O)	27	97
LADU – Dimpled Self-Furring (O)	27	97

O = Paper is offset 1" on one long edge and end to ensure proper lath-to-lath laps and a minimum 2" paper overhang on the opposing long edge and end.

**Note:** Asphalt paper-backed lath is available for various applications requiring a moisture barrier.

### BARRIER MESH




This tough, rigid heavy-gauge security mesh is used behind common-wall substrates to protect against break-ins and break-outs. Tough to smash or cut, it safeguards walls and ceilings in homes, apartments, offices, stores, vaults, storage areas and correctional facilities. Also fire-resistant, barrier mesh is a cost-effective, timesaving alternative to reinforced concrete or concrete block.

<b>D</b>	Th	ickness	kness c: SWD		kness c. SWD LWD		LWD	C-C	Percent of Open area						
Product code	Gauge	Overall thickness (in)	Size (in)	Width	Length (in)	of bond (SWD x LWD)									
	18	.039				.500" x 1.20"	60								
BM50	16	.050	1/2 96	1/2 96	1/2	48	.500" x 1.20"	63							
	13	.070			.500" x 1.20"	52									
DM75	13	.070	3/4 96	3/4 96	3/4	40	.923" x 2.00"	74							
BM75	10	.120				3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4 96
BM10	16	.050	1	96	48	1.090" x 2.00"	78								
	16	.048				1.33" x 3.00"	83								
BM15	13	.070	1-1/2	96	48	1.33" x 3.00"	80								
	10	.110				1.33" x 3.00"	75								

• Product comes standard as carbon steel; galvanized is available upon request.

Available in standard or flat.

### STRIP LATH



Strip lath is a flat, closed diamond, expanded metal strip used as plaster reinforcement over joints of nonmetallic lathing bases and where dissimilar bases join. It's commonly attached diagonally at the corners of doors, windows or areas prone to cracks. It may also be used to span pipe chases or reinforce other stress points such as the corners of openings in the stucco membrane within the lath system. For spray-fireproofing systems, strip lath provides pre-cut widths, easy-to-install mechanical breaks on painted steel.

Product	Size		
code	Width (in)	Length (ft)	
LAST	4	0	
LAST	6	8	

### Cornerite™ METAL LATH ANGLE



Cornerite[™] metal lath angle is used to reinforce all inside lath corners to reduce corner cracking. Formed from finished edge strip lath, it's bent lengthwise to a 100° angle to ensure a snug fit into 90° corners. It's commonly used when walls meet walls or ceilings, over inner angles of masonry construction. Cornerite is produced to ASTM C1063 standards.

	Size		
Product code	Width	Length (ft)	
	(in)	(fť)	
XRIT	2 x 2	4	
	2 x 2	8	
	3 x 3	8	

### Structalath[®] II



For residential/wood frame construction, Structalath[®] II is a welded wire lath engineered to enhance the performance of stucco cladding. Structa Wire Corp's Structalath reduces cracking and increases stucco embedment while providing worker-friendly benefits.

Si	ze			D. L. S
Width (in)	Length (ft)	Area (sq yds)	Weight/Roll (lbs)	Packaging Rolls/Pallet
38-3/8	150	53	52	32
54	100	53	54	25
48	112.5	53	54	25

Equivalent to 1.75 metal lath

Not available in all geographic areas

Structalath[®] is a registered trademark of Structa Wire Corp.

#### Twin Trac®



Structa Wire Corp's Twin Trac[®] is an innovative self-furring, reinforcing lath that simplifies the attachment of lath to wood and steel studs. Excellent for commercial construction, it has all the great features of regular Structalath plus eight secondary cold-rolled longitudinal wires that add strength to form a 'track' for convenient attachment. Also available in stainless steel.


Si	ze		W 1	<b>D</b> I .
Width (in)	Length (ft)	Area (sq yds)	Weight/Roll (lbs)	Packaging Rolls/Pallet
38-3/8	150	50	60	32

• Equivalent to 2.5 metal lath

• Not available in all geographic areas

Twin Trac® is a registered trademark of Structa Wire Corp.

### Mega Lath™



Structa Wire Corp's Mega Lath™ is self-furring, welded wire providing heavy-duty reinforcing for both stucco and stone installation. This product provides easy attachment for both wood and steel construction. It's specifically designed for stucco applications that require extra reinforcing.

	Size			W/ 1 1 / D 11	D. L. C
	Width (in)	Length (ft)	Area (sq yds)	Weight/Roll (lbs)	Packaging Rolls/Pallet
ĺ	30	108	30	57	48

• Equivalent to 3.4 metal lath

Not available in all geographic areas

Mega Lath™ is a trademark of Structa Wire Corp.

#### V Truss®



V Truss® for walls and ceilings was designed by Structa Wire Corp to improve the performance of stucco on overhead surfaces. This selffurring, welded wire lath is also approved for use on vertical surfaces and as a reinforcing component for rainscreen wall systems.

Si	ze		M 1 1 10 10 1	D. L. S
Width (in)	Length (in)	Area (sq yds)	Weight/Sheet (Ibs)	Packaging Sheets/Bundle
28	98	2.1	4.5	12

• Equivalent to 3/8" high rib metal lath

Not available in all geographic areas

• Also available with housewrap backing for open frame construction

V Truss[®] is a registered trademark of Structa Wire Corp.

#### **#1A EXPANDED FLANGE CORNER BEAD**



ClarkDietrich 1A expanded flange corner bead is used to provide strong corner reinforcement for conventional plaster applications. A solid metal nose provides a straight, rigid ground for screeding, and the 2-7/8" or 3" flanges can be flexed easily over irregular, uneven surfaces. Plaster keys near the solid nose provide increased reinforcement where needed and ensure straight corners.

		Size
Product code	Width (in)	Length (ft)
	0.7/0	8
CBXA	2-7/8	10
(galvanized)	3	8
		10
CBZA*	2-7/8	10
(zinc)	3	10

*Recommended for interior high-moisture exposure areas and exterior plaster applications.

### #2A Double-X™ CORNER BEAD



ClarkDietrich Double-X,[™] or 2A galvanized corner bead, provides additional rigidity for reinforcing plaster corners. The Double-X is an ideal choice for corners in high-traffic areas. Combination of expanded flanges and pronounced bead nose ensures effective corner alignment and efficient plaster keying from edge to nose.

	Siz	e
Product code	Width (in)	Length (ft)
CBXX	3-1/4	10

### #66 EXPANDED FLANGE CASING BEAD



ClarkDietrich #66 expanded flange casing beads are used as a plaster stop, an exposed trim around wall openings, and at junctions or intersections of plaster and other wall or ceiling finishes. Extra-long expanded flange for tie-on applications. Short 90° return flange at plaster surface ensures a neat finish.

Commonly applied under metal lath. Also used with plaster board, plaster bases, masonry construction or stucco applications. Also serves as a finish trim for thin veneer stone.

		Size	
Product code	Grounds (in)	Length (ft)	Weep hole
	3/8		
	1/2		
VVCD	5/8		
XXCB (galvanized)	3/4	10	None
(galvallizeu)	7/8		
	1		
	1-1/4		
	3/8		
	1/2		
XXZB	5/8		
(zinc)	3/4	10	None
(2000)	7/8		
	1		
	1-1/4		

Size

Length (ft)

10

10

Weep

hole

Yes

Yes

#### #66 EXPANDED FLANGE CASING BEAD WITH WEEP HOLE

Product code

XXCW

(galvanized)

XXZW

(zinc)

Grounds

(in)

3/8

1/2 5/8

3/4

7/8

1 1-1/4

3/8 1/2

5/8

3/4

7/8

1

1-1/4



Designed for use with select, tested and approved one-coat plaster systems, this version of the #66 expanded flange casing bead includes weep holes for moisture dissipation. Expanded flange is 3-1/8" wide to aid plaster keying.

NOTE: It is important to remember that casing beads with weep holes punched in the ground flange are for tested and approved one-coat systems. No other applications are implied or suggested.

# #66 N SHORT FLANGE CASING BEAD



ClarkDietrich #66 N short flange casing beads are used as plaster stops, as exposed trim around wall openings and junctions, or at intersections of plaster and other wall or ceiling finishes. Perforated 1-1/4" nailing flange aids attachment and plaster keying. When used in conjunction with lath, the 66 N is installed under the lath.

		Size	
Product code	Grounds (in)	Length (ft)	Weep hole
	3/8		
	1/2	10 No	No
SFCB	5/8		
(galvanized)	3/4		
(gaivanizeu)	7/8		
	1		
	1-1/4		
	3/8		
SFZB	1/2	10	No
(zinc)	3/4	10	INU
	7/8		

### #66 N SHORT FLANGE CASING BEAD WITH WEEP HOLE



This #66 N short flange galvanized casing bead has the same uses as the #66 expanded flange casing beads associated with select one-coat systems, but it has weep holes for moisture dissipation. Perforated 1-1/4" nailing flange aids attachment and plaster keying.

NOTE: It is important to remember that casing beads with weep holes punched in the ground flange are for tested and approved one-coat systems. No other applications are implied or suggested.

		Size	
Product code	Grounds (in)	Length (ft)	Weep hole
	3/8		
	1/2		
	5/8		
SFWB*	3/4	10	Yes
	7/8		
	1		
	1-1/4		

*Available in zinc as a custom order.

### **DOUBLE-V CONTROL JOINT #15**



Double-V, sometimes called M-Type control joints, relieves the stresses of basic expansion and contraction associated with inherent shrinkage during stucco curing and general thermal changes. Resists corrosion, plus expanded flanges allow for proper keying and easy installation. Ground heights include 3/8" for thin-coat plaster and 1/2", 3/4" and 7/8" for conventional plaster.

	Siz	e
Product code	Grounds (in)	Length (ft)
	3/8	
VVCJ	1/2	10
(galvanized)	3/4	10
	7/8	
)0/17	1/2	
VVJZ (zinc)	3/4	10
(21110)	7/8	

#### DOUBLE-J CONTROL JOINT #15 x 5



A general-purpose control joint offering exceptional expansion control for plastered walls and ceilings, the double-J expansion control joint has a 5/16" reveal and rolled outer edges that allow effective plaster bonding. This helps prevent visible separation cracks. The applied plastic tape keeps the reveal clean and is removed easily after finish application.

	Siz	ze
Product code	Grounds (in)	Length (ft)
XJ15	1/2	
(galvanized)	3/4	10
(gaivailizeu)	7/8	
7 14 5	1/2	
ZJ15 (zinc)	3/4	10
(ZITIC)	7/8	

### #30 Corner Master™ INSIDE JOINT



ClarkDietrich Corner Master™ #30 inside corner control joint is designed to provide stress relief at plaster wall inside corner intersections, by absorbing movement and controlling cracking. It has expanded flanges pre-formed at 90° for a flush fit at inside corners. Ground heights offered aid plaster keying and result in a clean, straight finish. Manufactured from galvanized steel for corrosion protection.

	Siz	e
Product code	Grounds (in)	Length (ft)
	1/2	
CR30	3/4	10
	7/8	

**CAUTION:** Joints and corners are a potential point of water intrusion. ClarkDietrich strongly recommends building paper be placed as flashing behind all joints and corners. Also, a bead of high-quality caulking should be applied under the joints prior to the attachment of the materials.

### **#40 2-PIECE EXPANSION JOINT**



ClarkDietrich expansion joint #40 is a two-piece slip joint that finishes butt ends of adjacent panels in wide or tall walls and ceilings, to allow for multi-directional movement. Ideal for joining dissimilar wall types such as wood framing to CMU and at construction joints. Use where excessive horizontal and vertical movement may occur. Adjustable expansion opening or reveal is 1/4" to 5/8".


	Size	e
Product code	Grounds (in)	Length (ft)
EJ40 (galvanized)	1/2 3/4 7/8	10
EZ40 (zinc)	1/2 3/4 7/8	10

**CAUTION:** Suggestions for installation precautions when installing two-piece expansion joints and double casing beads used as double expansion joints—ASTM C1063 requires that double casing beads used as a movement joint are installed "with a flexible barrier membrane behind the casing beads." It is ClarkDietrich's opinion that all two-piece joints, whether made from double casing beads or as a manufactured two-piece joint, should be installed with the flexible peel and stick membrane behind the joint. It is further recommended that they be filled with backer rod and a highly elastic top-quality sealant.

### 093 ZINC CONTROL JOINT



ClarkDietrich 093 zinc control joint is applied between abutting gypsum panels to relieve stresses of expansion and contraction of drywall and veneer plaster systems in wall expanses over 30,' and ceiling areas exceeding 2,500 square feet. It's installed from door header to ceiling, from floor to ceiling in long partition runs, and from wall to wall in large ceiling areas or in areas where framing or furring change direction. For interior or exterior applications.



**NOTE:** Where fire and sound control are prime considerations, an approved seal must be installed behind the control joint.

### ZINC CONTROL JOINTS 38, 50, 75 AND 100



Zinc control joints 38, 50, 75 and 100 are roll-formed from zinc to resist corrosion in both interior and exterior applications with gypsum or Portland cement plaster. An open slot, 1/4" wide and 1/2" deep, is protected with plastic tape that is removed after plaster and finish are completed. Perforated short flanges aid keying and wire attachment to metal lath.

	S	ize
Product code	Grounds (in)	Length (ft)
ZCJ3	3/8	
ZCJ5	1/2	10
ZCJ7	3/4	10
ZCJ1	1	

CAUTION: Joints and corners are a potential point of water intrusion. ClarkDietrich strongly recommends building paper be placed as flashing behind all joints and corners. Also, a bead of high-quality caulking should be applied under the joints prior to the attachment of the materials.

#### F.H.A.7 FOUNDATION WEEP SCREED



F.H.A.7 foundation weep screed protects the stop edges of stucco and exterior insulated finish system materials at the sill plate. Commonly referred to as F.H.A. screed, it meets all pertinent IBC/IRC requirements as part of a drainage system for exterior stucco applications.

		Size	
Product code	Grounds (in)	Depth (in)	Length (ft)
FHA7	7/8	3-1/2	10
FRA/	1-3/8	3-1/2	10

Also available without bonding holes and in 28 gauge (FHAE) for non-code work.

# 7/8" SILL SCREED



7/8" sill screed is a similar profile to the F.H.A.7 foundation weep screed except the bottom flange has been cut back to allow trowel access for cleaning excess material and trimming of the vapor barrier. It offers impact and splash protection, and meets all other applicable codes with respect to 3-1/2" nailing flange, 26 gauge galvanized steel and 7/8" ground.

		Size		
Product code	Grounds (in)	Depth (in)	Length (ft)	
SI36	7/8	5-1/2	10	

#### #1 J-WEEP WITH 2" NAILING FLANGE AND WEEP HOLE



1-3/8" J-weep low-back is commonly used as a stop around door and window openings or in areas where stucco or E.I.F.S. terminations abut dissimilar wall types. Nail, screw or staple-attach to the frame or sheathing, then foam insulation, cement board or metal lath can be installed over it. The protruding ridge of the metal must extend beyond the plane of overlaid materials.

		Size		Weep
Product code	Grounds (in)	Flange height (in)	Length (ft)	hole
JCLB	1-3/8	2	10	No
JWLB	1-3/8	2	10	Yes

NOTE: Do not use as a foundation weep screed for three-coat stucco or stone applications. It should only be used on approved one-coat systems.

# 3-1/2" J-WEEP HIGH-BACK PLASTER STOP



J-weep high-back plaster stop is a J-shaped square-nosed trim manufactured from 26 gauge galvanized steel. Punched weep holes allow for use as a sill weep screed or screed and trim around wall openings. Squared bends accommodate 1" rigid insulation and 3/8" one-coat stucco applications.

D. L. J.		Size		
Product code	Grounds (in)	Depth (in)	Length (ft)	Weep hole
JWP	7/8	3-1/2	10	Yes
JVVF	1-3/8	3-1/2	10	Tes

#### Mini-Bead™ 800 AND 900



ClarkDietrich Mini-Bead™ 800 and 900 are fine-mesh corner beads used to provide corner reinforcement for one- and two-coat veneer plaster systems. Mini-Bead 800 has 1/16" grounds for one-coat veneer plaster and 90 keys per linear foot for excellent bonding and strong corners. Mini-Bead 900 has 3/32" grounds for two-coat veneer plaster systems.

	roduct code Grounds (in)	Size	
Product code		Width (in)	Length (ft)
MB80 (galvanized)	1/16	1-1/4	8
MB90 (galvanized)	3/32	1-1/4	10
ZB80 (zinc)	1/16	1-1/4	10
ZB90 (zinc)	3/32	1-1/4	10

Note: Zinc Mini-Beads should be used in exterior finish systems.

#### #701A METAL J-TRIM WITH 3/32" AND 1/16" GROUNDS



ClarkDietrich veneer trims are J-shaped to fit standard gypsum panel depths with grounds to accommodate veneer finishes. They provide clean, neat edge protection for one- or two-coat veneer plaster finishes at gypsum panel terminations to wall openings and wall or ceiling intersections. Trim with 3/32" grounds is for two-coat veneers and trim with 1/16" grounds is for one-coat veneer plaster.

Our zinc alternatives provide ultimate corrosion protection for cement board and exterior applications.

	<b>C</b> 1	Si	re
Product code	Product code Grounds (in)	Width (in)	Length (ft)
	4/0	1/2	8
M71A	3/32	1/2	10
(galvanized)	3/32	5/8	8
			10
	1/16	1/2	8
M81A		1/2	10
(galvanized)		5/8	8
		5/0	10
Z71A	3/32	1/2	10
(zinc)	5/52	5/8	10
Z81A	1/16	1/2	10
(zinc)	1/10	5/8	10

### #701B METAL L-TRIM WITH 3/32" AND 1/16" GROUNDS



Our veneer trims are L-shaped trims designed for use at junctions of veneer gypsum base with rough concrete or masonry ceilings. Sized to fit standard gypsum plaster bases, the trim with 3/32" grounds is for two-coat veneer, and the trim with 1/16" grounds is for one-coat veneer plaster.

Our zinc alternatives provide the added benefit of ultimate corrosion protection for exterior applications.

	<b>C</b> 1		Grounds S		ze
Product code	Grounds (in)	Width (in)	Length (ft)		
		1/2	8		
M71B	3/32	1/2	10		
(galvanized)	(galvanized) 5/32 5/8	E/0	8		
		0/C	10		
	1/16	1/2	8		
M81B			10		
(galvanized)			8		
		5/0	10		
Z71B	3/32	1/2	10		
(zinc)	3/32	5/8	10		
Z81B	1/16	1/2	10		
(zinc)	1/10	5/8	10		

# WIRE CORNER REINFORCEMENT



A welded wire right angle assembly, affording a truer, stronger exterior corner that reduces cracking in Portland cement plaster.

Bullnose, Stockaid and Archaid are also available in stock 10' lengths.

	Siz	e
Product code	Flange (in)	Length (ft)
W951	2-1/2 x 2-1/2	10

Available West Coast only.

### TILE CAP




Preferred method where sink or lavatory is to be recessed. A punched metal strip attached to the front edge of the cabinet is used in some geographical areas as a screed and support for the countertop trim.

Product code	Length (ft)
TC127	5

### VINYL CORNER BEAD

JUMBO CORNER BEAD






Vinyl Corp. #1 corner bead provides hard-to-damage, rustproof, straight corners, and is easily curved for smooth arches. A heavier version of our #1 corner bead, the #2 corner bead also has wider flanges. #2 corner beads should be used where a more durable corner is required.

Product code	Length (ft)	Grounds	Size (in)	Pcs./Box
#1	7, 8, 9, 10	Any	2-1/2 x 2-1/2	50
#2	8, 10	Any	2-3/4 x 2-3/4	40






Vinyl Corp. jumbo corner bead is designed for deep fills or irregular corner conditions.

Product code	Grounds	Size (in)	Pcs./Box
#40	Any	4-1/4 x 4-1/4	25
#30	Any	3 x 3	25
#43	Any	4-1/4 x 3	25
#4150	Any	4-1/4 x 1-1/2	25
#3150	Any	3 x 1-1/2	25

U.S. Patent Nos. 5,816,002 and 6,070,374



### VINYL Archmaker™ CORNER BEAD






Our #1 Archmaker™ corner bead provides true, uniform, curved or arched reinforcement. The heavier version of our #1 Arch, our #2 Arch corner bead should be used for applications requiring increased damage resistance. The #1X Archmaker corner bead provides a true, uniform, curved or arched reinforcement with a 1-1/2" flange for narrow returns. The #2X Arch is a heavier version of our #1X Arch and should be used for increased damage resistance. All of our Archmaker corner beads conform to most arched and curved designs.

Product code	Grounds	Size (in)	Pcs./Box
#1Arch	Any	2-1/2 x 2-1/2	50
#2Arch	Any	2-3/4 x 2-3/4	40
#1XArch	Any	2-1/2 x 1-1/2	50
#2XArch	Any	2-3/4 x 1-1/2	40

U.S. Patent Nos. 5,816,002 and 6,070,374

### VINYL BULLNOSE CORNER BEAD





Designed for use in applications such as schools and hospitals, Vinyl Corp.'s #1B 3/4" bullnose corner bead provides hard-to-damage, rustproof, soft corners. The #2B bullnose corner bead is a heavier version that is appropriate for applications where a more durable corner is required.

Product code	Length (ft)	Grounds	Size (in)	Pcs./Box
#1B	7, 8, 9, 10	Any	2-1/2 x 2-1/2	20
#2B	8, 10	Any	2-3/4 x 2-3/4	16

# VINYL BULLNOSE Archmaker™ CORNER BEAD






#1 bullnose Archmaker[™] corner beads offer a true, uniform, curved or arched corner reinforcement with a bullnose design. The #2B bullnose Archmaker corner bead provides a heavier option for use where a more durable corner is desired. Both conform to most arched and curved designs.

Product code	Length (ft)	Grounds	Size (in)	Pcs./Box
#1BArch	7, 8, 9, 10	Any	2-1/2 x 2-1/2	20
#2BArch	8, 10	Any	2-3/4 x 2-3/4	16

U.S. Patent Nos. 5,816,002 and 6,070,374





Like their metal counterparts, vinyl casing beads are used to terminate stucco and stone against doors, windows and dissimilar surfaces. Casing beads should not be used in lieu of foundation weep screeds at the base of the wall, as they do not meet building code requirements.


Product code	Grounds (in)	Dimensions	Pcs./Carton
6625	1/4		100
6638	3/8		100
6650	1/2	1 2/4" flop go width	100
6658	5/8	1-3/4" flange width perforated flange	100
6675	3/4	periorated hange	75
6678	7/8		75
66100	1		75

Visit vinylcorp.com for more vinyl accessories.



### VINYL CONTROL JOINT

VINYL CASING BEADS



Control joints are designed to relieve stress and assist in controlling cracking in large areas of walls and ceilings. Vinyl Corp.'s specially designed Connector Clips are provided for alignment and base for sealants.

Product code	Grounds (in)	Size (in)	Pcs./Box
1538	3/8	4 flange width	35
1550	1/2		35
1558	5/8		30
1575	3/4		26
1578	7/8		20
15100	1		20

NOTE: Connector Clips are not provided with 3/8" ground.

Positive attachment of each flange or control joint to separate framing is required. Caulk all intersections, butt joints, ends and corners at time of installation.

### VINYL CONTROL JOINT

#### With removable tape





Used to provide stress relief and assist in controlling cracking in large areas of walls and ceilings, control joints with removable tape protect the deep "V" expansion slot during construction. Specially designed Connector Clips are provided for alignment and base for sealants. Recommended for smooth finishes.


Product code	Grounds (in)	Size (in)	Pcs./Box
1525X	1/4	2-1/4 flange width	50
1538X	3/8		50
1550X	1/2		40
1558X	5/8	2 1/4 floor go width	35
1575X	3/4	3-1/4 flange width	30
1578X	7/8		30
15100X	1		30

NOTE: Connector Clips are not provided for 1/4" or 3/8" grounds.

Positive attachment of each flange of control joint to separate framing is required. Caulk all intersections, butt joints, ends and corners at time of installation.

### 3-1/2" VINYL WEEP SCREED






Designed to relieve moisture from stucco/stone and act as a stop. Install on frame construction where stucco/ stone and foundation walls meet. Shown here is standard weep screed.

Product number	Grounds (in)	Dimensions	Pcs./Carton
WS38-350U	3/8		50
WS50-350U	1/2		50
WS58-350U	5/8	4" overall width,	40
WS75-350U	3/4	unperforated flange	40
WS78-350U	7/8		30
WS138-350U	1-3/8		30

Caulk all intersections, butt joints, ends and corners at time of installation.

Other variations of the vinyl weep screed can be found at vinylcorp.com.

### VINYL FOUNDATION WEEP SCREED



Foundation weep screed acts as a stop, and is designed with an unperforated flange, allowing moisture removal from stucco installations on frame construction at the foundation line.

Product code	Grounds (in)	Size (in)	Pcs./Box
FWS6678W	7/8	3-1/2 overall width	40
FWS66138W	1-3/8	5-1/2 Overall width	40

Caulk all intersections, butt joints, ends and corners at time of installation.



### Any clip or connector you'd need, exactly when you want it. Strength is in the details.

For the widest and most cost-effective array of clips, connectors, supports and framing hardware, turn to ClarkDietrich Clip Express.[™] With Clip Express, you get fully engineered, rigorously tested and precisionformed connectors each and every time. Many of our connectors were developed by, or in conjunction with, framing installers in order to deliver highperformance products for significant installed savings. But what makes Clip Express unique is not simply the vast lineup of products. It's our delivery, and pronto. Because we know that staying on schedule is crucial, we ship most orders the same day they are received.

We know that having the right products, at the right time, and at the right price is absolutely essential to getting the job done. ClarkDietrich Clip Express is ready to deliver. When, how and where you need it.

- Curtain wall/bypass connections
- Head-of-wall, deflection and rigid connections
- Floor joist, roof and truss framing connections
- Bridging, bracing and backing connections
- Gusset plates, specialty clips, connectors and fasteners
- Overnight delivery available



ClarkDietrich FastClip™ slide clip deflection clips are used to attach exterior curtain wall studs to the building structure and provide for vertical building movement

independent of the cold-formed

steel framing. FastClip slide

clips install quickly with screws

or powder-actuated fasteners. Embossed with fastening patterns to ensure accurate placement.

The ClarkDietrich Fast Strut™ curtain wall connector employs the FastClip technology for curtain wall stud attachment and is commonly used when large standoff conditions exist. Fast Strut products allow

framing attachment well beyond the

perimeter of the structural steel-or when the spandrel beams are set back from the edge of the structure. Attached to the underside of structural members with screws, welds or powder-actuated fasteners.

### FastClip[™] SLIDE CLIP





FastClip Slide Clip (3-1/2")



FastClip Slide Clip (5-1/2")



Fast Strut 12



### Flat Tail Slide Clip™

111

ClarkDietrich' is used to atta wall studs to th providing for 2 movement independent of the coldformed steel framing. It provides variable standoff, eliminating the need for shims or additional framing components. Restricts lateral movement, but enables the curtain wall system to move vertically.

D	Thickness			C'	D I .
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton
FCSC	14	68	0.0713	1-1/2 x 3-1/2 x 4-1/2	05
FCSC	14	68	0.0713	1-1/2 x 5-1/2 x 4-1/2	25

3-1/2" FCSC includes 55 FastClip deflection screws per carton.

5-1/2" FCSC includes 80 FastClip deflection screws per carton.

U.S. Patent No. 6,688,069



D. L. J.	Thickness			c:	D I .	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton	
FS12	14	68	0.0713	4 x 2 x 12-1/4		
FS15	14	68	0.0713	4 x 2 x 15-1/4	10	
Custom lengths	14	68	0.0713	per customer specs		

Includes 55 FastClip deflection screws per carton. U.S. Patent No. 6,688,069



Stud width (in)

3-5/8-8

Design thickness (in)

0.1242

Packaging Pcs./Bucket

25

n's Flat Tail Slide Clip™			Thickness	
ach exterior curtain	Product code	Gauge	Mils	D thick
he building structure,	FTSC	10	118	0
2-1/4" vertical building	Includes 80 Fa	stClip deflection	on screws per bi	ucket.







# Slide Clip™





A ClarkDietrich Slide Clip™ is used to attach exterior curtain wall studs to the building structure and provide for vertical building movement independent of the cold-formed steel framing. Slide clips are used in bypass framing situations and are normally welded or otherwise fastened to the vertical leg of a structural angle at the floor or roof edge.

		Thickne	SS	C:	D I .	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton	
SD	14	68	0.0713	2-3/8 x 5	FO	
SD	12	97	0.1017	2-3/8 x 5	50	

### Fast Top™ CLIP





FTC3



FTC5

#### ClarkDietrich Fast Top[™] clips are used in head-of-wall deflection conditions for in-fill curtain wall assemblies to provide for vertical movement. Use in place of, or in combination with, deflection track. They also make a positive attachment and eliminate the need to install bridging continuously throughout

the uppermost punchouts.

		Thickness				C: 1 1		
Product code	Gauge	Mils	Design thickness (in)	Web width (in)	Leg length (in)	Standard length (ft)	Packaging Pcs./Carton	
FTC3	14	68	0.0713	4	1-1/2	3-1/4	25	
FTC5	14	68	0.0713	4	1-1/2	4-3/4	30	

FTC3 includes 55 FastClip™ deflection screws per carton. FTC5 includes 110 FastClip deflection screws per carton. U.S. Patent No. 6,688,069

# EXTENDED FastClip[™] SLIDE CLIP



deflection clips are used to attach exterior curtain wall studs to the building structure and provide for vertical building movement independent of the cold-formed steel framing. Clips are ideal for medium to larger standoff conditions. Install quickly with screws, welds or powderactuated fasteners, and they provide adjustable standoff to ensure a plumb wall plane.

ClarkDietrich Extended FastClip™

		Thicknes	s	C:	D. I	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
FCEC	14	68	0.0713	1-7/8 x 6 x 4-3/4	25	
FCEC	14	68	0.0713	1-7/8 x 8 x 4-3/4	25	
FCEC	14	68	0.0713	1-7/8 x 10 x 4-3/4	25	
FCEC	14	68	0.0713	1-7/8 x 12 x 4-3/4	25	

Includes 80 FastClip deflection screws per bucket. U.S. Patent No. 6,688,069

# Extended Uni-Clip™



Uni-Clip™ rigid framing clip is used to attach exterior wall studs to the structure of the building. Designed to resist horizontal and vertical loads, the extended rigid clips install easily with screws, powder-actuated fasteners, or welds. This clip is ideal for all medium and large standoff conditions.

ClarkDietrich's Extended

D. L. i		Thicknes	s	C:	Packaging
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./ Bucket
UXRC	14	68	0.0713	1-7/8 x 4-7/8 x 6	25
UXRC	14	68	0.0713	1-7/8 x 4-7/8 x 8	25
UXRC	14	68	0.0713	1-7/8 x 4-7/8 x 10	25
UXRC	14	68	0.0713	1-7/8 x 4-7/8 x 12	25





# Uni-Clip[™] END CLIP





ClarkDietrich's Uni-Clip[™] end clip is a universal framing clip used to attach and support numerous rigid framing conditions. The Uni-Clip framing clip has a stiffened corner that provides superior design values and is installed easily with screws or powder-actuated fasteners. This clip is ideal for most rigid connections, including shear, tension and two-axis loading.

Product code	Thickness			<u> </u>	
	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton
UCEC	14	68	0.0713	3-1/2 x 1-1/2 x 4-1/2	25

U.S. Patent No. 6,688,069



ClarkDietrich EasyClip™ E-Series™ support clips are used for rigid standoff connections. The 4" wide leg provides extra length to achieve standoff connections up to 3". These support clips are commonly used in bypass wall conditions, solid blocking attachments in joist framing, and to secure rafter framing to the primary structure. EasyClip E-Series support clips are prepunched for faster and more accurate fastener placement.

D. L.		Thic	kness	<u>c:</u>	D I .
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
E543				4 x 1-1/2 x 3	100
E545				4 x 1-1/2 x 5	100
E547	16	54	0.0566	4 x 1-1/2 x 7	100
E549				4 x 1-1/2 x 9	50
E541				4 x 1-1/2 x 11	50
E683				4 x 1-1/2 x 3	100
E685				4 x 1-1/2 x 5	100
E687	14	68	0.0713	4 x 1-1/2 x 7	80
E689				4 x 1-1/2 x 9	50
E681				4 x 1-1/2 x 11	50
E973				4 x 1-1/2 x 3	50
E975				4 x 1-1/2 x 5	50
E977	12	97	0.1017	4 x 1-1/2 x 7	50
E979				4 x 1-1/2 x 9	50
E971				4 x 1-1/2 x 11	40

### EasyClip S-Series™ SUPPORT CLIP

EasyClip[™] E-Series[™] SUPPORT CLIP



ClarkDietrich EasyClip S-Series™ support clips are used for rigid connections in window and door framing, joist, bypass or other miscellaneous connections to secure one framing member to another—or to secure framing members to the structural frame. EasyClip S-Series clips are prepunched for faster and more accurate fastener placement.

D I .		Thie	ckness	<b>C</b> :	D 1 1
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
S543				1-1/2 x 1-1/2 x 3	400
S545				1-1/2 x 1-1/2 x 5	200
S547	16	54	0.0566	1-1/2 x 1-1/2 x 7	100
S549				1-1/2 x 1-1/2 x 9	100
S541				1-1/2 x 1-1/2 x 11	100
S683				1-1/2 x 1-1/2 x 3	200
S685				1-1/2 x 1-1/2 x 5	200
S687	14	14 68 0.0713	0.0713	1-1/2 x 1-1/2 x 7	100
S689				1-1/2 x 1-1/2 x 9	100
S681				1-1/2 x 1-1/2 x 11	100
S973				1-1/2 x 1-1/2 x 3	200
S975				1-1/2 x 1-1/2 x 5	150
S977	12	97	0.1017	1-1/2 x 1-1/2 x 7	100
S979				1-1/2 x 1-1/2 x 9	80
S971	1			1-1/2 x 1-1/2 x 11	70



#### EasyClip U-Series[™] CLIP ANGLE





ClarkDietrich EasyClip™ U-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging or for miscellaneous rigid connections. U-channel is passed through the stud knockout and an EasyClip U-Series clip is screwattached or welded to provide a rigid connection. These clips are prepunched for faster, more accurate fastener placement. Do not use in bridging applications when the stud width exceeds 6."

D I .	Thickne		kness	Size	D I I
Product code	Gauge	Mils	Design thickness (in)	(in)	Packaging Pcs./Bucket
U543				1-1/2 x 1-1/2 x 3-3/8	400
U545	16	54	0.0566	1-1/2 x 1-1/2 x 5-3/4	200
U547	10	54	0.0000	1-1/2 x 1-1/2 x 7-3/4	100
U549				1-1/2 x 1-1/2 x 9-3/4	100
U683				1-1/2 x 1-1/2 x 3-3/8	200
U685	14	68	0.0713	1-1/2 x 1-1/2 x 5-3/4	170
U687	14	00	0.0713	1-1/2 x 1-1/2 x 7-3/4	100
U689				1-1/2 x 1-1/2 x 9-3/4	100
U973				1-1/2 x 1-1/2 x 3-3/8	200
U975	12	07	0.1017	1-1/2 x 1-1/2 x 5-3/4	130
U977	12	97	0.1017	1-1/2 x 1-1/2 x 7-3/4	100
U979				1-1/2 x 1-1/2 x 9-3/4	80

### EasyClip B-Series[™] CLIP ANGLE





ClarkDietrich EasyClip B-Series™ clip angles are used to secure U-channel to wall studs in backto-back framing applications and for various miscellaneous rigid connections. The shorter length of the B-Series clip enables it to be installed inside the C-shape. It can also be used to secure lateral bridging on single studs where the clip is preferred to be inside the C-shape. Do not use in lateral bridging when stud width exceeds 6".

Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
B543				1-1/2 x 1-1/2 x 3	400
B545	16	54	0.0566	1-1/2 x 1-1/2 x 5-1/4	200
B547	10	54	0.0500	1-1/2 x 1-1/2 x 7-1/4	100
B549				1-1/2 x 1-1/2 x 9-1/4	100
B683			0.0713	1-1/2 x 1-1/2 x 3	200
B685	14	60		1-1/2 x 1-1/2 x 5-1/4	170
B687	14	68		1-1/2 x 1-1/2 x 7-1/4	100
B689				1-1/2 x 1-1/2 x 9-1/4	100
B973				1-1/2 x 1-1/2 x 3	200
B975	10	97	0.4047	1-1/2 x 1-1/2 x 5-1/4	130
B977	12	97	0.1017	1-1/2 x 1-1/2 x 7-1/4	100
B979				1-1/2 x 1-1/2 x 9-1/4	80

# EasyClip X-Series™ CLIP ANGLE





ClarkDietrich EasyClip X-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging. U-channel is passed through the stud knockout and an EasyClip X-Series clip is screwattached or welded to provide a rigid connection. X-Series clip angles and U-channel should not be used in lateral bridging when stud width exceeds 6."

Product		Thickness			Destruction
code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
X543				2 x 2 x 3-3/8	200
X545	10	6 54	0.0566	2 x 2 x 5-3/4	170
X547	16			2 x 2 x 7-3/4	100
X549				2 x 2 x 9-3/4	100
X683		68		2 x 2 x 3-3/8	200
X685			68 0.0713	2 x 2 x 5-3/4	100
X687	14			2 x 2 x 7-3/4	100
X689				2 x 2 x 9-3/4	80
X973				2 x 2 x 3-3/8	100
X975	12	97	0.1017	2 x 2 x 5-3/4	100
X977		97	0.1017	2 x 2 x 7-3/4	60
X979				2 x 2 x 9-3/4	60

### FastBridge™ CLIP





The ClarkDietrich FastBridge[™] Clip is used to secure 1-1/2" U-channel [Cold Rolled Channel (CRC)] to structural wall studs when used in load-bearing or curtain wall applications. The wall stud friction fit design allows for as little as one screw for the connection to the U-channel. Do not use in studs over 8" wide.

		Dealessing		
Product code	Gauge	Mils	Design thickness (in)	Packaging Pcs./Bucket
FB43	18	43	0.0451	200
FB68	14	68	0.0713	200

### SwiftClip[™] LS-Series[™] SUPPORT CLIP





SwiftClip™ LS-Series™ support clips are used in multiple construction projects, specifically in conjunction with studs and track. The L-shaped clips fit between the stud flanges, so that shorter length clips do not need to be ordered. These labor timesavers include prepunched holes for quicker screw attachments, and are punched to accommodate for U-channel lateral bracing connections.

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
LS543				1-1/2 x 1-1/2 x 3-1/4	300
LS545				1-1/2 x 1-1/2 x 5-1/2	200
LS547	16	54	0.0566	1-1/2 x 1-1/2 x 7-1/4	150
LS549				1-1/2 x 1-1/2 x 9-1/4	100
LS541				1-1/2 x 1-1/2 x 11-1/4	100
LS683				1-1/2 x 1-1/2 x 3-1/4	300
LS685				1-1/2 x 1-1/2 x 5-1/2	200
LS687	14	68	0.0713	1-1/2 x 1-1/2 x 7-1/4	100
LS689				1-1/2 x 1-1/2 x 9-1/4	100
LS681				1-1/2 x 1-1/2 x 11-1/4	50
LS973				1-1/2 x 1-1/2 x 3-1/4	200
LS975				1-1/2 x 1-1/2 x 5-1/2	100
LS977	12	97	0.1017	1-1/2 x 1-1/2 x 7-1/4	100
LS979				1-1/2 x 1-1/2 x 9-1/4	50
LS971				1-1/2 x 1-1/2 x 11-1/4	50

# EasyClip[™] A-Series[™] END CLIP



ClarkDietrich EasyClip™ A-Series™ end clips are most commonly used to reinforce connections in kneewall applications or to reinforce jamb stud connections to the primary frame. These clips are unpunched, as the specific application will determine the appropriate number and placement of fasteners.

D I .	Thickness			Size	D 1 1
Product code	Desi	Design thickness (in)	(in)	Packaging Pcs./Bucket	
A543	40	<b>E</b> 4	0.0500	3 x 3 x 3	100
A546	16	54	0.0566	3 x 3 x 6	100
A683	4.4	68	0.0713	3 x 3 x 3	100
A686	14	00	0.0713	3 x 3 x 6	100
A973	12	97	0.1017	3 x 3 x 3	100
A976	12	91	0.1017	3 x 3 x 6	50

### EasyClip[™] D-Series[™] ANCHOR CLIP



CLIP



ClarkDietrich EasyClip™ D-Series™ anchor clips are high-performance, cost-effective solutions for knee wall-to-foundation connections, light-duty shearwall-to-foundation connections and truss-to-wall connections. These multi-application clips feature reinforced stiffening ribs that provide superior design values for maximum performance.

		Thickness		C:	D I	
Product code	Gauge	Gauge Mils De thickn		Size (in)	Packaging Pcs./Bucket	
D683	4.4	<u></u>	0.0740	2 x 2 x 3-1/2		
D685	14	68	0.0713	2 x 2 x 5-1/2	40	
D973	40	07	0.4047	2 x 2 x 3-1/2	40	
D975	12	97	0.1017	2 x 2 x 5-1/2		

### EasyClip T-Series™ TALL ANCHOR CLIP



ClarkDietrich EasyClip T-Series™ tall anchor clips are highperformance, cost-effective solutions for knee wall-tofoundation connections, lightduty shearwall-to-foundation connections and truss-to-wall connections. They are designed to resist horizontal, torsional and vertical (uplift) loads.

D. L.		Thic	kness	<b>C</b> 1	D L I	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
T683	4.4	60	0.0710	2 x 4 x 3-1/2		
T685	14	68	0.0713	2 x 4 x 5-1/2	40	
T973	40	97	0.4047	2 x 4 x 3-1/2	40	
T975	12 0		0.1017	2 x 4 x 5-1/2		



# EasyClip[™] U-Series[™] CLIP ANGLE



CLIP



ClarkDietrich EasyClip™ U-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging or for miscellaneous rigid connections. U-channel is passed through the stud knockout and an EasyClip U-Series clip is screwattached or welded to provide a rigid connection. These clips are prepunched for faster, more accurate fastener placement. Do not use in bridging applications when the stud width exceeds 6."

D I .	Product code Gauge Mils Design thickness (in)		kness	Size	D I
				Size (in)	Packaging Pcs./Bucket
U543				1-1/2 x 1-1/2 x 3-3/8	400
U545	10	54	0.0566	1-1/2 x 1-1/2 x 5-3/4	200
U547	16		0.0566	1-1/2 x 1-1/2 x 7-3/4	100
U549					1-1/2 x 1-1/2 x 9-3/4
U683		60		1-1/2 x 1-1/2 x 3-3/8	200
U685	4.4		0.0713	1-1/2 x 1-1/2 x 5-3/4	170
U687	14	68	0.0713	1-1/2 x 1-1/2 x 7-3/4	100
U689				1-1/2 x 1-1/2 x 9-3/4	100
U973				1-1/2 x 1-1/2 x 3-3/8	200
U975	12	07	0.1017	1-1/2 x 1-1/2 x 5-3/4	130
U977	12	97	0.1017	1-1/2 x 1-1/2 x 7-3/4	100
U979				1-1/2 x 1-1/2 x 9-3/4	80

### EasyClip B-Series™ CLIP ANGLE



ClarkDietrich EasyClip B-Series™ clip angles are used to secure U-channel to wall studs in backto-back framing applications and for various miscellaneous rigid connections. The shorter length of the B-Series clip enables it to be installed inside the C-shape. It can also be used to secure lateral bridging on single studs where the clip is preferred to be inside the C-shape. Do not use in lateral bridging when stud width exceeds 6".

		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
B543				1-1/2 x 1-1/2 x 3	400
B545	16	54	0.0566	1-1/2 x 1-1/2 x 5-1/4	200
B547	10	54	0.0500	1-1/2 x 1-1/2 x 7-1/4	100
B549				1-1/2 x 1-1/2 x 9-1/4	100
B683				1-1/2 x 1-1/2 x 3	200
B685	14	<u> </u>	0.0713	1-1/2 x 1-1/2 x 5-1/4	170
B687	14	68	0.0715	1-1/2 x 1-1/2 x 7-1/4	100
B689				1-1/2 x 1-1/2 x 9-1/4	100
B973				1-1/2 x 1-1/2 x 3	200
B975	12	97	0.1017	1-1/2 x 1-1/2 x 5-1/4	130
B977	12	97	0.1017	1-1/2 x 1-1/2 x 7-1/4	100
B979				1-1/2 x 1-1/2 x 9-1/4	80

### EasyClip X-Series™ CLIP ANGLE

ClarkDietrich EasyClip X-Series[™] clip angles are used to secure U-channel to wall studs for lateral bridging. U-channel is passed through the stud knockout and an EasyClip X-Series clip is screwattached or welded to provide a rigid connection. X-Series clip angles and U-channel should not be used in lateral bridging when stud width exceeds 6."

Product	Thickness				Packaging
code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
X543		54		2 x 2 x 3-3/8	200
X545	16		0.0566	2 x 2 x 5-3/4	170
X547	16			2 x 2 x 7-3/4	100
X549				2 x 2 x 9-3/4	100
X683		68	0.0713	2 x 2 x 3-3/8	200
X685	14			2 x 2 x 5-3/4	100
X687	14			2 x 2 x 7-3/4	100
X689	-			2 x 2 x 9-3/4	80
X973				2 x 2 x 3-3/8	100
X975	12	07	0.4047	2 x 2 x 5-3/4	100
X977		97	0.1017	2 x 2 x 7-3/4	60
X979	-			2 x 2 x 9-3/4	60



#### Spazzer[®] 9200 SPACER AND BRIDGING BAR





The TradeReady[®] Spazzer[®] 9200 bar is a pre-notched, 20 gauge, galvanized steel spacer and bridging bar. It facilitates rapid erection of studs into a rigid, accurately laid out gridwork that has excellent resistance to stud rotation and displacement. Hanging drywall is also faster and easier because the Spazzer 9200 bar eliminates the bow that often occurs in tall interior studs.

Product		Thie	ckness	Size	Packaging	
code	Gauge	Mils	Design thickness (in)	(in)	Pcs./Box	Pcs./Skid
SPZD	20	33	0.0346	7/8 x 7/8 x 50	N/A	1350

- Eliminates stud spacing layout at deck
- Improves drywall installation speed
- Automatically positions and rigidly holds studson 16" or 24" centers without fasteners
- Eliminates clip angles and the labor required to install them
- U.S. Patent Nos. 5,784,850 and 6,021,618

### Spazzer 5400





ClarkDietrich TradeReady Spazzer 5400 spacer bar is a galvanized steel spacer and bridging bar, engineered to facilitate the rapid erection of exterior curtain wall framing, load-bearing walls and high interior partitions constructed of structural studs. Proprietary prepunched slots provide excellent torsional and lateral stud restraint.

		Thickness		Size (in)	Packaging		
Product code	Gauge	Mils	Design thickness (in)		Pcs./Bundle	Pcs./Skid	
SPZS	16	54	0.0566	1-1/4 x 1-1/4 x 50	N/A	680	

- Fast, easy and efficient
- Reduces labor up to 40%
- Eliminates clip angles, bridging clips and welding
- Pre-notched at 12," 16" and 24" intervals so no layout is required
- U.S. Patent No. 6,708,460 and other patents pending.

### Spazzer Bar Guard™





Used to secure the Spazzer 5400 spacer bar when used in loadbearing applications.

0	Product code	Size (in)	Packaging Pcs./Carton
-	SPBG	3-1/4 x 1-5/8	100

### Spazzer BAR FLY CLIP





The Spazzer fly clip is a secure, fast and efficient way to finish a wall section. This prepunched clip eliminates the need for cutting and bending when using the Spazzer 5400 spacer bar.

Product code	Size (in)	Packaging Pcs./Carton	
SFLY	1 x 1-1/4 x 1	100	



clarkdietrich.com

#### Danback[®] WOOD BACKING PLATE





Just snap, flex and screw. It's that fast.

Danback[®] is a heavy-duty, flexible wood backing system used to support cabinets, shelves, handrails, wall-mounted sinks and counters, and all other wallmounted fixtures. Danback provides superior connection shear and pullout strength to support and meet even some of the heaviest loading conditions. The patented hinge design actually flexes around the stud and snaps into place for a perfect fit—every time.

Product code	Width (in)	Length (in)	Packaging Pcs./Skid
D16F*			250
D24F*	E 4/0	40	
D16C**	5-1/8	48	
D24C**			

- Reduces installation time up to 90%
- Available for 16" and 24" o.c. framing
- Eliminates cutting, notching, ripping and routing
- Made with Dricon[®] fire-retardant treated wood
- Complies with all national building codes

Dricon® is a registered trademark of Arch Wood Protection, Inc. Danback® is a registered trademark of Daniel W. Tollenaar.

U.S. Patent No. 6,705,056 of Daniel W. Tollenaar.

*F = fire-treated plywood. D16 = 16" o.c. spacing. D24 = 24" o.c. spacing.

Trimables available for off-module spacing in small bucket or bulk quantities.

**FSC-certified lumber available on request, which can contribute to LEED® points on your project. Contact ClarkDietrich LEED professionals at 888-437-3244 for more information. FSC chain-of-custody # BV-COC-008121.

#### Katz[™] BLOCKING



ClarkDietrich Katz[™] blocking is specifically manufactured to ladder frame between parallel framing members and provide for the attachment of the top of the interior nonstructural walls when trusses or floor joists run parallel to the walls. Katz blocks are secured to the floor joists or roof trusses with screws or nails.

Product code	Size (in)	Length (in)	
	3-5/8	16	
NA	3-5/0	24	

CLIP



clarkdietrich.com

FastBack[™] BACKING CLIP

For use with the FastBack™ backing system, the FastBack backing clip conceals fasteners on the face of the product. Rotate the FastBack clip over the flange of the stud until it sits flush. Then fasten into place using drywall screws in the predrilled holes.

Product code	Width (in)	Length (in)	Packaging Pcs./Carton
FBBC	1-1/4	5-1/8	100
FBBC	1-1/4	10-1/4	100

U.S. Patent No. 7,882,676 is owned by Jeffery Thomas Ellis.

### G-Series™ PUNCHED GUSSET PLATES





G-Series[™] punched gusset plates are multipurpose connectors used in a variety of framing connections including roof framing, header framing and shearwall applications. They adapt to multiple configurations and varying construction tolerances.

		Thi	ckness	Size (in)	D I .:
Product code	Gauge	Mils	Design thickness (in)		Packaging Pcs./Bucket
G436	18	43	0.0451	6 x 8-1/2	
G546	16	54	0.0566	6 x 8-1/2	50
G686	14	68	0.0713	6 x 8-1/2	

### GP-Series™ UNPUNCHED GUSSET PLATES





GP-Series[™] unpunched gusset plates are used to facilitate connections between chord members for in-plane framing and anchoring diagonal tension strapping to corner studs for shearwalls. Adapts to multiple configurations and varying construction tolerances.

D I .		Thic	ckness	DL · ·	D. L. C
Product code	Gauge	Mils	Design thickness (in)	Plate size (in)	Packaging Pcs.
				6 x 6	
	16	54	0.0566	6 x 12	25
GP				12 x 12	
GP		12 97	0.1017	6 x 6	
	12			6 x 12	25
				12 x 12	

#### H-Series™ UNIVERSAL HEADER HANGER



The H-Series[™] universal header hanger is used to connect box headers to jambs, or beams to columns, and transfer large vertical loads. This universal hanger is designed so one part can be used for either side of the connection. The hanger also features a support tab for proper alignment and easy installation.

D. I. I.		Thic	kness	Size (in)	Packaging Pcs./Bucket
Product code	Gauge	Mils	Design thickness (in)		
H436	18	43	0.0451	6 x 8-1/2	
H546	16	54	0.0566	6 x 8-1/2	50
H686	14	68	0.0713	6 x 8-1/2	-



#### EasyClip™ E-Series™ SUPPORT CLIP





ClarkDietrich EasyClip™ E-Series™ support clips are used for rigid standoff connections. The 4" wide leg provides extra length to achieve standoff connections up to 3". These support clips are commonly used in bypass wall conditions, solid blocking attachments in joist framing, and to secure rafter framing to the primary structure. EasyClip E-Series support clips are prepunched for faster and more accurate fastener placement.

<b>р</b> і .		Thic	ckness	C'	D I .
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
E543				4 x 1-1/2 x 3	100
E545				4 x 1-1/2 x 5	100
E547	16	54	0.0566	4 x 1-1/2 x 7	100
E549				4 x 1-1/2 x 9	50
E541				4 x 1-1/2 x 11	50
E683			68 0.0713	4 x 1-1/2 x 3	100
E685				4 x 1-1/2 x 5	100
E687	14	68		4 x 1-1/2 x 7	80
E689				4 x 1-1/2 x 9	50
E681				4 x 1-1/2 x 11	50
E973				4 x 1-1/2 x 3	50
E975				4 x 1-1/2 x 5	50
E977	12	12 97	0.1017	4 x 1-1/2 x 7	50
E979				4 x 1-1/2 x 9	50
E971				4 x 1-1/2 x 11	40

### EasyClip S-Series[™] SUPPORT CLIP



CLIP



ClarkDietrich EasyClip S-Series™ support clips are used for rigid connections in window and door framing, joist, bypass or other miscellaneous connections to secure one framing member to another, or to secure framing members to the structural frame. EasyClip S-Series clips are prepunched for faster and more accurate fastener placement.

D I .		Thio	kness	Size (in)	D. L. J
Product code	Gauge	Mils	Design thickness (in)		Packaging Pcs./Bucket
S543				1-1/2 x 1-1/2 x 3	400
S545				1-1/2 x 1-1/2 x 5	200
S547	16	54	0.0566	1-1/2 x 1-1/2 x 7	100
S549				1-1/2 x 1-1/2 x 9	100
S541				1-1/2 x 1-1/2 x 11	100
S683				1-1/2 x 1-1/2 x 3	200
S685				1-1/2 x 1-1/2 x 5	200
S687	14	14 68	0.0713	1-1/2 x 1-1/2 x 7	100
S689				1-1/2 x 1-1/2 x 9	100
S681				1-1/2 x 1-1/2 x 11	100
S973				1-1/2 x 1-1/2 x 3	200
S975				1-1/2 x 1-1/2 x 5	150
S977	12	97	0.1017	1-1/2 x 1-1/2 x 7	100
S979				1-1/2 x 1-1/2 x 9	80
S971				1-1/2 x 1-1/2 x 11	70

### EasyClip QuickTwist™ WEB STIFFENER



EasyClip QuickTwist[™] web stiffeners are used to provide reinforcement of joist webs to prevent crippling. Web reinforcement is often required by design to enhance the load capacity of joists. The unique design of QuickTwist allows the installer to insert the stiffener on the inside of the joist *after* the joist is installed. This stiffener eliminates the need to pre-insert traditional web stiffeners prior to joist installation.

<b>D</b>	<u> </u>		Thickness		11.1.1.*	
Product code	Size (in)	Gauge	Mils	Design thickness (in)	Height* (in)	Packaging
					7-1/4	
					8	
			97		9-1/4	Dependent on order quantity
QTWS	3-1/2	12		0.1017	10	
					11-1/4	
					12	
					14	
	6	12			7-1/4	Dependent on order quantity
					8	
					9-1/4	
QTWS			97	0.1017	10	
					11-1/4	
					12	
					14	

*Dimension is nominal size. Actual product is shorter to fit inside joist.

# Uni-Clip[™] END CLIP





ClarkDietrich's Uni-Clip[™] end clip is a universal framing clip used to attach and support numerous rigid framing conditions. The Uni-Clip framing clip has a stiffened corner that provides superior design values and is installed easily with screws or powder-actuated fasteners. This clip is ideal for most rigid connections, including shear, tension and two-axis loading.

D I .	Thickness		Thickness			
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton	
UCEC	14	68	0.0713	3-1/2 x 1-1/2 x 4-1/2	25	

U.S. Patent No. 6,688,069

# FIELD SKEWABLE TradeReady® RIM TRACK SPLICE PLATE





The ClarkDietrich field skewable TradeReady® rim track splice plate provides an easy and efficient method for splicing TradeReady rim. This prepunched plate is also ideal for connecting and reinforcing the rim at bay or bow window details. The center of the plate allows for easy one-time field bending from 0° to 135°.

D I .		Thic	kness	c:	D I .
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Box
TDSP	18	43	0.0451	4 x 6	100
TDSP	16	54	0.0566	4 x 6	100

CAUTION: This plate can only be bent one time.

### G-Series™ PUNCHED GUSSET PLATES





G-Series[™] punched gusset plates are multipurpose connectors used in a variety of framing connections including roof framing, header framing and shearwall applications. They adapt to multiple configurations and varying construction tolerances.

D I .	Thickness			<u>c:</u>	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
G436	18	43	0.0451	6 x 8-1/2	
G546	16	54	0.0566	6 x 8-1/2	50
G686	14	68	0.0713	6 x 8-1/2	

### GP-Series™ UNPUNCHED GUSSET PLATES





GP-Series™ unpunched gusset plates are used to facilitate connections between chord members for in-plane framing and anchoring diagonal tension strapping to corner studs for shearwalls. Adapts to multiple configurations and varying construction tolerances.

Product code	Thickness			DL + 1	D I I
	Gauge	Mils	Design thickness (in)	Plate size (in)	Packaging Pcs.
				6 x 6	
	16	54	0.0566	6 x 12	25
GP				12 x 12	
GF				6 x 6	
	12	97	0.1017	6 x 12	25
				12 x 12	

# Uni-Clip[™] END CLIP





ClarkDietrich's Uni-Clip™ end clip is a universal framing clip used to attach and support numerous rigid framing conditions. The Uni-Clip framing clip has a stiffened corner that provides superior design values and is installed easily with screws or powder-actuated fasteners. This clip is ideal for most rigid connections, including shear, tension and two-axis loading.

Product code	Thickness			<u> </u>	
	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Carton
UCEC	14	68	0.0713	3-1/2 x 1-1/2 x 4-1/2	25

U.S. Patent No. 6,688,069

# EasyClip[™] E-Series[™] SUPPORT CLIP





ClarkDietrich EasyClip™ E-Series™ support clips are used for rigid standoff connections. The 4" wide leg provides extra length to achieve standoff connections up to 3". These support clips are commonly used in bypass wall conditions, solid blocking attachments in joist framing, and to secure rafter framing to the primary structure. EasyClip E-Series support clips are prepunched for faster and more accurate fastener placement.

D. L.		Thic	kness	<u>c</u> :	D 1 1	
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
E543				4 x 1-1/2 x 3	100	
E545				4 x 1-1/2 x 5	100	
E547	16	54	0.0566	4 x 1-1/2 x 7	100	
E549				4 x 1-1/2 x 9	50	
E541	Ī			4 x 1-1/2 x 11	50	
E683		14 68		4 x 1-1/2 x 3	100	
E685						4 x 1-1/2 x 5
E687	14		0.0713	4 x 1-1/2 x 7	80	
E689				4 x 1-1/2 x 9	50	
E681				4 x 1-1/2 x 11	50	
E973			-	4 x 1-1/2 x 3	50	
E975					4 x 1-1/2 x 5	50
E977	12	97	0.1017	4 x 1-1/2 x 7	50	
E979	T I			4 x 1-1/2 x 9	50	
E971	T I			4 x 1-1/2 x 11	40	

### EasyClip T-Series[™] TALL ANCHOR CLIP





ClarkDietrich EasyClip T-Series™ tall anchor clips are highperformance, cost-effective solutions for knee wall-tofoundation connections, lightduty shearwall-to-foundation connections and truss-to-wall connections. They are designed to resist horizontal, torsional and vertical (uplift) loads.

D.L.	Thickness			<b>C</b> '	D I .
Product code	Gauge	Mils	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
T683	14 68	60	68 0.0713	2 x 4 x 3-1/2	
T685		00		2 x 4 x 5-1/2	40
T973	12	07	0.4047	2 x 4 x 3-1/2	40
T975	12	97	0.1017	2 x 4 x 5-1/2	

### ALUMINUM BURN CLIP





ClarkDietrich aluminum burn clips are used as part of the H-stud area separation wall assembly and are designed to melt when exposed to fire. The clips hold the area separation wall assembly in place at the floor, roof and truss line between adjacent units. In a fire, the aluminum burn clips on the fire-ridden side of the wall will melt, allowing the wall structure for that side to collapse.

Product code	Thickness (in)	Size (in)	Packaging Pcs./Bucket
AB	0.050	2 x 2 x 2-1/2	500
AB63*	0.063	2 x 2 x 2-1/2	500

*AB63 meets requirements of ICC-ES Legacy Report 92-19.

### RESILIENT SOUND ISOLATION CLIP



The RSIC-1[®] resilient sound isolation clip is used in conjunction with drywall furring channel to fasten gypsum wallboard to various wall and floor-ceiling designs and applications, while simultaneously providing acoustical separation (decoupling). This significantly reduces the amount of impact and sound that filters from surrounding rooms-reducing the noise transfer by 75 to 100%.

Product code	Pcs./Bucket
RSIC-1	200
U.S. Patent No. 6,267,347 of MTEC, LLC. The RSIC-1 clip is a registered trademark of M	rec, llc.

UL and UL Classified are registered trademarks of Underwriters Laboratories, Inc.



CLIP

EXPRESS

CLIP

# METAL FURRING CHANNEL CLIP



ClarkDietrich metal furring channel clips are made of galvanized wire and used to attach metal furring channels to 1-1/2" U-channels in ceiling gridwork. Clips must be installed on alternating sides of the 1-1/2" channels. Use tie wire when clips cannot be alternated. Clips should only be used when singlelayer gypsum or single-layer veneer plaster base is used.

Product code Pcs./Bucket MFCC 500

### CUSTOM FABRICATED CLIPS AND CONNECTORS



When the job calls for a connection, clip or support that doesn't exist in this catalog, ClarkDietrich can create whatever you need. We can custom fabricate just about any shape, bend, angle or specialty framing clip, connector or support to your exact specification. Manufactured using precision cutting and forming equipment, a diverse selection of specialized sizes and shapes is available—including prepunched holes and/ or specialized slots. Simply submit your dimensioned drawings to your ClarkDietrich representative, and we'll do the rest!

Note: The performance and installation of custom-made products is the sole responsibility of the design professional and engineer of record. Any customer ordering a custom-fabricated clip, connector or support shall indemnify, defend and hold harmless ClarkDietrich and ClarkDietrich Engineering Services for any loss or damage arising in whole or in part.









### Product Name Index

#701A Metal J-Trim80
#701B Metal L-Trim80
093 Control Joints
103 Deluxe Corner Bead58

### Α

A-Series	91
Anchor Clip	92
Archway Bead	64-65
Area Separation Wall Systems	32-33
Aluminum Burn Clip.	

### В

B-Series	24, 90, 93
Backing Clip	
Backing Plate	25, 26, 95
Barrier Mesh	
Bridle Hanger	53
Bullnose Corner Beads 5	69-61, 64-66, 68

#### С

0
C-Joist Framing50
C-Runner
C-Studs
CH-Stud
CT Shaftwall
Casing Beads
Channel Clip
Clinch-On Products
Clip Angle
Clip Express
Clips and Connectors
Contact Information
Contour Track
Corner Angle
Corner Caps
Corner Master #30
Cornerite
Custom Clips and Connectors
Custom Shapes

### D

D-Series
Danback Wood Backing Plate25, 95
Deep Leg Deflection Track
Deflection Track
Diagonal Tension Strapping46, 51
Drop 'N Lock Clip
Double Track
Double-J Control Joint
Double-V Control Joint
Double-X Corner Bead74

### Е

E-Series
E-Stud
EasyClip 24, 25, 46, 50, 52, 89-93, 97, 100
End Clip
Engineering Services4
Expansion Joint #40, 2-piece
Exterior Framing

### F

Fast Strut
Fast Top Clip
FastBack Backing Clip
FastBridge Clip
FastClip Slide Clip
Field Skewable TradeReady Splice Plate98

Flat Strapping
Flat Tail Slide Clip86
Floor Framing 48-53
Foundation Weep Screed 79-79, 84
Furring Channel14, 37
Furring Channel Clip13, 101

### G

G-Series
GP-Series
Galvanized Junior Mesh Lath
General Notes
Goldline Paper-Faced Beads54-57
Grommets 13, 36, 44
Gusset Plates

# Н

H-Series
H-Stud
HDS Framing System
HDS Header Bracket
Head-of-Wall Deflection Systems
Heavy-Duty Furring Channel
Heavy-Duty Stud
High Rib Lath
How to Use This Catalog 6

### I

Interior Contour Track12	
Interior Finishing	
Interior Framing	

# J

J-Bead 61, 66, 68
J-Runner
J-Tabbed Track
J-Weep
Jamb Strut
Junior Mesh70

### Κ

Katz Blocking	
Knockouts	
ksi6	

### L

L-Bead62, 67
L-Header
L-Series
LA-Series
LE-Series
LS-Series
LEED Information8
Locations

#### Μ

MaxTrak Slotted Deflection Track	. 19, 41
Mega Lath	73
Metal Corner Beads	.58-62
Metal Lath and Accessories	69-84
Metric Specifications	7
Mini-Bead 800/900	62, 80
Miscellaneous Angles	37

### Ν

0

### Ρ

Paper-Faced Beads.54-57Partition End Cap.67Plastic Grommets.13, 36, 44Product Availability.7Product Identification.6Product Labeling.7Product Substitution.6ProSTUD Drywall Framing System.10-11ProSTUD Sound Assemblies.15ProTRAK.11
Protective Coatings
Q
Quicksilver

QuickTwist ...... 50, 97

#### R

RC-1 Pro
RC-1 ProPlus
RC-2 Pro17
RC-2 ProPlus
RC-Deluxe
RSIC-1 Clip 18, 101
RedHeader RO
Resilient Channel16, 17
Resilient Channel Installation
Resilient Sound Isolation Clip 18, 101
Rip Bead
Rough Openings

# S

52, 89, 97
70
70
7
28-31
86, 87
19, 41
15-18, 101
15-18, 101
23, 44, 94
44, 94
44, 94
59
71
7
7
72
73
36, 51
72, 74-84
74, 82-83
4
9, 91, 97, 100
23, 45, 91

### Product Name Index

1
T-Series
Table of Contents
Tension Bracing
Tile Cap
TradeReady Floor System
TradeReady Header
TradeReady Rim
TradeReady Steel Joist
TradeReady Structural Blocking50
Twin Trac

### U

U-Bead
U-Channel
U-Series
USG Shaftwall Systems
USG CH-Stud
USG E-Stud
USG J-Runner
USG Jamb Strut 31
Uni-Clip End Clip
Universal Header Hanger96
Utility Lath

#### V

V
V Truss
Vinyl Bullnose Archmaker Corner Bead
Vinyl Corp
Vinyl Drywall Trims
Vinyl Stucco Corner Beads
Vinyl Stucco Control Joints
Vinyl Stucco Trims
,
W
Web Stiffener
Wire Corner Reinforcement80
Х
X-Series
Y
Yield Strength
Z
Z-Furring
Zinc Control Joints

### Product Code Index

٨

A
A-Series
В
B-Series       .24, 90, 93         BJB50/58       .68         BJB50S/58S       .68         BM10       .75         BM15       .75         BM50       .72         BM75       .72         BPE       .26         BPN       .26
C
CAE
CBXX
CDBV
CNTB
CR30
D
D-Series

#### Ε

E-Series	7
F	
FB4324, 91	
FB68	
FBBC	
· · · · · · · · · · · · · · · · · · ·	
FCE 14	
FCEC	
FCED	
FCM	
FCMD14, 37	/
FCN	

#### FTC3/FTC5.....20, 43, 88 G GP.....46,96,99 н H436......96 H546 ......96 H686.....96 HCN90 ..... 13 HDS ......22, 40, 47 J Κ КА......95 L LAM (O).....70 LAST......72 LS-Series ..... 23, 45, 91

FCND......14

#### Μ

M20A
M20B62
M285 60,65
M385 60,65
M400
M401
M402
M71A80
M71B80
M81A
M81B80
M859
MAX
MB80
MB90
MFCC
, NI
Ν
NOTC

#### 0

0
OTSB20
OTSC
P

#### P100......55 P1BN......56 P1WO......55 P1XW......55 P2I......55 PEC50/58......67

### Q

QTWS	50,97
R	

RCDE17
RCDN17
RCSD
RCUR16-17
RSIC-1

### S

S-Series
SD
SFCB75
SFLY
SFWB75
SFZB75
SI36
SPBG
SPGR
SPZD
SPZS

### Т

-
T-Series
T20
T2752
T36
TC127
TD12, 16, 19, 24
TDHA
TDHB
TDJ
TDSB50
TDSP98
TDW
TSA
TSB
TSC
TSD
TSE19, 36, 42
TSF
TTE
TTN

### U

•	
U-Series	. 24, 46, 90, 93
UCEC	89,98,99
USG CH	
USG ES	
USG JR	
USG JS	
UXRC	

# V

•
VBAB
VBCB64
VBKB64
VBSB64
VCJT
VLAB
VLCB
VLJB66
VLLS
VLMJ
VLSB63
VLZL
VVCJ
VVJZ

#### W

W951	 	81
WCJ	 	
WJZ	 	
WS	 	

# Х

X-Series25, 90, 93
XJ1576
XRIT
XXCB
XXCW75
XXZB74
XXZW75

### Ζ

Z71A
Z71B
Z81A
Z81B80
ZB80
ZB90
ZCJ1
ZCJ377
ZCJ577
ZCJ7
ZFE
ZFN14
ZJ1576
ZNCJ62,77

### PATENTS AND TRADEMARKS

#### Patents

U.S. Patent Nos.	5,689,922; 5,784,850; 5,816,002; 6,021,618; 6,070,374; 6,301,854; 6,418,694; 6,688,069; 6,691,478; 6,691,487; 6,708,460; 6,761,005; 7,240,459
Canadian Patent	No. 2319346
Mexican Patent N	No. 243294
U.S. Patent No.	5,836,133 is owned by B&D Industries, Inc.
U.S. Patent No.	6,705,056 is owned by Daniel W. Tollenaar
U.S. Patent No.	6,267,347 is owned by MTEC, LLC
U.S. Patent No.	7,882,676 is owned by Jeffery Thomas Ellis

GOLDLINE® Trims are following patents:	e covered under the	
U.S. Patent Nos.	5,836,122 and 5,613,335	
Canadian Patent No.	2,212,854	
Australian Patent No.	695482	
New Zealand Patent N	o. 302378	
PLATINUM® Trims (separate patent) are covered under the following:		
U.S. Patent No.	7,214,434 B2	
Canadian Patent No.	2,417,325	
Australian Patent No.	2004202648	
New Zealand Patent N		

#### Trademarks

ClarkDietrich is a trademark of ClarkDietrich Building Systems. TradeReady,® Spazzer,® FastClip,™ EasyClip,™ Fast Top,™ Fast Strut,™ Uni-Clip,™ Clip Express,™ Drop 'N Lock Clip,™ Stronger Than Steel,™ FastBack,™ HDS,® RedHeader RO,™ QuickTwist,™ Slide Clip,™ SubmittalPro,® SwiftClip,™ A-Series,™ B-Series,™ D-Series,™ E-Series,™ G-Series,™ GP-Series,™ H-Series,™ L-Series,™ LS-Series,™ LE-Series,™ LA-Series,™ S-Series,™ T-Series,™ U-Series,™ X-Series,™ QuickClip,™ MaxTrak,® Bar Guard,™ DoubleTrack,™ QC-Series,™ ProSTUD,® ProTRAK,® Contour Track,®

Deluxe," RC-Deluxe," QuickSilver," Rip Bead," Cornerite,[™] Junior,[™] Katz,[™] C-Series,[™] CWN,[™] CSJ™ CSW™ CSE™ CSS™ Double-X™ Corner Master,[™] Mini-Bead,[™] FastBridge[™] and Archmaker[™] are owned by ClarkDietrich Building Systems. DriCon[®] is a registered trademark of Arch Wood Protection, Inc. LEED[®] is a registered trademark of the U.S. Green Building Council. Danback[®] is a registered trademark of Daniel W. Tollenaar. UL® and UL Design[®] are trademarks of Underwriters Laboratories, Inc. RSIC-1[®] is a registered trademark of MTEC, LLC. Structalath," Twin Trac® and V Truss® are registered trademarks of Structa Wire Corp. Mega Lath™ is a trademark of Structa Wire Corp. Goldline® and Platinum® are registered trademarks of Bailey Metal Products, Ltd. USG Sheetrock[®] is a registered trademark of USG Corporation.

#### WARRANTY

#### Warranty

Our products are manufactured in accordance with company standards and/or industry standards, as applicable. All ClarkDietrich Building Systems products are covered by our standard warranty which is contained in our Standard Terms and Conditions of Sale and which will be provided upon request. Generally, we warrant our products will be free from defects in material and workmanship at the time of shipment, subject to the limitations stated in the warranty. Unless specifically agreed in writing by us with respect to specific orders, we do not make any warranty of merchantability or fitness for a particular purpose. The buyer is responsible to assure that buyer orders the appropriate product for any applicable code or specification requirements.

NOTICE: Our liability is expressly limited to replacement of defective products. We shall not be liable for incidental and consequential damages, nor for any loss caused by misuse or misapplication of our products. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from the date it was or reasonably should have been discovered.

clarkdietrich.com

### CODE APPROVALS AND PERFORMANCE STANDARDS

ClarkDietrich products meet or exceed these applicable performance standards.

#### AISI "North American Specification for the Design of Cold-Formed Steel Structural Members, AISI S-100-2007 with 2010 supplement"

#### ASTM American Society for Testing and Materials

#### **Product specifications**

ASTM C645	Non-structural steel framing members
ASTM C955	Load-bearing steel framing
ASTM C847	Metal lath products
ASTM C841/C1063	Veneer and plaster accessories
ASTM C1047	Beads and trims-metal-paper-vinyl

#### **Material specifications**

ASTM A1003 (NS33, ST33H, ST50H)			
ASTM A653	Zinc-coated hot-dip process		
ASTM A653/B69	Veneer and plaster accessories		

#### Protective coating standards

ASTM C645	Non-structural steel framing members
ASTM C955	Load-bearing steel framing
ASTM A653	Zinc-coated hot-dip process
ASTM C1063	Veneer and plaster accessories
ASTM C1047	Beads and trims-metal-paper-vinyl

#### UL[®] Underwriters Laboratories testing standard UL 263 "Fire Tests of Building Construction and Materials"

Additional code approvals International Building Code

ClarkDietrich Building Systems is a proud member of the Steel Framing Industry Association (SFIA). Check the updated list of Certified Production Facilities at Architectural Testing's website at www.archtest.com.



Scan for the most up-to-date ClarkDietrich literature.

#### LEED[®] Credit MR 2

#### Construction Waste Management (Up to 2 points)

ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream. The contribution to LEED must be calculated by the contractor based on weight or volume.

#### LEED Credit MR 4 Recycled Content (Up to 3 points)

ClarkDietrich Building Systems produces products with a minimum recycled content of 34.9%, of which 24.3% is post-consumer and 9.4% is pre-consumer. These minimum values are based on resources from Steel Recycling Institute. If a higher content is desired, ClarkDietrich can provide this information if mill certifications are requested at time of order. ClarkDietrich recycles nearly 100% of its post-industrial scrap.

ClarkDietrich Building Systems has prepared this literature with the utmost diligence and care for accuracy and conformance to standards.

ClarkDietrich intends this information to be accurate, informative, and helpful as a selection guide for choosing ClarkDietrich Building System products. However, this information is only to be used for guidance and is not intended to replace the design, drawings, specifications, and decisions of a professional architect or engineer.

ClarkDietrich Building Systems or its affiliates shall not be responsible for incidental or consequential damages, directly or indirectly sustained, nor for loss caused by application of our products for other than their intended uses. Our liability is limited to replacement of defective products. Claims shall be deemed waived unless they are made to us in writing within thirty (30) days of the date a problem was or reasonably should have been discovered.

ClarkDietrich Building Systems reserves the right to modify or change any information contained in this literature without notification.



#### LOCATIONS

# ClarkDietrich Building Systems Manufacturing and Sales Locations:

<b>CALIFORNIA</b> Riverside	<b>CALIFORNIA</b> Sacramento	CONNECTICUT Bristol	FLORIDA Dade City
P 951.360.3500	P 951.360.3500	P 866.921.0023	P 352.518.4400
F 951.360.3333	F 951.360.3333	F 860.584.6899	F 352.518.4450
GEORGIA McDonough	HAWAII Kapolei	ILLINOIS Rochelle	MARYLAND Baltimore
P 678.304.5500	P 951.360.3500	P 800.659.0745	P 410.477.4000
F 678.304.5555	F 951.360.3333	F 513.645.0750	F 410.477.1550
OHIO Warren—East	OHIO Warren—West	TEXAS Baytown	<b>TEXAS</b> Dallas
P 330.372.5564	P 330.372.4014	P 281.383.1617	P 214.350.1716
F 330.372.4055	F 330.372.1945	F 281.573.1679	F 214.350.7252
<b>CLIP EXPRESS[™]—East</b>	CLIP EXPRESS—West	VINYL CORP.	
₽ 866.638.1908	p 530.406.3462	P 800.648.4695	

### ClarkDietrich Engineering Services. A full spectrum of solutions.

Toll-Free Phone: 877.832.3206 Toll-Free Fax: 877.832.3208 Technical Services: 888.437.3244 Email: engineering@clarkdietrich.com

CENTRAL Crown Point, IN NORTHEAST Bristol, CT SOUTHEAST McDonough, GA SOUTHEAST Roswell, GA WEST Carlsbad, CA Turn to ClarkDietrich for a complete lineup of steel construction products and services nationwide:

Interior Framing · Exterior Framing · Interior Finishing · Clips/Connectors · Metal Lath/Accessories · Engineering



9100 Centre Pointe Dr. Suite 210 West Chester, OH 45069 P 513.870.1100 F 513.870.1300 clarkdietrich.com Clarkwestern Dietrich Building Systems LLC

CD-Full Line 6/14 @ 6/14 ClarkDietrich Building Systems. The technical content of this literature is effective 6/1/14 and supersedes all previous information.